

02-Feb-26

Manufacturer: Garmin International, Inc.
Address: 1200 E. 151st St.
 Olathe, KS 66062-3426
 U.S.A.
Chile Representative: Matías Rodríguez Correa
 Rosario Norte 660 piso 24, Las Condes Santiago
 Province CP 7550083, Chile
Contact Email: matias.rodriguez@garmin.com
Subject: SUBTEL, Chile (Resolution 737) Certification Compliance 2026
Commercial Name: Forerunner 165

	Información (Information)
Tipo de equipo (Equipment type)	Portable Digital Transceiver
Marca (Brand)	Garmin 
Modelo (Model)	A04714
Tecnología o modulación (Technology or modulation)	ASK for NFC / GFSK for ANT/ GFSK for BLE
Frecuencias (Frequencies)	13.56 MHz / 2402-2480 MHz / 2402-2480 MHz
Ganancia de antena (dBi) (Antenna gain (dBi))	ANT -0.30 dBi / BLE -0.30 dBi
P.i.r.e. (E.I R P.)	-29.20 dBm, 0.001mW / 3.18 dBm, 2.07 mW / 3.19 dBm, 2.08mW
Módulos (Modules)	NFC, ANT, BLE

As all measurements for NFC are made in radiated mode to comply with the field strength limits, gain information is not required to be noted in the reports or any additional documentation.

Declaration of Conformity Statement: the equipment previously identified complies with the provisions established in the Technical Standard for Small Range Equipment, approved by Exempt Resolution No.1,985 of 2017, of the Undersecretary of Telecommunications.

Declaración de conformidad: El equipo anteriormente identificado cumple con las disposiciones establecidas en la Norma Técnica para Equipos de Corto Alcance, aprobada mediante la Resolución Exenta N° 1.985 de 2017, de la Subsecretaría de Telecomunicaciones.

Test Report 2023-064

Version A

Issued 3 Nov 2023

Project GCL-0458

Model Identifier: A04714

Primary Test Standard(s)

CFR 47, FCC Part 15.247

RSS-247 Issue 2

Garmin Compliance Lab

Garmin International

1200 E 151st Street

Olathe Kansas 66062 USA

Client-supplied Information

FCC ID: IPH-04714

IC ID: 1792A-04714



See section 6 of this report regarding the presence or absence of accreditation logos or marks on this cover page.

1. Summary

The equipment or product described in section 5 of this report was tested at the Garmin Compliance Lab according to standards listed in section 6. This report focuses on the 2.4 GHz Bluetooth Low Energy (BLE) transceiver(s). Test records within this report may include data for the ANT transmitter, but ANT is addressed in separate report. The results are as follows.

Parameter	Description	Key Performance Values	Result	Data starts at page
Hopping Channels	The radio manages its use of channels appropriately. [15.247(a)(1); RSS-247 at 5.1]	N/A	N/A	N/A
DTS Bandwidth	The nature of the radio signal is broadband, being at least 500 kHz wide. [15.247(a)(2); RSS-247 at 5.2(a)]	The 6dB bandwidth is 704 kHz or greater.	PASS	12
Other Bandwidths	Regulatory agencies also require the reporting of signal bandwidths using alternate processes. [2.202; RSS-GEN at 6.7]	These values are reported but have no actual performance requirements.	Reported	15
Transmit Power	The peak transmit power presented to the antenna is no greater than 1 Watt or 30 dBm. The effective radiated power is limited to 4 Watts or 36 dBm EIRP. [15.247(b); RSS-247 at 5.4(d)]	The maximum transmit power is 3.49 dBm or 2.2 mW.	PASS	20
Antenna Gain	The radio should not focus too much energy in any direction. Unless additional rules are applied, the antenna gain is no greater than 6 dBi. [15.247(b)(4) and (c)]	NT. The client stated that the antenna gain was -0.3 dBi and will document antenna gain separately.	NT	NT
Unwanted Emissions (Conducted Spurious)	The radio should not provide too much radio energy to the antenna at frequencies beyond its intended frequency band. [15.247(d); RSS-247 at 5.5]	Emissions outside the band must be reduced at least 20 dB from in-band levels. The measured reduction was at least 43.7 dB.	PASS	22
Restricted Bands	The radio must not emit in certain designated restricted frequency bands above a set of limit values. [15.247(d) and 15.205; RSS-247 at 3.3]	Emissions in the restricted bands were at least 8.92 dB below the applicable limits.	PASS	25
Power Spectral Density	The radio must not focus too much radio energy in a narrow frequency band. [15.247(e); RSS-247 at 5.2(b)]	The limit is 8 dBm in a 3 kHz band. The strongest emission level was -12.66 dBm in a band of at least 3 kHz.	PASS	30

Hybrid Systems	A radio that is both frequency hopping and digitally modulated should satisfy a combination of system rules. [15.247(f); RSS-247 at 5.3]	N/A. The radios described in this report are not subjected to the Hybrid System rules.	N/A	N/A
Frequency Hopping Rules	Frequency hopping systems have additional functional requirements. [15.247(g) and (h); RSS-247 at 5.1]	N/A. The radios described in this report are not subjected to the Frequency Hopping rules.	N/A	N/A
Radio Safety	The radio emissions must meet public health & safety guidelines related to human exposure. [15.247(i) and 1.1307; RSS-Gen at 3.4]	NT. Client will report radio energy safety results separately.	NT	NT
Frequency Stability	The radio tuning must be robust over a range of temperature and supply voltage conditions. [RSS-Gen at 6.11]	Radio emissions remained within the allowed radio band under all environmental conditions tested.	PASS	33
Unintended Radiated Emissions	Radio emissions that this device may generate via its structures and connected cables that are not necessary for its operation and that may affect other radio communication	8.6 dB of margin. Appropriate for use in homes, offices, and industrial facilities. [Class B]	PASS	36
AC Mains Conducted Emissions	Radio emissions that this device may generate via its ac power network connections that are not necessary for its operation and that may affect radio communication.	6.84 dB of margin. Appropriate for use in homes, offices, and industrial facilities. [Class B]	PASS	48

NT (Not Tested) means the requirement may or may not be applicable, but the relevant measurement or test was not performed as part of this test project.

N/A (Not Applicable) means the lab judged that the test sample is exempt from the requirement.

Table 1: Summary of results

Report Organization

For convenience of the reader, this report is organized as follows:

1. Summary
2. Test Background
3. Report History and Approval
4. Test Sample Modifications and Special Conditions
5. Description of Equipment Tested
6. Test Standards Applied
7. Measurement Instrumentation Uncertainty
8. Selected Examples of Calculations
9. Environmental Conditions During Test
10. Immunity Performance Criteria

Annex: Test records are provided for each type of test, following the order and page numbering stated in the summary table. Concluding notes appear on the final page of this report.

Due to confidentiality, certain material (such as test setup photographs) has been removed from this report and placed in GCL Test Report 2023-067. That report is treated as a part of this document by way of this reference.

2. Test Background

The testing reported here was performed at the Garmin Compliance Lab, an organization within Garmin International, located at 1200 E 151st St, Olathe Kansas, USA. The contact telephone number is +1.913.397.8200.

The testing was performed on behalf of the Garmin design group, a separate organization located at 1200 E 151st St, Olathe Kansas, USA. Witnesses from the business group included: None.

Test Sample received: 01 Sep 2023
Test Start Date: 18 Sep 2023
Test End Date: 19 Oct 2023

The data in this test report apply only to the specific samples tested.

Upon receipt all test samples were believed to be properly assembled and ready for testing.

3. Report History and Approval

This report was written by Majid Farah and initially issued on 3 Nov 2023 as Version A.

Report Technical Review:

David Arnett
Technical Lead EMC Engineer



Report Approval:

Shruti Kohli
Manager Test and Measurement (EMC, Reliability and Calibration)



4. Test Sample Modifications and Special Conditions

The following special conditions or usage attributes were judged during test to be necessary to achieve compliance with one or more of the standards listed in section 6 of this report:
None

The following modifications to the test sample(s) were made, and are judged necessary to achieve compliance with one or more of the standards listed in section 6 of this report:
None

5. Description of the Equipment Tested

5.1 Unique Identification

Product Model A04714
Serial Numbers Tested 3453413731, 3453413644

This product tested is a mobile device for collecting and sharing data with the user and nearby electronic devices.

The client affirmed that the test samples will be representative of production in all relevant aspects.

5.2 Key Parameters

EUT Input Power: 5 Vdc
I/O Ports: USB
Radio Transceivers: Bluetooth Low Energy, ANT, NFC
Radio Receivers: GPS L1, Galileo E1, BeiDou, GLONASS
Primary Functions: Data collection and communication
Typical use: Portable in multiple orientations
Highest internal frequency: 2.484 GHz
Firmware Revision 3.05

5.3 Operating modes

During test, the EUT was operated in one or more of the following modes. Some modes may not applicable for this product or in this report.

Mode 1: M1 (Bt Tx). Bluetooth, sometimes called Bluetooth Classic, radio is transmitting consistently on a selected channel sending data using the BR (Basic Rate of 1 Mbps), EDR2 (Extended Data Rate of 2 Mbps) or EDR3 (Extended Data Rate of 3 Mbps) modulation types.

Mode 2: M2 (Bt Ink). Bluetooth Classic radio is paired to a companion device, transmitting and receiving data on various channels in accordance with the protocol, and maintaining the paired relationship.

Mode 3: M3 (Ble Tx). Bluetooth Low Energy radio transmitting consistently on a selected channel at 1 Mbps or 2 Mbps

Mode 4: M4 (Ble Ink). Bluetooth Low Energy radio is paired to a companion device, transmitting and receiving data on various channels in accordance with the protocol, and maintaining the paired relationship.

Mode 5: M5 (ANT Tx). ANT radio transmitting consistently on a selected channel.

Mode 6: M6 (ANT Ink). ANT radio is paired to a companion device, transmitting and receiving data in accordance with the protocol, and maintaining the paired relationship.

Mode 7: M7 (WiFi Tx). The IEEE 802.11 b/g/n radio was transmitting consistently on a selected channel, with a specified modulation type, and data rate.

Mode 8: M8 (WiFi Link). The IEEE 802.11 b/g/n radio is paired to a companion device, transmitting and receiving data on a selected channel in accordance with the protocol, and maintaining the paired relationship.

Mode 9: M9 (Rx 2.4). The radio was set to receive 2.4 GHz signals but not transmit. In this situation, it was specifically looking for Bluetooth Low Energy signals which cover the 2.4 GHz band and represent a worst-case scenario.

Mode 10: M10 (All2.4). This means the radio was tested in modes M1, M3, M5, and M7 if applicable.

Mode 11: M11 (GNSS). The Global Navigation Satellite System receiver is monitoring the GNSS bands, attempting to detect a constellation and determine location. Unless otherwise noted, the EUT was provided simulated GNSS signals representing one of more constellation types. In addition, the EUT may have been reporting signal levels and satellite data to an attached computer to monitor link health.

Mode 12: M12 (NFC Ink). The NFC 13.56 MHz transceiver is in Card Emulation mode, and is actively linked to a companion NFC Reader.

5.4 EUT Arrangement


During test, the EUT components and associated support equipment were selected including the following arrangement sets.

Arrangement 1: A1 (Solo). The test sample operates from its battery and no external physical connections. No block diagram is needed for this arrangement.

Arrangement 2: A2 (Upwr). The test sample is attached to a Mains-powered device connected that provides dc power to the sample over a cable but no user data. See the block diagram in Figure 1.

Arrangement 3: A3 (Udata). The test sample is attached to a Mains-powered device connected that provides dc power to the sample and user data over a cable. See the block diagram in Figure 1.

Arrangement 4: A4 (Udc). The test sample is attached to a Mains-powered device connected that provides dc power to the sample and may or may not provide user data. This arrangement is specified in the test plan to provide staff flexibility when the presence or absence of data on the cable is not pertinent. See the block diagram in Figure 1.

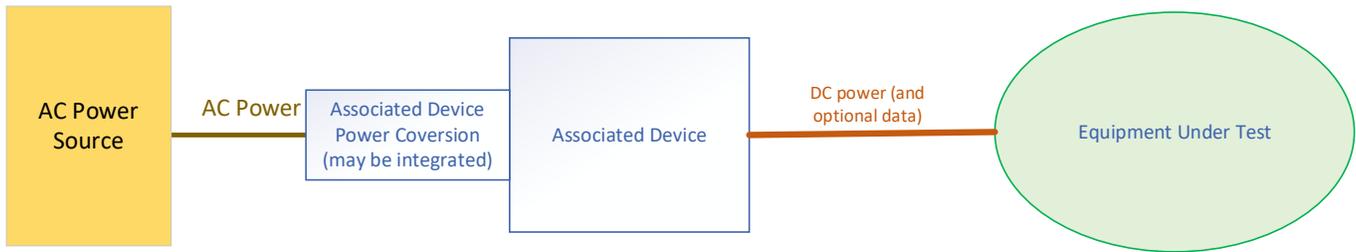

*This interconnect drawing is not to scale.
It does not indicate the placement of devices.*

Figure 1: Block diagram of equipment for arrangements A2, A3, A4

Arrangement 5: A5 (NFCp) The test sample is placed near an NFC Card Reader. The NFC Card Reader is connected to a laptop computer. The test sample is powered by a device that does not include data over the cable, just as with A2. For clarity, test sample is NOT powered by, or connected to, the laptop computer that powers the NFC Card Reader.

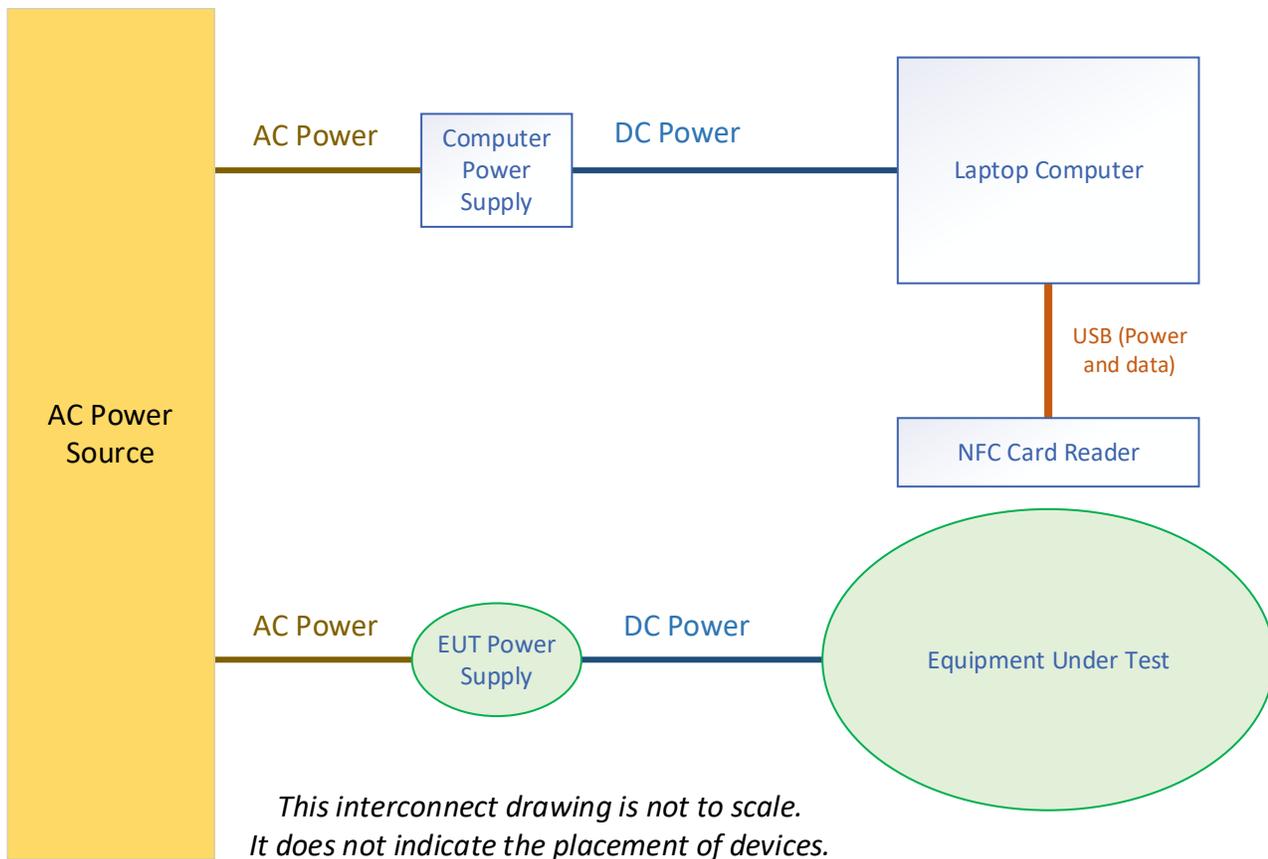


Figure 2: Block diagram of equipment arrangement A5

Arrangement 6: A6 (NFCu) The test sample is placed near an NFC Card Reader. The NFC Card Reader is connected to a laptop computer. The test sample is powered by its own batteries rather than an external power source.

5.5 Associated Equipment (AE) used

Description	Manufacturer	Model	Serial Number
AC/DC Power Converter	Phihong	PSAF10R-050Q	None
Laptop Computer	Dell	Latitude 5410	5VSPFB3
Laptop Power Supply	Dell	HA65NM191	None

Table 2: List of associated equipment that may have been used during test

5.6 Cables used

Description	From	To	Length	EMC Treatment
USB	Power and/or Data source	EUT	54 cm	None

Table 3: List of cables that may have been used during test

6 Test Standards Applied

6.1. Accredited Standards

The following test or measurement standards were applied and are within the scope of the lab's accreditation. All results in this report that cite these standards are presented as Accredited results consistent with ISO/IEC 17025.

- AS/NZS 4268: 2017
- CFR 47, FCC Part 15.247
- ANSI C63.10: 2013 and ANSI C63.10: 2020
- RSS-GEN Issue 5 Amd 2
- RSS-247 Issue 2

6.2. Non-accredited Standards

The following test or measurement standards were applied and are either outside the scope of the lab's accreditation, or were performed in such a way that results are not presented as being fully accredited.

- TRC-43 Issue 3

6.3 Variances

The following variances were applied to standards cited in this section.

Where different test standards cover the same test parameter or phenomenon, and the standards have compatible differences, the stricter of the requirements is typically applied. For example, a consolidated limit may be applied to emission tests selecting the strictest of the limits at each frequency. Likewise, if one standard requires a vertical antenna sweep with boresighting and another does not, swept motion with boresighting will typically be used as it is the more stringent requirement.

6.4 Laboratory Accreditation

The Garmin Compliance Lab, an organization within Garmin International, is registered with the US Federal Communication Commission as US1311. The lab is recognized by the Canada Department of Innovation, Science, and Economic Development (ISED) under CAB identifier US0233.

The Garmin Compliance Lab, an organization within Garmin International, is accredited by A2LA, Certificate No. 6162.01. The presence of the A2LA logo on the cover of this report indicates this is an accredited ISO/IEC 17025 test report. If the logo is absent, this report is not issued as an accredited report. Other marks and symbols adjacent to the A2LA logo are accreditation co-operations of which A2LA is a member under a mutual recognition agreement, and to which the Garmin Compliance Lab has been sublicensed.

7 Measurement Instrumentation Uncertainty

The lab has analyzed the sources of measurement instrumentation uncertainty. The analysis concludes that the actual measurement values cited in this report are accurate within the U_{LAB} intervals shown below with approximately 95% statistical confidence. Where the report shows a judgment that a test sample passes a test against a published limit based on these measured values, that judgment has a statistical confidence of 97.5% or greater. Measurement Instrumentation Uncertainty is one component of over-all measurement uncertainty, and other uncertainty components are not considered as part of this analysis.

The primary benchmark for measurement instrumentation uncertainty (MIU) in an electromagnetic compatibility (EMC) test lab is the set of U_{CISPR} values published in CISPR 16-4-2. In all cases where a U_{CISPR} value is published by CISPR, the analysis shows that U_{LAB} – this lab’s estimated MIU – is better than the U_{CISPR} benchmark.

The secondary benchmark for MIU in an EMC lab performing radio transceiver tests is a set of uncertainty limit values published in various ETSI standards. In this report, U_{ETSI} is the most restrictive of the values found in the ETSI EN standards listed in section 5 of this report. The analysis principles are described in the ETSI TR documents listed there. In most cases U_{LAB} is better than the U_{ETSI} benchmark. Where U_{LAB} exceeds the U_{ETSI} benchmark cited here, that entry is preceded by an asterisk. When required by the ETSI EN standards, excess uncertainty will be added to the measurand before comparison to a limit. In an individual test report, staff may re-evaluate that excess uncertainty based on the uncertainty of the method used and the uncertainty limits of the actual ETSI EN standard being applied, and the revised uncertainty values will be shown in the test report.

Some measurement uncertainties analyzed and reported here are not addressed in CISPR 16-4-2 or the ETSI standards, as indicated by the entry ‘None.’

Test Type	U_{LAB}	U_{CISPR}	U_{ETSI}
Conducted DC voltage	0.09% + 2 x LSDPV	None	1%
Conducted AC voltage below 500 Hz	1.0% + 3 x LSDPV	None	2%
Conducted Emissions, Mains Voltage	0.10% + 10 mV	None	None
Conducted Emissions, Mains Current	0.10% + 3 mA	None	None
Conducted Emissions, Mains Power	0.15% + 100 mW	None	None
Conducted Emissions, Power Mains, 9 kHz to 150 kHz	1.49 dB	3.8 dB	None
Conducted Emissions, Power Mains, 150 kHz to 30 MHz	1.40 dB	3.4 dB	None
Conducted Emissions, Cat 6 LCL, 150 kHz to 30 MHz	2.80dB	5 dB	None
Conducted Emissions, Cat 5 LCL, 150 kHz to 30 MHz	3.21 dB	5 dB	None
Conducted Emissions, Cat 3 LCL, 150 kHz to 30 MHz	4.24 dB	5 dB	None
Radiated Emissions, below 30 MHz	0.88 dB	None	6 dB
Radiated Emissions, 30 MHz to 1000 MHz	2.77 dB	6.3 dB	6 dB
Radiated Emissions, 1 GHz to 18 GHz	2.60 dB	5.2 & 5.5 dB	6 dB
Radiated Emissions, 18 GHz to 26.5 GHz	2.73 dB	None	6 dB
*Radio Signal Frequency Accuracy	*1.55 x 10 ⁻⁷	None	1.0 x 10 ⁻⁷
Radio Signal Occupied Bandwidth	0.95%	None	5%
Radio Power or Power Spectral Density	0.98 dB	None	1 dB
Temperature	0.38 °C	None	1 °C
Barometric Pressure	0.38 kPa	None	None
Relative Humidity	2.85% RH	None	±5% RH
Signal Timing	The greater of these three... 0.63 usec 0.01% of value 0.5 x LSDPV	None	None

Note: LSDPV stands for the Least Significant Digit Place Value reported. In the value 1470 msec, the least significant digit is the 7. It has a 10 msec place value. The LSDPV is thus 10 msec and the maximum error due to roundoff would be 5 msec. If the time value were reported as 1470 msec, the underscore indicates that the 0 is a significant figure and the error due to roundoff would be 0.5 msec. All digits provided to the right of a decimal point radix are significant.

8 Selected Example Calculations

Certain regulators require samples of the calculations that lead from the raw measurement to the final result for AC Mains conducted and unintended radiated emissions. The assumption is that the lab performs raw measurements, then adds, subtracts, multiplies, or divides based on transducer factors, amplifier gains, and losses in the signal transmission path. In this lab, our CISPR 16 Receiver does not work that way. The calibration factors and losses and gains are provided to the receiver as detailed data files. These factors are applied in the RF measurement path prior to the detector. But as a step in the lab measurement process, staff frequently verify that these factors are applied correctly. They make a measurement with the factors applied inside the receiver, then they disable the factors and remeasure the result manually adding in the various relevant factors.

The transmission loss is measured including the combined losses and gains of preamplifiers, cables, and any band-selective filters. In many cases above 1 GHz it is a negative value, indicating that the preamplifier gain is greater than these other losses.

Here are examples of these calculations. The data in these examples was not taken as part of this project:

8.1 AC Mains conducted emissions at 22 MHz

(Raw measurement) + (AMN factor) + (transmission loss) = Result

$$(7.145 \text{ dBuV}) + (9.812 \text{ dB}) + (0.216 \text{ dB}) = 17.173 \text{ dBuV}$$

8.2 Radiated Emissions at 630 MHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(2.25 \text{ dBuV}) + (27.80 \text{ dB/m}) + (2.89 \text{ dB}) = 32.94 \text{ dBuV/m}$$

8.3 Radiated Emissions at 2.7 GHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(43.72 \text{ dBuV}) + (32.22 \text{ dB/m}) + (-36.09 \text{ dB}) = 39.85 \text{ dBuV/m}$$

9 Environmental Conditions During Test

Environmental conditions in the test lab were monitored during the test period. Temperature and humidity are controlled by an air handling system. As information to the reader, the conditions were observed at the values or within the ranges noted below. For any tests where environmental conditions are critical to test results and require further constraints or details, the test records in the annex may provide more specific information.

Temperature:	20.5 to 23.6 °C
Relative Humidity:	34.3% to 55.7% (non-condensing)
Barometric Pressure	96.3 to 99.2 kPa

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
Barometer	Traceable	6453	221702700	3-Aug-2022	1-Aug-2024

Table 4: Environmental monitoring device

10 Immunity Performance Criteria

If this report includes immunity tests then results have been categorized as Performance Criteria A, B, C, or D. The standards that the lab applied will define the details for A, B, and C, as well as which criterion is required for each type of test. They will also define the electrical stresses that were applied during each test. In a very general sense the observed criteria noted in this report are as follows:

Criterion A. The stress applied did not alter product operation. This criterion is generally used for ‘continuous’ stresses that can be present for a long time in the places the product will be used, or that can appear often, even though they may come and go over time.

Criterion B. The stress applied altered product operation, but the product self-recovered so that the user would not have to try to figure out how to restore it to full operation. This criterion is generally used for 'transient' stresses that appear briefly and occasionally, but are usually not present in the places the product will be used.

Criterion C. The stress applied altered product operation, but the user could restore it to full operation, for example by power cycling the product. This criterion is generally used for 'transient' stresses that appear briefly and only rarely in the places the product will be used.

Criterion D. This is not an official criterion in the standards, because it would be a failure of the requirements. This indication in a test record means the product was affected in a way that the user might not be able to correct. The effect could include some degree of hardware damage, or it could include loss of program files or data files necessary for operation.

Repeatability is an issue in all EMC immunity work. When the product operation changes unexpectedly during a test, and the change would fail the requirements of the standard, this is an anomaly. The test operator needs to determine whether the anomaly was a result of the applied electrical stress. The investigation is done by repeating the section of the test where the anomaly occurred three times. If the same or a similar anomaly occurs in any of the three repeat trials, it is confirmed as a response to the stress. If not, the anomaly is judged unreproducible and is not considered when judging the A, B, or C observed performance. Since there is usually no ability to confirm a Criterion D anomaly, these are usually treated as Criterion D upon a single occurrence.

Tests that require Criterion B performance will be judged to Pass if criteria A or B is observed. Similarly, tests that require Criterion C performance will be judged to Pass if criteria A, B, or C is observed.

ANNEX

The remainder of this report is an Annex containing individual test data records. These records are the basis for the judgments summarized in section 1 of this report. The Annex ends with a set of concluding notes regarding use of the report.

Test Record
Transmitter DTS Bandwidth Tests
Test IDs TR02
Project GCL0458

Test Date(s) 28 Sep 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731

Operating Mode M10 (All2.4)
 Arrangement A3 (Udata)
 Input Power 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-GEN (as noted in Section 6 of the report).

Radio Protocol Bluetooth Low Energy (BLE), ANT
 Radio Band 2400 to 2483.5 MHz

Pass/Fail Judgment: PASS (BLE)

Test record created by: Majid Farah
Date of this record: 05 Oct 2023

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220146	3-Jun-2023	3-Jun-2024

Table TR02.1: List of test equipment used

Test Software Used: Keysight PXE firmware A.35.06

Test Method

During this test the transmitter output is fed directly, or through RF attenuators, to the spectrum analyzer. The analyzer has a built-in capability to identify the minimum bandwidth that contains a specified portion of the total power observed, and also identify parameters such as the edge frequencies for that bandwidth and the center frequency error. The spectrum is scanned many times so that the varied effects of modulation are appropriately assessed. Since the focus is on the relative distribution of energy across a range of frequencies, the absolute amplitudes recorded during this test are not relevant and may not include cable losses or attenuation factors.

Test Setup

This block diagram shows the test equipment setup.

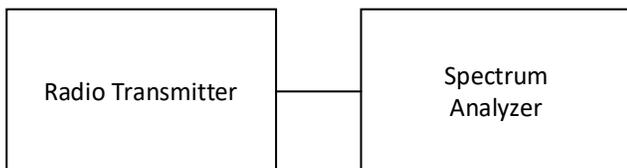


Figure TR02.1: Test setup

Test Data

The data for each test is summarized below, followed by the spectral data for each case highlighted in yellow. For BLE operating at 2 Mbps, the lowest operating frequency was 2404 MHz, and the highest operating frequency was 2478 MHz. For all other radios reported here, the lowest operating frequency was 2402 MHz, and the highest operating frequency was 2480 MHz.

The DTS Bandwidth is measured using a spectrum analyzer operating with a defined resolution bandwidth. The analysis finds the smallest continuous range of frequencies containing all emissions within 6 dB of the highest value. The requirement is that the DTS Bandwidth be greater than 500 kHz. As such the lowest measured bandwidth is worst case. Bluetooth radios are judged to have met this requirement. ANT is not part of this 15.247 report scope.

		2402 (04)	2440	2480 (78)
BLE	1 Mbps	720.40	713.80	704.00
BLE	2 Mbps	1163.00	1148.00	1157.00
ANT		500.20	495.80	495.90

Table TR02.2: Summary of DTS bandwidth data in kHz for ANT and BLE modes



Figure TR02.2: Bandwidth data for BLE 1 Mbps at 2480 MHz

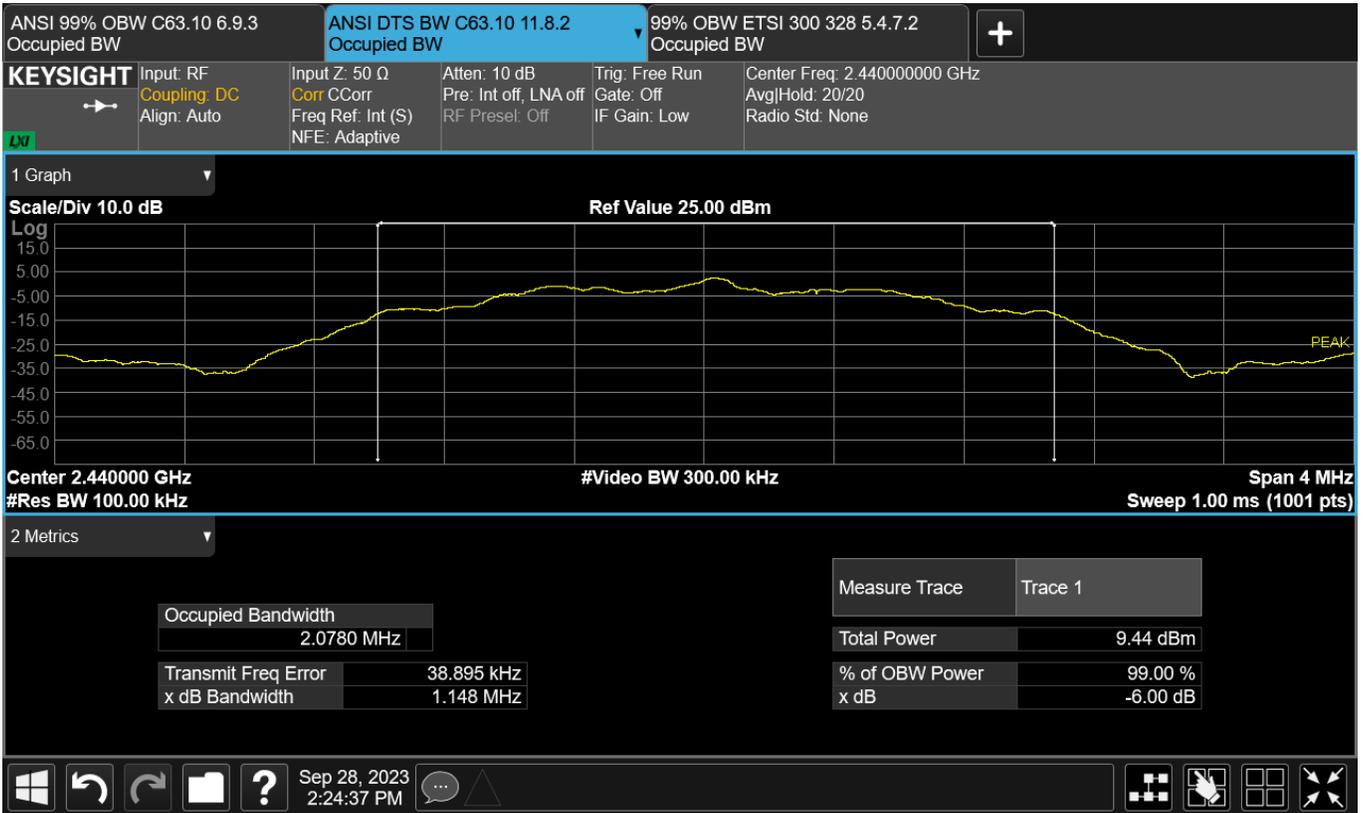


Figure TR02.3: Bandwidth data for BLE 2 Mbps at 2440 MHz

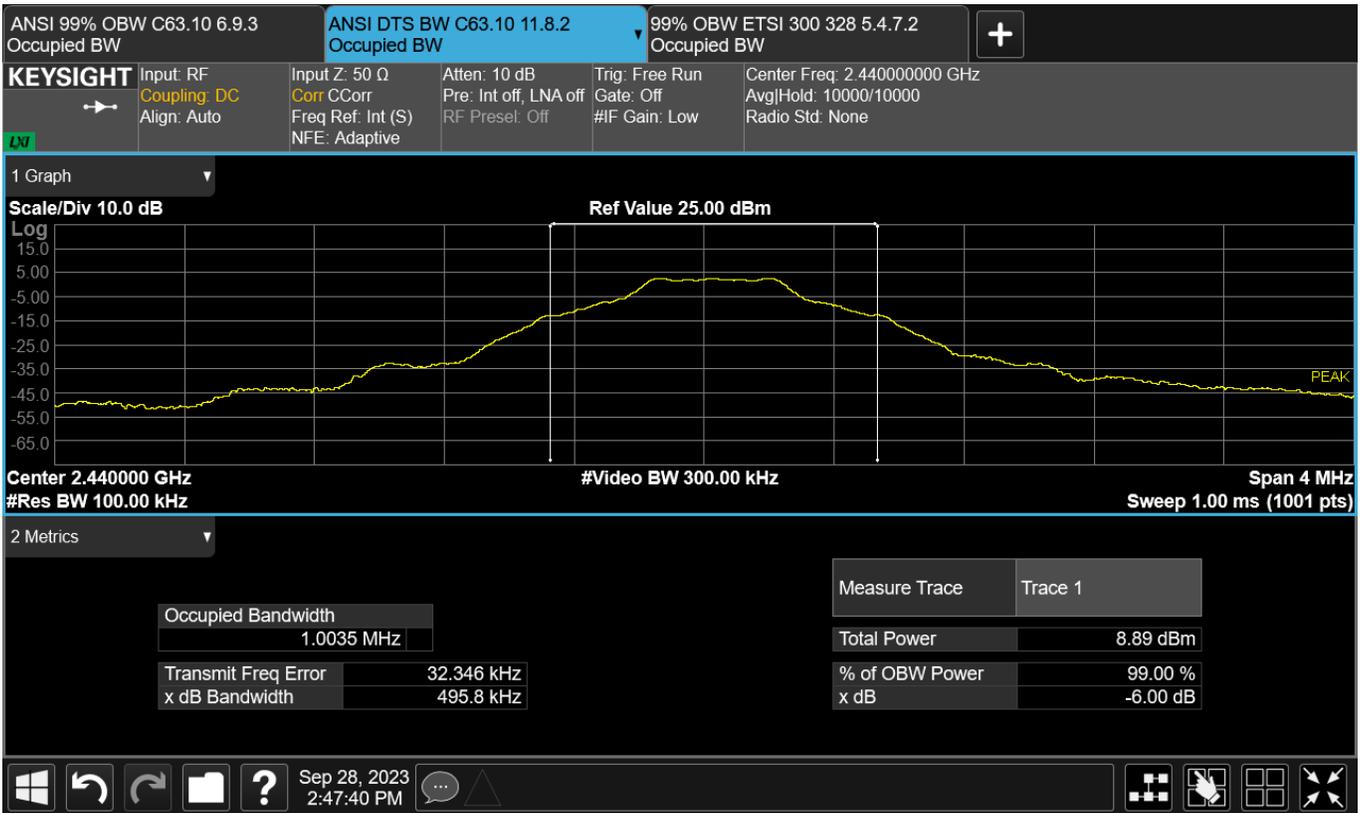


Figure TR02.4: Bandwidth data for ANT at 2440 MHz

This line is the end of the test record.

Test Record
Transmitter Bandwidth Tests
Test IDs TR03
Project GCL0458

Test Date(s) 28 Sep 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731

Operating Mode M10 (All2.4)
 Arrangement A3 (Udata)
 Input Power 5 Vdc

Test Standards: FCC Part 2.202, ANSI C63.10, TRC-43, RSS-GEN (as noted in Section 6 of the report).

Radio Protocol Bluetooth Low Energy (BLE), ANT
 Radio Band 2400 to 2483.5 MHz

Pass/Fail Judgment: Reported

Test record created by: Majid Farah
Date of this record: 03 Oct 2023
 Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220146	3-Jun-2023	3-Jun-2024

Table TR03.1: List of test equipment used

Test Software Used: Keysight PXE firmware A.35.06

Background

There are regulatory requirements to present two additional types of bandwidth analyses: 99% Occupied Bandwidth and Necessary Bandwidth. There are no limits or functional requirements around these data, beyond a reporting requirement. The contents of this test record are for information, and do not affect compliance of the devices that are the subject of this report.

For BLE operating at 2 Mbps, the lowest operating frequency was 2404 MHz, and the highest operating frequency was 2478 MHz. For all other Bluetooth, BLE, and ANT radios reported here, the lowest operating frequency was 2402 MHz, and the highest operating frequency was 2480 MHz.

Test Setup

This block diagram shows the test equipment setup.

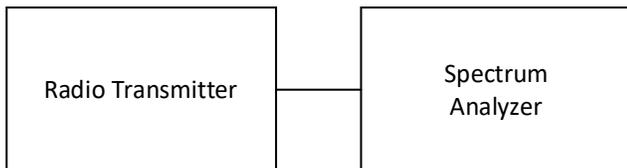


Figure TR03.1: Test setup

Occupied Bandwidth, 99% Test Method

During this test the transmitter output is fed directly, or through RF attenuators, to the spectrum analyzer. The analyzer has a built-in capability to identify the minimum bandwidth that contains a specified percentage of the total power observed. The spectrum is scanned hundreds of times so that the varied effects of modulation are appropriately assessed. Since the focus is on the relative distribution of energy across a range of frequencies, the absolute amplitudes recorded during this test are not relevant and may not include cable losses or attenuation factors.

Occupied Bandwidth, 99% Test Data

The data for each type of bandwidth is summarized below, followed by the spectral data for the cases highlighted in yellow. The analysis threshold for this test was the bandwidth containing 99% of the observed power using the ANSI C63.10 method. The standards require testing a frequency near the bottom, middle, and top of the band. The measured bandwidth data have MHz as their units of measure.

		2402 (04)	2440	2480 (78)
BLE	1 Mbps	1.049	1.049	1.051
BLE	2 Mbps	2.044	2.046	2.049
ANT		0.986	0.986	0.989

Table TR03.2: Summary of 99% bandwidth data in MHz for ANT and BLE modes

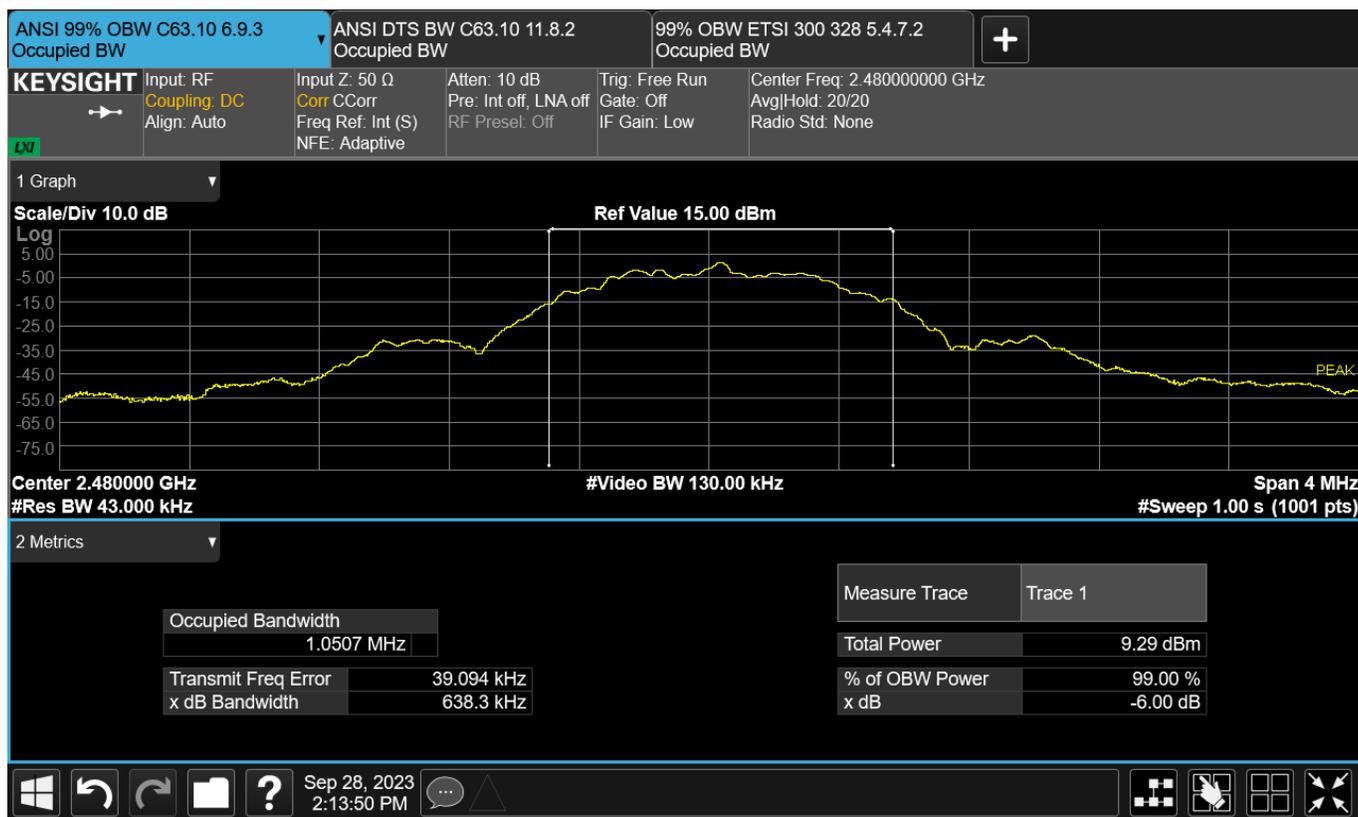


Figure TR03.2: Bandwidth data for BLE 1 Mbps at 2480 MHz

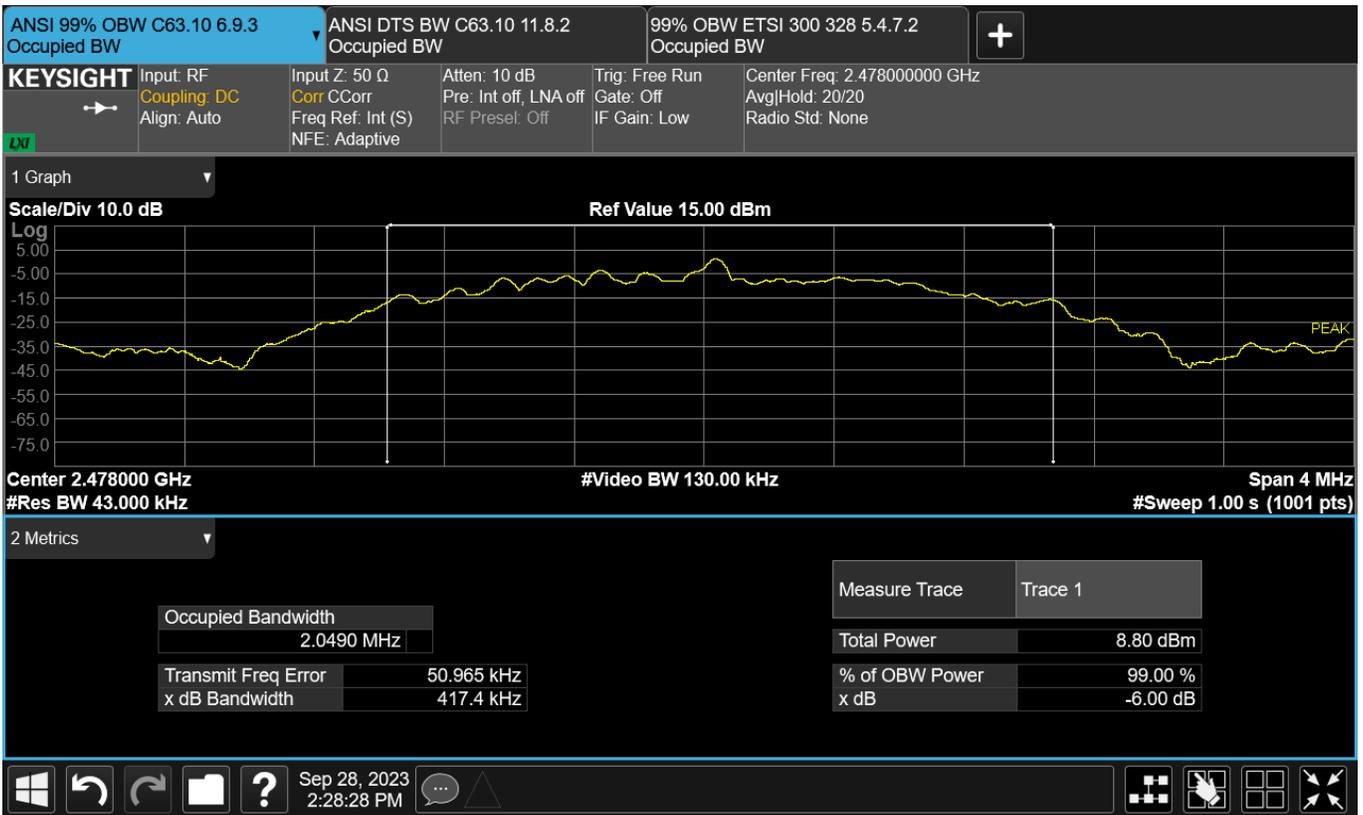


Figure TR03.3: Bandwidth data for BLE 2 Mbps at 2478 MHz

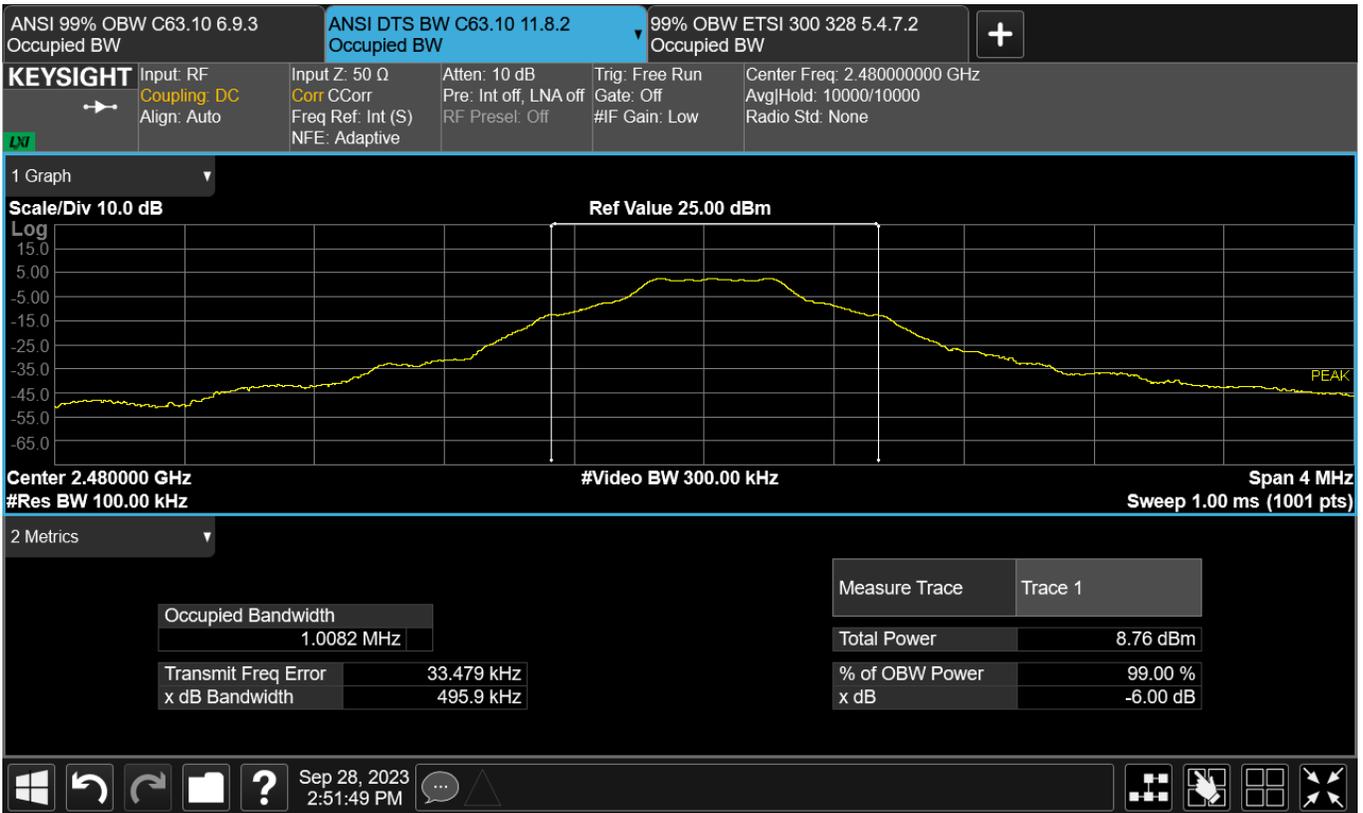


Figure TR03.4: Bandwidth data for ANT at 2480 MHz

Necessary Bandwidth Calculations

The Necessary Bandwidth is a theoretical value based on the specifications for a communication protocol, rather than the hardware implementation and a subsequent lab measurement. The analysis methods in FCC Part 2.202 and TRC-43 are the same for Bluetooth, ANT, and IEEE 802.11b WiFi. However, they differ for IEEE 802.11g and 11n systems because the Canadian TRC-43 standard provides different analysis methods for Orthogonal Frequency Division Multiplexing systems (OFDM). The tables below will show the analysis for most of the radios signals as a combined approach, then separately analyze the results for IEEE 802.11g and n systems. The tables below may include radio protocols that are not part of the product being evaluated.

The radio modulation schemes for Ant, for the various Bluetooth protocols, and for IEEE 802.11 b WiFi are a mix of Phase Shift Key (PSK) and Quadrature Amplitude Modulation (QAM) techniques. The Necessary Bandwidth calculations use the equations from 47CFR Part 2.202(g) table section 6. We have set the variable K=1, which leaves the equation for both PSK and QAM as:

$$B_N = 2R / \text{Log}_2(S)$$

where B_N is the Necessary Bandwidth, R is the bit rate, and S is the number of signaling states.

Radio Type	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
ANT / ANT+	1	1	2	1	2

Table TR03.101: Necessary Bandwidth for ANT and ANT+ Radio Protocols (FCC and TRC-43)

Radio Type	Sub-type	Method	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
Bluetooth	BR	GFSK	1	1	2	1	2
	EDR2	Pi/4 DPSK	2	1	4	2	2
	EDR3	8DPSK	3	1	8	3	2
BLE	1Mbps	GFSK	1	1	2	1	2
	2Mbps	DQPSK	2	1	4	2	2

Table TR03.102: Necessary Bandwidth for Bluetooth Radio Protocols (FCC and TRC-43)

Radio Type	Sub-type	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
802.11 b	1	1	1	2	1	2
	2	2	1	4	2	2
	5.5	5.5	1	4	2	5.5
	11	11	1	4	2	11

Table TR03.103: Necessary Bandwidth for IEEE 802.11 b Radio Protocol (FCC and TRC-43)

Radio Type	Sub-type	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
802.11 g	6	6	1	2	1	12
	9	9	1	2	1	18
	12	12	1	4	2	12
	18	18	1	4	2	18
	24	24	1	16	4	12
	36	36	1	16	4	18
	48	48	1	64	6	16
	54	54	1	64	6	18
	802.11 n	MCS0	7.2	1	2	1
MCS1		14.4	1	4	2	14.4
MCS2		21.7	1	4	2	21.7
MCS3		28.9	1	16	4	14.5
MCS4		43.3	1	16	4	21.7
MCS5		57.8	1	64	6	19.3
MCS6		65	1	64	6	21.7
MCS7		72.2	1	64	6	24.1

Table TR03.104: Necessary Bandwidth for IEEE 802.11 g and n 20 MHz Radio Protocols (FCC)

As a note, the bit rate for IEEE 802.11 n WiFi is calculated based on the IEEE standard's short guard interval of 400 nsec. If only the long guard interval of 800 nsec were implemented, the bit rate for MCS7 would decrease to 65 Mbps for a Necessary Bandwidth of 21.7 MHz.

The TRC-43 method for OFDM signals simply multiplies the number of subcarriers, K, and the subcarrier spacing, N_s. In both cases, N_s is 312.5 kHz. The count of subcarriers includes nulls. So for example, 802.11 n uses 4 pilot subcarriers, 52 data subcarriers, and one null suppressed subcarrier in the middle for 57 total subcarrier channels.

$$B_N = N_s * K$$

Radio Type	N _s (MHz)	K	BN (MHz)
802.11g	0.3125	53	16.6
802.11n	0.3125	57	17.8

Table TR03.105: Necessary Bandwidth for IEEE 802.11 g and n 20 MHz Radio Protocols (TRC-43)

This line is the end of the test record.

Test Record
Transmitter Power
Test IDs TR01
Project GCL0458

Test Date(s) 25 Sep 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731

Operating Mode M10 (All2.4)
 Arrangement A3 (Udata)
 Input Power 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, ETSI EN 300 328, RSS-GEN, RSS-247 (as noted in Section 6 of the report).

Antenna Gain -0.3 dBi, as reported by the client.
 Radio Protocol Bluetooth Low Energy, ANT

Pass/Fail Judgment: PASS

Test record created by: Majid Farah
Date of this record: 27 Sep 2023
 Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
RF Power Sensor	Rohde&Schwarz	NRP8S	109927	7-Jul-2023	1-Jul-2024

Table TR01.1: List of test equipment used

Software used: Rohde & Schwarz Power Viewer V11.3; TimePowerAnalysisSpreadsheetv10.xls

Test Method

The basic test standards provide options for the time evaluation test method. The following test methods were applied.

ETSI EN 300 328: 5.4.2.2.1
 ANSI C63.10: 11.9.1.3

The parameters of duty cycle, transmitter timing, or medium utilization are typically not required for adaptive transceivers or transceivers emitting at 10 dBm EIRP or less, so those results will be omitted from the data set.

Transmit Power Data

Each measurement is made conducted from the antenna port with the transmitter on a specified channel and in a selected transmission protocol.

Where standards cited here apply different analytical test methods for the same fundamental data or different limits, the results for both methods are provided and the more-strict limit may be applied. In this case, the ANSI method finds the highest value (numerical peak) and applies the 30 dBm limit from the US and Canadian standards. By contrast, the ETSI method reports the highest numerical average observed during any transmission burst and applies a 20 dBm EIRP limit. All values met the respective limits with more than 10 dB of margin.

The results are shown below. Yellow highlighted cells indicate the highest power value for each radio protocol. Bluetooth Low Energy at the 2 Mbps data has its lowest and highest channel frequencies set at 2404 MHz and 2478 MHz. The lowest and highest operating channel frequencies for the other protocols are 2402 MHz and 2480 MHz.

	Frequency (MHz)			ANSI Limit (dBm)
	2402 (04)	2440	2478 (80)	
ANT	3.48	3.37	3.24	30
BLE 1 Mbps	3.48	3.38	3.25	30
BLE 2 Mbps	3.49	3.39	3.26	30

Table TR01.2: Transmit Power Summary in dBm with ANSI C63.10 analytical methods

	Frequency (MHz)			ETSI Limit (dBm EIRP)
	2402 (04)	2440	2480 (78)	
ANT	3.09	2.99	2.87	20
BLE 1 Mbps	2.99	2.89	2.76	20
BLE 2 Mbps	2.36	2.27	2.14	20

Table TR01.3: Transmit Power Summary in dBm EIRP with ETSI analytical methods

Additional Transmit Power Data Analysis

The technical requirements for safety to RF exposure also look at transmitter power. Since data from this report may be compared with data from RF exposure reports, this lab has performed a further analysis of the same raw data for power over time used above. This analysis applies standards such as FCC Part 2.1091, FCC Part 2.1093, RSS-102, ANSI C95.3, EN/IEC 62311, or EN 62479.

These data analyses look at average power over time in linear milliwatt units. These data are averaged over a time period no longer than 1 second.

	Frequency (MHz)		
	2402 (04)	2442	2480 (78)
ANT	2.17	2.12	1.97
BLE 1 Mbps	0.91	0.89	0.86
BLE 2 Mbps	0.49	0.48	0.47

Table TR01.4: Additional RF exposure power summary, with units of milliwatt

Setup Diagram

The following block diagrams show how the EUT and test equipment is arranged for test. The client provided a short length of cable to bring the signals out to a connector. This cable was found to have 0.7 dB of loss in this frequency range. This factor was taken into account during the data analysis.

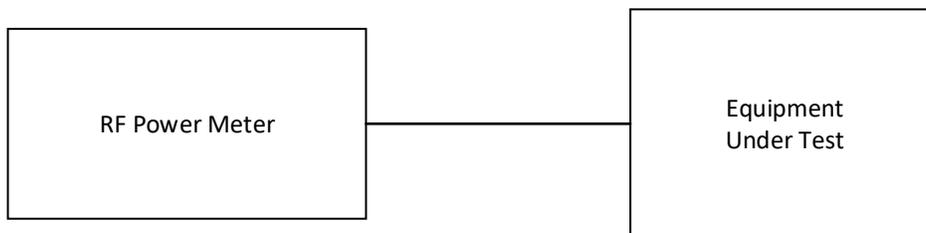


Figure TR01.1: Test equipment setup

This line is the end of the test record.

Test Record
Conducted Spurious Emissions
Test IDs TR08
Project GCL-0458

Test Date(s) 11 Oct 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731
 Operating Mode M3 (Ble Tx)
 Arrangement A3 (Udata)
 Input Power 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-GEN, RSS-247 (as noted in Section 6 of the report).

Pass/Fail Judgment: PASS

Test record created by: Jim Solum
 Date of this test record: 23 Oct 2023

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220146	3-Jun-2023	3-Jun-2024

Table TR08.1: Test equipment used

Software used: Keysight PXE software. A.35.06

Test Method

The basic test standards provide options for the test method. The following test methods were applied.
 ANSI C63.10: 11.11.2 and 11.11.3

Test Setup

This block diagram shows the test equipment setup.

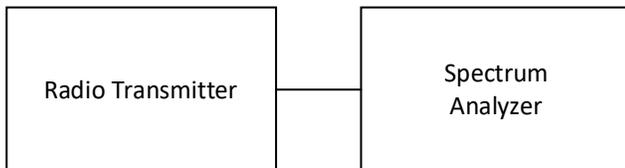


Figure TR08.1: Test setup

Test Data

The conducted spurious emission test measures the strength of intentional and unintentional radio signals conducted from the transmitter to the antenna across a wide range of frequencies. It does not evaluate whether intentional signals meet specific limits. Rather, it ensures that magnitudes unintentional signals are sufficiently reduced relative to the intentional signal to satisfy the requirements of the relevant standards.

This measurement requires that a coaxial feed line from the transmitter is available as a connector exterior to the test sample. This feed line and connector may be a part of the shipping product, or it may be a special modification to the product for testing purposes. The connector is attached via laboratory cables to the measurement instrument. The results have been adjusted to account for the losses in the laboratory cables. Where feasible, the losses of any added feed lines are also included in that adjustment.

Data is collected using the required detector function(s) across the frequency range. The instrument uses a 100 kHz bandwidth detector.

The data table below shows the final measurement data which may be at harmonics of the carrier, or at frequencies that represent one of the highest data points measured.

The peak level of the fundamental is also identified. The harmonics or spurious emissions must be reduced from this fundamental level by 20 dBc. This harmonic limit is calculated and used to determine compliance. A reduction from the carrier that is greater than 20 is a passing result. The minimum margin from the peak level for each mode are highlighted in yellow.

Data plots are provided for the worst-case data sets. One plot shows the spectrum at the carrier, and another shows the spectrum across the band. On this second plot, a green reference line is at approximately the 20 dBc maximum spurious emission level.

	Frequency (MHz)		
	2402	2440	2480
BLE 1 Mbps	43.7	47.06	44.67

Table TR08.2: Results Summary



Figure TR08.2: Reference level measurement for Bluetooth BLE 1 Mbps at 2402 MHz

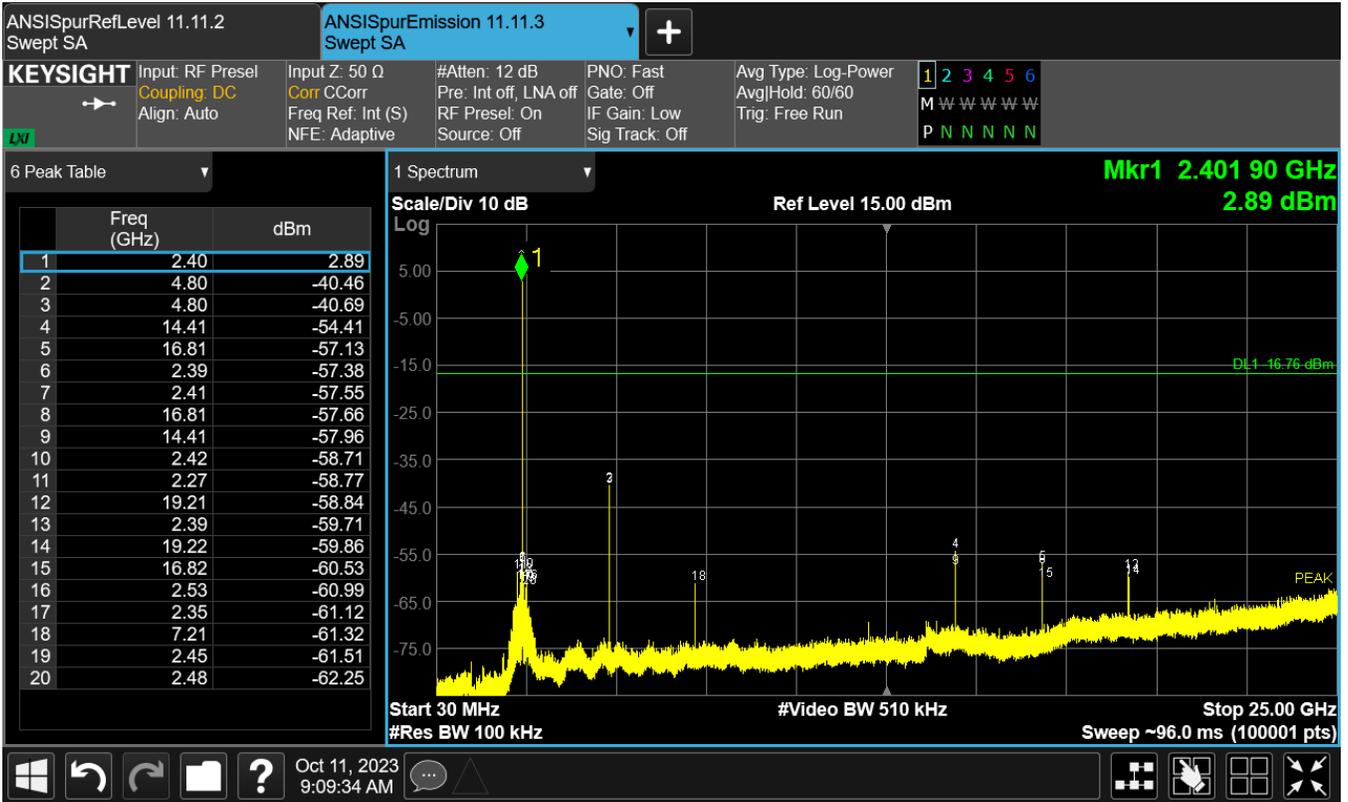


Figure TR08.3: Spectral data for Bluetooth BLE 1 Mbps at 2402 MHz

This line is the end of the test record.

Test Record
Radiated Emission Tests RE01, RE02
Project GCL0458

Test Date(s) 18 Sep 2023
 Test Personnel Jim Solum

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M3 (Ble Tx), M5 (ANT Tx)
 Arrangement A2 (Upwr)
 Input Power 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, (as noted in Section 6 of the report).

Frequency Range: FCC Restricted Bands (2200-2390MHz, 2483.5-2500MHz)
Pass/Fail Judgment: PASS

Test record created by: Jim Solum
Date of this record: 25 Sep 2023

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	7-Jun-2023	1-Jun-2024
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	16-Nov-2022	16-Nov-2025
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/0	1	Calibration	Not Required
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10721	30-Aug-2023	1-Sep-2026

Table RE01.1: Test Equipment Used

Software Used

Keysight PXE N9048B Firmware version A.33.03
 RE Signal Maximization Tool v2023Jul14.xlsx
 FCC Restricted Band 2p4GHz Template v1b 2023Jun20.xlsx

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst-case frequencies selected by the test personnel while observing the receiver display. The turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings for each of the restricted band ranges. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

Restricted band measurements in the lower band were made while the transmitter was tuned to its lowest frequency of 2402 MHz. Measurements in the upper band were made while the transmitter was tuned to its highest frequency of 2480 MHz.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The tables show the selected final measurement data between the FCC restricted bands. It includes the strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC restricted band Class B Limit at 3m.

Frequency (MHz)	Avg Limit (dBuV/m)	Pk Limit (dBuV/m)	Avg Level (dBuV/m)	Pk Level (dBuV/m)	Av Margin (dB)	Pk Margin (dB)	Azimuth (degree)	Height (mm)	Polarity
2390	54	74	33.628	57.467	20.372	16.533	-5	1062	HORZ
2386	54	74	34.757	55.264	19.243	18.736	-5	1062	HORZ

Table RE01.2: Emission summary FCC restricted band from 2200 to 2390 MHz (BLE1)

Frequency (MHz)	Avg Limit (dBuV/m)	Pk Limit (dBuV/m)	Avg Level (dBuV/m)	Pk Level (dBuV/m)	Av Margin (dB)	Pk Margin (dB)	Azimuth (degree)	Height (mm)	Polarity
2483.5	54	74	35.367	65.045	18.633	8.955	13	1120	HORZ
2483.5	54	74	35.364	65.079	18.636	8.921	13	1120	HORZ

Table RE01.3: Emission summary FCC restricted band from 2483.5 to 2500 MHz (BLE1)

Frequency (MHz)	Avg Limit (dBuV/m)	Pk Limit (dBuV/m)	Avg Level (dBuV/m)	Pk Level (dBuV/m)	Av Margin (dB)	Pk Margin (dB)	Azimuth (degree)	Height (mm)	Polarity
2390	54	74	33.849	57.61	20.151	16.39	-5	1062	HORZ
2386	54	74	37.941	55.427	16.059	18.573	-5	1062	HORZ

Table RE01.4: Emission summary FCC restricted band from 2200 to 2390 MHz (ANT)

Frequency (MHz)	Avg Limit (dBuV/m)	Pk Limit (dBuV/m)	Avg Level (dBuV/m)	Pk Level (dBuV/m)	Av Margin (dB)	Pk Margin (dB)	Azimuth (degree)	Height (mm)	Polarity
2483.5	54	74	36.421	64.89	17.579	9.11	13	1120	HORZ
2488	54	74	37.039	58.326	16.961	15.674	13	1120	HORZ

Table RE01.5: Emission summary FCC restricted band from 2483.5 to 2500 MHz (ANT)

The graphs below show the background spectrum observed during pre-scan, as well as the final data points from the table above.

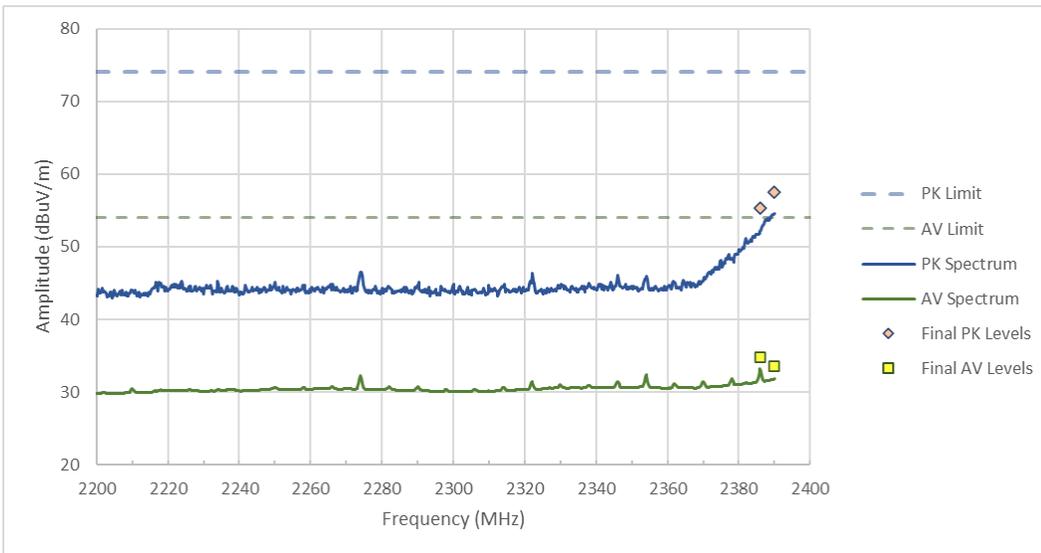


Figure RE01.1: Spectral data FCC restricted band from 2200 to 2390 MHz (BLE1)

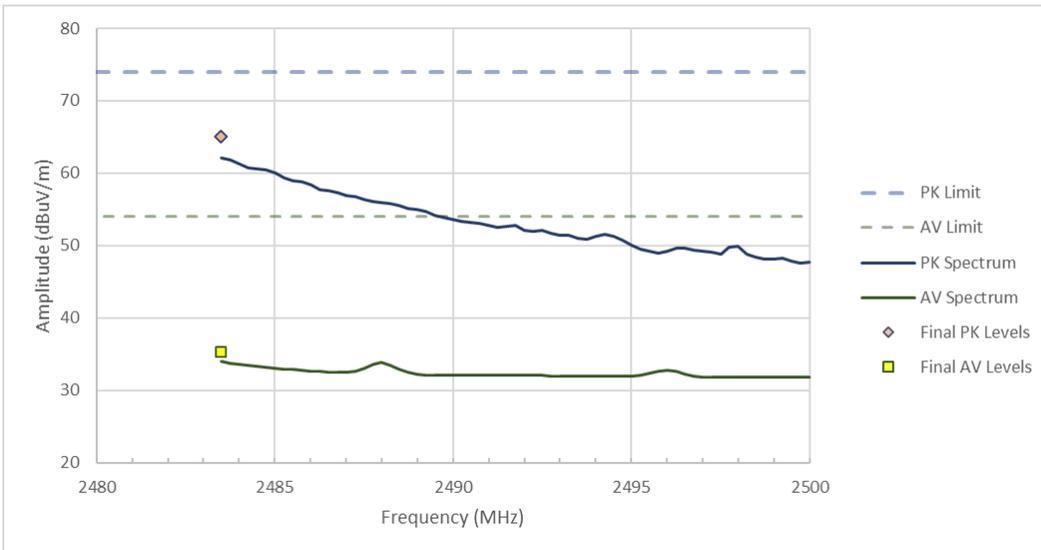


Figure RE01.2: Spectral data FCC restricted band from 2483.5 to 2500 MHz (BLE1)

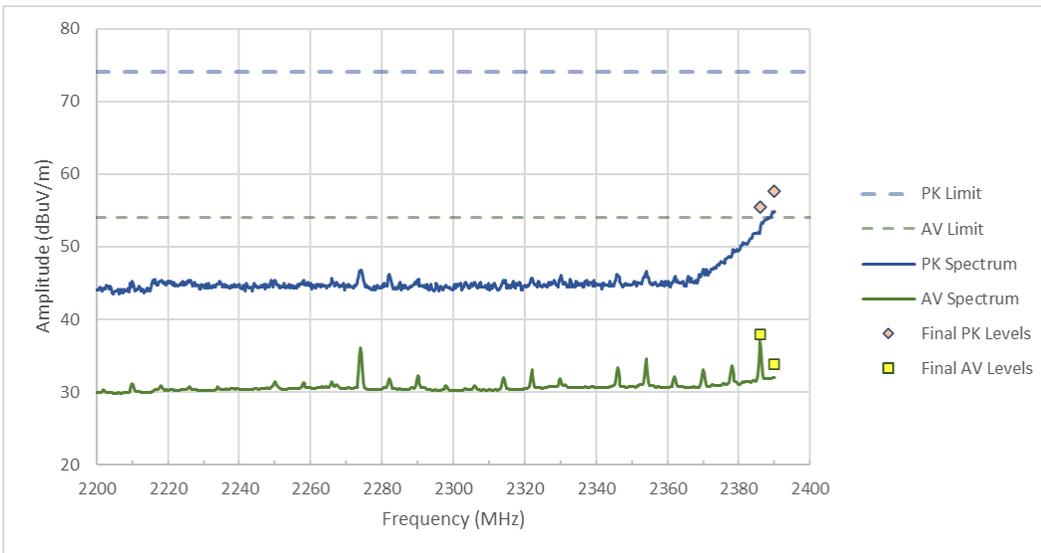


Figure RE01.3: Spectral data FCC restricted band from 2200 to 2390 MHz (ANT)

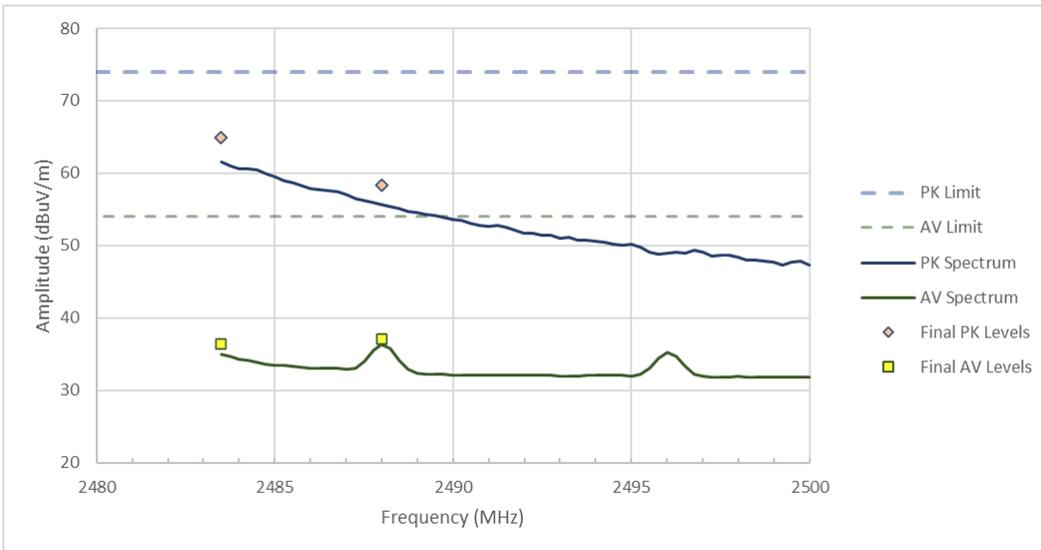


Figure RE01.4: Spectral data FCC restricted band from 2483.5 to 2500 MHz (ANT)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

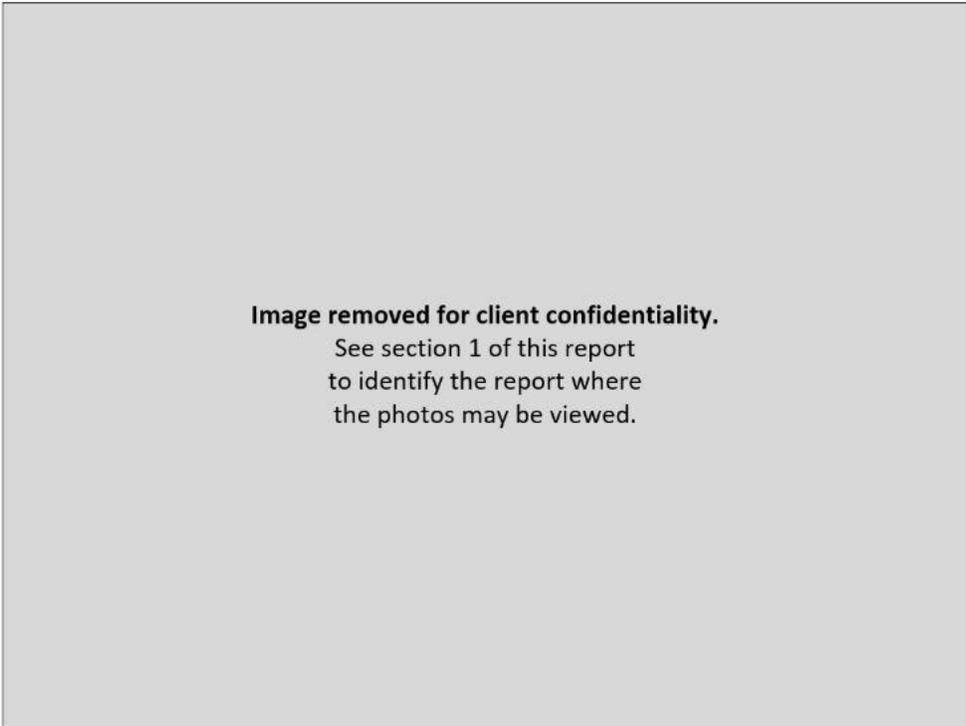


Figure RE01.5: EUT test setup, front view (X orientation)



Figure RE01.6: EUT test setup, reverse view (X orientation)

This line is the end of the test record.

Test Record
Transmitter Power Spectral Density
Test IDs TR05
Project GCL-0458

Test Date(s) 10 Oct 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731

Operating Mode M3 (Ble Tx)
 Arrangement A3 (Udata)
 Input Power 5Vdc

Test Standards: FCC Part 15, ANSI C63.10, AS/NZS 4268, RSS-GEN, RSS-247 (as noted in Section 6 of the report).

Antenna Gain -0.30 dBi, as reported by the client
 Radio Protocol Bluetooth Low Energy (BLE)

Pass/Fail Judgment: PASS

Test record created by: Jim Solum
Date of this record: 23 Oct 2023

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220146	3-Jun-2023	3-Jun-2024

Table TR05.1: Test equipment used

Software Used: Keysight PXE software A.35.06

Test Method

The basic test standards provide options for the test method. The following test methods were applied.
 ANSI C63.10: PKPSD (11.10.2)

Test Setup

This block diagram shows the test equipment setup.

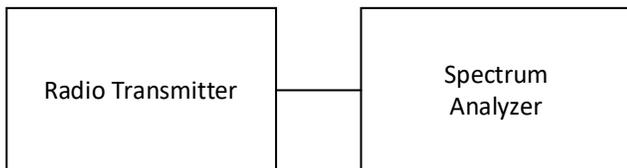


Figure TR05.1: Test setup

Test Data

Each measurement is made conducted from the antenna port with the transmitter on a specified channel and in a selected transmission protocol. The results include the effects of any measurement cable losses. Results reported are in units of dBm/Bandwidth and do not include the effect of antenna gain. The standard limit is 8 dBm / 3 kHz,

and meeting the limit with higher resolution bandwidths is permitted. All data met the limit using a 30 kHz resolution bandwidth.

For BLE operating at 2 Mbps, the lowest operating frequency was 2404 MHz, and the highest operating frequency was 2478 MHz. For all other Bluetooth, BLE, and ANT radios reported here, the lowest operating frequency was 2402 MHz, and the highest operating frequency was 2480 MHz.

The highest PSD levels for each mode are highlighted in yellow, and graphical results are provided for those cases.

	2402 (04)	2440	2480 (78)
BLE 1 Mbps	-12.67	-12.66	-13.02
BLE 2 Mbps	-14.47	-14.38	-14.76

Table TR05.2: Summary of results

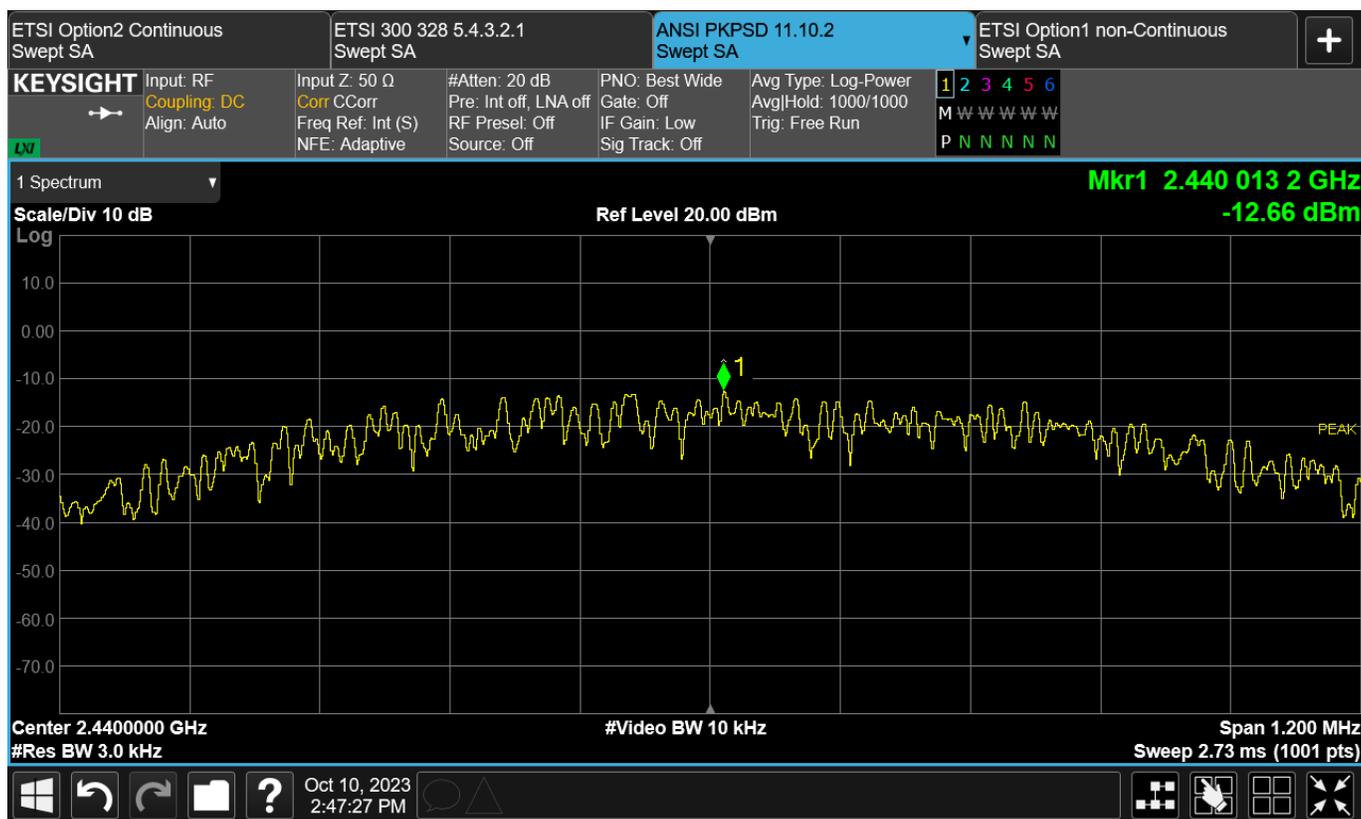


Figure TR05.2: Test data for BLE 1 Mbps, 2440 MHz.

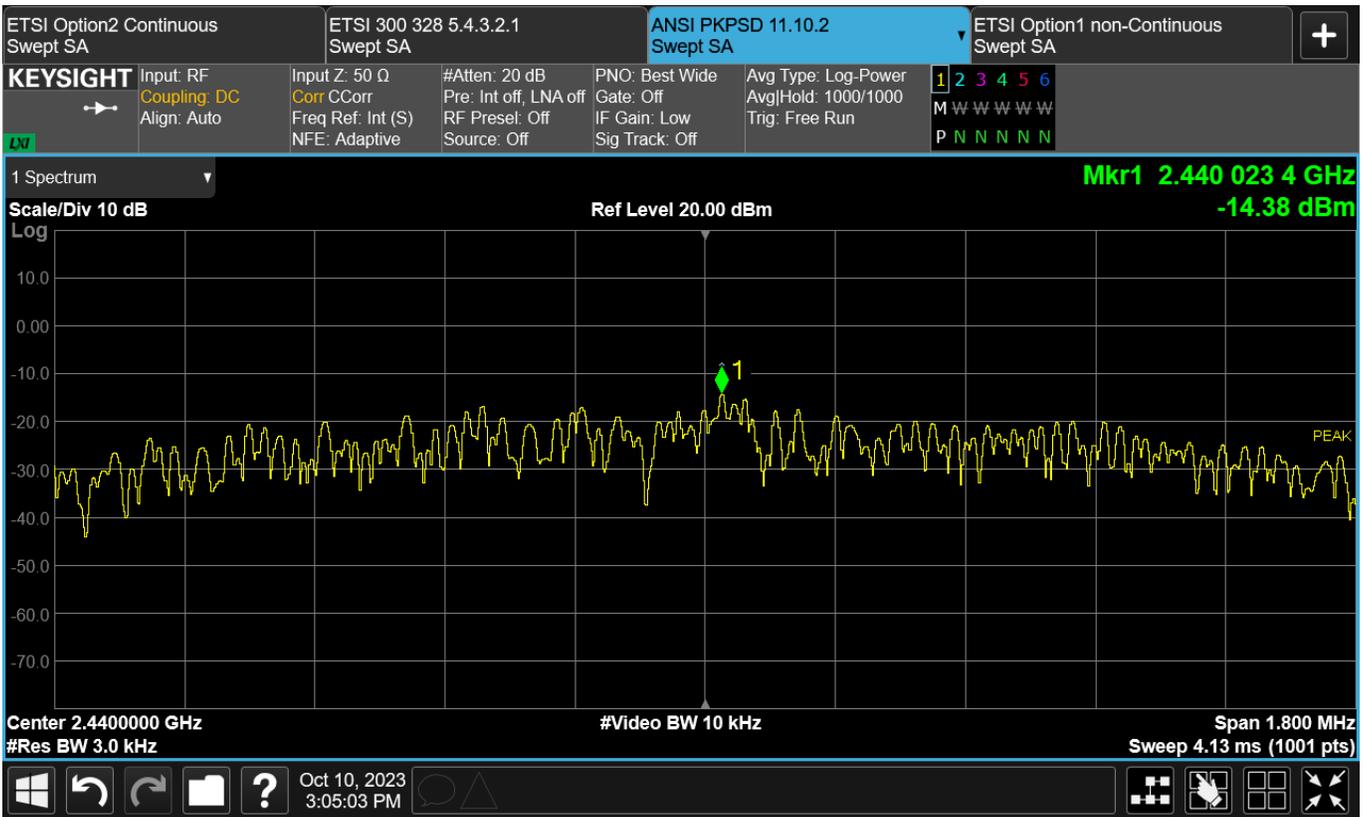


Figure TR05.3: Test data for BLE 2 Mbps, 2440 MHz.

This line is the end of the test record.

Test Record
Transmitter Stability in Extreme Conditions
Test IDs TR15
Project GCL-0458

Test Date(s) 15 Oct 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731

Operating Mode M1 (BTx)
 Arrangement A3 (Udata)
 Nominal Input Power 5 Vdc

Test Standards: FCC part 15, RSS-GEN, ANSI C63.10 (as noted in Section 6 of the report)

Radio Protocol BLE (Bluetooth Low Energy), ANT

Pass/Fail Judgment: PASS

Test record created by: Majid Farah
Date this record: 18 Oct 2023
 Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Thermometer	Thermco	ACCD370P	220608121	26-Aug-2022	1-Sep-2024
Barometer	Traceable	6453	221702700	3-Aug-2022	1-Aug-2024
DMM Multimeter	FLUKE	79 III	71740743	5-Apr-2023	1-Apr-2024
Programmable DC power source	Keithley	2260B-30-72 720 W	1411917	21-Apr-2023	15-Apr-2024
Thermal Chamber	Tenney	T2RC	32774-02	Calibration	Not Required

Table TR15.1: Equipment used

Software Used: PXE Software Revision A.33.03, FrequencyStabilityAnalysisTemplateV1.xlsx

Test Method

The standards cited require observation of the stability for transmission frequency and/or power at certain environmental extremes. The reference is performance on nominal input voltage and a temperature of 20 °C. Where the standards cited here impose different limits or conditions, the most stringent limits and conditions have been applied.

The acceptance criterion is that the 6 dBc Occupied Bandwidth of the modulated signal should remain within the 2400-2483.5 MHz radio band. The modes utilized include those that showed emissions closest to the band edge during prior bandwidth testing.

Test Data

The test sample(s) were subjected to extreme conditions and performed as shown below. Yellow highlights indicate the highest level for a protocol, for which an image of the spectrum is also provided. In the spectral plots, the data sets have been combined to present the low and high channel results side by side. Orange diamond markers indicate the spectral peak, which the black square markers are at the 2400 MHz or 2483.5 MHz band edge.

Tx Mode	Temp	Volts	Low Ch.	High Ch.
Bluetooth	°C	Vdc	dBc	dBc
BLE 1 Mbps	50	5	31.2	36.4
BLE 1 Mbps	40	5	32.3	34.6
BLE 1 Mbps	30	5	32.0	34.1
BLE 1 Mbps	20	5	32.7	32.8
BLE 1 Mbps	10	5	33.2	32.1
BLE 1 Mbps	0	5	32.6	31.2
BLE 1 Mbps	-10	5	33.1	30.5
BLE 1 Mbps	-20	5	32.4	30.0

Table TR15.2 Difference between peak and band edge levels for BLE 1 Mbps transmissions during temperature variations

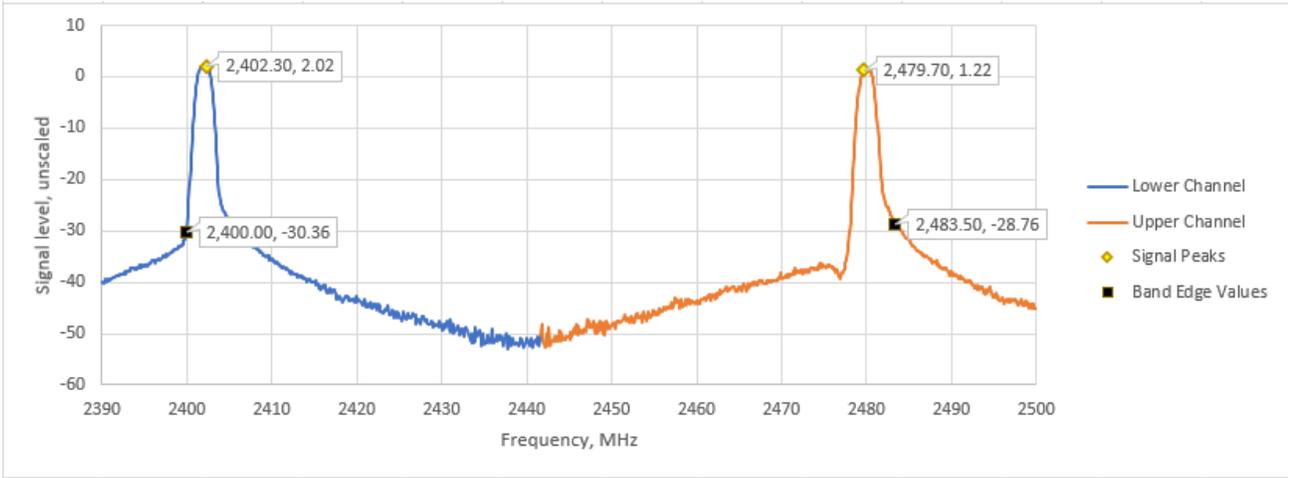


Figure TR15.1: Spectral data for BLE 1 Mbps at -20 °C which represent low and high channel

Tx Mode	Temp	Volts	Low Ch.	High Ch.
Bluetooth	°C	Vdc	dBc	dBc
BLE 1 Mbps	20	4.25	32.7	32.9
BLE 1 Mbps	20	5	32.7	32.8
BLE 1 Mbps	20	5.75	32.9	32.8

Table TR15.3 Difference between peak and band edge levels for BLE 1 Mbps transmissions at 20 °C during voltage variations

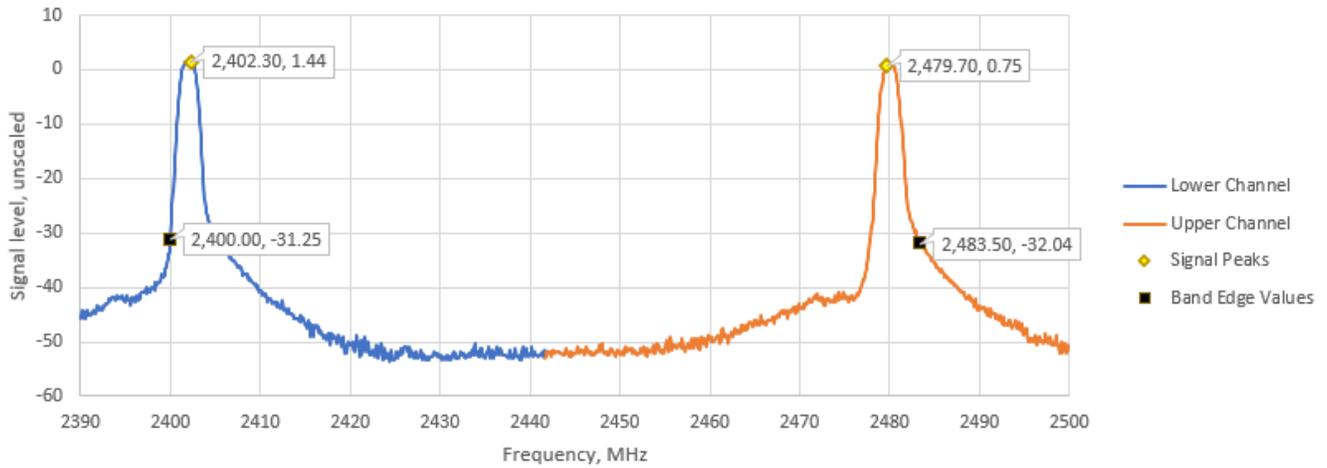


Figure TR15.2: Spectral data for BLE 1 Mbps at 20 °C which represent low and high channel

Setup Block Diagram

The following block diagrams show the EUT configured and arranged in the manner which it was measured.

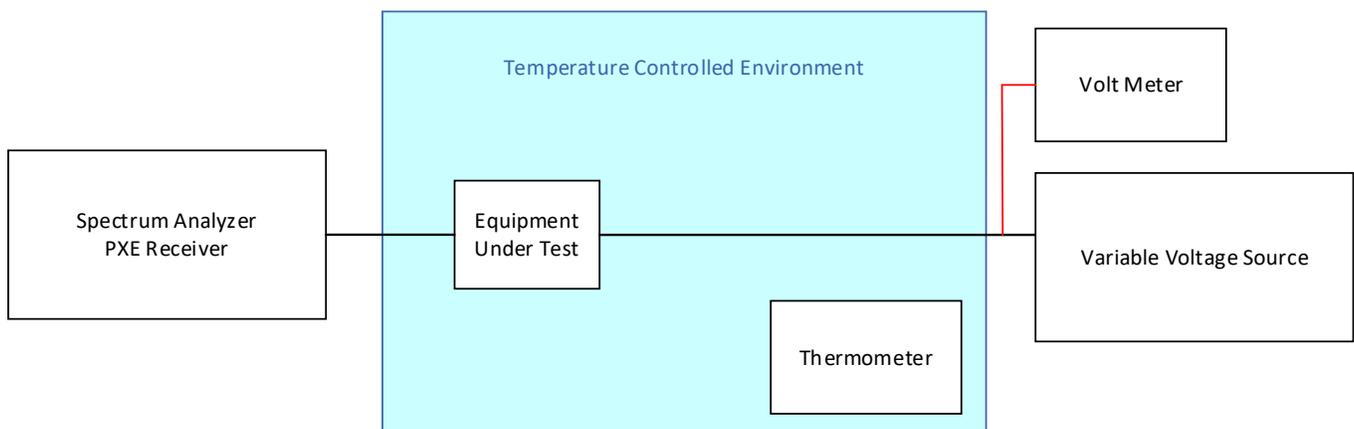


Figure TR15.3: Schematic drawing of the test equipment setup

This line is the end of the test record.

Test Record
Radiated Emission Test RE03
Project GCL0458

Test Date(s) 14 Oct 2023
 Test Personnel David Kerr, assisted by Aditya Prakash

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M3 (Ble Tx)
 Arrangement A2 (Upwr)
 Input Power 5 VDC (USB)

Test Standards: FCC Part 15, ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 30 MHz to 1000 MHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 14 Oct 2023

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 26 GHz	Keysight	N9048B	MY59290135	27-Sep-2023	1-Oct-2024
Antenna, Biconilog, 30M-6 GHz	ETS Lindgren	3142E	00233201	19-Jul-2022	15-Jul-2024
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	7-Nov-2022	7-Nov-2025
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10720	16-Jan-2023	15-Jan-2026

Table RE03.1: Test Equipment Used

Software Used:
 N9048B Keysight PXE firmware version A.32.06
 EPX/RE automation software ver. 2023.01.001

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 30 MHz and 1 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m.

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μV)	dB(1/m)	dB(μV/m)	dB(μV/m)	dB	cm	deg
		QP		QP	QP	QP		
216.000	H	5.7	19.4	25.1	43.5	18.4	119.8	306.0
33.570	V	5.4	20.9	26.3	40.0	13.7	100.0	354.0
52.020	V	7.7	13.9	21.6	40.0	18.4	100.0	212.0
51.480	V	8.0	14.0	22.0	40.0	18.0	100.0	203.0
107.430	V	6.4	16.6	23.0	43.5	20.5	100.0	356.0
107.580	V	6.4	16.6	23.0	43.5	20.5	100.0	41.0

Table RE03.2: Emission summary (2402MHz)

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μV)	dB(1/m)	dB(μV/m)	dB(μV/m)	dB	cm	deg
		QP		QP	QP	QP		
216.000	H	4.9	19.4	24.3	43.5	19.2	115.9	291.0
944.970	H	0.6	36.8	37.4	46.0	8.6	263.4	151.0
33.600	V	5.4	20.9	26.3	40.0	13.7	100.0	141.0
51.330	V	7.9	14.0	21.9	40.0	18.1	100.0	177.0
107.670	V	6.5	16.6	23.1	43.5	20.4	100.0	43.0
107.760	V	6.5	16.6	23.1	43.5	20.4	100.0	49.0

Table RE03.3: Emission summary (2440MHz)

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μV)	dB(1/m)	dB(μV/m)	dB(μV/m)	dB	cm	deg
		QP		QP	QP	QP		
154.950	H	1.5	18.9	20.4	43.5	23.1	389.1	355.0
216.000	H	4.7	19.4	24.1	43.5	19.4	143.7	314.0
52.050	V	7.5	13.9	21.4	40.0	18.6	100.0	157.0
81.360	V	5.4	14.3	19.7	40.0	20.3	115.9	33.0
107.760	V	6.1	16.6	22.7	43.5	20.8	100.0	59.0
181.440	V	2.8	18.5	21.3	43.5	22.2	100.0	291.0

Table RE03.4: Emission summary (2480MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

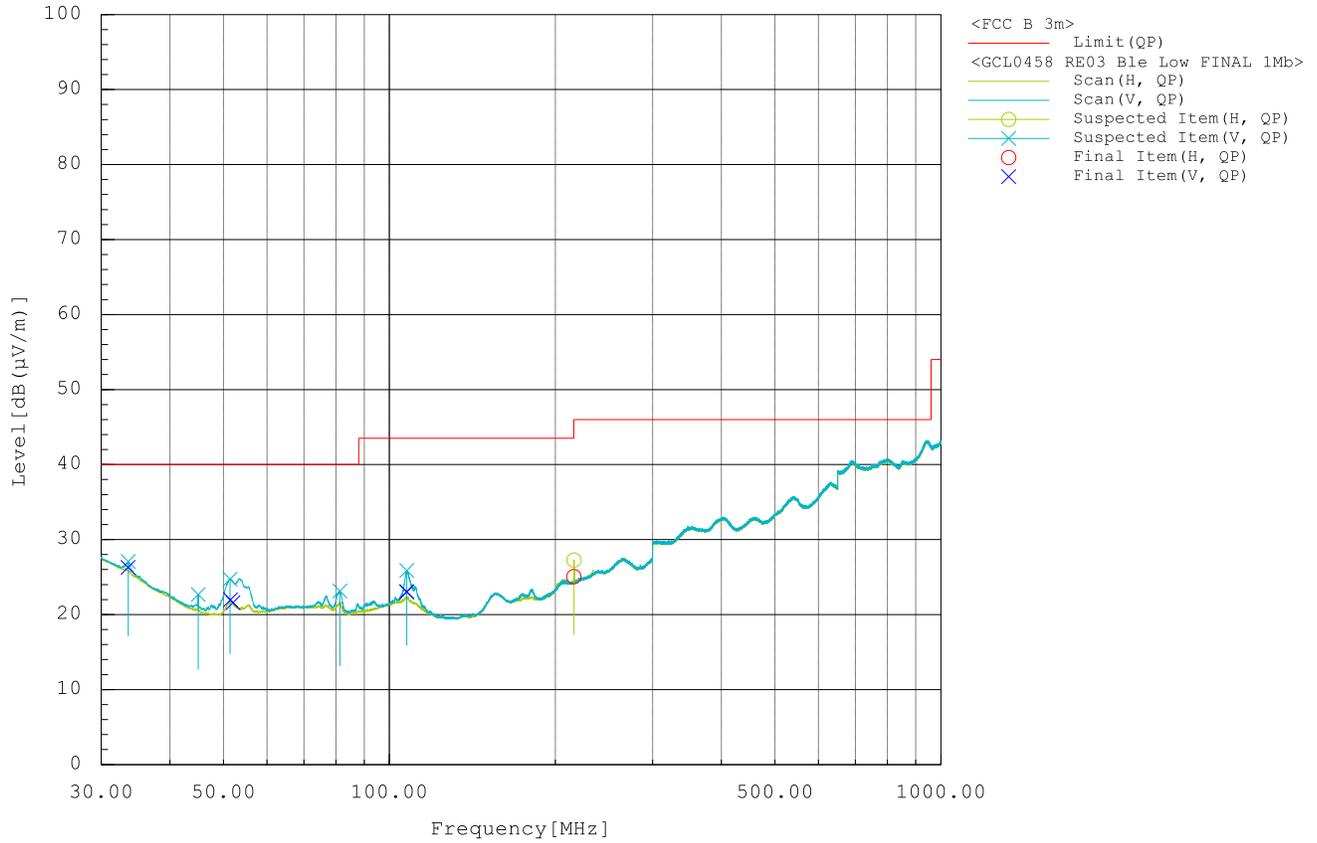


Figure RE03.1: Spectral data (2402MHz)

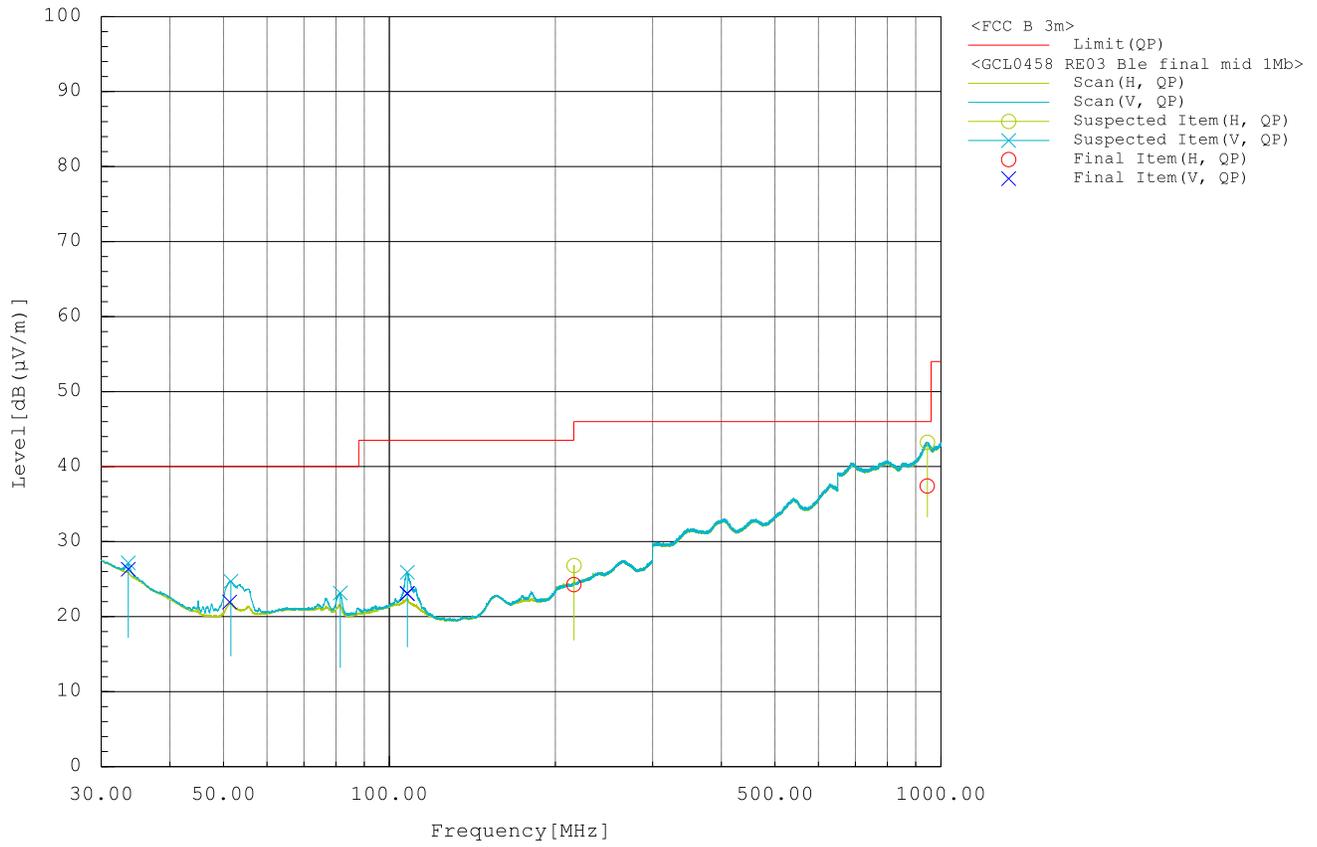


Figure RE03.2: Spectral data (2440MHz)

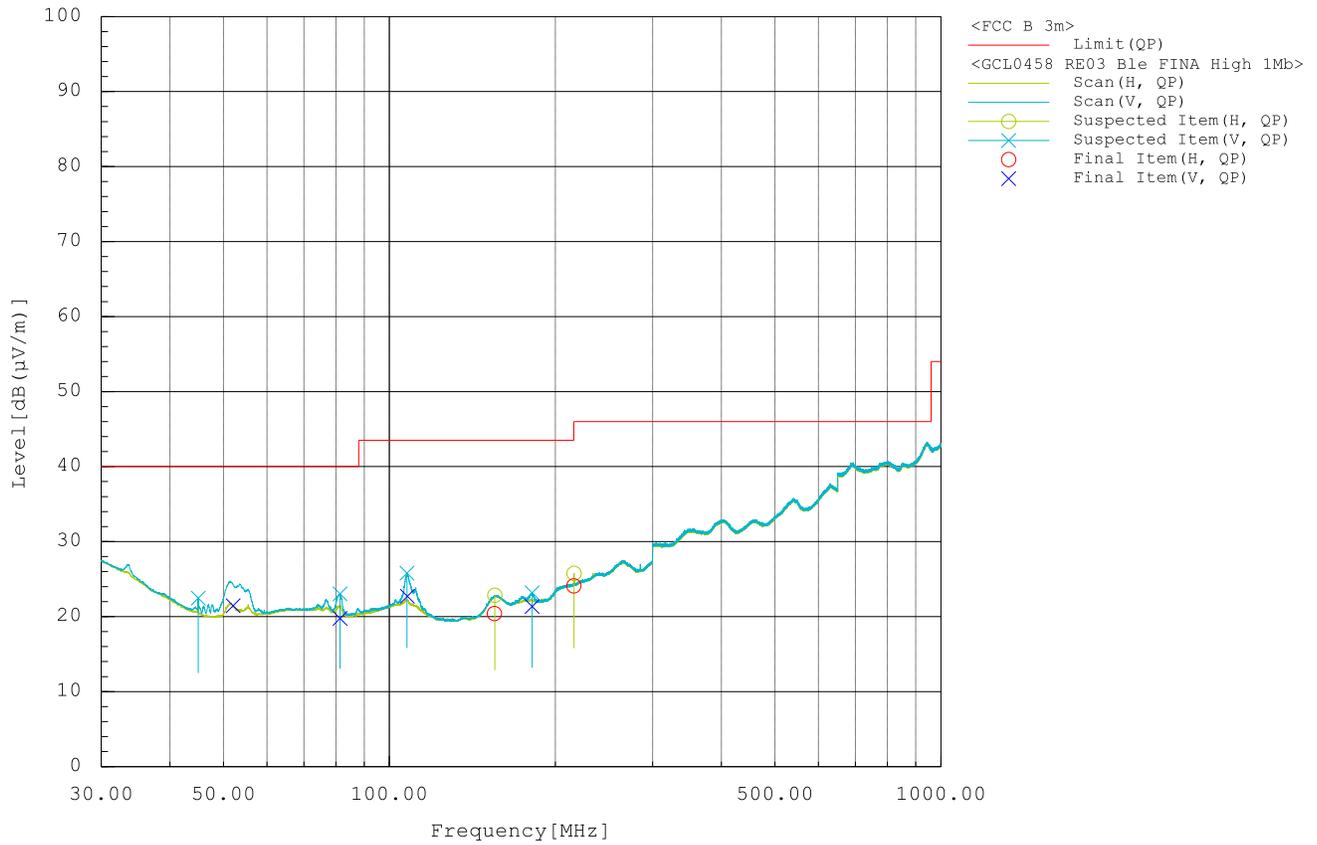


Figure RE03.3: Spectral data (2480MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE03.4: EUT test setup, front view (X orientation)

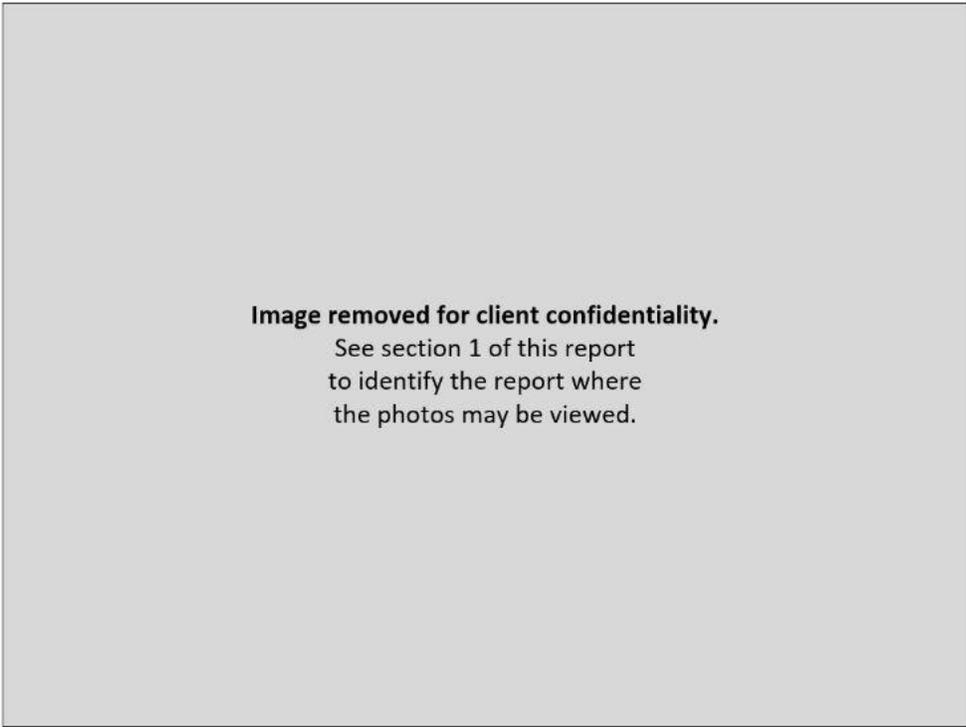


Figure RE03.5: EUT test setup, reverse view (X orientation)

This line is the end of the test record.

Test Record
Radiated Emission Test RE04
Project GCL0458

Test Date(s) 10 Oct 2023
 Test Personnel Dave Kerr, Jim Solum

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M3 (Ble Tx)
 Arrangement A2 (Upwr)
 Input Power 5 Vdc (USB)

Test Standards: FCC Part 15, ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 1 GHz to 2.2 GHz
Pass/Fail Judgment: PASS

Test record created by: Dave Kerr, Jim Solum
Date of this record: 10 Oct 2023

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	7-Jun-2023	1-Jun-2024
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	16-Nov-2022	16-Nov-2025
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10721	30-Aug-2023	1-Sep-2026
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/01		Calibration	Not Required

Table RE04.1: Test Equipment Used

Software Used: N9048B Keysight PXE firmware version A.33.03
 EPX/RE automation software ver. 2023.01.001

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The tables show the selected final measurement data between 1000 MHz and 2200 MHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m.

Frequency MHz	Pol.	Reading		Factor dB(1/m)	Level		Limit		Margin		Height cm	Angle deg
		dB(μ V)			dB(μ V/m)		dB(μ V/m)		dB			
		CAV	PK		CAV	PK	AV	PK	CAV	PK		
1179.750	V	32.1	45.9	-5.4	26.7	40.5	54.0	74.0	27.3	33.5	100.0	270.0
1071.000	H	31.4	45.0	-6.1	25.3	38.9	54.0	74.0	28.7	35.1	323.5	67.0
1326.750	H	31.9	45.6	-4.2	27.7	41.4	54.0	74.0	26.3	32.6	400.0	270.0
1492.750	H	32.0	46.1	-3.5	28.5	42.6	54.0	74.0	25.5	31.4	374.2	169.0
1677.750	H	32.1	45.9	-3.7	28.4	42.2	54.0	74.0	25.6	31.8	212.6	331.0
2126.000	H	32.6	46.0	-1.3	31.3	44.7	54.0	74.0	22.7	29.3	114.5	158.0

Table RE04.2: Emission summary (Ble 1Mb low 2402MHz)

Frequency MHz	Pol.	Reading		Factor dB(1/m)	Level		Limit		Margin		Height cm	Angle deg
		dB(μ V)			dB(μ V/m)		dB(μ V/m)		dB			
		CAV	PK		CAV	PK	AV	PK	CAV	PK		
1271.000	V	31.8	45.0	-4.3	27.5	40.7	54.0	74.0	26.5	33.3	357.6	182.0
2042.500	V	32.4	46.0	-1.5	30.9	44.5	54.0	74.0	23.1	29.5	349.8	331.0
1112.000	H	31.8	45.4	-6.0	25.8	39.4	54.0	74.0	28.2	34.6	151.9	30.0
1325.250	H	31.9	45.3	-4.2	27.7	41.1	54.0	74.0	26.3	32.9	381.3	270.0
1930.500	H	32.7	46.0	-1.8	30.9	44.2	54.0	74.0	23.1	29.8	242.4	41.0
1527.750	H	31.9	45.4	-3.8	28.1	41.6	54.0	74.0	25.9	32.4	100.0	251.0

Table RE04.3: Emission summary (Ble 1Mb Mid 2440MHz)

Frequency MHz	Pol.	Reading		Factor dB(1/m)	Level		Limit		Margin		Height cm	Angle deg
		dB(μ V)			dB(μ V/m)		dB(μ V/m)		dB			
		CAV	PK		CAV	PK	AV	PK	CAV	PK		
1304.000	H	31.8	45.1	-4.3	27.5	40.8	54.0	74.0	26.5	33.2	246.3	67.0
1515.250	H	32.0	45.4	-3.6	28.4	41.8	54.0	74.0	25.6	32.2	108.6	40.0
1866.750	H	32.3	46.3	-2.2	30.1	44.1	54.0	74.0	23.9	29.9	199.4	219.0
1786.750	V	32.3	45.9	-2.7	29.6	43.2	54.0	74.0	24.4	30.8	329.5	251.0
1442.750	V	32.1	45.9	-3.9	28.2	42.0	54.0	74.0	25.8	32.0	311.9	323.0
1991.750	V	32.4	46.6	-1.7	30.7	44.9	54.0	74.0	23.3	29.1	347.9	127.0

Table RE04.4: Emission summary (Ble 1Mb High 2480MHz)

The graphs below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

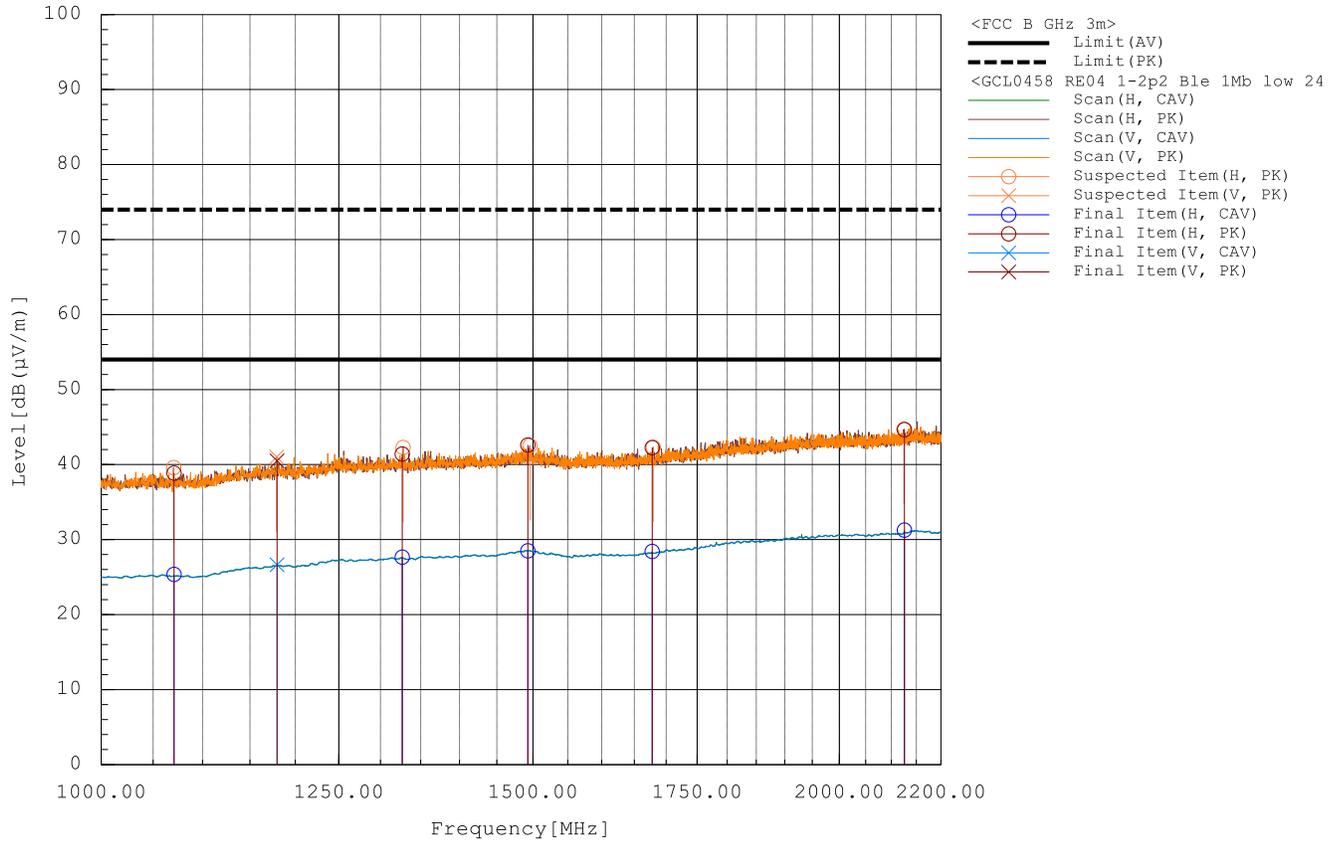


Figure RE04.1: Spectral data (Ble 1Mb low 2402MHz)

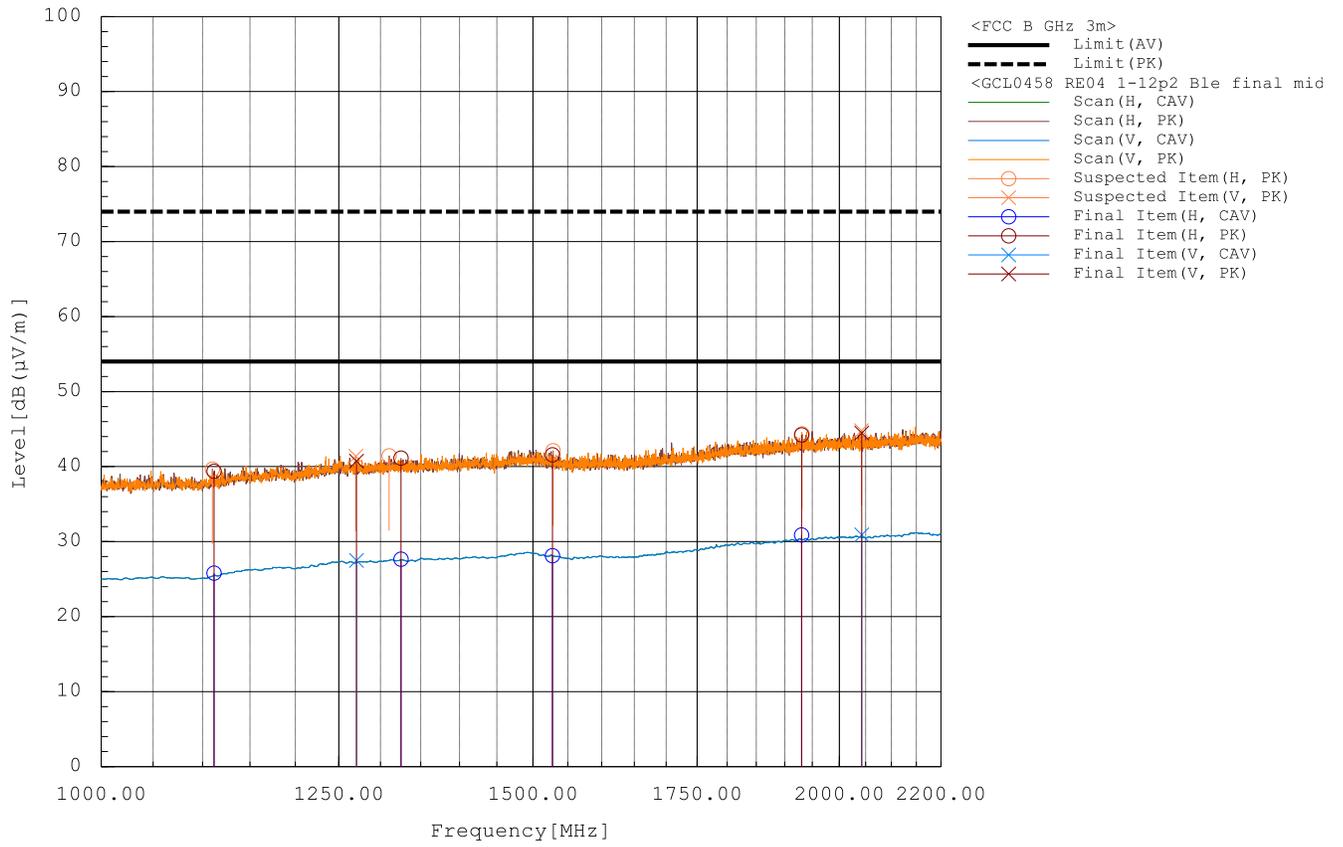


Figure RE04.2: Spectral data (Ble 1Mb Mid 2440MHz)

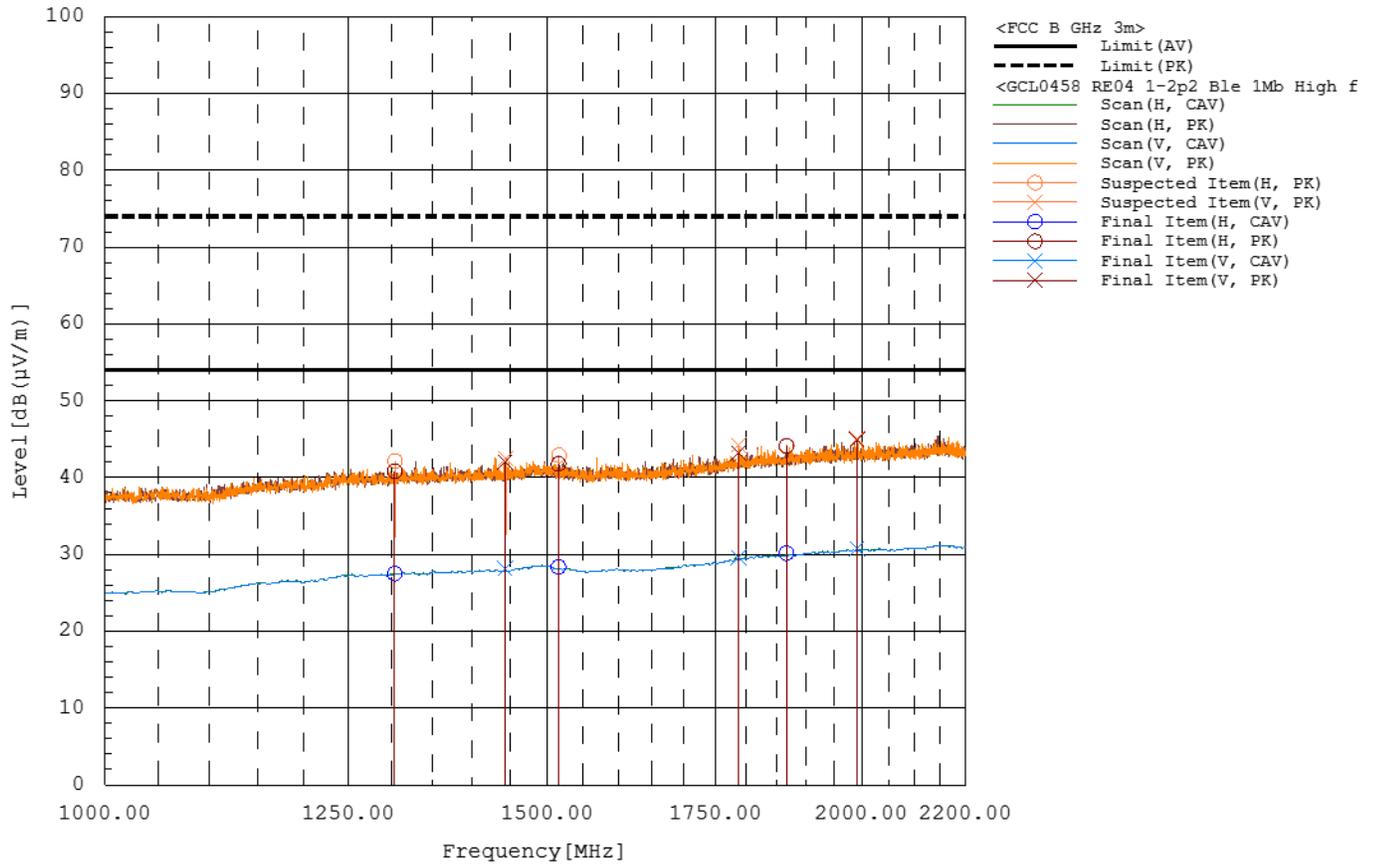


Figure RE04.3: Spectral data (Ble 1Mb High 2480)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

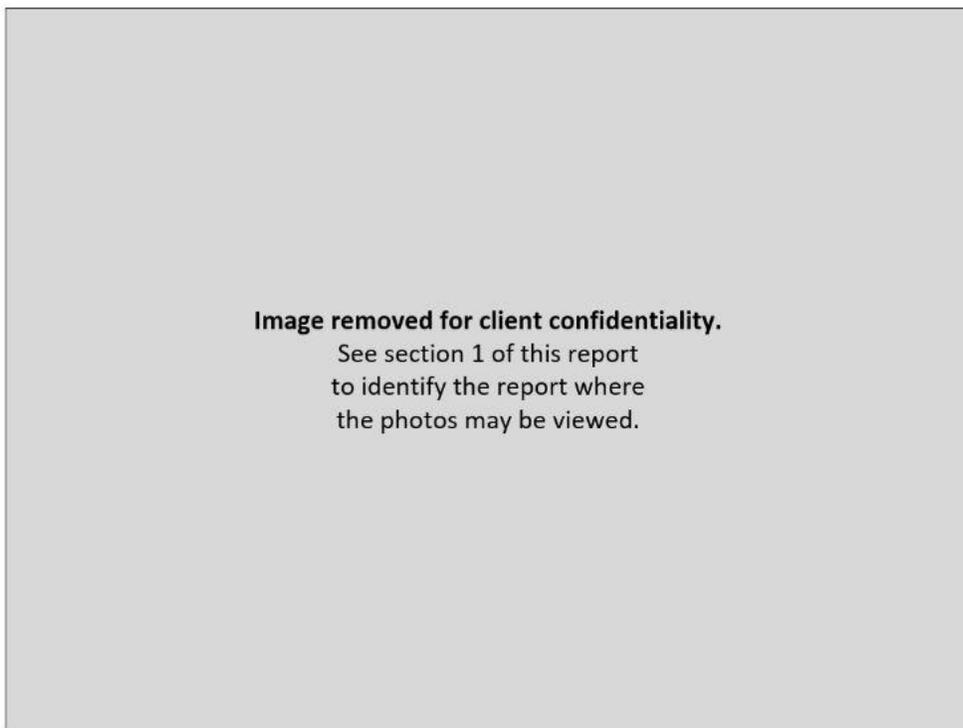


Figure RE04.4: EUT test setup, (Ble Tx 1Mb) front view

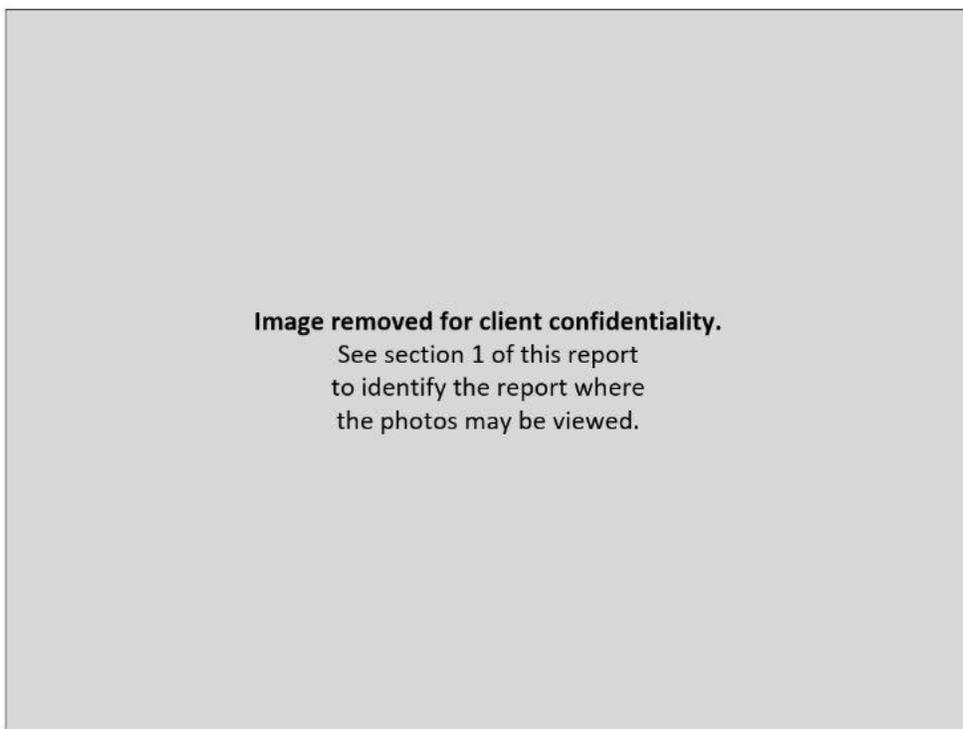


Figure RE04.5: EUT test setup, (Ble Tx 1Mb) reverse view

This line is the end of the test record.

Test Record

Conducted Emissions Mains Test CE01 Project GCL0458

Test Date(s) 06 Oct 2023
Test Personnel David Kerr

Product Model A04714
Serial Number tested 3453413644

Operating Mode M3 (Ble Tx)
Arrangement A2 (Upwr)
Input Power 115 V/ 60 Hz

Test Standards: FCC Part 15 (as noted in Section 6 of the report).

Frequency Range: 150 kHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: Aditya Prakash
Date of this record: 10 Oct 2023
Original record, Version A.

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-23	1-Feb-24
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10721	30-Aug-23	1-Sep-26
DMM Multimeter	FLUKE	79 III	71740743	5-Apr-23	1-Apr-24
LISN multiline; 20A 50uH	Com-Power	LIN-120C	20160005	10-Feb-23	15-Feb-24

Table CE01.1: Test Equipment Used

Software Used

Keysight PXE software A.33.03; CE Mains 150k to 30M Data Analysis V2 2021Jun10.xlsx

Test Data

The conducted emission test process began with a set of preliminary scans on both power conductors using both Quasi-Peak and Average detectors across the frequency range. Where the test standard requires cable manipulation, one or more likely worst case frequencies selected by the test personnel. Cables were manipulated to find the maximal signal strength while observing the receiver levels at those selected frequencies. At each of the frequencies selected for final measurements, Quasi-peak and Average detector readings were taken on each conductor.

The table shows the selected final measurement data. It includes at least the six strongest emissions observed relative to the limit lines, along with other data points of interest. The yellow highlight indicate the data points with the least margin to the quasi-peak detector limit and the average detector limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B.

Frequency (kHz)	QP Limit (dBuV)	AV Limit (dBuV)	L1 QP (dBuV)	L2 QP (dBuV)	L1 AV (dBuV)	L2 AV (dBuV)	QP Margin (dB)	AV Margin (dB)
641	56.00	46.00	36.26	31.93	32.03	25.90	19.74	13.97
668	56.00	46.00	43.36	38.94	39.16	32.31	12.64	6.84
670	56.00	46.00	42.74	38.59	38.66	31.87	13.26	7.34
701	56.00	46.00	34.51	32.05	31.27	26.17	21.49	14.73
728	56.00	46.00	32.67	28.98	28.53	23.74	23.33	17.47
758	56.00	46.00	33.54	28.94	28.84	23.57	22.46	17.16

Table CE01.2: Emission summary

The graph below shows preliminary scan data as continuous curves. Superimposed are the final measurement data points reported in the table above.

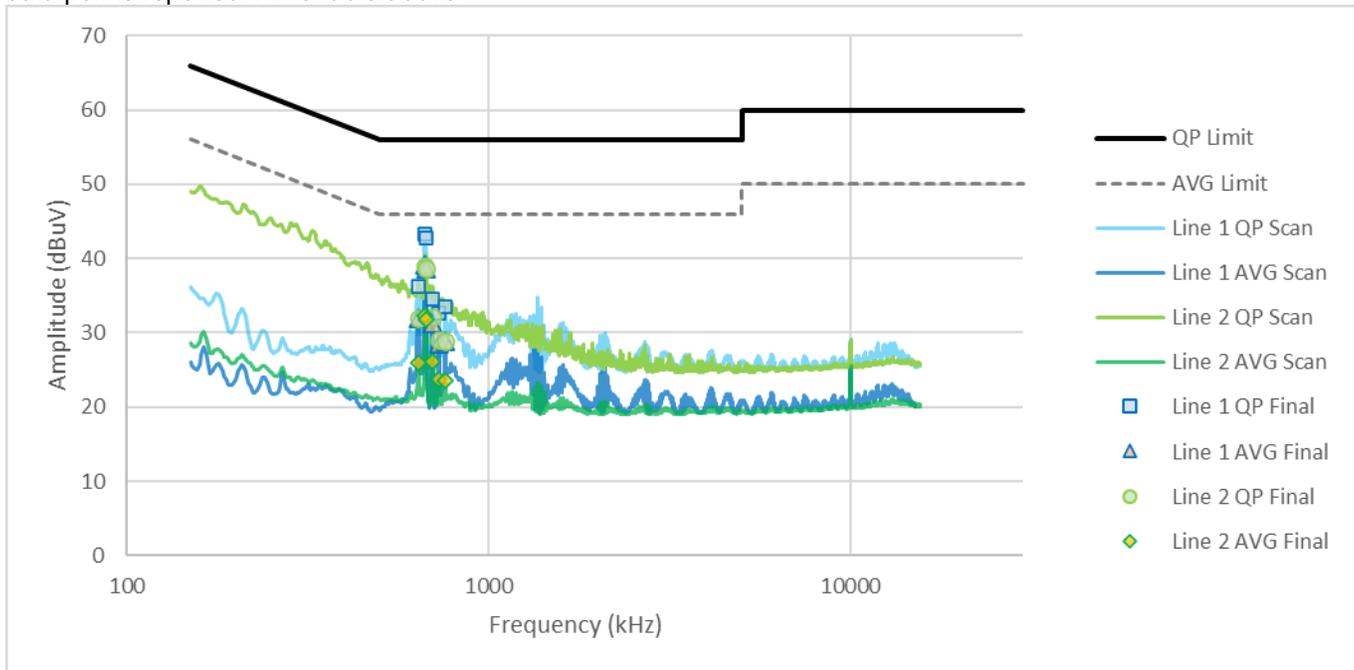


Figure CE01.1: Spectral data

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure CE01.2: Test setup, front view

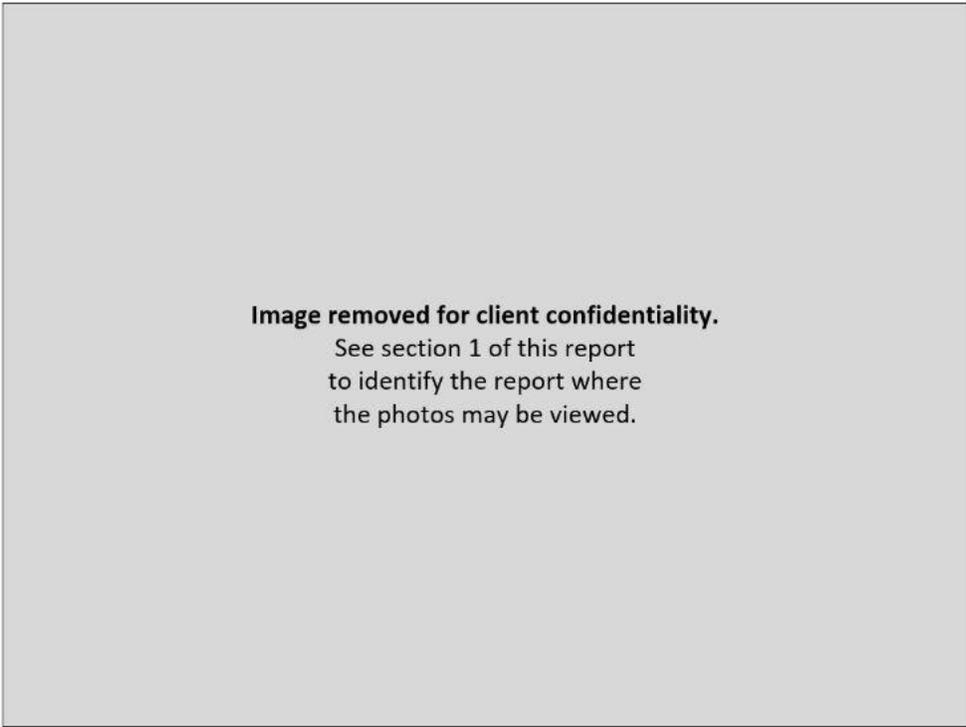


Figure CE01.3: Test setup, side view

This line is the end of the test record.

Concluding Notes

This report stands as an integrated record of the tests performed and must be copied or distributed in its complete form. The reproduction of selected pages or sections separate from the complete report would require specific approval from the manager of the Garmin Compliance Lab.

This is the final page of the report.

Test Report 2023-068

Version A

Issued 3 Nov 2023

Project GCL-0458

Model Identifier: A04714

Primary Test Standard(s)

CFR 47, FCC Part 15.249

RSS-247 Issue 2

Garmin Compliance Lab

Garmin International

1200 E 151st Street

Olathe Kansas 66062 USA

Client-supplied Information

FCC ID: IPH-04714

IC ID: 1792A-04714



See section 6 of this report regarding the presence or absence of accreditation logos or marks on this cover page.

1. Summary

The equipment or product described in section 5 of this report was tested at the Garmin Compliance Lab according to standards listed in section 6. This report focuses on the 2.4 GHz ANT transceiver(s). Test records within this report may include data for the BLE transmitter, but BLE is addressed in separate report. The results are as follows.

Parameter	Description	Key Performance Values	Result	Data starts at page
Restricted Bands	The radio must not emit in certain designated restricted frequency bands above a set of limit values. [15.205; RSS-210 at 7.1]	Emissions in the restricted bands were at least 8.92 dB below the applicable limits.	PASS	11
Carrier and Harmonic Emissions	The field strength from the radio carrier and its harmonics must meet specific limits at a 3 m test distance. [15.249(a); RSS-210 at B.10]	The limit is 50 mV/m (94 dBuV/m) in the carrier band, and 0.5 mV/m (54 dBuV/m) at all other frequencies. This sample demonstrated 8.2 dB of margin or greater.	PASS	16
Frequency Stability	The radio tuning must be robust over a range of temperature and supply voltage conditions. [RSS-Gen at 6.11]	Radio emissions remained within the allowed radio band under all environmental conditions tested.	PASS	35
Other Bandwidths	Regulatory agencies also require the reporting of signal bandwidths using alternate processes. [2.202; RSS-GEN at 6.7]	These values are reported but have no actual performance requirements.	Reported	38

NT (Not Tested) means the requirement may or may not be applicable, but the relevant measurement or test was not performed as part of this test project.

N/A (Not Applicable) means the lab judged that the test sample is exempt from the requirement.

Table 1: Summary of results

Report Organization

For convenience of the reader, this report is organized as follows:

1. Summary
2. Test Background
3. Report History and Approval
4. Test Sample Modifications and Special Conditions
5. Description of Equipment Tested
6. Test Standards Applied
7. Measurement Instrumentation Uncertainty
8. Selected Examples of Calculations
9. Environmental Conditions During Test
10. Immunity Performance Criteria

Annex: Test records are provided for each type of test, following the order and page numbering stated in the summary table. Concluding notes appear on the final page of this report.

Due to confidentiality, certain material (such as test setup photographs) has been removed from this report and placed in GCL Test Report 2023-067. That report is treated as a part of this document by way of this reference.

2. Test Background

The testing reported here was performed at the Garmin Compliance Lab, an organization within Garmin International, located at 1200 E 151st St, Olathe Kansas, USA. The contact telephone number is +1.913.397.8200.

The testing was performed on behalf of the Garmin design group, a separate organization located at 1200 E 151st St, Olathe Kansas, USA. Witnesses from the business group included: None.

Test Sample received: 01 Sep 2023
Test Start Date: 18 Sep 2023
Test End Date: 19 Oct 2023

The data in this test report apply only to the specific samples tested.

Upon receipt all test samples were believed to be properly assembled and ready for testing.

3. Report History and Approval

This report was written by Majid Farah and initially issued on 3 Nov 2023 as Version A.


Report Technical Review:

David Arnett
Technical Lead EMC Engineer



Report Approval:

Shruti Kohli
Manager Test and Measurement (EMC, Reliability and Calibration)

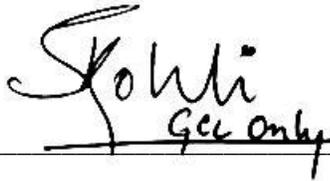

4. Test Sample Modifications and Special Conditions

The following special conditions or usage attributes were judged during test to be necessary to achieve compliance with one or more of the standards listed in section 6 of this report:

None

The following modifications to the test sample(s) were made, and are judged necessary to achieve compliance with one or more of the standards listed in section 6 of this report:

None

5. Description of the Equipment Tested

5.1 Unique Identification

Product Model A04714
Serial Numbers Tested 3453413731, 3453413644

This product tested is a mobile device for collecting and sharing data with the user and nearby electronic devices.

The client affirmed that the test samples will be representative of production in all relevant aspects.

5.2 Key Parameters

EUT Input Power: 5 Vdc
I/O Ports: USB
Radio Transceivers: Bluetooth Low Energy, ANT, NFC
Radio Receivers: GPS L1, Galileo E1, BeiDou, GLONASS
Primary Functions: Data collection and communication
Typical use: Portable in multiple orientations
Highest internal frequency: 2.484 GHz
Firmware Revision 3.05

5.3 Operating modes

During test, the EUT was operated in one or more of the following modes. Some modes may not applicable for this product or in this report.

Mode 1: M1 (Bt Tx). Bluetooth, sometimes called Bluetooth Classic, radio is transmitting consistently on a selected channel sending data using the BR (Basic Rate of 1 Mbps), EDR2 (Extended Data Rate of 2 Mbps) or EDR3 (Extended Data Rate of 3 Mbps) modulation types.

Mode 2: M2 (Bt Ink). Bluetooth Classic radio is paired to a companion device, transmitting and receiving data on various channels in accordance with the protocol, and maintaining the paired relationship.

Mode 3: M3 (Ble Tx). Bluetooth Low Energy radio transmitting consistently on a selected channel at 1 Mbps or 2 Mbps

Mode 4: M4 (Ble Ink). Bluetooth Low Energy radio is paired to a companion device, transmitting and receiving data on various channels in accordance with the protocol, and maintaining the paired relationship.

Mode 5: M5 (ANT Tx). ANT radio transmitting consistently on a selected channel.

Mode 6: M6 (ANT Ink). ANT radio is paired to a companion device, transmitting and receiving data in accordance with the protocol, and maintaining the paired relationship.

Mode 7: M7 (WiFi Tx). The IEEE 802.11 b/g/n radio was transmitting consistently on a selected channel, with a specified modulation type, and data rate.

Mode 8: M8 (WiFi Link). The IEEE 802.11 b/g/n radio is paired to a companion device, transmitting and receiving data on a selected channel in accordance with the protocol, and maintaining the paired relationship.

Mode 9: M9 (Rx 2.4). The radio was set to receive 2.4 GHz signals but not transmit. In this situation, it was specifically looking for Bluetooth Low Energy signals which cover the 2.4 GHz band and represent a worst-case scenario.

Mode 10: M10 (All2.4). This means the radio was tested in modes M1, M3, M5, and M7 if applicable.

Mode 11: M11 (GNSS). The Global Navigation Satellite System receiver is monitoring the GNSS bands, attempting to detect a constellation and determine location. Unless otherwise noted, the EUT was provided simulated GNSS signals representing one of more constellation types. In addition, the EUT may have been reporting signal levels and satellite data to an attached computer to monitor link health.

Mode 12: M12 (NFC Ink). The NFC 13.56 MHz transceiver is in Card Emulation mode, and is actively linked to a companion NFC Reader.

5.4 EUT Arrangement


During test, the EUT components and associated support equipment were selected including the following arrangement sets.

Arrangement 1: A1 (Solo). The test sample operates from its battery and no external physical connections. No block diagram is needed for this arrangement.

Arrangement 2: A2 (Upwr). The test sample is attached to a Mains-powered device connected that provides dc power to the sample over a cable but no user data. See the block diagram in Figure 1.

Arrangement 3: A3 (Udata). The test sample is attached to a Mains-powered device connected that provides dc power to the sample and user data over a cable. See the block diagram in Figure 1.

Arrangement 4: A4 (Udc). The test sample is attached to a Mains-powered device connected that provides dc power to the sample and may or may not provide user data. This arrangement is specified in the test plan to provide staff flexibility when the presence or absence of data on the cable is not pertinent. See the block diagram in Figure 1.

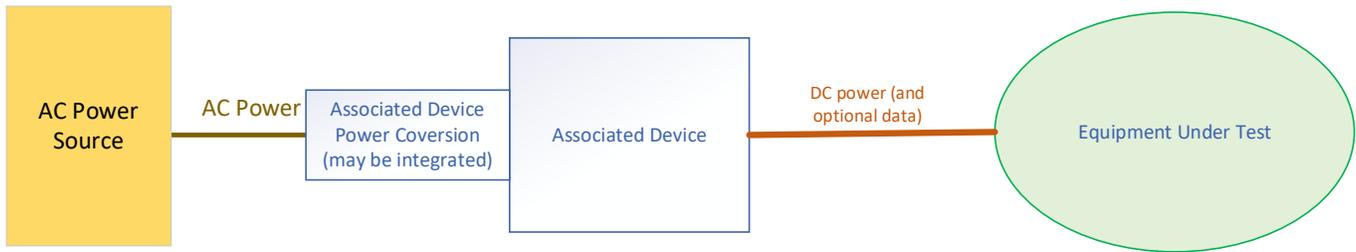

*This interconnect drawing is not to scale.
It does not indicate the placement of devices.*

Figure 1: Block diagram of equipment for arrangements A2, A3, A4

Arrangement 5: A5 (NFCp) The test sample is placed near an NFC Card Reader. The NFC Card Reader is connected to a laptop computer. The test sample is powered by a device that does not include data over the cable, just as with A2. For clarity, test sample is NOT powered by, or connected to, the laptop computer that powers the NFC Card Reader.

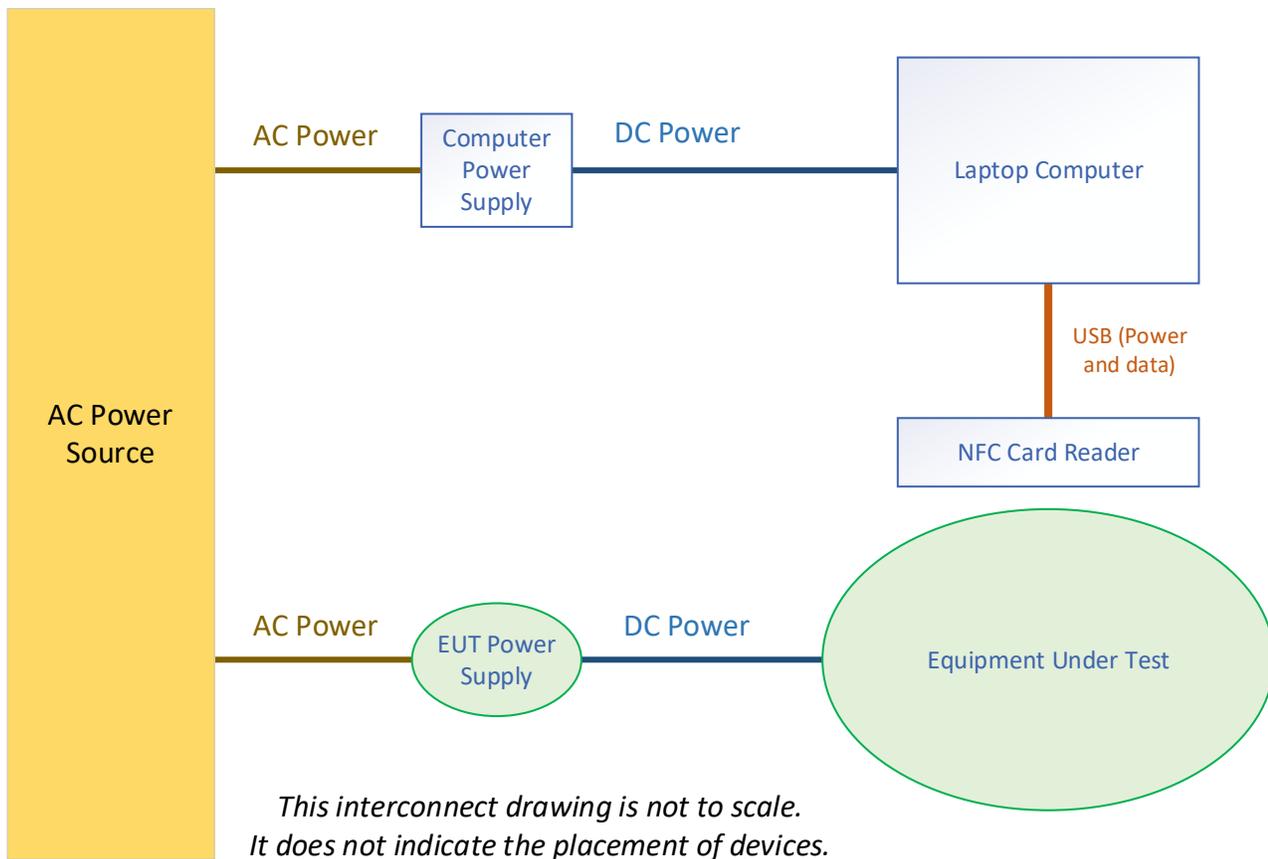


Figure 2: Block diagram of equipment arrangement A5

Arrangement 6: A6 (NFCu) The test sample is placed near an NFC Card Reader. The NFC Card Reader is connected to a laptop computer. The test sample is powered by its own batteries rather than an external power source. The test sample is NOT powered by, or connected to, the laptop computer that powers the NFC Card Reader.

5.5 Associated Equipment (AE) used

Description	Manufacturer	Model	Serial Number
AC/DC Power Converter	Phihong	PSAF10R-050Q	None
Laptop Computer	Dell	Latitude 5410	5VSPFB3
Laptop Power Supply	Dell	HA65NM191	None

Table 2: List of associated equipment that may have been used during test

5.6 Cables used

Description	From	To	Length	EMC Treatment
USB	Power and/or Data source	EUT	54 cm	None

Table 3: List of cables that may have been used during test

6 Test Standards Applied

6.1. Accredited Standards

The following test or measurement standards were applied and are within the scope of the lab's accreditation. All results in this report that cite these standards are presented as Accredited results consistent with ISO/IEC 17025.

- AS/NZS 4268: 2017
- CFR 47, FCC Part 15.249
- ANSI C63.10: 2013 and ANSI C63.10: 2020
- RSS-GEN Issue 5 Amd 2
- RSS-247 Issue 2

6.2. Non-accredited Standards

The following test or measurement standards were applied and are either outside the scope of the lab's accreditation, or were performed in such a way that results are not presented as being fully accredited.

- TRC-43 Issue 3

6.3 Variances

The following variances were applied to standards cited in this section.

Where different test standards cover the same test parameter or phenomenon, and the standards have compatible differences, the stricter of the requirements is typically applied. For example, a consolidated limit may be applied to emission tests selecting the strictest of the limits at each frequency. Likewise, if one standard requires a vertical antenna sweep with boresighting and another does not, swept motion with boresighting will typically be used as it is the more stringent requirement.

During tests of radiated harmonic emissions, the data are adjusted downward 17.4 dB before comparison to the Average Detector limit. This adjustment is intended to compensate for the maximum possible transmitter duty cycle. The adjustment value is calculated using $20 \log(1/D)$ where D is the duty cycle. ANSI C63.10 would seem to prefer any adjustment be based on $10 \log(1/D)$. The details around this choice are discussed more fully in Test Record RE08 which appears at about page 23. No adjustment is made when comparing data to a Peak Detector limit, consistent with ANSI C63.10.

6.4 Laboratory Accreditation

The Garmin Compliance Lab, an organization within Garmin International, is registered with the US Federal Communication Commission as US1311. The lab is recognized by the Canada Department of Innovation, Science, and Economic Development (ISED) under CAB identifier US0233.

The Garmin Compliance Lab, an organization within Garmin International, is accredited by A2LA, Certificate No. 6162.01. The presence of the A2LA logo on the cover of this report indicates this is an accredited ISO/IEC 17025 test report. If the logo is absent, this report is not issued as an accredited report. Other marks and symbols adjacent to the A2LA logo are accreditation co-operations of which A2LA is a member under a mutual recognition agreement, and to which the Garmin Compliance Lab has been sublicensed.

7 Measurement Instrumentation Uncertainty

The lab has analyzed the sources of measurement instrumentation uncertainty. The analysis concludes that the actual measurement values cited in this report are accurate within the U_{LAB} intervals shown below with approximately 95% statistical confidence. Where the report shows a judgment that a test sample passes a test against a published limit based on these measured values, that judgment has a statistical confidence of 97.5% or greater. Measurement Instrumentation Uncertainty is one component of over-all measurement uncertainty, and other uncertainty components are not considered as part of this analysis.

The primary benchmark for measurement instrumentation uncertainty (MIU) in an electromagnetic compatibility (EMC) test lab is the set of U_{CISPR} values published in CISPR 16-4-2. In all cases where a U_{CISPR} value is published by CISPR, the analysis shows that U_{LAB} – this lab’s estimated MIU – is better than the U_{CISPR} benchmark.

The secondary benchmark for MIU in an EMC lab performing radio transceiver tests is a set of uncertainty limit values published in various ETSI standards. In this report, U_{ETSI} is the most restrictive of the values found in the ETSI EN standards listed in section 5 of this report. The analysis principles are described in the ETSI TR documents listed there. In most cases U_{LAB} is better than the U_{ETSI} benchmark. Where U_{LAB} exceeds the U_{ETSI} benchmark cited here, that entry is preceded by an asterisk. When required by the ETSI EN standards, excess uncertainty will be added to the measurand before comparison to a limit. In an individual test report, staff may re-evaluate that excess uncertainty based on the uncertainty of the method used and the uncertainty limits of the actual ETSI EN standard being applied, and the revised uncertainty values will be shown in the test report.

Some measurement uncertainties analyzed and reported here are not addressed in CISPR 16-4-2 or the ETSI standards, as indicated by the entry ‘None.’

Test Type	U_{LAB}	U_{CISPR}	U_{ETSI}
Conducted DC voltage	0.09% + 2 x LSDPV	None	1%
Conducted AC voltage below 500 Hz	1.0% + 3 x LSDPV	None	2%
Conducted Emissions, Mains Voltage	0.10% + 10 mV	None	None
Conducted Emissions, Mains Current	0.10% + 3 mA	None	None
Conducted Emissions, Mains Power	0.15% + 100 mW	None	None
Conducted Emissions, Power Mains, 9 kHz to 150 kHz	1.49 dB	3.8 dB	None
Conducted Emissions, Power Mains, 150 kHz to 30 MHz	1.40 dB	3.4 dB	None
Conducted Emissions, Cat 6 LCL, 150 kHz to 30 MHz	2.80dB	5 dB	None
Conducted Emissions, Cat 5 LCL, 150 kHz to 30 MHz	3.21 dB	5 dB	None
Conducted Emissions, Cat 3 LCL, 150 kHz to 30 MHz	4.24 dB	5 dB	None
Radiated Emissions, below 30 MHz	0.88 dB	None	6 dB
Radiated Emissions, 30 MHz to 1000 MHz	2.77 dB	6.3 dB	6 dB
Radiated Emissions, 1 GHz to 18 GHz	2.60 dB	5.2 & 5.5 dB	6 dB
Radiated Emissions, 18 GHz to 26.5 GHz	2.73 dB	None	6 dB
*Radio Signal Frequency Accuracy	*1.55 x 10 ⁻⁷	None	1.0 x 10 ⁻⁷
Radio Signal Occupied Bandwidth	0.95%	None	5%
Radio Power or Power Spectral Density	0.98 dB	None	1 dB
Temperature	0.38 °C	None	1 °C
Barometric Pressure	0.38 kPa	None	None
Relative Humidity	2.85% RH	None	±5% RH
Signal Timing	The greater of these three... 0.63 usec 0.01% of value 0.5 x LSDPV	None	None

Note: LSDPV stands for the Least Significant Digit Place Value reported. In the value 1470 msec, the least significant digit is the 7. It has a 10 msec place value. The LSDPV is thus 10 msec and the maximum error due to roundoff would be 5 msec. If the time value were reported as 1470 msec, the underscore indicates that the 0 is a significant figure and the error due to roundoff would be 0.5 msec. All digits provided to the right of a decimal point radix are significant.

8 Selected Example Calculations

Certain regulators require samples of the calculations that lead from the raw measurement to the final result for AC Mains conducted and unintended radiated emissions. The assumption is that the lab performs raw measurements, then adds, subtracts, multiplies, or divides based on transducer factors, amplifier gains, and losses in the signal transmission path. In this lab, our CISPR 16 Receiver does not work that way. The calibration factors and losses and gains are provided to the receiver as detailed data files. These factors are applied in the RF measurement path prior to the detector. But as a step in the lab measurement process, staff frequently verify that these factors are applied correctly. They make a measurement with the factors applied inside the receiver, then they disable the factors and remeasure the result manually adding in the various relevant factors.

The transmission loss is measured including the combined losses and gains of preamplifiers, cables, and any band-selective filters. In many cases above 1 GHz it is a negative value, indicating that the preamplifier gain is greater than these other losses.

Here are examples of these calculations. The data in these examples was not taken as part of this project:

8.1 AC Mains conducted emissions at 22 MHz

(Raw measurement) + (AMN factor) + (transmission loss) = Result

$$(7.145 \text{ dBuV}) + (9.812 \text{ dB}) + (0.216 \text{ dB}) = 17.173 \text{ dBuV}$$

8.2 Radiated Emissions at 630 MHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(2.25 \text{ dBuV}) + (27.80 \text{ dB/m}) + (2.89 \text{ dB}) = 32.94 \text{ dBuV/m}$$

8.3 Radiated Emissions at 2.7 GHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(43.72 \text{ dBuV}) + (32.22 \text{ dB/m}) + (-36.09 \text{ dB}) = 39.85 \text{ dBuV/m}$$

9 Environmental Conditions During Test

Environmental conditions in the test lab were monitored during the test period. Temperature and humidity are controlled by an air handling system. As information to the reader, the conditions were observed at the values or within the ranges noted below. For any tests where environmental conditions are critical to test results and require further constraints or details, the test records in the annex may provide more specific information.

Temperature:	20.5 to 23.6 °C
Relative Humidity:	34.3% to 55.7% (non-condensing)
Barometric Pressure	96.3 to 99.2 kPa

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
Barometer	Traceable	6453	221702700	3-Aug-2022	1-Aug-2024

Table 4: Environmental monitoring device

10 Immunity Performance Criteria

If this report includes immunity tests then results have been categorized as Performance Criteria A, B, C, or D. The standards that the lab applied will define the details for A, B, and C, as well as which criterion is required for each type of test. They will also define the electrical stresses that were applied during each test. In a very general sense the observed criteria noted in this report are as follows:

Criterion A. The stress applied did not alter product operation. This criterion is generally used for ‘continuous’ stresses that can be present for a long time in the places the product will be used, or that can appear often, even though they may come and go over time.

Criterion B. The stress applied altered product operation, but the product self-recovered so that the user would not have to try to figure out how to restore it to full operation. This criterion is generally used for 'transient' stresses that appear briefly and occasionally, but are usually not present in the places the product will be used.

Criterion C. The stress applied altered product operation, but the user could restore it to full operation, for example by power cycling the product. This criterion is generally used for 'transient' stresses that appear briefly and only rarely in the places the product will be used.

Criterion D. This is not an official criterion in the standards, because it would be a failure of the requirements. This indication in a test record means the product was affected in a way that the user might not be able to correct. The effect could include some degree of hardware damage, or it could include loss of program files or data files necessary for operation.

Repeatability is an issue in all EMC immunity work. When the product operation changes unexpectedly during a test, and the change would fail the requirements of the standard, this is an anomaly. The test operator needs to determine whether the anomaly was a result of the applied electrical stress. The investigation is done by repeating the section of the test where the anomaly occurred three times. If the same or a similar anomaly occurs in any of the three repeat trials, it is confirmed as a response to the stress. If not, the anomaly is judged unreproducible and is not considered when judging the A, B, or C observed performance. Since there is usually no ability to confirm a Criterion D anomaly, these are usually treated as Criterion D upon a single occurrence.

Tests that require Criterion B performance will be judged to Pass if criteria A or B is observed. Similarly, tests that require Criterion C performance will be judged to Pass if criteria A, B, or C is observed.

ANNEX

The remainder of this report is an Annex containing individual test data records. These records are the basis for the judgments summarized in section 1 of this report. The Annex ends with a set of concluding notes regarding use of the report.

Test Record
Radiated Emission Tests RE01, RE02
Project GCL0458

Test Date(s) 18 Sep 2023
 Test Personnel Jim Solum

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M3 (Ble Tx), M5 (ANT Tx)
 Arrangement A2 (Upwr)
 Input Power 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, (as noted in Section 6 of the report).

Frequency Range: FCC Restricted Bands (2200-2390MHz, 2483.5-2500MHz)
Pass/Fail Judgment: PASS

Test record created by: Jim Solum
Date of this record: 25 Sep 2023

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	7-Jun-2023	1-Jun-2024
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	16-Nov-2022	16-Nov-2025
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/0	1	Calibration	Not Required
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10721	30-Aug-2023	1-Sep-2026

Table RE01.1: Test Equipment Used

Software Used

Keysight PXE N9048B Firmware version A.33.03
 RE Signal Maximization Tool v2023Jul14.xlsx
 FCC Restricted Band 2p4GHz Template v1b 2023Jun20.xlsx

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst-case frequencies selected by the test personnel while observing the receiver display. The turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings for each of the restricted band ranges. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

Restricted band measurements in the lower band were made while the transmitter was tuned to its lowest frequency of 2402 MHz. Measurements in the upper band were made while the transmitter was tuned to its highest frequency of 2480 MHz.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The tables show the selected final measurement data between the FCC restricted bands. It includes the strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC restricted band Class B Limit at 3m.

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(degree)	(mm)	---
2390	54	74	33.628	57.467	20.372	16.533	-5	1062	HORZ
2386	54	74	34.757	55.264	19.243	18.736	-5	1062	HORZ

Table RE01.2: Emission summary FCC restricted band from 2200 to 2390 MHz (BLE1)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(degree)	(mm)	---
2483.5	54	74	35.367	65.045	18.633	8.955	13	1120	HORZ
2483.5	54	74	35.364	65.079	18.636	8.921	13	1120	HORZ

Table RE01.3: Emission summary FCC restricted band from 2483.5 to 2500 MHz (BLE1)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(degree)	(mm)	---
2390	54	74	33.849	57.61	20.151	16.39	-5	1062	HORZ
2386	54	74	37.941	55.427	16.059	18.573	-5	1062	HORZ

Table RE01.4: Emission summary FCC restricted band from 2200 to 2390 MHz (ANT)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(degree)	(mm)	---
2483.5	54	74	36.421	64.89	17.579	9.11	13	1120	HORZ
2488	54	74	37.039	58.326	16.961	15.674	13	1120	HORZ

Table RE01.5: Emission summary FCC restricted band from 2483.5 to 2500 MHz (ANT)

The graphs below show the background spectrum observed during pre-scan, as well as the final data points from the table above.

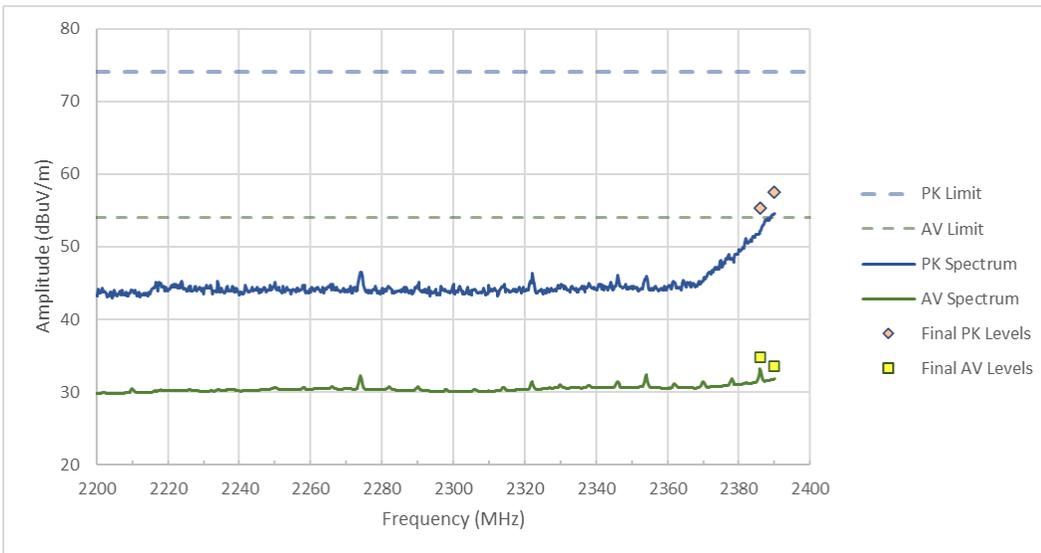


Figure RE01.1: Spectral data FCC restricted band from 2200 to 2390 MHz (BLE1)

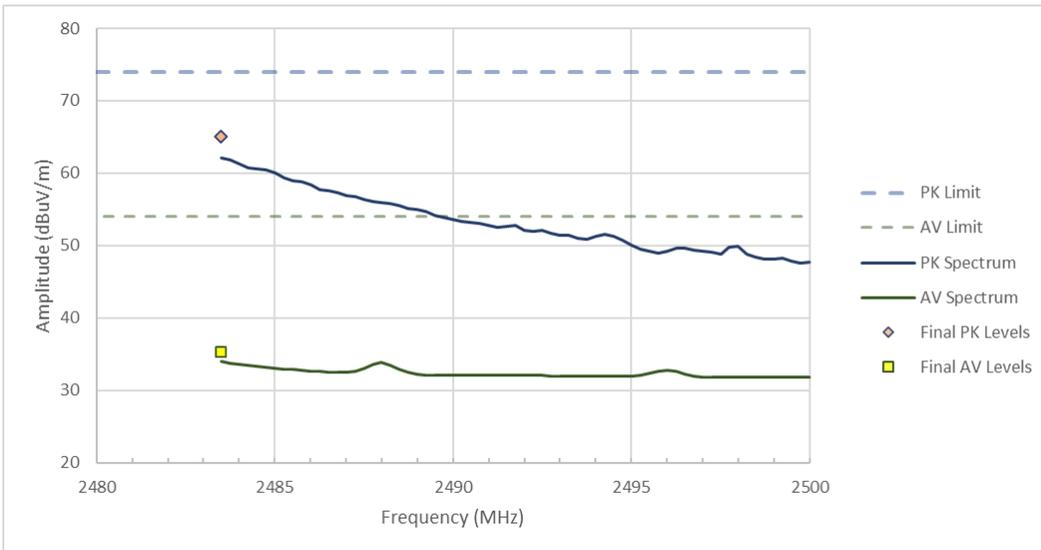


Figure RE01.2: Spectral data FCC restricted band from 2483.5 to 2500 MHz (BLE1)

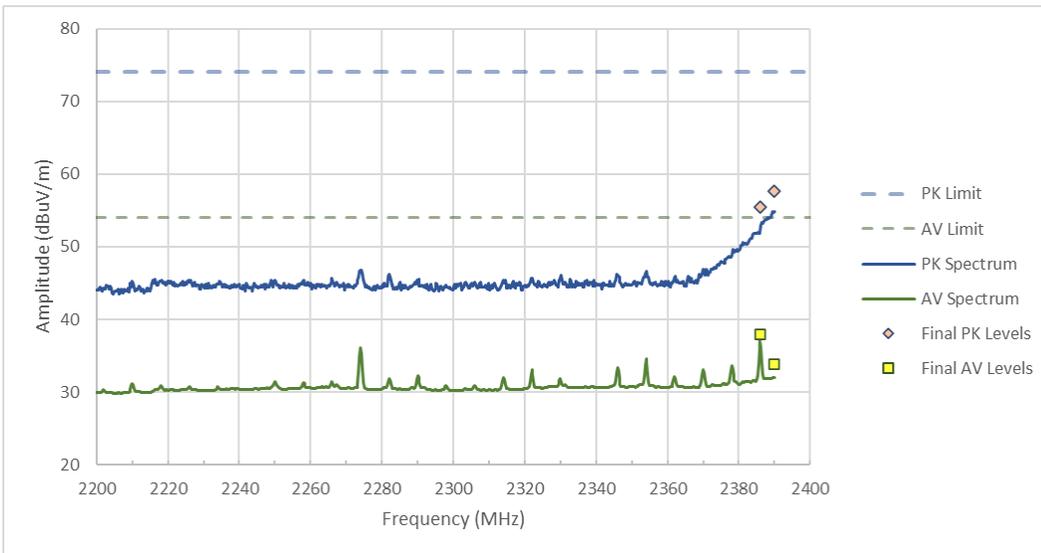


Figure RE01.3: Spectral data FCC restricted band from 2200 to 2390 MHz (ANT)

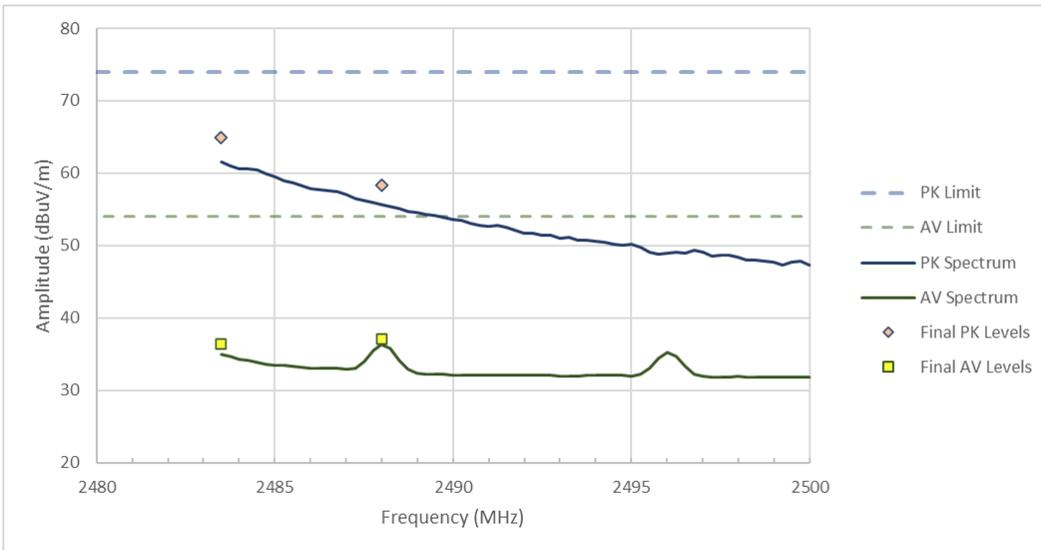


Figure RE01.4: Spectral data FCC restricted band from 2483.5 to 2500 MHz (ANT)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

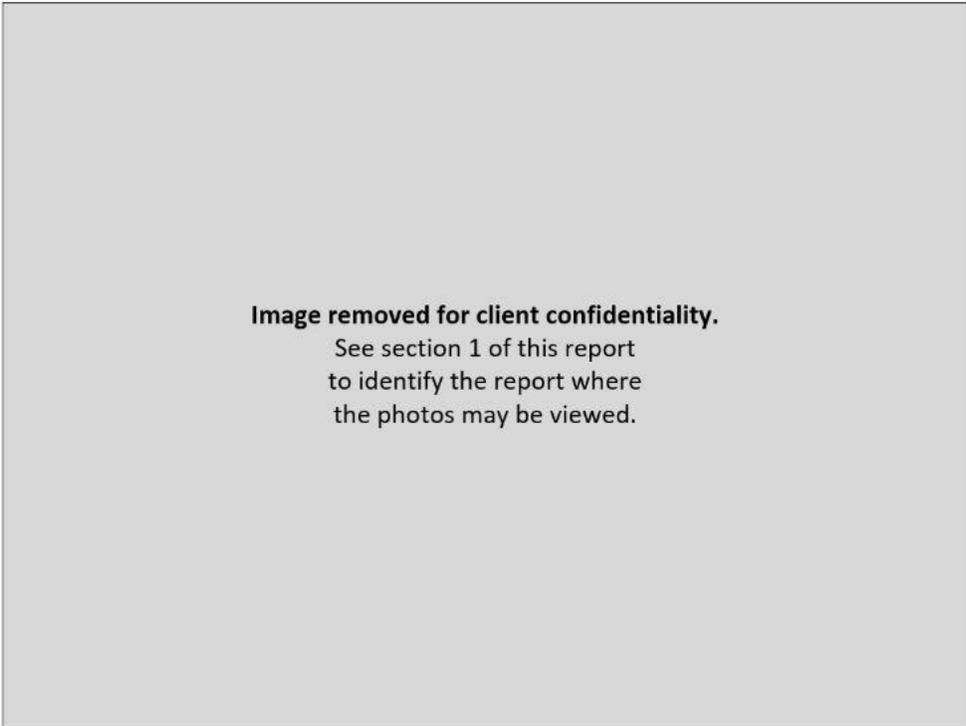


Figure RE01.5: EUT test setup, front view (X orientation)



Figure RE01.6: EUT test setup, reverse view (X orientation)

This line is the end of the test record.

Test Record
Radiated Emission Test RE07
Project GCL0458

Test Date(s) 14 Oct 2023
 Test Personnel David Kerr, assisted by Aditya Prakash

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M5 (Ant Tx)
 Arrangement A2 (Upwr)
 Input Power 5 VDC (USB)

Test Standards: FCC Part 15, ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 30 MHz to 1000 MHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 16 Oct 2023

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 26 GHz	Keysight	N9048B	MY59290135	27-Sep-2023	1-Oct-2024
Antenna, Biconilog, 30M-6 GHz	ETS Lindgren	3142E	00233201	19-Jul-2022	15-Jul-2024
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	7-Nov-2022	7-Nov-2025
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10720	16-Jan-2023	15-Jan-2026

Table RE07.1: Test Equipment Used

Software Used:
 N9048B Keysight PXE firmware version A.32.06
 EPX/RE automation software ver. 2023.01.001

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 30 MHz and 1 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m.

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μV)	dB(1/m)	dB(μV/m)	dB(μV/m)	dB	cm	deg
		QP		QP	QP	QP		
44.940	V	3.4	15.3	18.7	54.0	35.3	400.0	122.0
135.030	V	1.8	16.2	18.0	54.0	36.0	234.5	30.0
411.060	V	0.7	27.5	28.2	54.0	25.8	296.7	97.0
802.020	V	0.7	34.7	35.4	54.0	18.6	124.3	23.0
948.810	H	0.7	36.7	37.4	54.0	16.6	127.6	214.0
685.920	H	0.5	33.4	33.9	54.0	20.1	108.3	191.0

Table RE07.2: Emission summary (2402MHz)

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μV)	dB(1/m)	dB(μV/m)	dB(μV/m)	dB	cm	deg
		QP		QP	QP	QP		
44.970	V	3.6	15.3	18.9	54.0	35.1	358.1	76.0
134.970	V	1.4	16.2	17.6	54.0	36.4	358.8	359.0
408.900	V	0.6	27.6	28.2	54.0	25.8	335.0	255.0
692.220	V	0.2	33.5	33.7	54.0	20.3	232.4	119.0
944.700	H	0.3	36.8	37.1	54.0	16.9	162.4	159.0
797.250	H	0.3	34.6	34.9	54.0	19.1	281.0	254.0

Table RE07.3: Emission summary (2440MHz)

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μV)	dB(1/m)	dB(μV/m)	dB(μV/m)	dB	cm	deg
		QP		QP	QP	QP		
44.940	V	3.1	15.3	18.4	54.0	35.6	110.6	18.0
265.980	V	0.8	22.5	23.3	54.0	30.7	222.8	320.0
134.940	H	1.0	16.2	17.2	54.0	36.8	156.8	315.0
404.700	H	0.2	27.5	27.7	54.0	26.3	127.5	92.0
206.640	H	1.8	19.3	21.1	54.0	32.9	150.8	19.0
939.990	H	0.8	36.8	37.6	54.0	16.4	294.6	0.0

Table RE07.4: Emission summary (2480MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

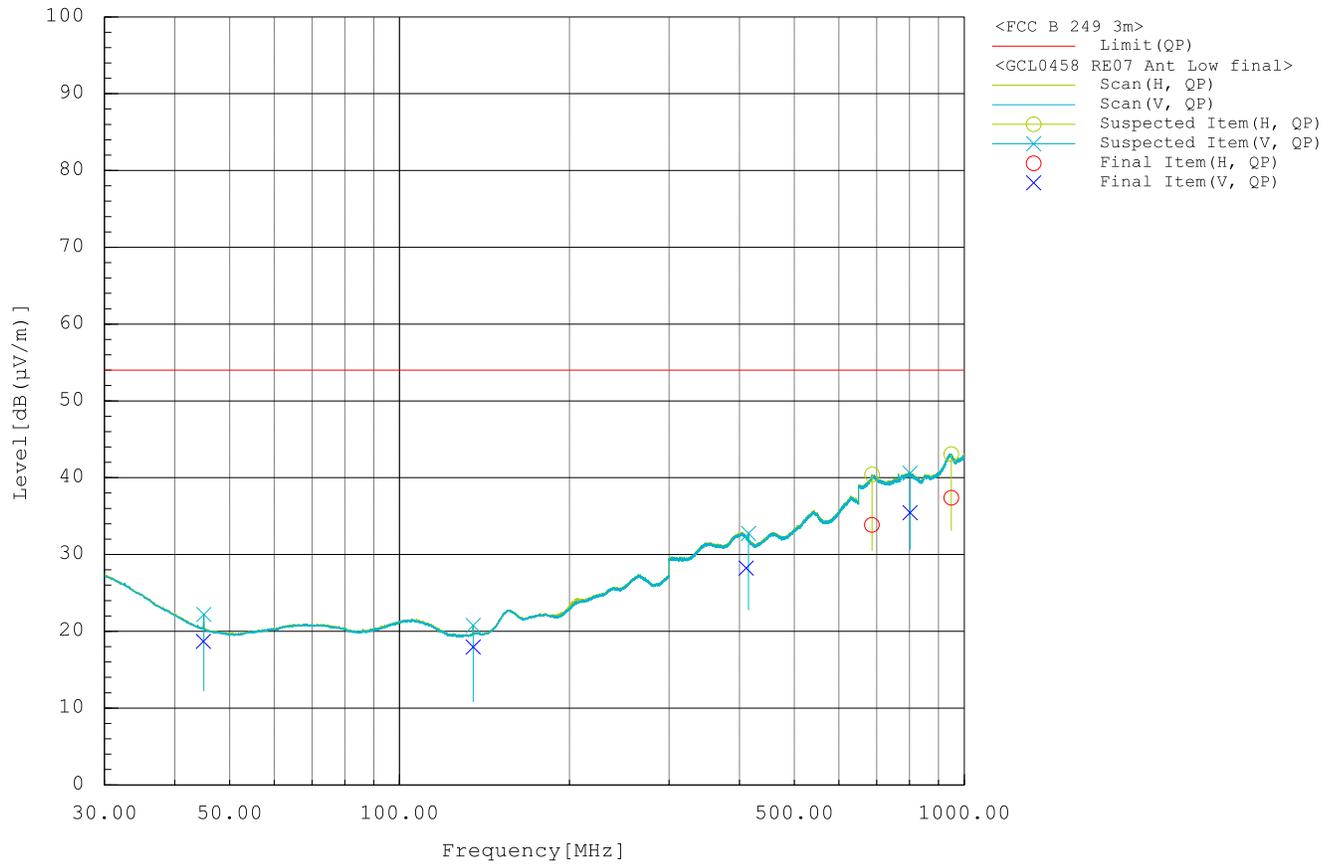


Figure RE07.1: Spectral data (2402MHz)

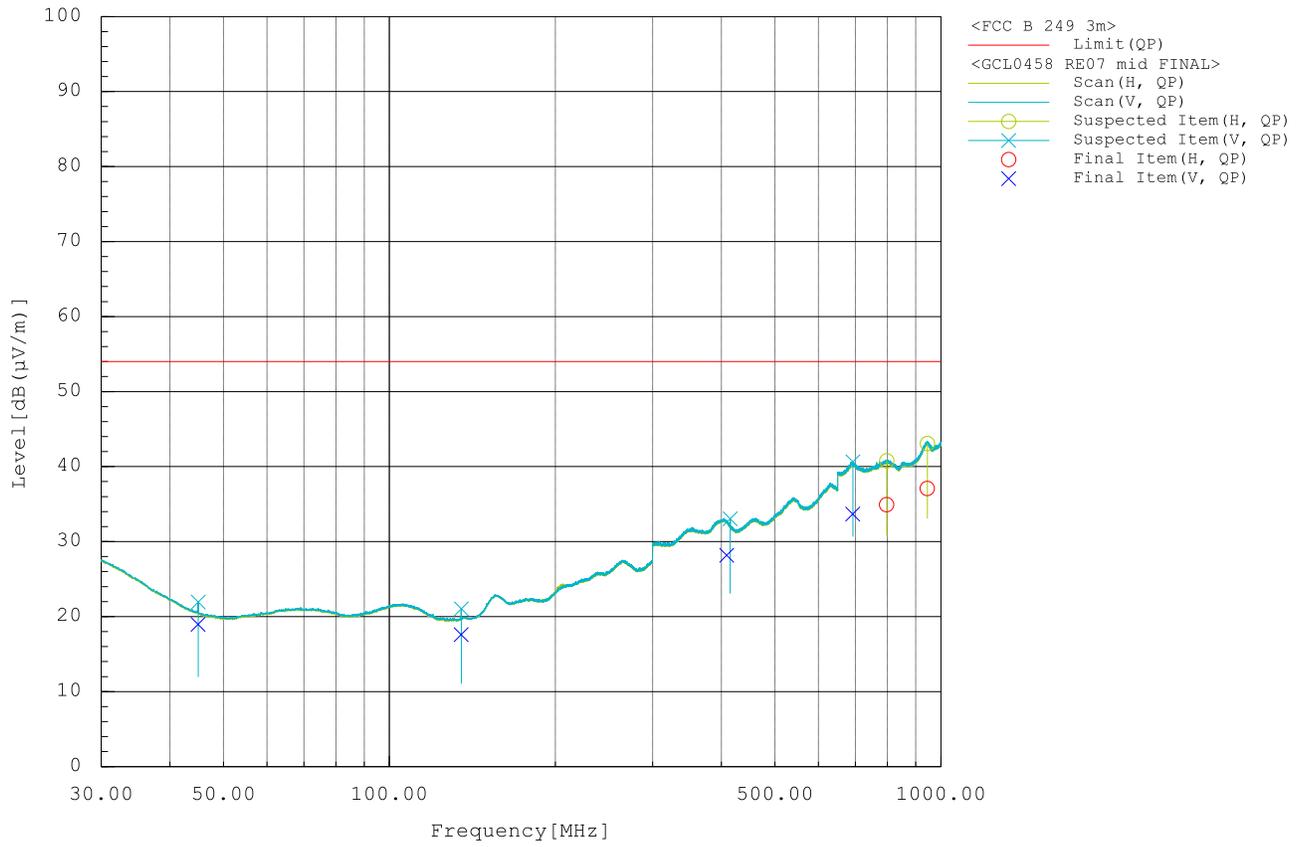


Figure RE07.2: Spectral data (2440MHz)

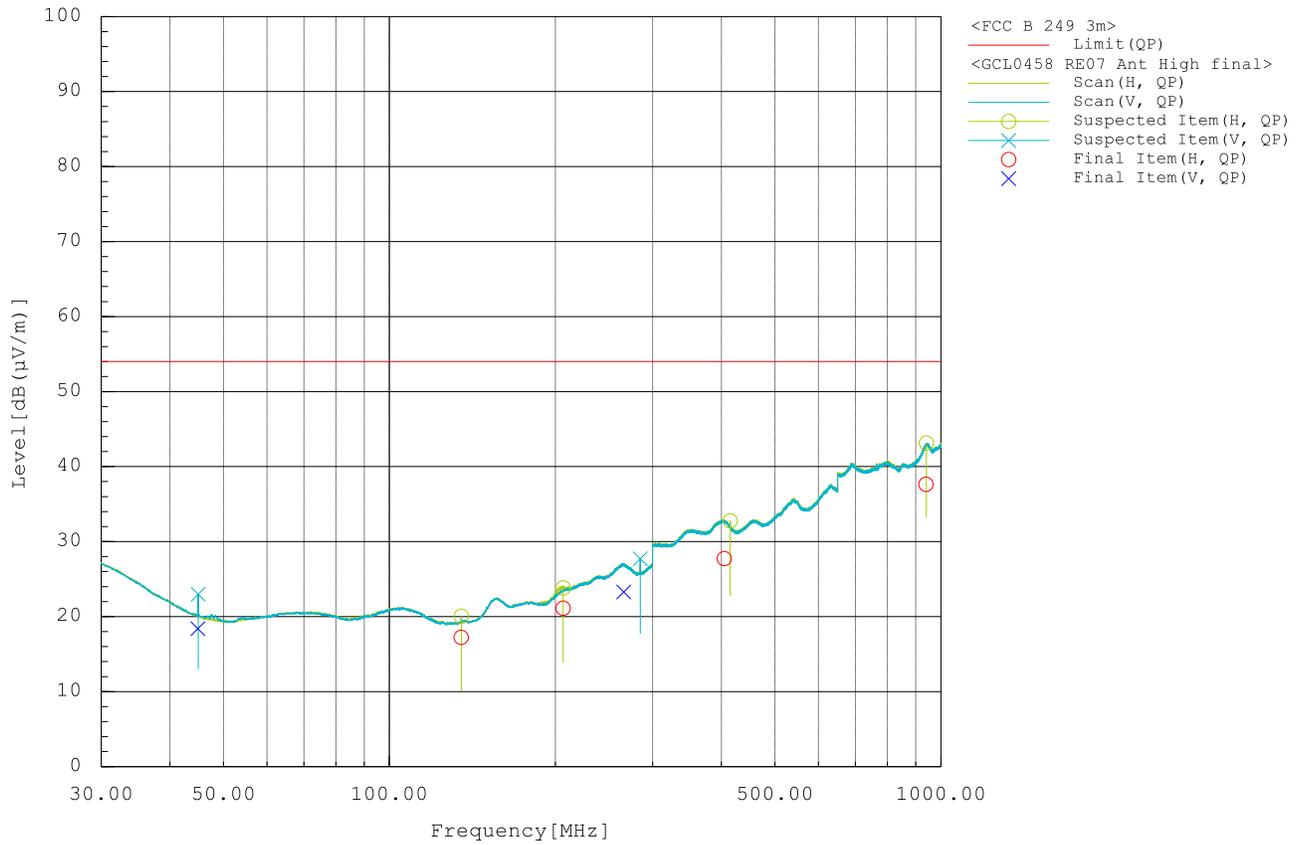


Figure RE07.3: Spectral data (2480MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE07.4: EUT test setup, front view (X orientation)

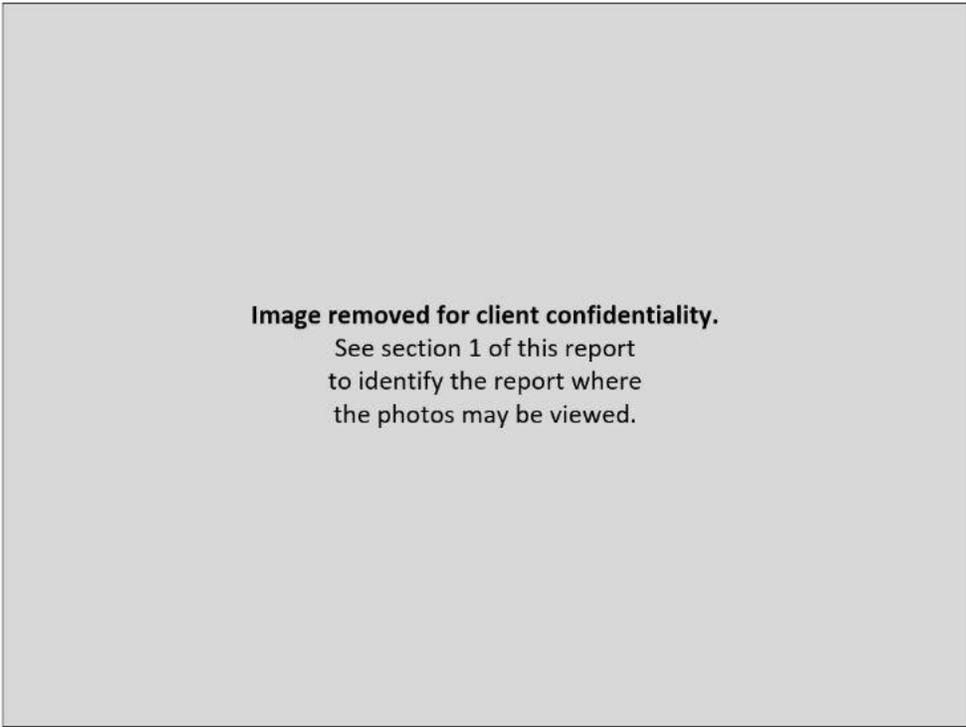


Figure RE07.5: EUT test setup, reverse view (X orientation)

This line is the end of the test record.

Test Record
Radiated Emission Test RE08
Project GCL0458

Test Date(s) 11 Oct 2023
 Test Personnel Dave Kerr, Jim Solum

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M5 (Ant Tx)
 Arrangement A2 (Upwr)
 Input Power 5 Vdc (USB)

Test Standards: FCC Part 15, ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 1 GHz to 18 GHz
Pass/Fail Judgment: PASS

Test record created by: Dave Kerr
Date of this record: 11 Oct 2023

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	7-Jun-2023	1-Jun-2024
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	16-Nov-2022	16-Nov-2025
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10720	16-Jan-2023	15-Jan-2026
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
3 GHz High Pass filter	Anatech Electronics	OK0R2	01	Calibration	Not Required

Table RE08.1: Test Equipment Used

Software Used: N9048B Keysight PXE firmware version A.33.03
 EPX/RE automation software ver. 2023.01.001

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The tables show the selected final measurement data between 1 GHz and 18 GHz. It includes the strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m.

The test sample was transmitting with a 96% duty cycle during this test. The client states that the maximum duty cycle for the ANT protocol is 13%. The CISPR Average detector has a square law response for signal pulses with these ANT timing parameters. In the data tables below, the Average detector values for the carrier frequencies have been adjusted downward by 17.4 dB, which is $20 * \log(13\% / 96\%)$. The Peak detector values are not reduced for duty cycle, nor were the other emissions adjusted for duty cycle.

Frequency MHz	Pol.	Reading		Factor	Level		Limit		Margin		Height cm	Angle deg	
		dB(μ V)			dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB			
		CAV	PK			CAV	PK	AV	PK	CAV			PK
2402.000	H	80.4	98.7	-1.7	78.7	97.0	94.0	114.0	15.3	17.0	215.3	153.0	
4804.000	H	47.6	56.2	4.0	51.6	60.2	54.0	74.0	19.8	13.8	243.3	120.0	
5293.000	H	34.4	52.1	5.0	39.4	57.1	54.0	74.0	14.6	16.9	258.6	78.0	
2402.000	V	79.5	97.8	-1.7	77.8	96.1	94.0	114.0	16.2	17.9	326.0	46.0	
5952.250	V	35.0	52.4	6.6	41.6	59.0	54.0	74.0	12.4	15.0	100.0	349.0	

Table RE08.2: Emission summary (Ant low 1-6GHz 2402MHz)

Frequency MHz	Pol.	Reading		Factor	Level		Limit		Margin		Height cm	Angle deg	
		dB(μ V)			dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB			
		CAV	PK			CAV	PK	AV	PK	CAV			PK
4880.000	H	42.0	54.2	4.0	46.0	58.2	54.0	74.0	25.4	15.8	321.8	147.0	
5853.250	H	34.9	51.3	6.1	41.0	57.4	54.0	74.0	13.0	16.6	161.5	117.0	
5977.750	H	34.9	51.5	6.7	41.6	58.2	54.0	74.0	12.4	15.8	104.6	311.0	
2440.000	V	97.9	98.8	-1.4	96.5	97.4	94.0	114.0	14.9	16.6	317.4	53.0	

Table RE08.3: Emission summary (Ant Mid 1-6GHz 2440MHz)

Frequency MHz	Pol.	Reading		Factor	Level		Limit		Margin		Height cm	Angle deg	
		dB(μ V)			dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB			
		CAV	PK			CAV	PK	AV	PK	CAV			PK
4018.750	H	35.3	51.8	1.9	37.2	53.7	54.0	74.0	16.8	20.3	214.5	286.0	
4960.000	H	46.7	56.2	4.2	50.9	60.4	54.0	74.0	20.5	13.6	100.0	159.0	
5540.500	H	34.5	50.7	5.5	40.0	56.2	54.0	74.0	14.0	17.8	108.6	141.0	
2480.000	V	96.4	97.3	-1.3	95.1	96.0	94.0	114.0	16.3	18.0	310.1	51.0	
2484.500	H	36.4	61.9	-1.3	35.1	60.6	54.0	74.0	18.9	13.4	400.0	166.0	

Table RE08.4: Emission summary (Ant High 1-6GHz 2480)

Frequency MHz	Pol.	Reading		Factor	Level		Limit		Margin		Height cm	Angle deg	
		dB(μ V)			dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB			
		CAV	PK			CAV	PK	AV	PK	CAV			PK
7205.560	H	29.1	39.5	11.6	40.7	51.1	54.0	74.0	13.3	22.9	211.8	187.0	
8562.260	H	19.3	34.0	14.7	34.0	48.7	54.0	74.0	20.0	25.3	205.1	119.0	
14219.900	H	17.4	32.7	20.8	38.2	53.5	54.0	74.0	15.8	20.5	384.9	12.0	

Table RE08.5: Emission summary (Ant low 6-18GHz 2402MHz)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μV)		dB(1/m)	dB(μV/m)		dB(μV/m)		dB		cm	deg
		CAV	PK		CAV	PK	AV	PK	CAV	PK		
8611.850	V	19.3	33.4	14.8	34.1	48.2	54.0	74.0	19.9	25.8	279.9	149.0
7320.550	H	29.5	39.9	12.0	41.5	51.9	54.0	74.0	12.5	22.1	215.8	194.0

Table RE08.6: Emission summary (Ant Mid 6-18GHz 2440MHz)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μV)		dB(1/m)	dB(μV/m)		dB(μV/m)		dB		cm	deg
		CAV	PK		CAV	PK	AV	PK	CAV	PK		
7440.570	H	25.4	37.3	12.2	37.6	49.5	54.0	74.0	16.4	24.5	276.3	196.0
7196.860	H	21.3	35.4	11.6	32.9	47.0	54.0	74.0	21.1	27.0	149.8	120.0
17111.940	H	17.2	31.4	25.7	42.9	57.1	54.0	74.0	11.1	16.9	369.1	91.0
17612.030	H	16.3	31.3	25.6	41.9	56.9	54.0	74.0	12.1	17.1	321.7	309.0

Table RE08.7: Emission summary (Ant High 6-18GHz 2480)

The graphs below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

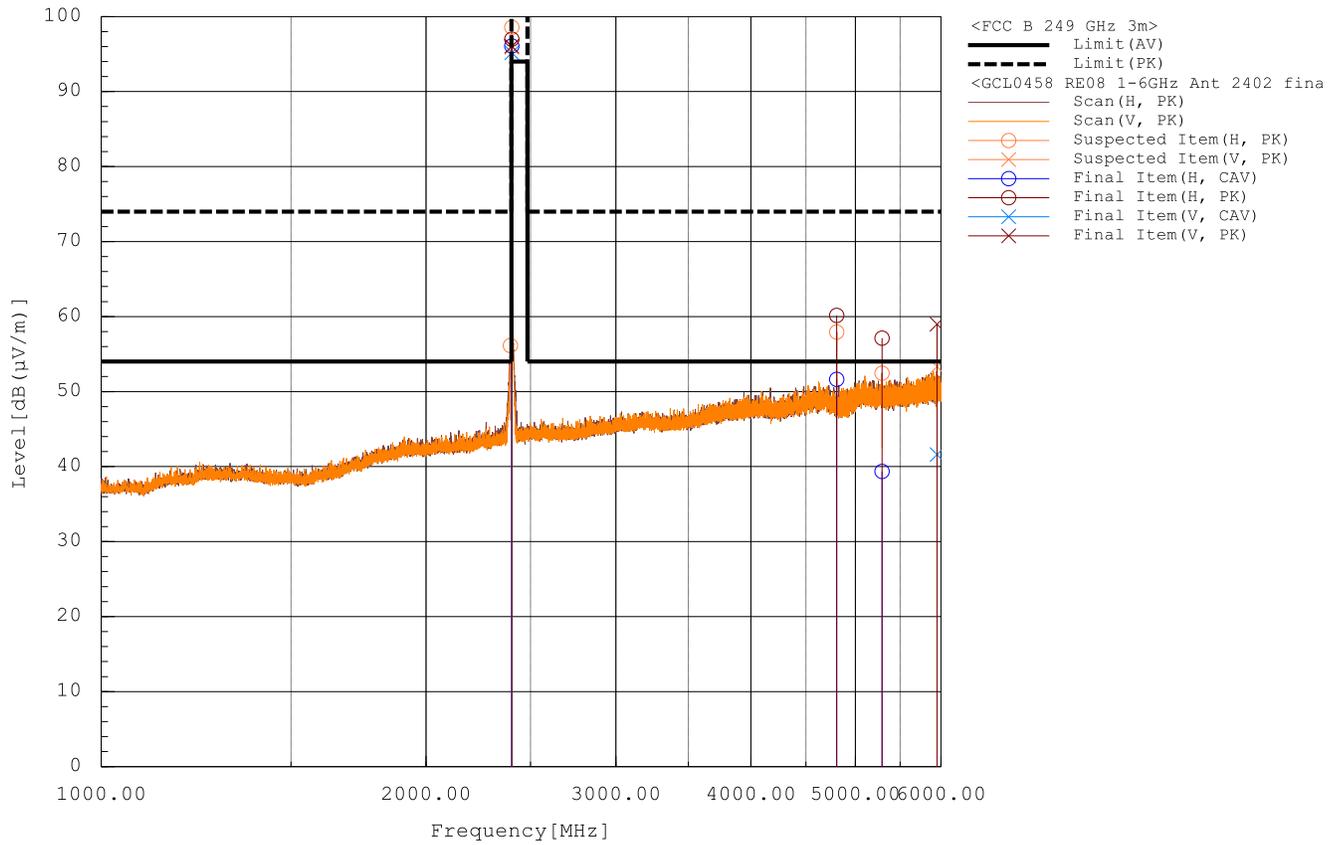


Figure RE08.1: Spectral data (Ant low1-6GHz 2402MHz)

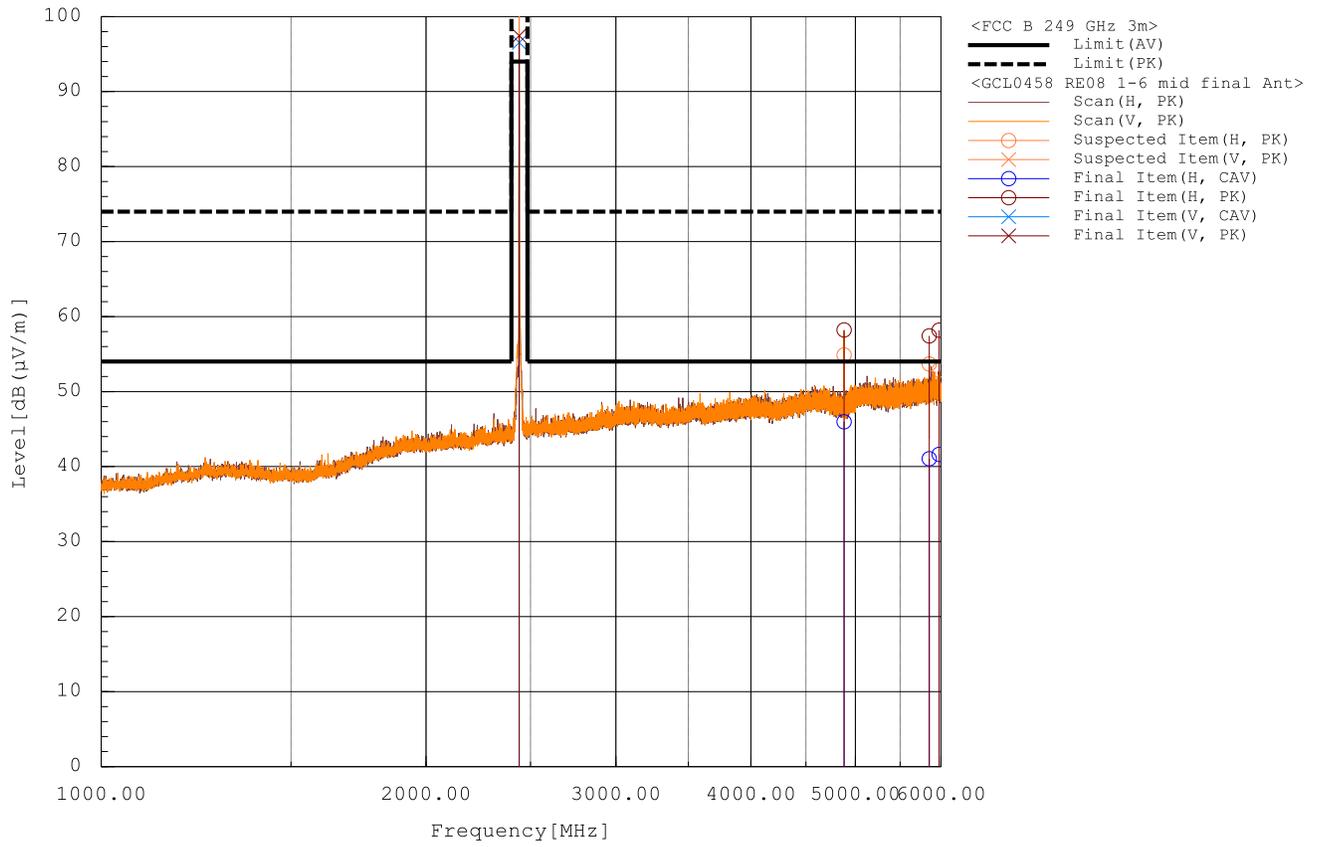


Figure RE08.2: Spectral data (Ant 1-6GHz Mid 2440MHz)

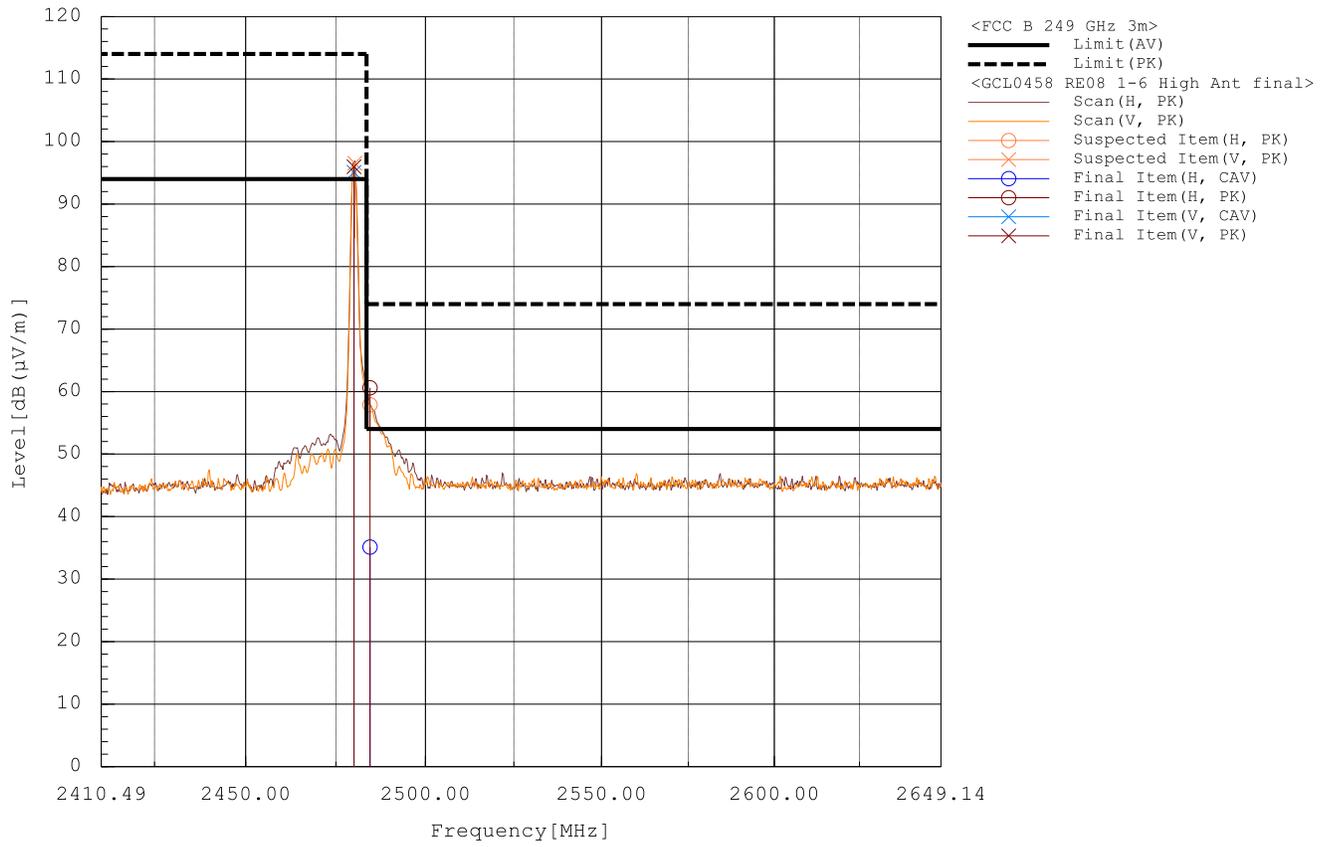


Figure RE08.3: Spectral data (Ant 1-6GHz High 2480)

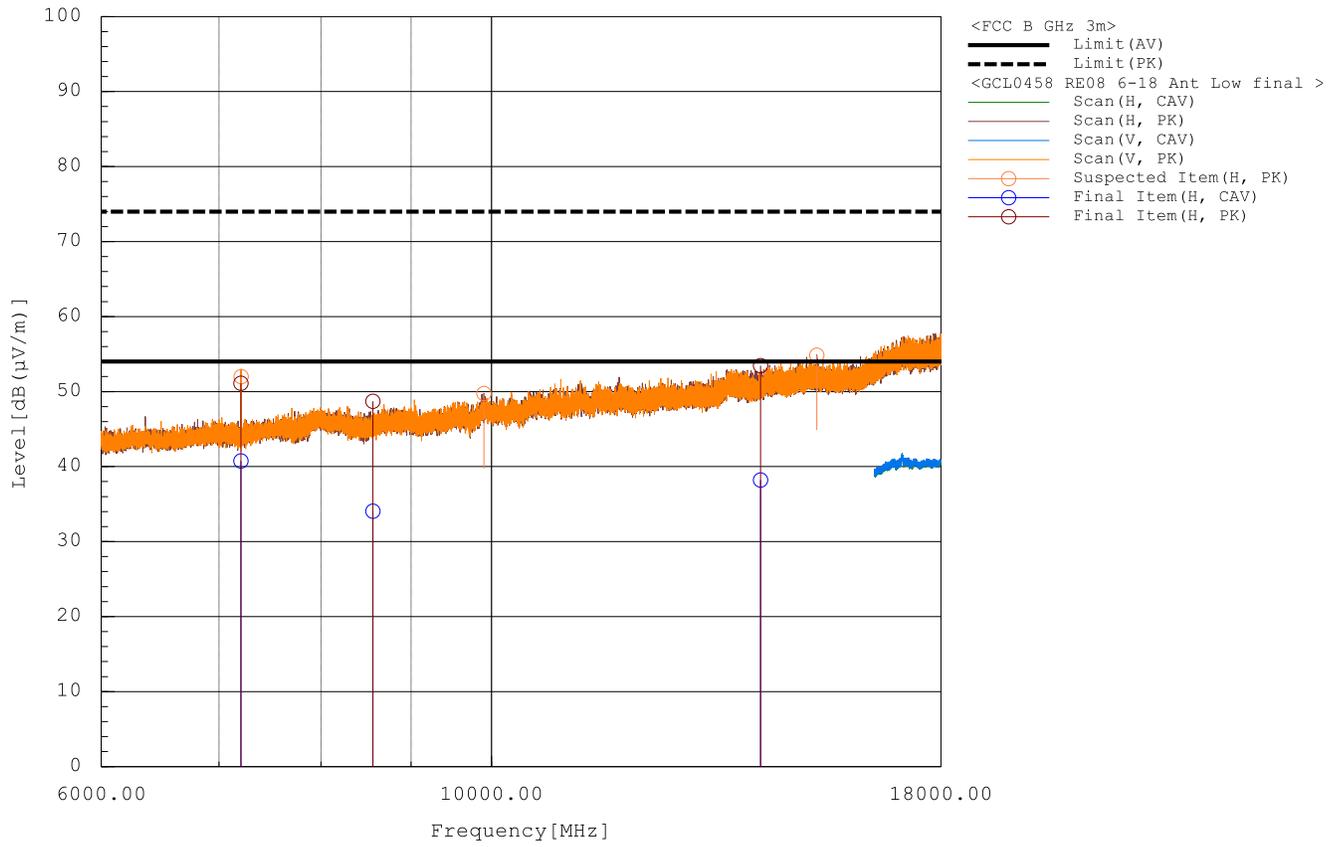


Figure RE08.4: Spectral data (Ant low 6-18GHz 2402MHz)

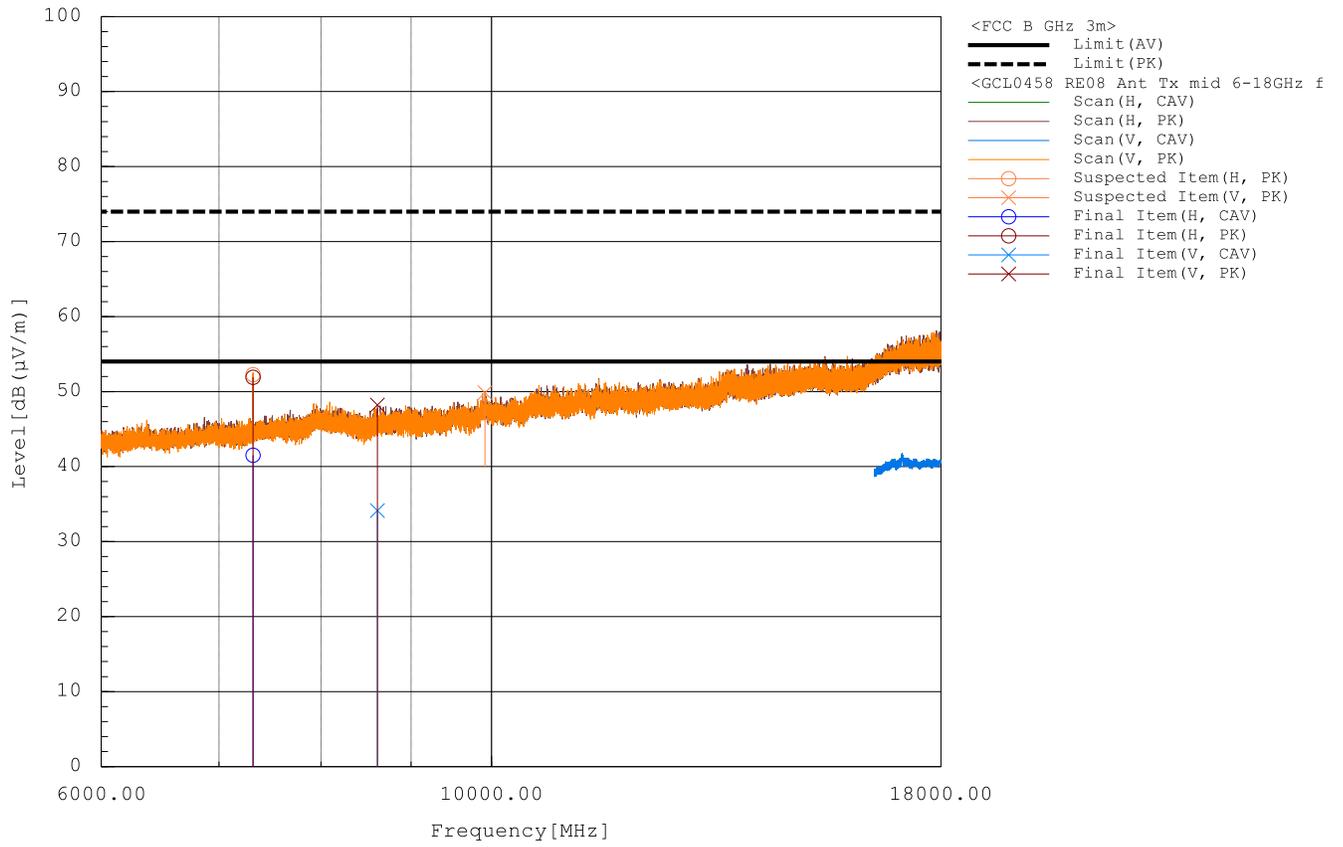


Figure RE08.5: Spectral data (Ant 6-18GHz Mid 2440MHz)

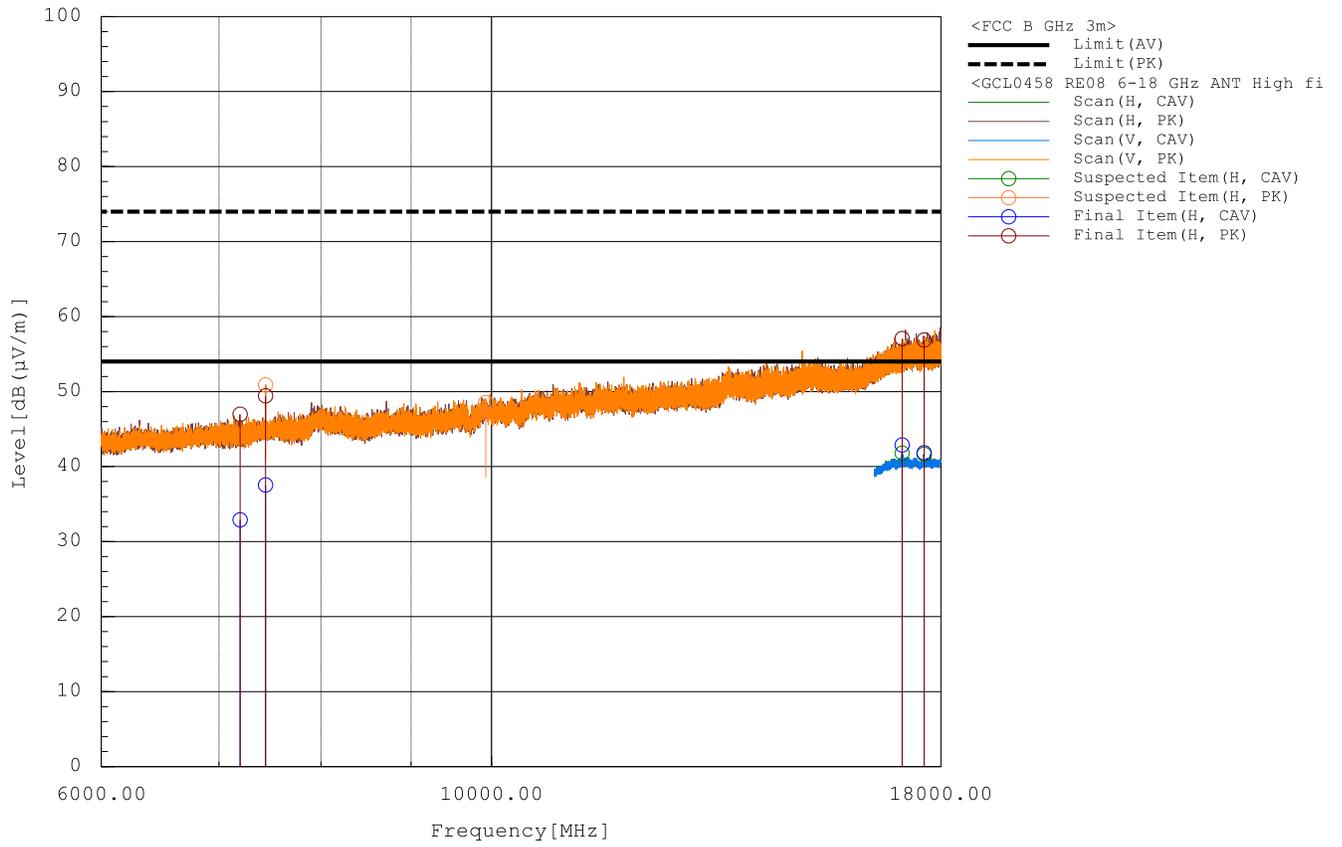


Figure RE08.6: Spectral data (Ant 6-18GHz High 2480)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

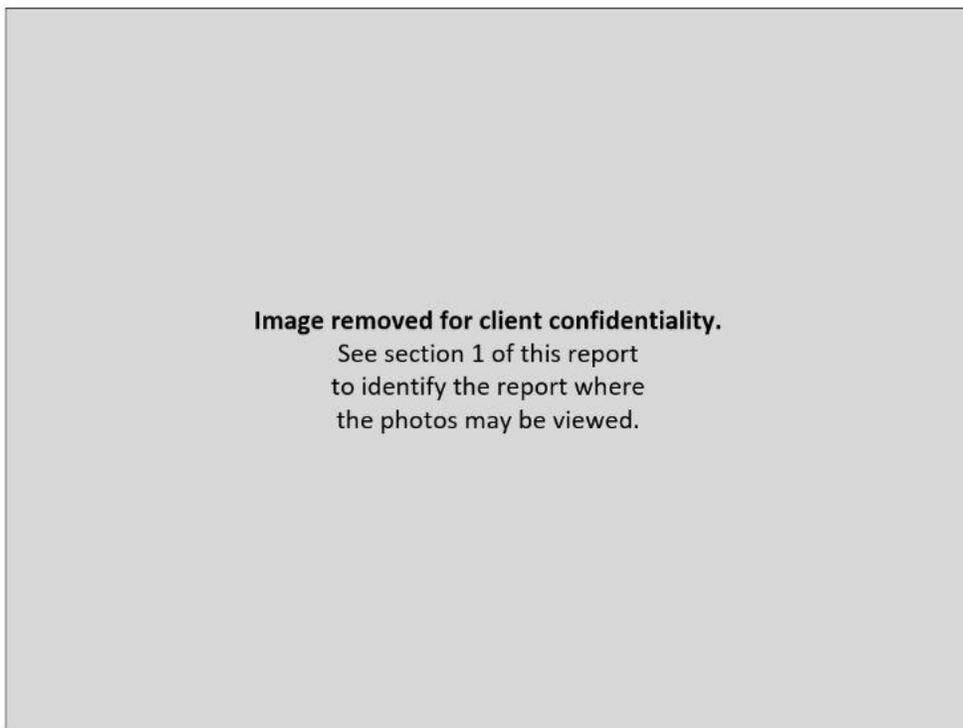


Figure RE08.4: EUT test setup, front view



Figure RE08.5: EUT test setup, reverse view

This line is the end of the test record.

Test Record
Radiated Emission Test RE09
Project GCL0458

Test Date(s) 06 Oct 2023
 Test Personnel Jim Solum

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M5 (ANT Tx)
 Arrangement A2 (Upwr)
 Input Power 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-210 (as noted in Section 6 of the report).

Frequency Range: 18 GHz to 26.5 GHz
Pass/Fail Judgment: PASS

Test record created by: Jim Solum
Date of this record: 11 Oct 2023

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 26 GHz	Keysight	N9048B	MY59290135	27-Sep-2023	1-Oct-2024
Antenna, Horn, 10-40 GHz	ETS Lindgren	3116C	00259186	23-Mar-2023	1-Apr-2024
Preamplifier, 18 Ghz to 40 Ghz	Com-Power	PAM-840A	461364	Calibration	Not Required
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	16-Nov-2022	16-Nov-2025
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10721	30-Aug-2023	1-Sep-2026

Table RE09.1: Test Equipment Used

Software Used: Keysight PXE software A.32.06
 RE Signal Maximization Tool v2023Jul14.xlsx
 RE 18G to 26G 1 meter Data AnalysisV1 2022Oct12.xlsx

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

In the 18 GHz to 26.5 GHz frequency range, pre-scan spectral data was taken at 1 meter and extrapolated to a 3 meter distance. Final measurements were made at 3 meters.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 18 GHz and 26.5 GHz. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m.

Frequency (MHz)	Avg Limit (dBuV/m)	Pk Limit (dBuV/m)	Avg Level (dBuV/m)	Pk Level (dBuV/m)	Av Margin (dB)	Pk Margin (dB)	Azimuth (degree)	Height (mm)	Antenna Polarity	EUT Polarity
24020.000	54.00	74.00	45.80	59.40	8.20	14.60	80	1729	HORZ	X

Table RE09.2: Emission summary

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

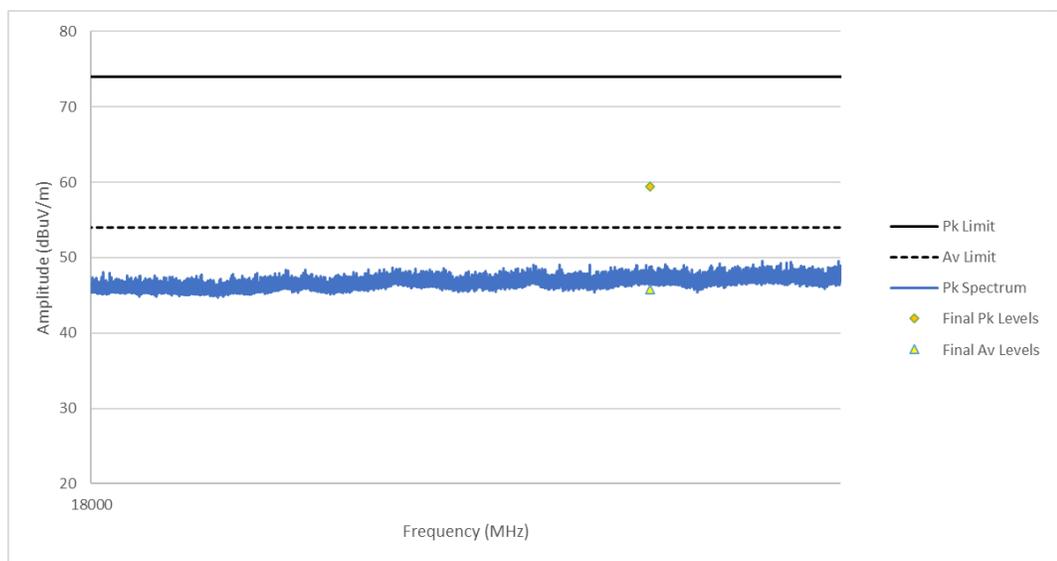


Figure RE09.1: Spectral data

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE09.2: EUT test setup, front view



Figure RE09.3: EUT test setup, reverse view

This line is the end of the test record.

Test Record
Transmitter Stability in Extreme Conditions
Test IDs TR15
Project GCL-0458

Test Date(s) 15 Oct 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731

Operating Mode M1 (BtTx)
 Arrangement A3 (Udata)
 Nominal Input Power 5 Vdc

Test Standards: FCC part 15, RSS-GEN, ANSI C63.10 (as noted in Section 6 of the report)

Radio Protocol BLE (Bluetooth Low Energy), ANT

Pass/Fail Judgment: PASS

Test record created by: Majid Farah
Date this record: 18 Oct 2023
 Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Thermometer	Thermco	ACCD370P	220608121	26-Aug-2022	1-Sep-2024
Barometer	Traceable	6453	221702700	3-Aug-2022	1-Aug-2024
DMM Multimeter	FLUKE	79 III	71740743	5-Apr-2023	1-Apr-2024
Programmable DC power source	Keithley	2260B-30-72 720 W	1411917	21-Apr-2023	15-Apr-2024
Thermal Chamber	Tenney	T2RC	32774-02	Calibration	Not Required

Table TR15.1: Equipment used

Software Used: PXE Software Revision A.33.03, FrequencyStabilityAnalysisTemplateV1.xlsx

Test Method

The standards cited require observation of the stability for transmission frequency and/or power at certain environmental extremes. The reference is performance on nominal input voltage and a temperature of 20 °C. Where the standards cited here impose different limits or conditions, the most stringent limits and conditions have been applied.

The acceptance criterion is that the 6 dBc Occupied Bandwidth of the modulated signal should remain within the 2400-2483.5 MHz radio band.

The modes utilized include those that showed emissions closest to the band edge during prior bandwidth testing.

Test Data

The test sample(s) were subjected to extreme conditions and performed as shown below. Yellow highlights indicate the highest level for a protocol, for which an image of the spectrum is also provided. In the spectral plots, the data sets have been combined to present the low and high channel results side by side. Orange diamond markers indicate the spectral peak, which the black square markers are at the 2400 MHz or 2483.5 MHz band edge.

Tx Mode	Temp	Volts	Low Ch.	High Ch.
Bluetooth	°C	Vdc	dBc	dBc
BLE 1 Mbps	50	5	31.2	36.4
BLE 1 Mbps	40	5	32.3	34.6
BLE 1 Mbps	30	5	32.0	34.1
BLE 1 Mbps	20	5	32.7	32.8
BLE 1 Mbps	10	5	33.2	32.1
BLE 1 Mbps	0	5	32.6	31.2
BLE 1 Mbps	-10	5	33.1	30.5
BLE 1 Mbps	-20	5	32.4	30.0

Table TR15.2 Difference between peak and band edge levels for BLE 1 Mbps transmissions during temperature variations

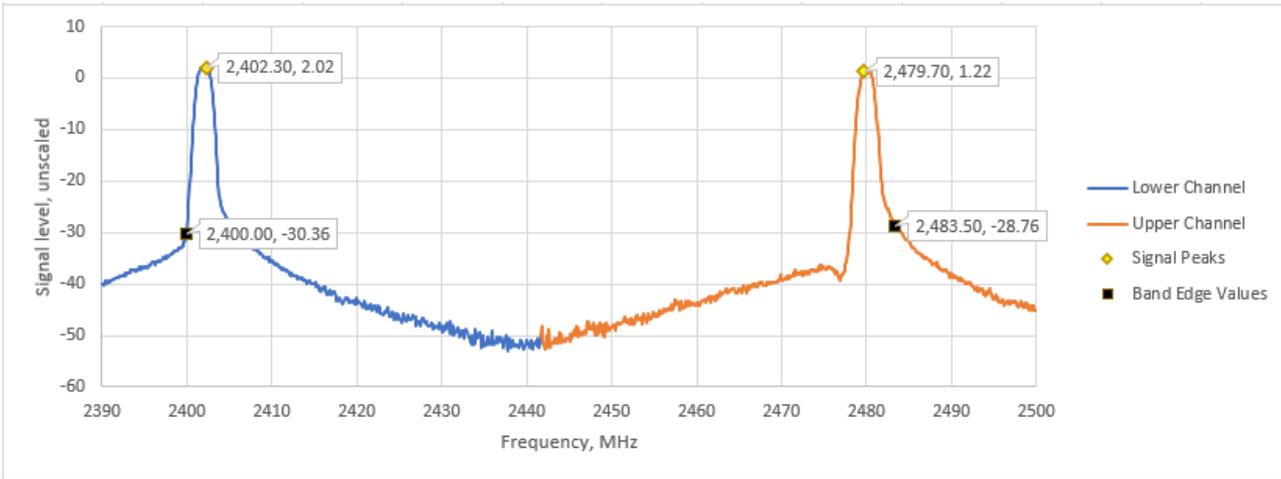


Figure TR15.1: Spectral data for BLE 1 Mbps at -20 °C which represent low and high channel

Tx Mode	Temp	Volts	Low Ch.	High Ch.
Bluetooth	°C	Vdc	dBc	dBc
BLE 1 Mbps	20	4.25	32.7	32.9
BLE 1 Mbps	20	5	32.7	32.8
BLE 1 Mbps	20	5.75	32.9	32.8

Table TR15.3 Difference between peak and band edge levels for BLE 1 Mbps transmissions at 20 °C during voltage variations

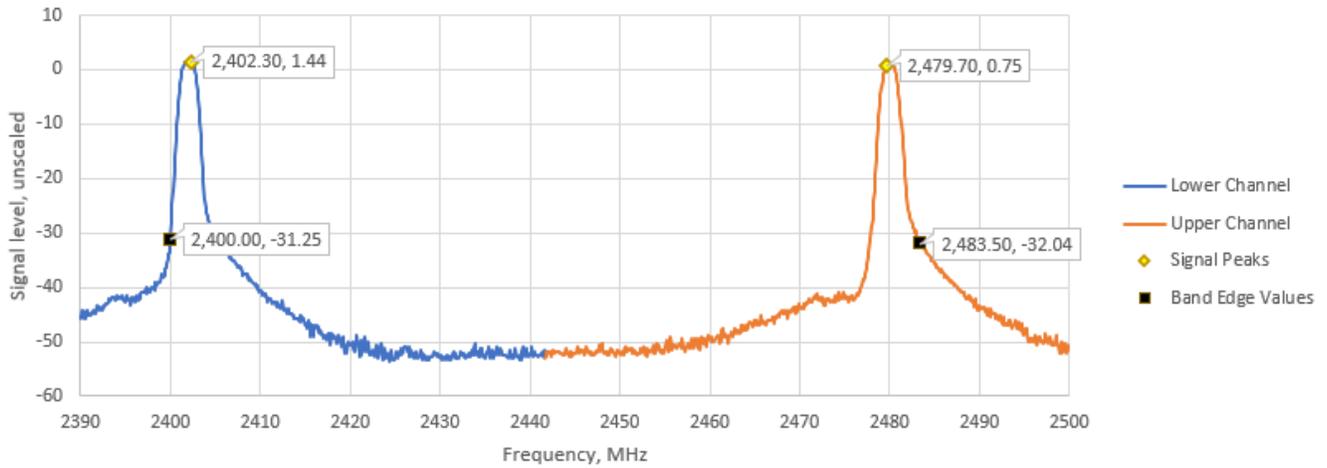


Figure TR15.2: Spectral data for BLE 1 Mbps at 20 °C which represent low and high channel

Setup Block Diagram

The following block diagrams show the EUT configured and arranged in the manner which it was measured.

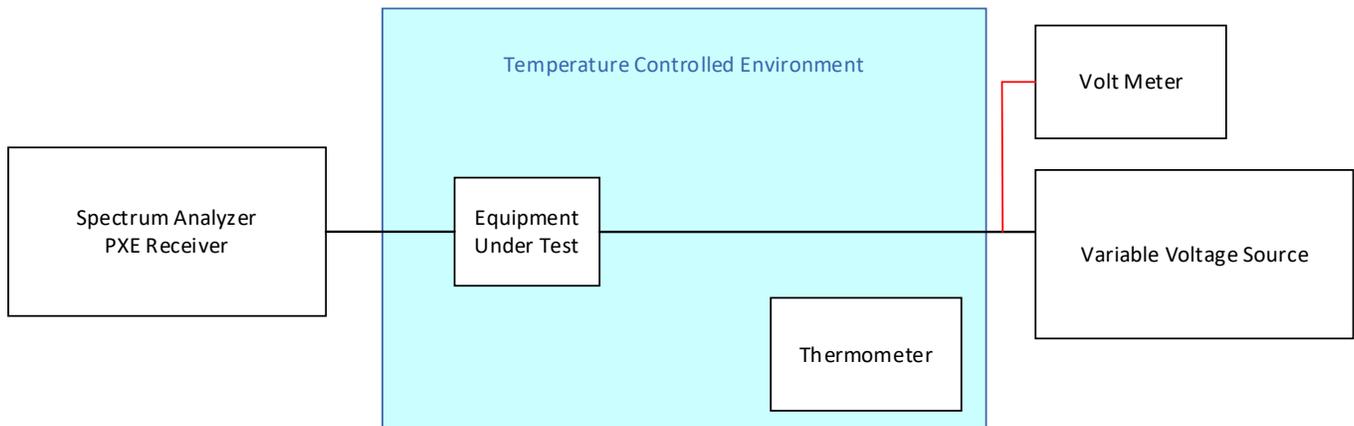


Figure TR15.3: Schematic drawing of the test equipment setup

This line is the end of the test record.

Test Record
Transmitter Bandwidth Tests
Test IDs TR03
Project GCL0458

Test Date(s) 28 Sep 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413731

Operating Mode M10 (All2.4)
 Arrangement A3 (Udata)
 Input Power 5 Vdc

Test Standards: FCC Part 2.202, ANSI C63.10, TRC-43, RSS-GEN (as noted in Section 6 of the report).

Radio Protocol Bluetooth Low Energy (BLE), ANT
 Radio Band 2400 to 2483.5 MHz

Pass/Fail Judgment: Reported

Test record created by: Majid Farah
Date of this record: 03 Oct 2023
 Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220146	3-Jun-2023	3-Jun-2024

Table TR03.1: List of test equipment used

Test Software Used: Keysight PXE firmware A.35.06

Background

There are regulatory requirements to present two additional types of bandwidth analyses: 99% Occupied Bandwidth and Necessary Bandwidth. There are no limits or functional requirements around these data, beyond a reporting requirement. The contents of this test record are for information, and do not affect compliance of the devices that are the subject of this report.

For BLE operating at 2 Mbps, the lowest operating frequency was 2404 MHz, and the highest operating frequency was 2478 MHz. For all other Bluetooth, BLE, and ANT radios reported here, the lowest operating frequency was 2402 MHz, and the highest operating frequency was 2480 MHz.

Test Setup

This block diagram shows the test equipment setup.

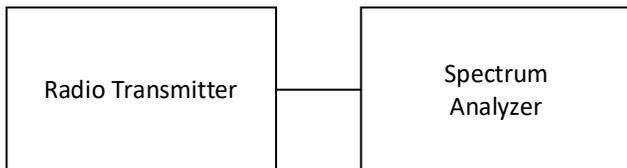


Figure TR03.1: Test setup

Occupied Bandwidth, 99% Test Method

During this test the transmitter output is fed directly, or through RF attenuators, to the spectrum analyzer. The analyzer has a built-in capability to identify the minimum bandwidth that contains a specified percentage of the total power observed. The spectrum is scanned hundreds of times so that the varied effects of modulation are appropriately assessed. Since the focus is on the relative distribution of energy across a range of frequencies, the absolute amplitudes recorded during this test are not relevant and may not include cable losses or attenuation factors.

Occupied Bandwidth, 99% Test Data

The data for each type of bandwidth is summarized below, followed by the spectral data for the cases highlighted in yellow. The analysis threshold for this test was the bandwidth containing 99% of the observed power using the ANSI C63.10 method. The standards require testing a frequency near the bottom, middle, and top of the band. The measured bandwidth data have MHz as their units of measure.

		2402 (04)	2440	2480 (78)
BLE	1 Mbps	1.049	1.049	1.051
BLE	2 Mbps	2.044	2.046	2.049
ANT		0.986	0.986	0.989

Table TR03.2: Summary of 99% bandwidth data in MHz for ANT and BLE modes

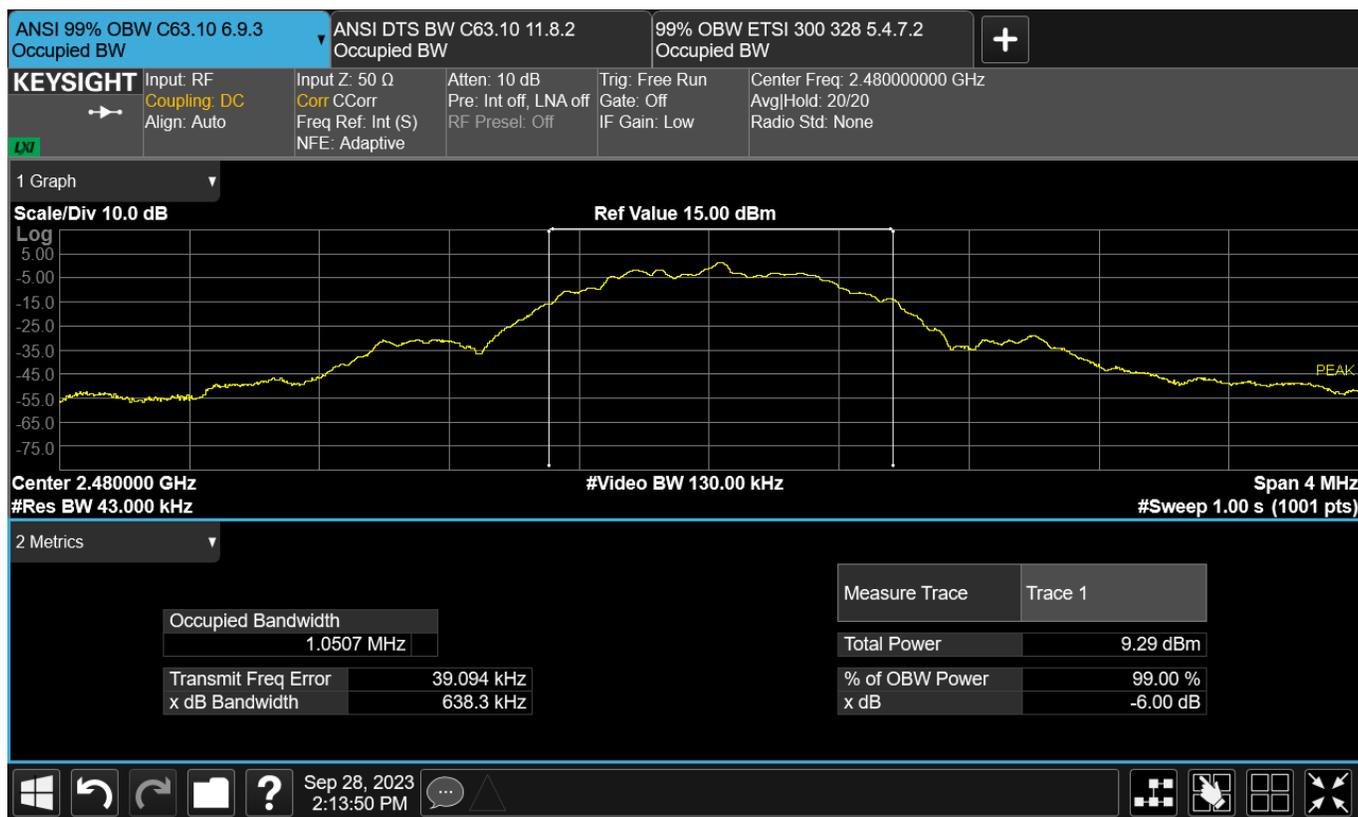


Figure TR03.2: Bandwidth data for BLE 1 Mbps at 2480 MHz

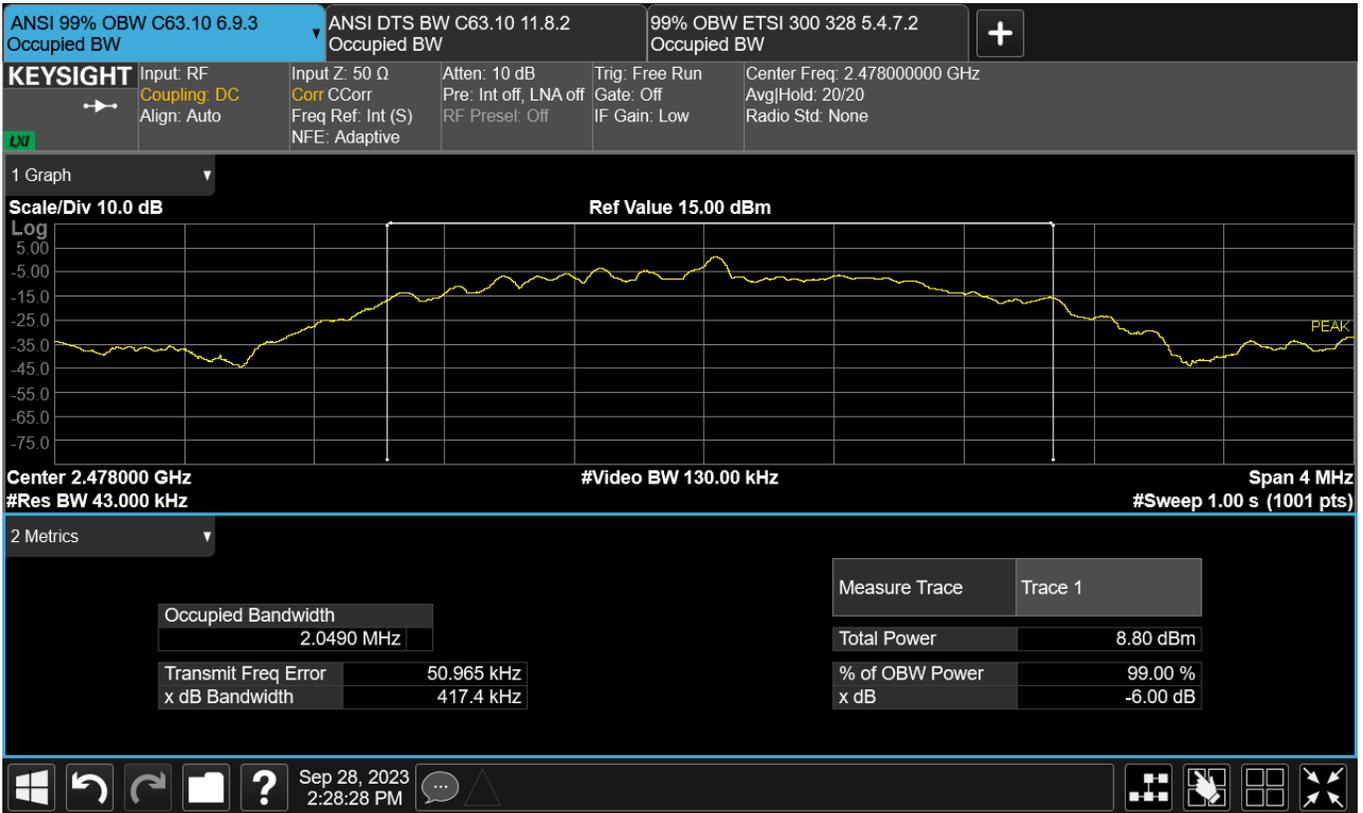


Figure TR03.3: Bandwidth data for BLE 2 Mbps at 2478 MHz

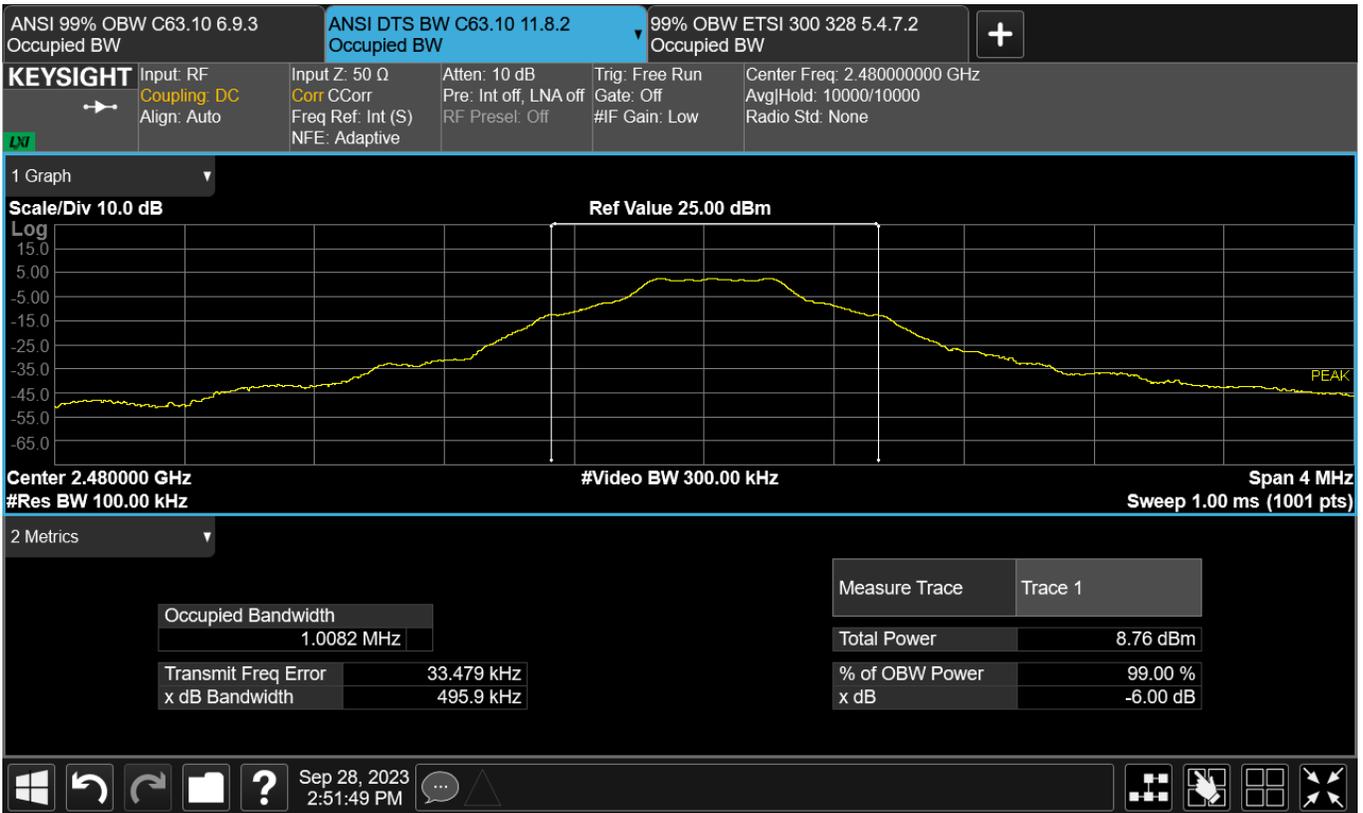


Figure TR03.4: Bandwidth data for ANT at 2480 MHz

Necessary Bandwidth Calculations

The Necessary Bandwidth is a theoretical value based on the specifications for a communication protocol, rather than the hardware implementation and a subsequent lab measurement. The analysis methods in FCC Part 2.202 and TRC-43 are the same for Bluetooth, ANT, and IEEE 802.11b WiFi. However, they differ for IEEE 802.11g and 11n systems because the Canadian TRC-43 standard provides different analysis methods for Orthogonal Frequency Division Multiplexing systems (OFDM). The tables below will show the analysis for most of the radios signals as a combined approach, then separately analyze the results for IEEE 802.11g and n systems. The tables below may include radio protocols that are not part of the product being evaluated.

The radio modulation schemes for Ant, for the various Bluetooth protocols, and for IEEE 802.11 b WiFi are a mix of Phase Shift Key (PSK) and Quadrature Amplitude Modulation (QAM) techniques. The Necessary Bandwidth calculations use the equations from 47CFR Part 2.202(g) table section 6. We have set the variable K=1, which leaves the equation for both PSK and QAM as:

$$B_N = 2R / \text{Log}_2(S)$$

where B_N is the Necessary Bandwidth, R is the bit rate, and S is the number of signaling states.

Radio Type	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
ANT / ANT+	1	1	2	1	2

Table TR03.101: Necessary Bandwidth for ANT and ANT+ Radio Protocols (FCC and TRC-43)

Radio Type	Sub-type	Method	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
Bluetooth	BR	GFSK	1	1	2	1	2
	EDR2	Pi/4 DPSK	2	1	4	2	2
	EDR3	8DPSK	3	1	8	3	2
BLE	1Mbps	GFSK	1	1	2	1	2
	2Mbps	DQPSK	2	1	4	2	2

Table TR03.102: Necessary Bandwidth for Bluetooth Radio Protocols (FCC and TRC-43)

Radio Type	Sub-type	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
802.11 b	1	1	1	2	1	2
	2	2	1	4	2	2
	5.5	5.5	1	4	2	5.5
	11	11	1	4	2	11

Table TR03.103: Necessary Bandwidth for IEEE 802.11 b Radio Protocol (FCC and TRC-43)

Radio Type	Sub-type	R Mbps	K	S	LogBase2 of (S)	BN (MHz)
802.11 g	6	6	1	2	1	12
	9	9	1	2	1	18
	12	12	1	4	2	12
	18	18	1	4	2	18
	24	24	1	16	4	12
	36	36	1	16	4	18
	48	48	1	64	6	16
	54	54	1	64	6	18
	802.11 n	MCS0	7.2	1	2	1
MCS1		14.4	1	4	2	14.4
MCS2		21.7	1	4	2	21.7
MCS3		28.9	1	16	4	14.5
MCS4		43.3	1	16	4	21.7
MCS5		57.8	1	64	6	19.3
MCS6		65	1	64	6	21.7
MCS7		72.2	1	64	6	24.1

Table TR03.104: Necessary Bandwidth for IEEE 802.11 g and n 20 MHz Radio Protocols (FCC)

As a note, the bit rate for IEEE 802.11 n WiFi is calculated based on the IEEE standard's short guard interval of 400 nsec. If only the long guard interval of 800 nsec were implemented, the bit rate for MCS7 would decrease to 65 Mbps for a Necessary Bandwidth of 21.7 MHz.

The TRC-43 method for OFDM signals simply multiplies the number of subcarriers, K, and the subcarrier spacing, N_s. In both cases, N_s is 312.5 kHz. The count of subcarriers includes nulls. So for example, 802.11 n uses 4 pilot subcarriers, 52 data subcarriers, and one null suppressed subcarrier in the middle for 57 total subcarrier channels.

$$B_N = N_s * K$$

Radio Type	N _s (MHz)	K	BN (MHz)
802.11g	0.3125	53	16.6
802.11n	0.3125	57	17.8

Table TR03.105: Necessary Bandwidth for IEEE 802.11 g and n 20 MHz Radio Protocols (TRC-43)

This line is the end of the test record.

Concluding Notes

This report stands as an integrated record of the tests performed and must be copied or distributed in its complete form. The reproduction of selected pages or sections separate from the complete report would require specific approval from the manager of the Garmin Compliance Lab.

This is the final page of the report.

Test Report 2023-065

Version A

Issued 3 Nov 2023

Project GCL-0458

Model Identifier: A04714

Primary Test Standard(s)

FCC Part 15.225

RSS-210 Issue 10 Amd 1

Garmin Compliance Lab

Garmin International

1200 E 151st Street

Olathe Kansas 66062 USA

Client-supplied Information

FCC ID: IPH-04714

IC ID: 1792A-04714



See section 6 of this report regarding the presence or absence of accreditation logos or marks on this cover page.

1. Summary

The equipment or product described in section 5 of this report was tested at the Garmin Compliance Lab according to standards listed in section 6. This report focuses on the 13.56 MHz Near Field Communication (NFC) Transceiver(s). The results are as follows.

Parameter	Description	Key Performance Values	Result	Data starts at page
Transmitter intentional emissions	Emissions while transmitting must be limited according to a mask that varies across the frequency range 13.110 to 14.010 MHz.[15.225(a) through (c), RSS-210 B.6]	22.6 dB of margin to the intentional emission limit.	PASS	11
Transmitter spurious emissions	Emissions beyond the intended radio band while transmitting must be suppressed a general limit. [FCC 15.225 (d) and RSS 210 B.6]	5.8 dB of margin to the Class B limit.	PASS	14
Conducted Emissions AC Power Port	Radio emissions that this device may generate via its ac power network connections that are not necessary for its operation and that may affect radio communication. [FCC Part 15.205 and RSS-GEN 8.8]	8.01 dB of margin to the appropriate limit. Tested 150 kHz to 30 MHz applying combined Class B limits.	PASS	18
Frequency stability under extreme Conditions	The ability for the radio to accurately maintain carrier frequency stable with changes in temperature and supply voltage. [FCC 15.225 (e) and RSS 210 B.6]	The Carrier frequency was stable within 0.01% of the target frequency.	PASS with caveat	21
Other Bandwidths	Bandwidth values are presented for 99% Occupied Bandwidth	There are requirements to report these numbers, but they do not have performance limits.	Reported	23

NT (Not Tested) means the requirement may or may not be applicable, but the relevant measurement or test was not performed as part of this test project.

N/A (Not Applicable) means the lab judged that the test sample is exempt from the requirement.

Table 1: Summary of results

Report Organization

For convenience of the reader, this report is organized as follows:

1. Summary
2. Test Background
3. Report History and Approval
4. Test Sample Modifications and Special Conditions
5. Description of Equipment Tested
6. Test Standards Applied
7. Measurement Instrumentation Uncertainty
8. Selected Examples of Calculations
9. Environmental Conditions During Test
10. Immunity Performance Criteria

Annex: Test records are provided for each type of test, following the order and page numbering stated in the summary table. Concluding notes appear on the final page of this report.

Due to confidentiality, certain material (such as test setup photographs) has been removed from this report and placed in GCL Test Report 2023-067. That report is treated as a part of this document by way of this reference.

2. Test Background

The testing reported here was performed at the Garmin Compliance Lab, an organization within Garmin International, located at 1200 E 151st St, Olathe Kansas, USA. The contact telephone number is +1.913.397.8200.

The testing was performed on behalf of the Garmin design group, a separate organization located at 1200 E 151st St, Olathe Kansas, USA. Witnesses from the business group included: None.

Test Sample received: 01 Sep 2023
Test Start Date: 18 Sep 2023
Test End Date: 1 Nov 2023

The data in this test report apply only to the specific samples tested.

Upon receipt all test samples were believed to be properly assembled and ready for testing.

3. Report History and Approval

This report was written by Majid Farah and initially issued on 3 Nov 2023 as Version A.


Report Technical Review:

David Arnett
Technical Lead EMC Engineer



Report Approval:

Shruti Kohli
Manager Test and Measurement (EMC, Reliability and Calibration)

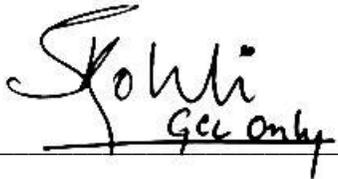

4. Test Sample Modifications and Special Conditions

The following special conditions or usage attributes were judged during test to be necessary to achieve compliance with one or more of the standards listed in section 6 of this report:

None.

The following modifications to the test sample(s) were made, and are judged necessary to achieve compliance with one or more of the standards listed in section 6 of this report:

None.

5. Description of the Equipment Tested

5.1 Unique Identification

Product Model A04714
Serial Numbers Tested 3453413644, 3453413671

This product tested is a mobile device for collecting and sharing data with the user and nearby electronic devices.

The client affirmed that the test samples will be representative of production in all relevant aspects.

5.2 Key Parameters

EUT Input Power: 5 Vdc
I/O Ports: USB
Radio Transceivers: Bluetooth Low Energy, ANT, NFC
Radio Receivers: GPS L1, Galileo E1, BeiDou, GLONASS
Primary Functions: Data collection and communication
Typical use: Portable in multiple orientations
Highest internal frequency: 2.484 GHz
Firmware Revision 3.05

5.3 Operating modes

During test, the EUT was operated in one or more of the following modes. Some modes may not applicable for this product or in this report.

Mode 1: M1 (Bt Tx). Bluetooth, sometimes called Bluetooth Classic, radio is transmitting consistently on a selected channel sending data using the BR (Basic Rate of 1 Mbps), EDR2 (Extended Data Rate of 2 Mbps) or EDR3 (Extended Data Rate of 3 Mbps) modulation types.

Mode 2: M2 (Bt Ink). Bluetooth Classic radio is paired to a companion device, transmitting and receiving data on various channels in accordance with the protocol, and maintaining the paired relationship.

Mode 3: M3 (Ble Tx). Bluetooth Low Energy radio transmitting consistently on a selected channel at 1 Mbps or 2 Mbps

Mode 4: M4 (Ble Ink). Bluetooth Low Energy radio is paired to a companion device, transmitting and receiving data on various channels in accordance with the protocol, and maintaining the paired relationship.

Mode 5: M5 (ANT Tx). ANT radio transmitting consistently on a selected channel.

Mode 6: M6 (ANT Ink). ANT radio is paired to a companion device, transmitting and receiving data in accordance with the protocol, and maintaining the paired relationship.

Mode 7: M7 (WiFi Tx). The IEEE 802.11 b/g/n radio was transmitting consistently on a selected channel, with a specified modulation type, and data rate.

Mode 8: M8 (WiFi Link). The IEEE 802.11 b/g/n radio is paired to a companion device, transmitting and receiving data on a selected channel in accordance with the protocol, and maintaining the paired relationship.

Mode 9: M9 (Rx 2.4). The radio was set to receive 2.4 GHz signals but not transmit. In this situation, it was specifically looking for Bluetooth Low Energy signals which cover the 2.4 GHz band and represent a worst-case scenario.

Mode 10: M10 (All2.4). This means the radio was tested in modes M1, M3, M5, and M7 if applicable.

Mode 11: M11 (GNSS). The Global Navigation Satellite System receiver is monitoring the GNSS bands, attempting to detect a constellation and determine location. Unless otherwise noted, the EUT was provided simulated GNSS signals representing one of more constellation types. In addition, the EUT may have been reporting signal levels and satellite data to an attached computer to monitor link health.

Mode 12: M12 (NFC Ink). The NFC 13.56 MHz transceiver is in Card Emulation mode, and is actively linked to a companion NFC Reader.

5.4 EUT Arrangement


During test, the EUT components and associated support equipment were selected including the following arrangement sets.

Arrangement 1: A1 (Solo). The test sample operates from its battery and no external physical connections. No block diagram is needed for this arrangement.

Arrangement 2: A2 (Upwr). The test sample is attached to a Mains-powered device connected that provides dc power to the sample over a cable but no user data. See the block diagram in Figure 1.

Arrangement 3: A3 (Udata). The test sample is attached to a Mains-powered device connected that provides dc power to the sample and user data over a cable. See the block diagram in Figure 1.

Arrangement 4: A4 (Udc). The test sample is attached to a Mains-powered device connected that provides dc power to the sample and may or may not provide user data. This arrangement is specified in the test plan to provide staff flexibility when the presence or absence of data on the cable is not pertinent. See the block diagram in Figure 1.

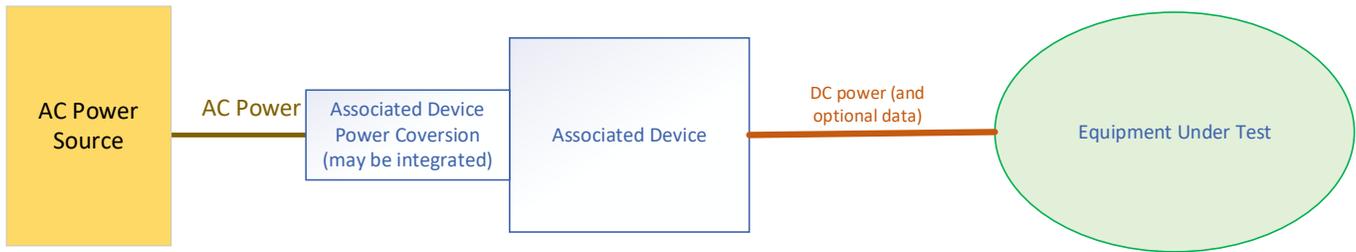

*This interconnect drawing is not to scale.
It does not indicate the placement of devices.*

Figure 1: Block diagram of equipment for arrangements A2, A3, A4

Arrangement 5: A5 (NFCp) The test sample is placed near an NFC Card Reader. The NFC Card Reader is connected to a laptop computer. The test sample is powered by a device that does not include data over the cable, just as with A2. For clarity, test sample is NOT powered by, or connected to, the laptop computer that powers the NFC Card Reader.

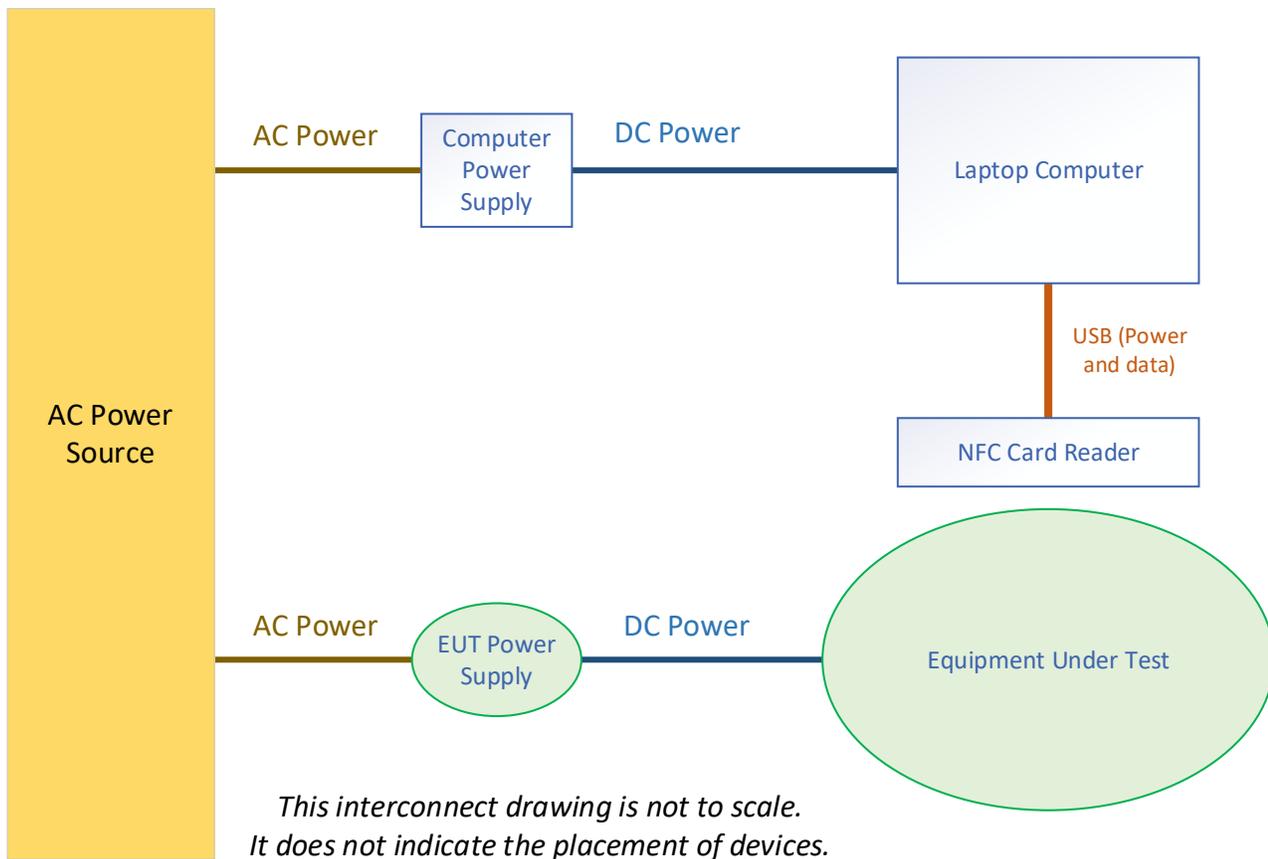


Figure 2: Block diagram of equipment arrangement A5

Arrangement 6: A6 (NFCu) The test sample is placed near an NFC Card Reader. The NFC Card Reader is connected to a laptop computer. The test sample is powered by its own batteries rather than an external power source. The test sample is NOT powered by, or connected to, the laptop computer that powers the NFC Card Reader.

5.5 Associated Equipment (AE) used

Description	Manufacturer	Model	Serial Number
NFC reader	ACS	ACR1252	RR554-086776
AC/DC Power Converter	Phihong technology	PSAF10R-050Q	None
Laptop Computer	Dell	Latitude 5410	5VSPFB3
Laptop Power Supply	Dell	HA65NM191	None

Table 2: List of associated equipment that may have been used during test

5.6 Cables used

Description	From	To	Length	EMC Treatment
USB	Power and/or Data source	EUT	54 cm	None

Table 3: List of cables that may have been used during test

6 Test Standards Applied

6.1. Accredited Standards

The following test or measurement standards were applied and are within the scope of the lab's accreditation. All results in this report that cite these standards are presented as Accredited results consistent with ISO/IEC 17025.

AS/NZS 4268: 2017
CFR 47, FCC Part 15.225
ANSI C63.10: 2013 and ANSI C63.10: 2020
RSS-GEN Issue 5 Amd 2
RSS-210 Issue 10 Amd 1

6.2. Non-accredited Standards

The following test or measurement standards were applied and are either outside the scope of the lab's accreditation, or were performed in such a way that results are not presented as being fully accredited.

None.

6.3 Variances

The following variances were applied to standards cited in this section.

Where different test standards cover the same test parameter or phenomenon, and the standards have compatible differences, the stricter of the requirements is typically applied. For example, a consolidated limit may be applied to emission tests selecting the strictest of the limits at each frequency. Likewise, if one standard requires a vertical antenna sweep with boresighting and another does not, swept motion with boresighting will typically be used as it is the more stringent requirement.

6.4 Laboratory Accreditation

The Garmin Compliance Lab, an organization within Garmin International, is registered with the US Federal Communication Commission as US1311. The lab is recognized by the Canada Department of Innovation, Science, and Economic Development (ISED) under CAB identifier US0233.

The Garmin Compliance Lab, an organization within Garmin International, is accredited by A2LA, Certificate No. 6162.01. The presence of the A2LA logo on the cover of this report indicates this is an accredited ISO/IEC 17025 test report. If the logo is absent, this report is not issued as an accredited report. Other marks and symbols adjacent to the A2LA logo are accreditation co-operations of which A2LA is a member under a mutual recognition agreement, and to which the Garmin Compliance Lab has been sublicensed.

7 Measurement Instrumentation Uncertainty

The lab has analyzed the sources of measurement instrumentation uncertainty. The analysis concludes that the actual measurement values cited in this report are accurate within the U_{LAB} intervals shown below with approximately 95% statistical confidence. Where the report shows a judgment that a test sample passes a test against a published limit based on these measured values, that judgment has a statistical confidence of 97.5% or greater. Measurement Instrumentation Uncertainty is one component of over-all measurement uncertainty, and other uncertainty components are not considered as part of this analysis.

The primary benchmark for measurement instrumentation uncertainty (MIU) in an electromagnetic compatibility (EMC) test lab is the set of U_{CISPR} values published in CISPR 16-4-2. In all cases where a U_{CISPR} value is published by CISPR, the analysis shows that U_{LAB} – this lab’s estimated MIU – is better than the U_{CISPR} benchmark.

The secondary benchmark for MIU in an EMC lab performing radio transceiver tests is a set of uncertainty limit values published in various ETSI standards. In this report, U_{ETSI} is the most restrictive of the values found in the ETSI EN standards listed in section 5 of this report. The analysis principles are described in the ETSI TR documents listed there. In most cases U_{LAB} is better than the U_{ETSI} benchmark. Where U_{LAB} exceeds the U_{ETSI} benchmark cited here, that entry is preceded by an asterisk. When required by the ETSI EN standards, excess uncertainty will be added to the measurand before comparison to a limit. In an individual test report, staff may re-evaluate that excess uncertainty based on the uncertainty of the method used and the uncertainty limits of the actual ETSI EN standard being applied, and the revised uncertainty values will be shown in the test report.

Some measurement uncertainties analyzed and reported here are not addressed in CISPR 16-4-2 or the ETSI standards, as indicated by the entry ‘None.’

Test Type	U_{LAB}	U_{CISPR}	U_{ETSI}
Conducted DC voltage	0.09% + 2 x LSDPV	None	1%
Conducted AC voltage below 500 Hz	1.0% + 3 x LSDPV	None	2%
Conducted Emissions, Mains Voltage	0.10% + 10 mV	None	None
Conducted Emissions, Mains Current	0.10% + 3 mA	None	None
Conducted Emissions, Mains Power	0.15% + 100 mW	None	None
Conducted Emissions, Power Mains, 9 kHz to 150 kHz	1.49 dB	3.8 dB	None
Conducted Emissions, Power Mains, 150 kHz to 30 MHz	1.40 dB	3.4 dB	None
Conducted Emissions, Cat 6 LCL, 150 kHz to 30 MHz	2.80dB	5 dB	None
Conducted Emissions, Cat 5 LCL, 150 kHz to 30 MHz	3.21 dB	5 dB	None
Conducted Emissions, Cat 3 LCL, 150 kHz to 30 MHz	4.24 dB	5 dB	None
Radiated Emissions, below 30 MHz	0.88 dB	None	6 dB
Radiated Emissions, 30 MHz to 1000 MHz	2.77 dB	6.3 dB	6 dB
Radiated Emissions, 1 GHz to 18 GHz	2.60 dB	5.2 & 5.5 dB	6 dB
Radiated Emissions, 18 GHz to 26.5 GHz	2.73 dB	None	6 dB
*Radio Signal Frequency Accuracy	*1.55 x 10 ⁻⁷	None	1.0 x 10 ⁻⁷
Radio Signal Occupied Bandwidth	0.95%	None	5%
Radio Power or Power Spectral Density	0.98 dB	None	1 dB
Temperature	0.38 °C	None	1 °C
Barometric Pressure	0.38 kPa	None	None
Relative Humidity	2.85% RH	None	±5% RH
Signal Timing	The greater of these three... 0.63 usec 0.01% of value 0.5 x LSDPV	None	None

Note: LSDPV stands for the Least Significant Digit Place Value reported. In the value 1470 msec, the least significant digit is the 7. It has a 10 msec place value. The LSDPV is thus 10 msec and the maximum error due to roundoff would be 5 msec. If the time value were reported as 1470 msec, the underscore indicates that the 0 is a significant figure and the error due to roundoff would be 0.5 msec. All digits provided to the right of a decimal point radix are significant.

8 Selected Example Calculations

Certain regulators require samples of the calculations that lead from the raw measurement to the final result for AC Mains conducted and unintended radiated emissions. The assumption is that the lab performs raw measurements, then adds, subtracts, multiplies, or divides based on transducer factors, amplifier gains, and losses in the signal transmission path. In this lab, our CISPR 16 Receiver does not work that way. The calibration factors and losses and gains are provided to the receiver as detailed data files. These factors are applied in the RF measurement path prior to the detector. But as a step in the lab measurement process, staff frequently verify that these factors are applied correctly. They make a measurement with the factors applied inside the receiver, then they disable the factors and remeasure the result manually adding in the various relevant factors.

The transmission loss is measured including the combined losses and gains of preamplifiers, cables, and any band-selective filters. In many cases above 1 GHz it is a negative value, indicating that the preamplifier gain is greater than these other losses.

Here are examples of these calculations. The data in these examples was not taken as part of this project:

8.1 AC Mains conducted emissions at 22 MHz

(Raw measurement) + (AMN factor) + (transmission loss) = Result

$$(7.145 \text{ dBuV}) + (9.812 \text{ dB}) + (0.216 \text{ dB}) = 17.173 \text{ dBuV}$$

8.2 Radiated Emissions at 630 MHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(2.25 \text{ dBuV}) + (27.80 \text{ dB/m}) + (2.89 \text{ dB}) = 32.94 \text{ dBuV/m}$$

8.3 Radiated Emissions at 2.7 GHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(43.72 \text{ dBuV}) + (32.22 \text{ dB/m}) + (-36.09 \text{ dB}) = 39.85 \text{ dBuV/m}$$

9 Environmental Conditions During Test

Environmental conditions in the test lab were monitored during the test period. Temperature and humidity are controlled by an air handling system. As information to the reader, the conditions were observed at the values or within the ranges noted below. For any tests where environmental conditions are critical to test results and require further constraints or details, the test records in the annex may provide more specific information.

Temperature:	20.5 to 23.6 °C
Relative Humidity:	34.3% to 55.7% (non-condensing)
Barometric Pressure	96.3 to 99.2 kPa

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
Barometer	Traceable	6453	221702700	3-Aug-2022	1-Aug-2024

Table 4: Environmental monitoring device

10 Immunity Performance Criteria

If this report includes immunity tests then results have been categorized as Performance Criteria A, B, C, or D. The standards that the lab applied will define the details for A, B, and C, as well as which criterion is required for each type of test. They will also define the electrical stresses that were applied during each test. In a very general sense the observed criteria noted in this report are as follows:

Criterion A. The stress applied did not alter product operation. This criterion is generally used for ‘continuous’ stresses that can be present for a long time in the places the product will be used, or that can appear often, even though they may come and go over time.

Criterion B. The stress applied altered product operation, but the product self-recovered so that the user would not have to try to figure out how to restore it to full operation. This criterion is generally used for 'transient' stresses that appear briefly and occasionally, but are usually not present in the places the product will be used.

Criterion C. The stress applied altered product operation, but the user could restore it to full operation, for example by power cycling the product. This criterion is generally used for 'transient' stresses that appear briefly and only rarely in the places the product will be used.

Criterion D. This is not an official criterion in the standards, because it would be a failure of the requirements. This indication in a test record means the product was affected in a way that the user might not be able to correct. The effect could include some degree of hardware damage, or it could include loss of program files or data files necessary for operation.

Repeatability is an issue in all EMC immunity work. When the product operation changes unexpectedly during a test, and the change would fail the requirements of the standard, this is an anomaly. The test operator needs to determine whether the anomaly was a result of the applied electrical stress. The investigation is done by repeating the section of the test where the anomaly occurred three times. If the same or a similar anomaly occurs in any of the three repeat trials, it is confirmed as a response to the stress. If not, the anomaly is judged unreproducible and is not considered when judging the A, B, or C observed performance. Since there is usually no ability to confirm a Criterion D anomaly, these are usually treated as Criterion D upon a single occurrence.

Tests that require Criterion B performance will be judged to Pass if criteria A or B is observed. Similarly, tests that require Criterion C performance will be judged to Pass if criteria A, B, or C is observed.

ANNEX

The remainder of this report is an Annex containing individual test data records. These records are the basis for the judgments summarized in section 1 of this report. The Annex ends with a set of concluding notes regarding use of the report.

Test Record
Radiated Emission Test RE12
Project GCL0485

Test Date(s) 17 Oct 2023
 Test Personnel Dave Kerr

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M12 (NFC Ink)
 Arrangement A6 (NFCu)
 Input Power 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-210, RSS-GEN (as noted in Section 6 of the report).

Frequency Range: 10 MHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: Jim Solum
Date of this record: 24 Oct 2023

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 26 GHz	Keysight	N9048B	MY59290135	27-Sep-2023	1-Oct-2024
Loop antenna, amplified	Schwarzbeck	FMZB 1519B	00174	12-Jun-2023	15-Jun-2024
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	7-Nov-2022	7-Nov-2025
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10720	16-Jan-2023	15-Jan-2026

Table RE12.1: Test Equipment Used

Software Used

PXE Firmware version A.32.06
 RE 150k to 30M Signal Maximization Tool V1 2021Mar17.xlsx
 RE 150k to 30M XYZ_orientations_TemplateV6.xlsm
 RE NFC 150k to 30M Data Analysis Template V21 2023Jun19.xlsx

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, and three antenna polarizations typically described as X, Y, and Z. Subsequent testing was done using the antenna polarization(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. The designation of the X, Y, and Z antenna polarizations are reported by use of photographs.

The table shows the selected final measurement data between 10MHz and 30 MHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. The dbuA/m limits and measured dbuA/m values in the chart below are obtained from the dBuV/m limits and measured dBuV/m measured values. The two values differ by 51.52 dB based on the 377 Ohm characteristic impedance of free space. A positive margin value indicates that the emission was below the test limit. The test limits are for FCC Part 15 & RSS-210.

Frequency (MHz)	Limit (dBuV/m)	Limit (dBuA/m)	Measured (dBuV/m)	Measured (dBuA/m)	Margin (dB)	Azimuth (degree)	Height (mm)	Antenna Orientation
12.288	49.5	-2.0	24.1	-27.4	25.4	-3	1000	X
12.711	49.5	-2.0	26.9	-24.6	22.6	-9	1000	X
13.137	60.5	9.0	27.7	-23.8	32.8	8	1000	X
13.348	60.5	9.0	37.5	-14.0	23.0	-1	1000	X
13.560	104.0	52.5	66.0	14.5	38.0	-2	1000	X
13.985	60.5	9.0	27.6	-23.9	32.9	-3	1000	X
14.408	49.5	-2.0	26.5	-25.0	23.0	5	1000	X
14.831	49.5	-2.0	23.5	-28.0	26.0	8	1000	X

Table RE12.2: Emission summary (FCC / Canada)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the tables above.

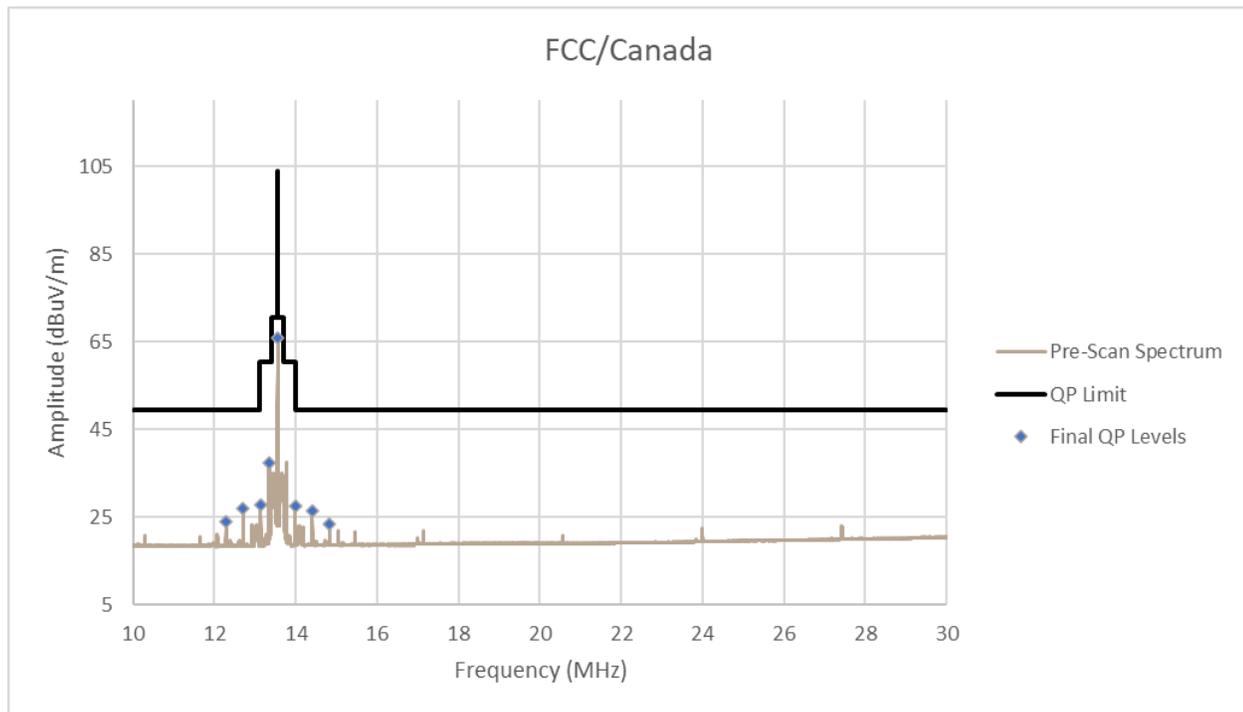


Figure RE12.1: Spectral data (FCC/Canada)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

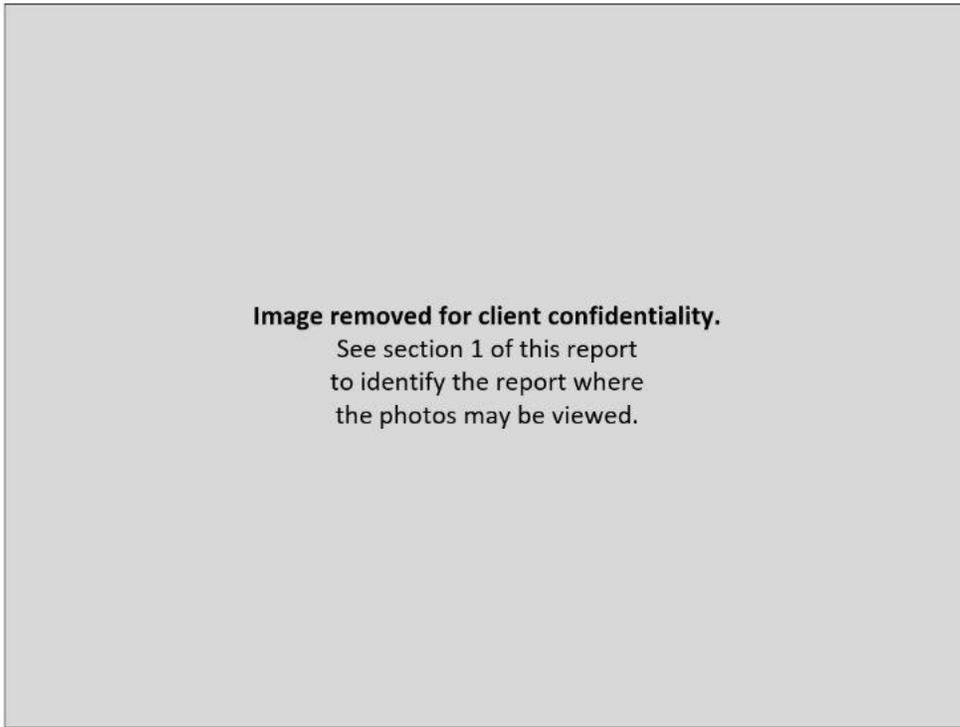


Figure RE12.2: EUT test setup, front view (Antenna X Orientation)



Figure RE12.3: EUT test setup, reverse view (Antenna X Orientation)

This line is the end of the test record.

Test Record
Radiated Emission Test RE13
Project GCL0458

Test Date(s) 19 Oct 2023
 Test Personnel David Kerr

Product Model A04714
 Serial Number tested 3453413644

Operating Mode M12 (NFC Ink)
 Arrangement A6 (NFCu)
 Input Power 5 Vdc (USB)

Test Standards: FCC Part 15, ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 30 MHz to 150 MHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 19 Oct 2023
 Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 26 GHz	Keysight	N9048B	MY59290135	27-Sep-2023	1-Oct-2024
Antenna, Biconilog, 30M-6 GHz	ETS Lindgren	3142E	00233201	19-Jul-2022	15-Jul-2024
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	7-Nov-2022	7-Nov-2025
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10720	16-Jan-2023	15-Jan-2026

RE13.1: Test Equipment Used

Software Used:
 N9048B Keysight PXE firmware version A.32.06
 EPX/RE automation software ver. 2023.01.001

Test Data

The radiated emission test process began with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 30 MHz and 150 MHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m.

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μV)	dB(1/m)	dB(μV/m)	dB(μV/m)	dB	cm	deg
		QP		QP	QP	QP		
149.160	H	17.4	17.4	34.8	43.5	8.7	229.0	47.0
96.000	H	6.5	15.8	22.3	43.5	21.2	312.8	0.0
120.000	H	13.9	15.7	29.6	43.5	13.9	286.4	12.0
51.210	V	20.2	14.0	34.2	40.0	5.8	100.0	153.0
55.290	V	18.7	14.0	32.7	40.0	7.3	100.0	155.0
59.400	V	15.0	14.1	29.1	40.0	10.9	221.4	150.0
37.710	V	13.1	18.5	31.6	40.0	8.4	100.0	114.0
85.710	V	8.5	14.4	22.9	40.0	17.1	112.2	70.0
30.870	V	8.2	22.3	30.5	40.0	9.5	100.0	19.0

Table RE13.2: Emission summary

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

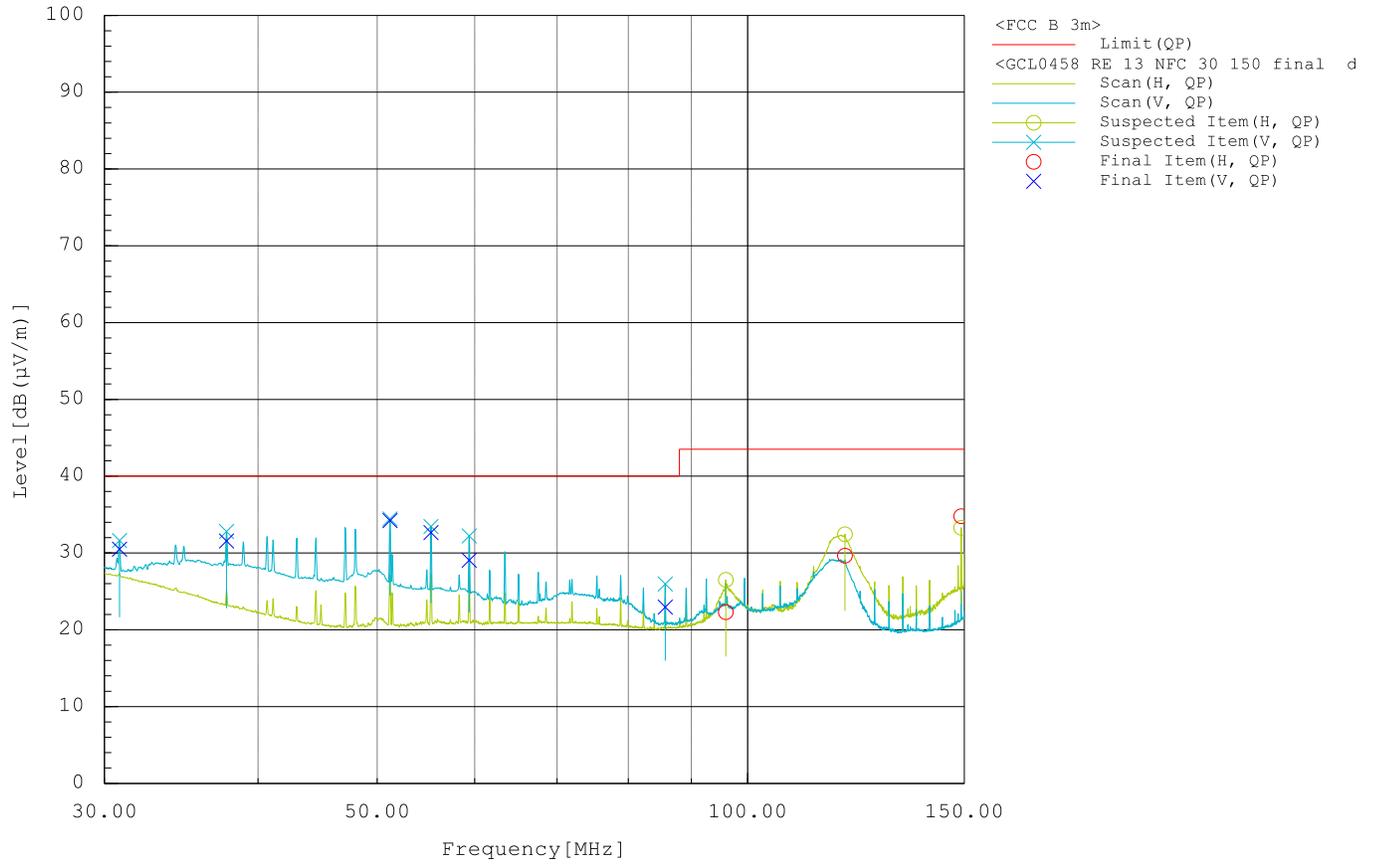


Figure RE13.1: Spectral data

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE13.2: EUT test setup, front view (X orientation)



Figure RE13.3: EUT test setup, reverse view (X orientation)

This line is the end of the test record.

Test Record

Conducted Emissions Mains Test CE02

Project GCL0458

Test Date(s) 06 Oct 2023
Test Personnel David Kerr

Product Model A04714
Serial Number tested 3453413644

Operating Mode M12 (NFC Ink)
Arrangement A5 (NFCp)
Input Power 115 V/ 60 Hz

Test Standards: FCC Part 15 (as noted in Section 6 of the report).

Frequency Range: 150 kHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: Aditya Prakash
Date of this record: 10 Oct 2023
Original record, Version A.

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-23	1-Feb-24
Tape measure, 1" x 33'	Lufkin	PHV1410CMEN	10721	30-Aug-23	1-Sep-26
DMM Multimeter	FLUKE	79 III	71740743	5-Apr-23	1-Apr-24
LISN multiline; 20A 50uH	Com-Power	LIN-120C	20160005	10-Feb-23	15-Feb-24

Table CE02.1: Test Equipment Used

Software Used

Keysight PXE software A.33.03; CE Mains 150k to 30M Data Analysis V2 2021Jun10.xlsx

Test Data

The conducted emission test process began with a set of preliminary scans on both power conductors using both Quasi-Peak and Average detectors across the frequency range. Where the test standard requires cable manipulation, one or more likely worst case frequencies selected by the test personnel. Cables were manipulated to find the maximal signal strength while observing the receiver levels at those selected frequencies. At each of the frequencies selected for final measurements, Quasi-peak and Average detector readings were taken on each conductor.

The table shows the selected final measurement data. It includes at least the six strongest emissions observed relative to the limit lines, along with other data points of interest. The yellow highlight indicate the data points with the least margin to the quasi-peak detector limit and the average detector limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B.

Frequency (kHz)	QP Limit (dBuV)	AV Limit (dBuV)	L1 QP (dBuV)	L2 QP (dBuV)	L1 AV (dBuV)	L2 AV (dBuV)	QP Margin (dB)	AV Margin (dB)
661	56	46	30.74	27.29	26.35	21.8	25.26	19.65
695	56	46	34.9	30.77	28.8	23.78	21.1	17.2
726	56	46	29.46	27.13	24.83	21.75	26.54	21.17
3428	56	46	37.96	35.88	35.03	32.9	18.04	10.97
10286	60	50	40.33	39.74	37.07	34.27	19.67	12.93
13560	60	50	44.75	37.27	41.99	33.52	15.25	8.01

Table CE02.2: Emission summary

The graph below shows preliminary scan data as continuous curves. Superimposed are the final measurement data points reported in the table above.

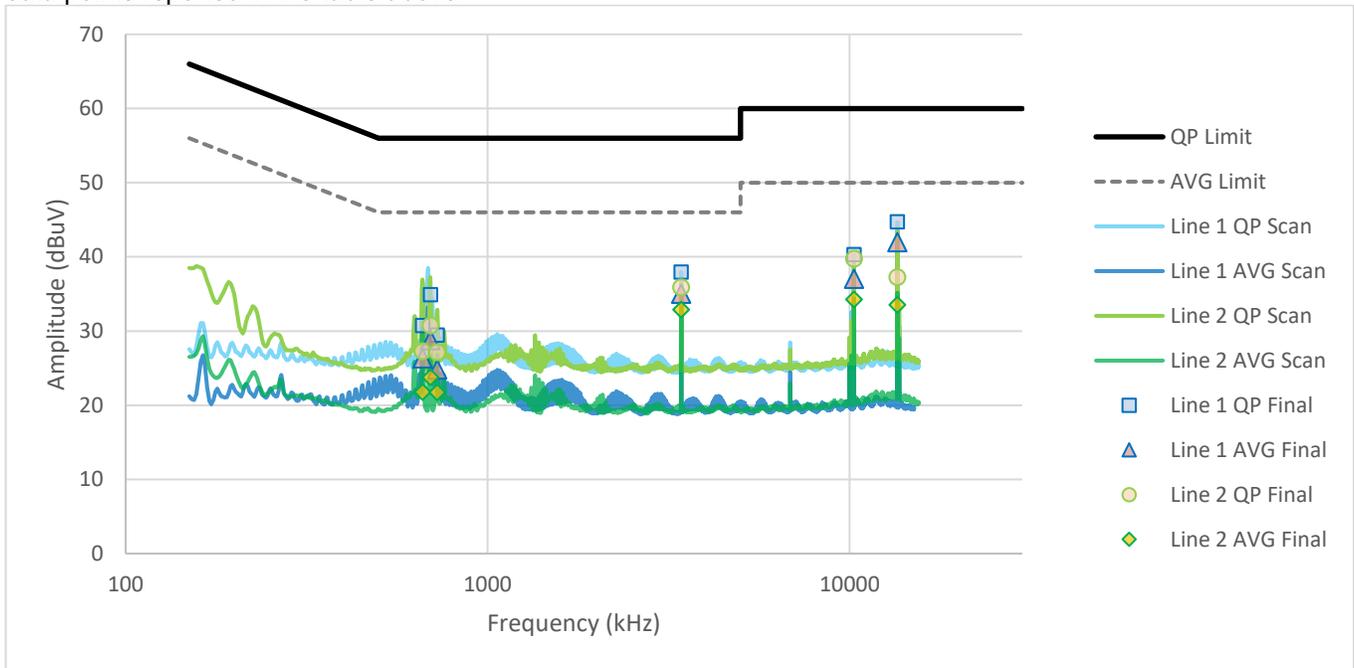


Figure CE02.1: Spectral data

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

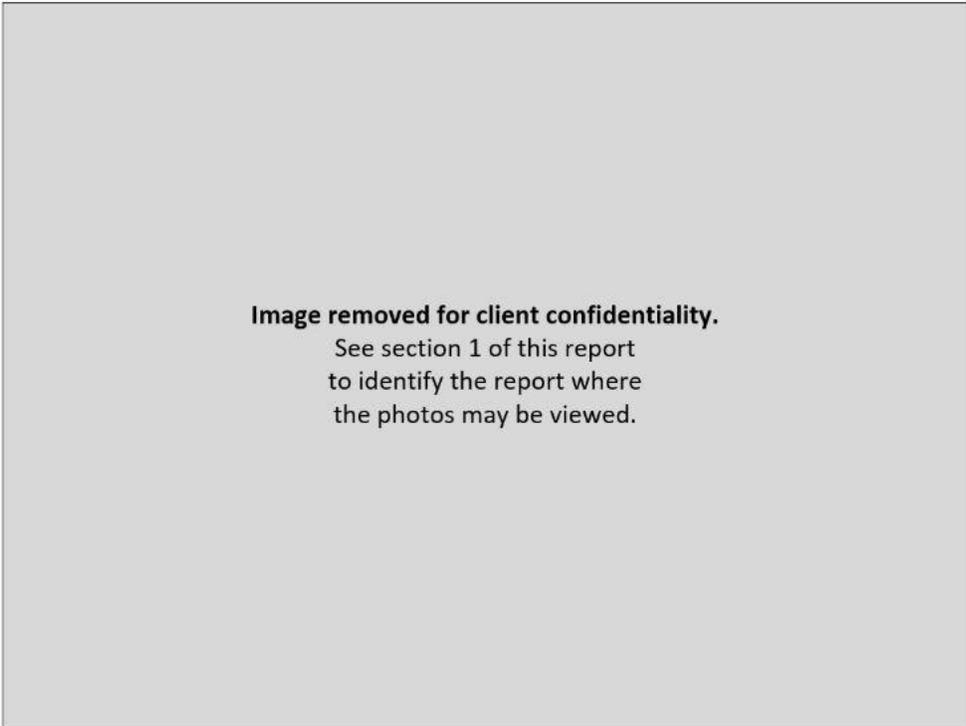


Figure CE02.2: Test setup, front view

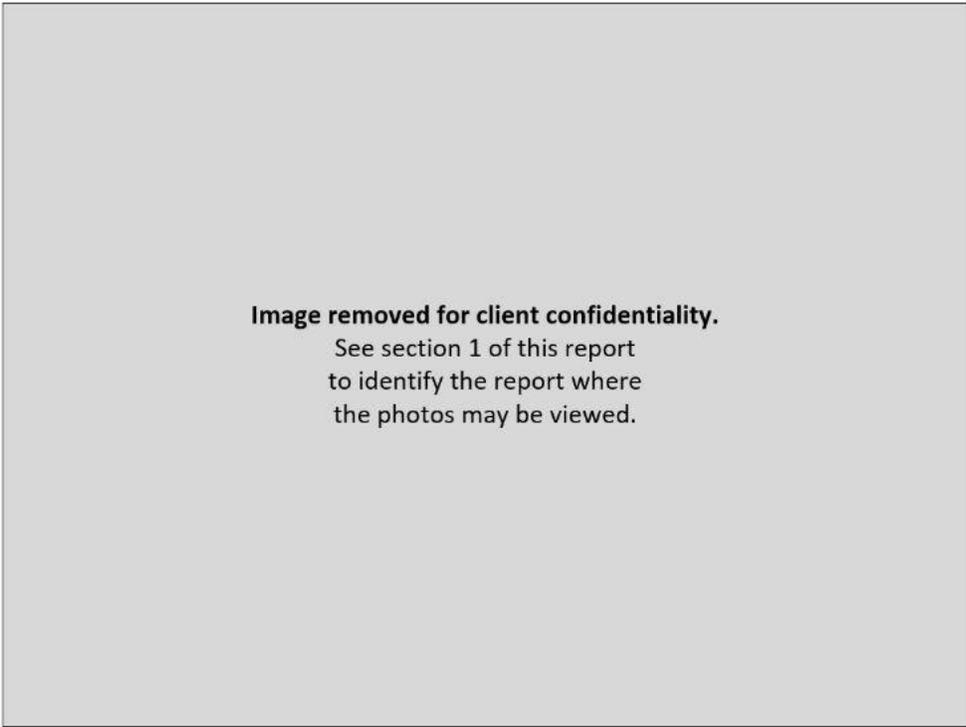


Figure CE02.3: Test setup, side view

This line is the end of the test record.

Test Record
Transmitter Stability in Extreme Conditions
Test IDs TR16
Project GCL-0458

Test Date(s) 15 Oct 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413671

Operating Mode M12 (NFCInk)
 Arrangement A3 (Udata)
 Nominal Input Power 5 Vdc

Test Standards: FCC part 15, RSS-GEN, RSS-210, ANSI C63.10 (as noted in Section 6 of the report)

Radio Protocol NFC

Pass/Fail Judgment: PASS with caveat

Test record created by: Majid Farah
Date this record: 18 Oct 2023
 Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Thermometer	Thermco	ACCD370P	220608121	26-Aug-2022	1-Sep-2024
Barometer	Traceable	6453	221702700	3-Aug-2022	1-Aug-2024
DMM Multimeter	FLUKE	79 III	71740743	5-Apr-2023	1-Apr-2024
Programmable DC power source	Keithley	2260B-30-72 720 W	1411917	21-Apr-2023	15-Apr-2024
Thermal Chamber	Tenney	T2RC	31244	Calibration	Not Required
Near Field Probe Set	Com-Power	PS-400	151544	Calibration	Not Required

Table TR16.1: Equipment used

Software Used: PXE Software Revision A.33.03, FrequencyStabilityAnalysisSystemplateV1.xlsx

Test Method

The standards cited require observation of the stability for transmission frequency and/or power at certain environmental extremes. The reference is performance on nominal input voltage and a temperature of 20 °C. Where the standards cited here impose different limits or conditions, the most stringent limits and conditions have been applied.

The Standard indicated carrier frequency stability shall not exceed 0.01% of operation frequency. The frequency was required to remain between the limits of 13.558644 and 13.561356 MHz. The modes utilized include those that showed emissions closest to the band edge during prior bandwidth testing.

Caveat

The NFC transceiver under test only operates when in the close vicinity of an NFC Reader. In this test, the client provided the ACR1252 manufactured by Advanced Card Systems as described in section 5.5 of the test report.

Emissions presented here show the combined signals from the NFC reader and the device under test. Signals for each were not distinguishable during the test. Per the client, the device under test matches its transmitting frequency to correspond to that of the reader device. The data presented here, and the conclusions drawn, apply to the device under test and the NFC Reader when tested together as a system.

Test Data

The test sample(s) were subjected to extreme conditions and performed as shown below. During NFC test mode, each measurement was made conducted from a near field probe located at a close distance to the sample and NFC reader. The sample needs to be attached to an NFC reader for continuous transmission.

Yellow highlights indicate the maximum and minimum measured carrier frequency. The maximum frequency measured was 13,559,939 Hz and the minimum was 13,559,783 Hz. The margin to high side of limit is 1414 Hz and margin for low side of the limit is 1156 Hz.

Tx Mode	Temp °C	Volts Vdc	NFC carrier frequency (Hz)			
			Time interval (minutes)			
			0	2	5	10
NFC	50	5	13,559,800	13,559,801	13,559,801	13,559,801
NFC	40	5	13,559,813	13,559,813	13,559,813	13,559,814
NFC	30	5	13,559,847	13,559,843	13,559,842	13,559,841
NFC	20	5	13,559,873	13,559,874	13,559,875	13,559,876
NFC	20	4.25	13,559,876	N/A	N/A	N/A
NFC	20	5.75	13,559,876	N/A	N/A	N/A
NFC	10	5	13,559,912	13,559,911	13,559,911	13,559,911
NFC	0	5	13,559,928	13,559,929	13,559,931	13,559,933
NFC	-10	5	13,559,942	13,559,942	13,559,942	13,559,942
NFC	-20	5	13,559,934	13,559,931	13,559,931	13,559,929

Table TR16.2: Carrier frequency measurement for NFC transmission during temperature and voltage variations

Setup Block Diagram

The following block diagrams show the EUT configured and arranged in the manner which it was measured.

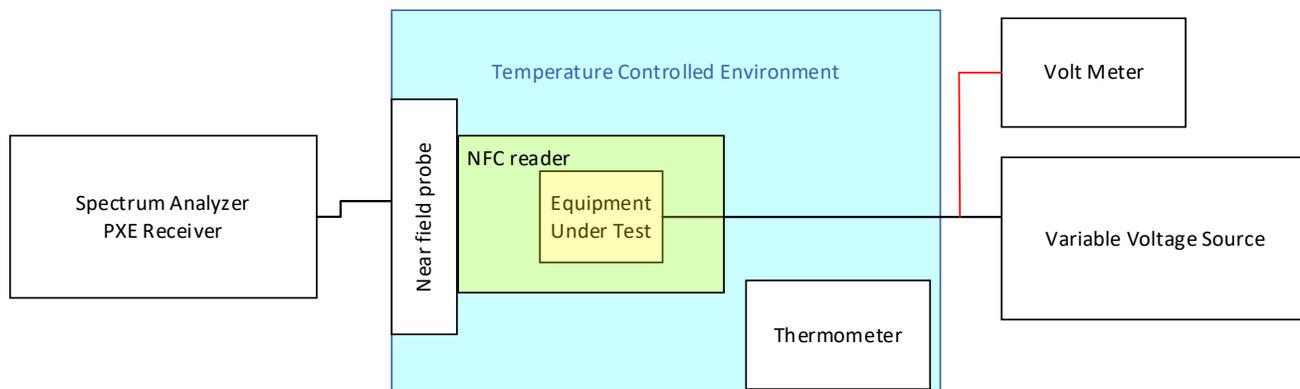


Figure TR16.1: Schematic drawing of the test equipment setup for NFC

This line is the end of the test record.

Test Record
Transmitter Bandwidth Tests
Test IDs TR17
Project GCL-0458

Test Date(s) 1 Nov 2023
 Test Personnel Majid Farah

Product Model A04714
 Serial Number tested 3453413671

Test Standards: ANSI C63.10, RSS-GEN (as noted in Section 6 of the report).

Radio Protocol NFC
 Radio Band 13.56 MHz

Pass/Fail Judgment: Reported

Test record created by: Majid Farah
Date of this record: 1 Nov 2023

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44GHz	Keysight	N9048B	MY62220139	30-Jan-2023	1-Feb-2024
Near Field Probe Set	Com-Power	PS-400	151544	Calibration	Not Required

Table TR17.1: Equipment Used


Test Software used: Keysight PXE System Code rev. A.33.03.

Background

There are regulatory requirements to present an additional type of bandwidth analysis: 99% Occupied Bandwidth. There are no limits or functional requirements around these data, beyond a reporting requirement. The contents of this test record are for information, and do not affect compliance of the devices that are the subject of this report.

Test Setup

This block diagram shows the test equipment setup.

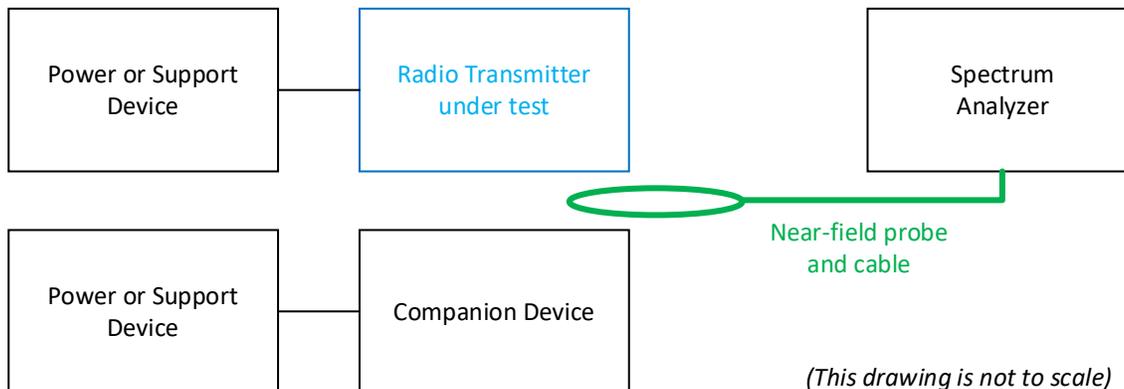

(This drawing is not to scale)

Figure TR17.1: Test setup

Caveat

The NFC transceiver under test only operates when in the close vicinity of an NFC Reader. In this test, the client provided the ACR1252 manufactured by Advanced Card Systems as described in section 5.5 of the test report.

Emissions presented here show the combined signals from the NFC reader and the device under test. Signals for each were not distinguishable during the test. Per the client, the device under test matches its transmitting frequency to correspond to that of the reader device. The data presented here, and the conclusions drawn, apply to the device under test and the NFC Reader when tested together as a system.

Occupied Bandwidth, 99% Test Method

During this test a small loop probe is placed between transmitter and the companion device because the test sample only transmits in response to a nearby NFC reader. This loop probe is then connected by cables to the spectrum analyzer. The analyzer has a built-in capability to identify the minimum bandwidth that contains a specified percentage of the total power observed. The spectrum is scanned hundreds of times so that the varied effects of modulation are appropriately assessed. Since the focus is on the relative distribution of energy across a range of frequencies, the absolute amplitudes recorded during this test are not relevant and may not include cable losses or attenuation factors.

Occupied Bandwidth, 99% Test Data

The data for each type of data transmission (A and B) is summarized below, followed by the spectral data for both types. The analysis threshold for this test was the bandwidth containing 99% of the observed power using the ANSI C63.10 method.

	Bandwidth
NFC Mode	MHz
Type A	2.1264
Type B	1.6427

Table TR17.2: Summary of 99% Occupied Bandwidth Data for 13.56 MHz NFC modes

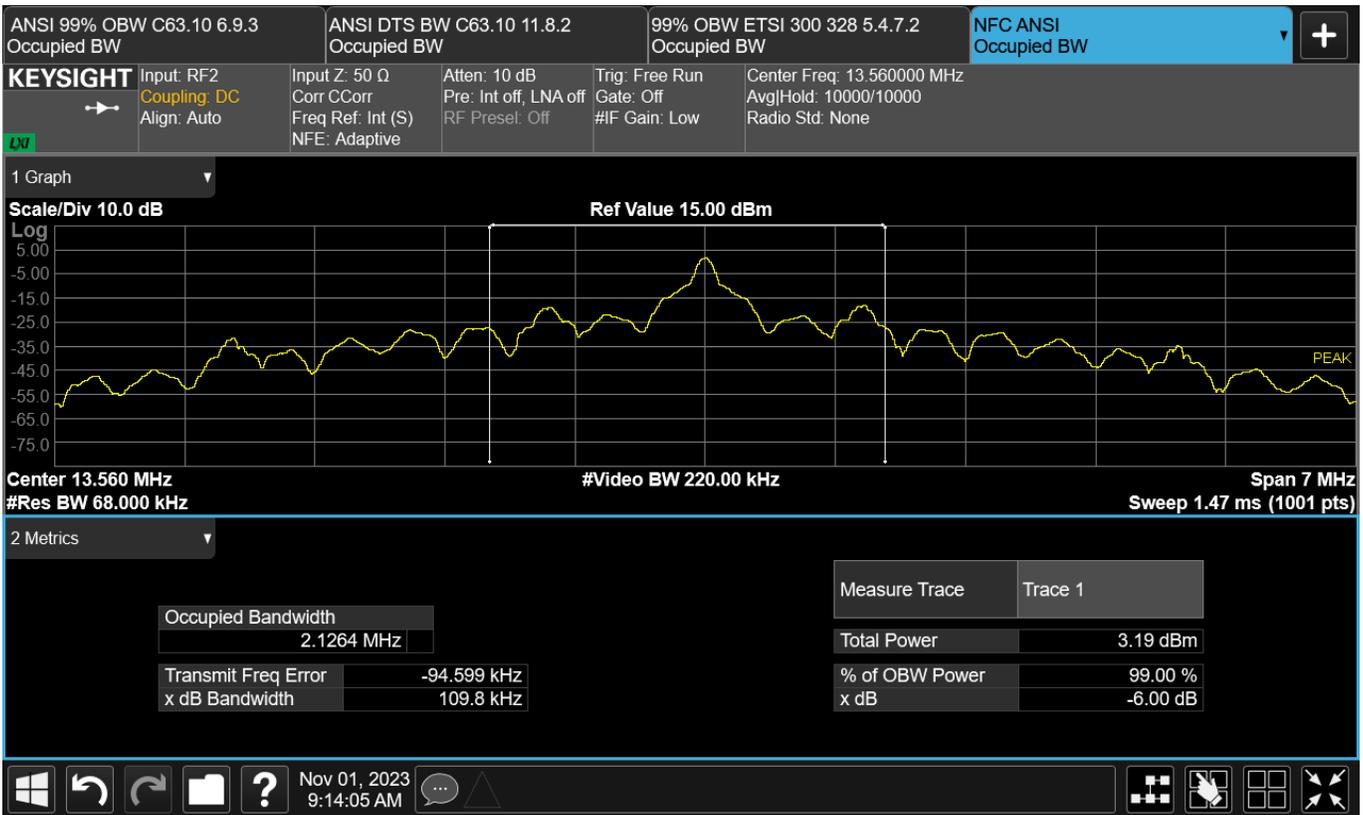


Figure TR17.2: Occupied bandwidth data for Type A transmissions

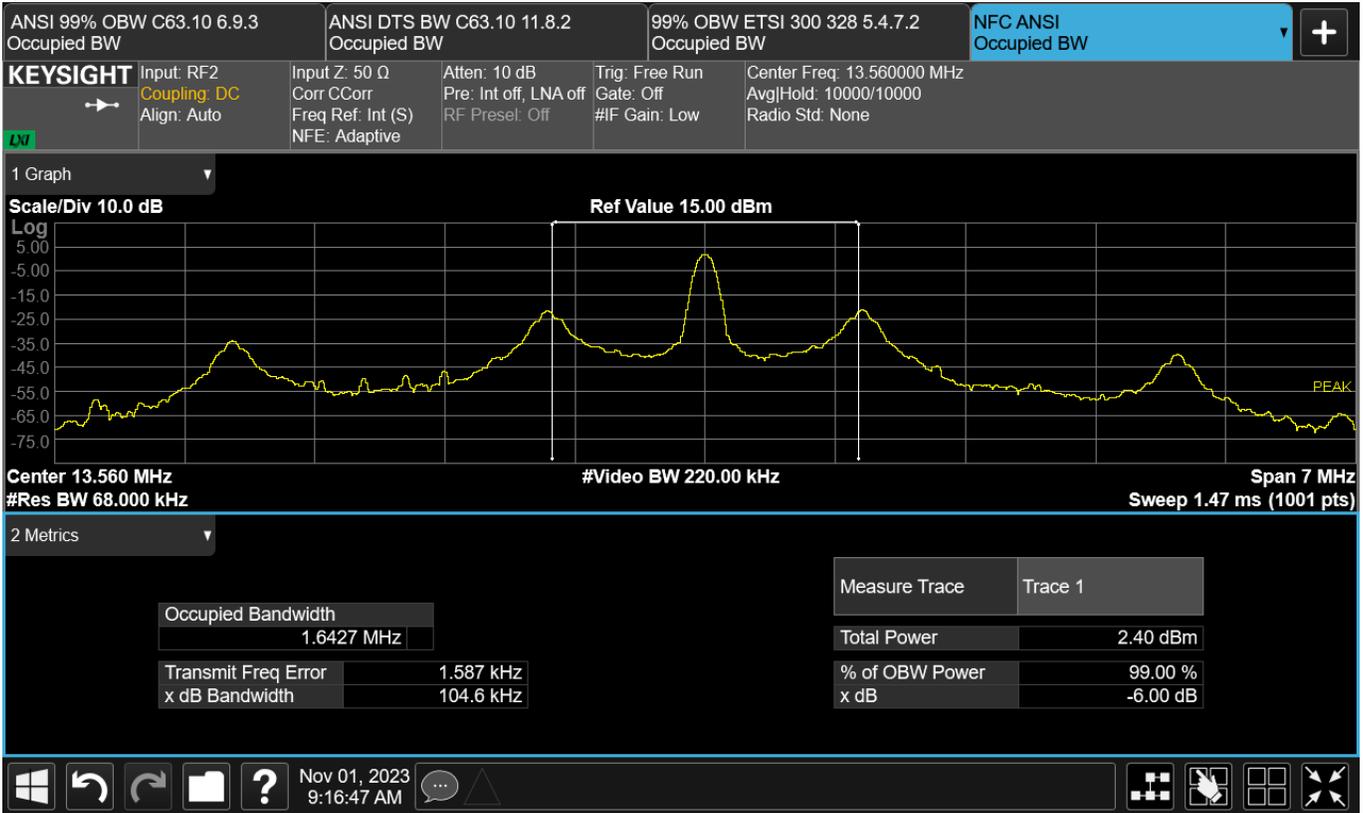


Figure TR17.3: Occupied bandwidth data for Type B transmissions

This line is the end of the test record.

Concluding Notes

This report stands as an integrated record of the tests performed and must be copied or distributed in its complete form. The reproduction of selected pages or sections separate from the complete report would require specific approval from the manager of the Garmin Compliance Lab.

This is the final page of the report.

RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

Garmin International, Inc.
1200 E. 151st Street
Olathe, KS 66062

Dates of Test:
Test Report Number:


September 22, 2023
SAR.20230911
Revision B

Lab Designation Number: US1195(FCC) & US0194(ISED)

FCC ID:	IPH-04714
IC Certificate:	1792A-04714
Model(s):	A04714
Test Sample:	Engineering Unit Same as Production
Serial No.:	453413899
Equipment Type:	Digital Transmission System Transceiver
Classification:	Portable Transmitter Next to Extremity
TX Frequency Range:	2402 – 2480 MHz; 2412 – 2462 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	2450 MHz (BLE) – 4.0 dBm, 2450 MHz (ANT) – 4.0 dBm, 13.56 MHz – <0 dBm Conducted
Signal Modulation:	GFSK, DSSS, OFDM
Antenna Type:	Internal Antenna
Application Type:	Certification
Standard(s):	47CFR1.1310, 47CFR2.1093, KDB447498 D01 v07, KDB248227 D01 v02r02, RSS-102, Safety Code 6
Separation Distance:	0 mm

This wireless portable device has been shown to be excluded for RF exposure testing for uncontrolled environment/general exposure limits specified in above listed standards for standalone SAR. The device has also been shown to meet the simultaneous requirements of each standard as well (See test report).

I attest to the accuracy of the data. I assume full responsibility for the completeness of these calculations and vouch for the qualifications of all persons making them.

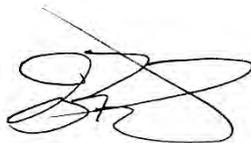

Jay M. Moulton
Vice President



Certificate # 2387.01

Table of Contents

1. Introduction	4
2. Radiation Sources	4
3. A04714.....	5
4. RF Exposure Classifications.....	6
5. RF Exposure Limits Standalone	7
FCC Requirements	7
ISED Requirements	8
6. BLE/ANT Specifications	9
7. Standalone SAR Exclusion Assessment	9
FCC Requirements	9
ISED Requirements	9
Appendix A	10

Comment/Revision	Date
Original Release	September 27, 2023
Revision A – Correct model number and IDs on page 1	September 28, 2023
Revision B – Change the description of the device page 5	November 10, 2023

Note: The latest version supersedes all previous versions listed in the above table. The latest version shall be used.

1. Introduction

This report shows exclusion calculations of the Garmin International, Inc. Model A04714 Digital Transmission System Transceiver with 47CFR1.1310, 47CFR2.1093, KDB447498 D01 v07, RSS-102, Safety Code 6.

2. Radiation Sources

Radio	Description	
BLE	Frequency Range (MHz)	2402 – 2480 MHz
	Maximum Power (dBm)	4.0 dBm
	Maximum Duty Cycle (%)	100%
ANT	Frequency Range (MHz)	2402 – 2480 MHz
	Maximum Power (dBm)	4.0 dBm
	Maximum Duty Cycle (%)	100%
13.56 MHz	Frequency Range (MHz)	13.56 MHz
	Maximum Power (dBm)	<0.0 dBm
	Maximum Duty Cycle (%)	100%

3. A04714

The device is worn in close proximity of the user. The minimum distance for all antennas is 5 mm for extremity evaluation. See a photo of the device in Appendix A.

4. RF Exposure Classifications

Device Types	
Fixed	A fixed device is defined as a device physically secured at one fixed location and cannot be easily re-located.
Mobile	A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. (47 CFR 2.1091)
Portable	A portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. (47 CFR 2.1093)

Exposure Categories	
Occupational / Controlled	Limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.
General population / uncontrolled	Exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5. RF Exposure Limits Standalone

FCC Requirements

The FCC SAR test exclusion for standalone SAR is determined for each operating configuration and exposure condition the device can operate.

The exclusion is evaluated based on the calculation in KDB447498 D01 v06 section 4.3.1 a). The formula is shown below.

$$[(\text{max. power, mW}) / (\text{min. distance, mm})] * [\sqrt{f_{(\text{GHz})}}] \leq 7.5 \text{ for extremity SAR}$$

ISED Requirements

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance^{4,5}

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

6. BLE/ANT Specifications

The maximum power including the antenna gain for the BLE/ANT is 4.0 dBm maximum TX power.

7. Standalone SAR Exclusion Assessment

FCC Requirements

The maximum power levels for each transmitter is listed below. The maximum power allowed to be excluded are shown below as well.

BLE Power = 2.5 mW
ANT Power = 2.5 mW
13.56 MHz Power = <1 mW

For the FCC, the calculation in section 5 above gives an exclusion power of 23.8 mW for the extremities.

Therefore, the all transmitters are excluded from standalone SAR evaluations.

ISED Requirements

The maximum power levels for each transmitter is listed below. The maximum power allowed to be excluded are shown below as well.

BLE Power = 2.5 mW
ANT Power = 2.5 mW
13.56 MHz Power = <1 mW

Based on the table in RSS-102, the transmitters must be less than 10 mW to be excluded from extremity SAR. The transmitter is less than the required power level to be excluded. Therefore, the all transmitters are excluded from SAR testing.

Note: For ISED extremity limits, the limit for body is multiplied by 2.5.

Appendix A

Photo Removed

Front of Device

Photo Removed

Back of Device