



Garmin International, Inc.
1200 East 151st Street
Olathe, Kansas 66062
P: 913-397-8200 F: 913-397-8282

02-Feb-26

Manufacturer: Garmin International, Inc.
Address: 1200 E. 151st St.
Olathe, KS 66062-3426
U.S.A.
Chile Representative: Matías Rodríguez Correa
Rosario Norte 660 piso 24, Las Condes Santiago
Province CP 7550083, Chile
Contact Email: matias.rodriguez@garmin.com
Subject: SUBTEL, Chile (Resolution 737) Certification Compliance 2026
Commercial Name: Forerunner 255S Music

	Información (Information)
Tipo de equipo (Equipment type)	Portable Digital Transceiver
Marca (Brand)	Garmin 
Modelo (Model)	AA4308
Tecnología o modulación (Technology or modulation)	ASK for NFC / GFSK for ANT/ GFSK for BTBR / $\pi/4$ -DQPSK, 8DPSK for BTEDR / GFSK for BLE/ DSSS for 802.11b / OFDM for 802.11g/n
Frecuencias (Frequencies)	13.56 MHz / 2402-2480 MHz / 2402-2480 MHz / 2402-2480 MHz / 2402-2480 MHz / 2412-2462 MHz
Ganancia de antena (dBi) (Antenna gain (dBi))	ANT 1.23 dBi / 802.15.1 1.23 dBi / 802.15.1 1.23 dBi / BLE 1.23 dBi / 802.11b/g/n 1.23 dBi
P.i.r.e. (E.I R P.)	-29.02 dBm, 0.001mW / 4.48 dBm, 2.80 mW / 14.15 dBm, 26.00 mW / 11.14dBm, 13.0 mW / 5.93 dBm, 3.92 mW / 18.90 dBm, 77.62 mW
Módulos (Modules)	NFC, ANT, BTBR, BTEDR, BLE, WiFi

As all measurements for NFC are made in radiated mode to comply with the field strength limits, gain information is not required to be noted in the reports or any additional documentation.
Declaration of Conformity Statement: the equipment previously identified complies with the provisions established in the Technical Standard for Small Range Equipment, approved by Exempt Resolution No.1,985 of 2017, of the Undersecretary of Telecommunications.

Declaración de conformidad: El equipo anteriormente identificado cumple con las disposiciones establecidas en la Norma Técnica para Equipos de Corto Alcance, aprobada mediante la Resolución Exenta N° 1.985 de 2017, de la Subsecretaría de Telecomunicaciones.


FCC/ISED DXX Part 15.225 Test Report

Prepared for: Garmin International Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: AA4308

Test Report No: R20211005-21-E10A

Approved By: 
Fox Lane
EMC Test Engineer,

DATE: 12 May 2022

Total Pages: 23



The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

Revision Page

Rev. No.	Date	Description
0	3 March 2022	Original – KVepuri Prepared by GLarsen, SProbst and FLane
A	3 March 2022	Added data points to Sec 3.2

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

TABLE OF CONTENTS

1	Summary of Test Results	4
1.1	Emissions Test Results	4
2	EUT Description	5
2.1	Equipment under Test (EUT)	5
2.2	Laboratory Description	5
2.3	EUT Setup	5
2.4	Test Equipment Used for all Tests	6
3	Test Results	7
3.1	Radiated Emissions, Band Width, Output Power and Band edge	7
3.2	Frequency Error	13
3.3	Conducted AC Mains Emissions	15
	APPENDIX A: SAMPLE CALCULATION	20
	APPENDIX B – MEASUREMENT UNCERTAINTY	22
	REPORT END	23

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

1 Summary of Test Results

The EUT was tested for compliance to the following standards and/or regulations;

1.1 Emissions Test Results

The EUT was tested for compliance to:

US CFR Title 47 FCC Part 15.225
RSS-Gen Issue 5

Table 1 – Emissions Test Results

Emissions Tests	Test Method and Limits	Result
Radiated Emissions	FCC Part 15.225 (a), (b), (c), (d) RSS-Gen, Issue 5, 6.5, 6.13 RSS-210 Issue 10 B.6	Complies
Bandedge	FCC Part 15.225 (b) (c) RSS-210 Issue 10 B.6	Complies
Frequency Error	FCC Part 15.225 (e)	Complies
Conducted Emissions	FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Complies

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

2 EUT Description

2.1 Equipment under Test (EUT)

Table 2 – Equipment under Test (EUT)

Model	AA4308
EUT Tested	23 February 2022
Serial No.	3392435192 (Radiated Measurements)
Operating Band	13.56 MHz
Device Type	NFC
Antenna	Trace Antenna
Power Supply	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

2.2 Laboratory Description

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number: 1953.01
 FCC Accredited Test Site Designation No: US1060
 Industry Canada Test Site Registration No: 4294A-1
 NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $28 \pm 4\%$
 Temperature of $22 \pm 3^\circ \text{C}$

2.3 EUT Setup

The EUT was powered by 120 VAC / 60Hz (5 VDC Output) for all tests. Emissions were compared between EUT charging and non-charging; worst case was reported.

EUT was paired with an NFC card reader (MN: ACR122U, SN: RR545-026162) for all testing.

For Conducted emissions an EUT Card Emulator (CE) mode was used.

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

2.4 Test Equipment Used for all Tests

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 21, 2021	July 21, 2023
Com-Power LISN 50 μ H / 250 μ H - 50 Ω	LI-220C	20070017	September 22, 2020	September 22, 2022
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	May 5, 2020	May 5, 2022
SunAR RF Motion	JB1	A091418	July 27, 2021	July 27, 2022
EMCO Loop Antenna**	6512	00024936	February 11, 2019	February 11, 2022
8447F POT H64 Preamplifier*	8447F POT H64	3113AD4667	February 1, 2021	February 1, 2023
Thermotron, Temp Chamber	SE1000-5-5	31373	NA	NA
Omega, Temp. Humidity Meter	iTHX-SD	ID # 2130155	April 23, 2021	April 23, 2023
RF Cable (preamplifier to antenna)*	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	April 14, 2020	April 14, 2022
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3874	April 14, 2020	April 14, 2022
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	April 14, 2020	April 14, 2022
N connector bulkhead (10m chamber)*	PE9128	NCEEBH1	April 14, 2020	April 14, 2022
N connector bulkhead (control room)*	PE9128	NCEEBH2	April 14, 2020	April 14, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA

*Internal Characterization **Extended Cal

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

3 Test Results

3.1 Radiated Emissions, Band Width, Output Power and Band edge

Test:	FCC Part 15.225 (a), (b), (c), (d) RSS-Gen, Issue 5, 6.5, 6.13 RSS-210 Issue 10 B.6
Test Specifications:	Class A
Test Result:	Complies

3.1.1 Test Description

Radiated emissions measurements were made from 30MHz to 1GHz at a distance of 3m (Radiated Emissions) and 3m (Bandwidth, Field Strength and Band edges) inside a semi-anechoic chamber. The EUT was rotated 360°, the antenna height varied from 1-4 meters and both the vertical and horizontal antenna polarizations examined. For measurements below 30 MHz, the loop antenna was used to measure in all 3 axes. The results were compared against the limits. Measurements were made by first using a spectrum analyzer to acquire the signal spectrum; individual frequencies were then measured using a CISPR 16.1 compliant receiver with the following bandwidth setting:

- 30MHz – 1GHz: 120kHz IF bandwidth, 60kHz steps
- 10MHz – 30MHz: 9kHz RBW, 4.5 kHz steps

Intermodulation products were investigated by measuring spurious emissions with each of the two 2.4 GHz radios running in parallel with the NFC radio. No intermodulation products were found above the labs system sensitivity.

3.1.2 Test Results

No radiated emissions measurements were found in excess of the limits. Test result data can be seen below.

3.1.3 Test Environment

Testing was performed at the NCEE Labs Lincoln facility in the 10m semi-anechoic chamber. Laboratory environmental conditions varied slightly throughout the test:

- Relative humidity of $30 \pm 5\%$
- Temperature of $23 \pm 2^\circ \text{C}$

3.1.4 Test Setup

See Section 2.3 for further details.

3.1.5 Test Equipment Used

See section 2.4 for the equipment list.

3.1.6 Test Pictures and/or Figures

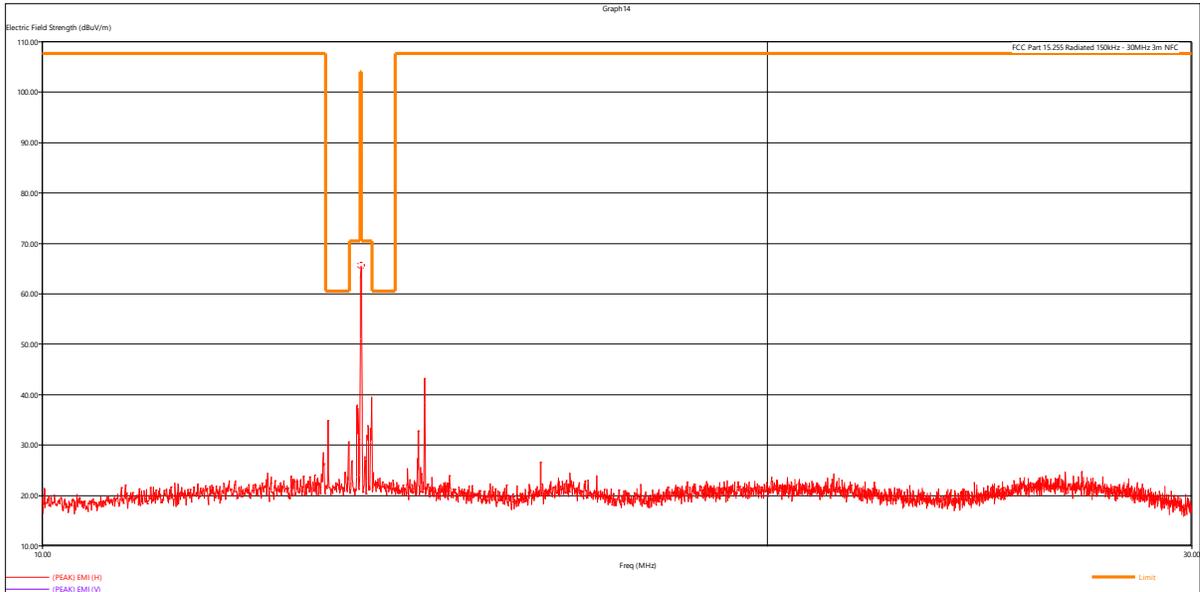


Figure 1 – NFC Radiated Emissions Plot, 10MHz – 30MHz
 All emissions were found to be at least 6dB below limit line

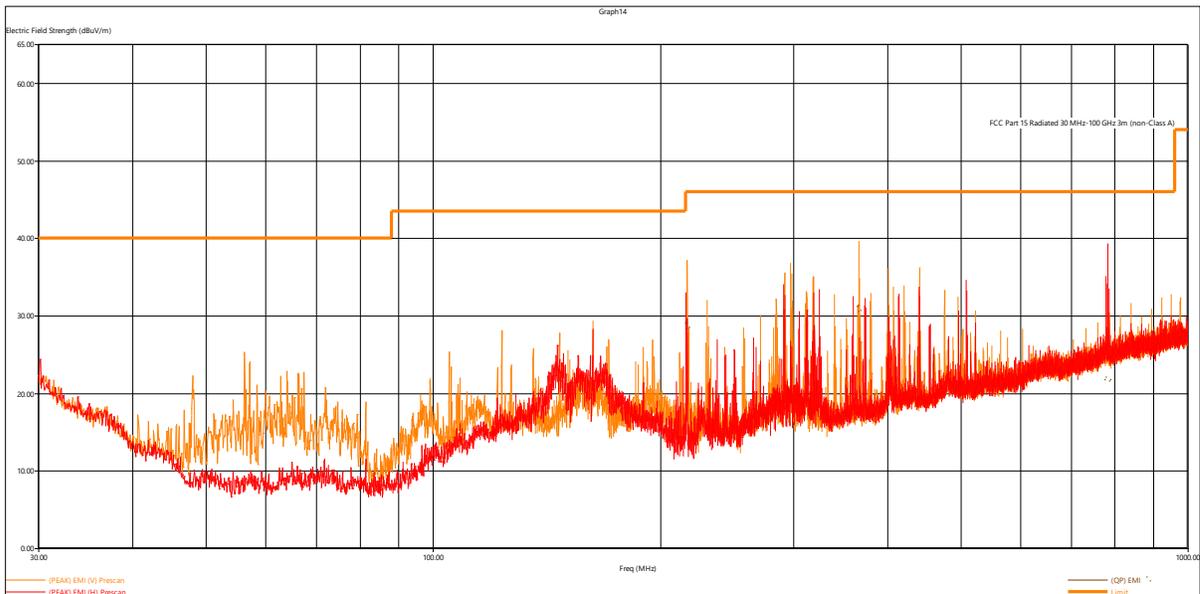


Figure 2 – NFC Radiated Emissions Plot, 30MHz – 1GHz

Quasi-Peak Measurements						
Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
783.258960	21.72	46.02	24.30	202.00	244.00	H
216.990240	28.73	46.02	17.29	100.00	180.00	V
366.156720	30.90	46.02	15.12	173.00	130.00	V

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

All other emissions were found to be at least 6dB below limit line

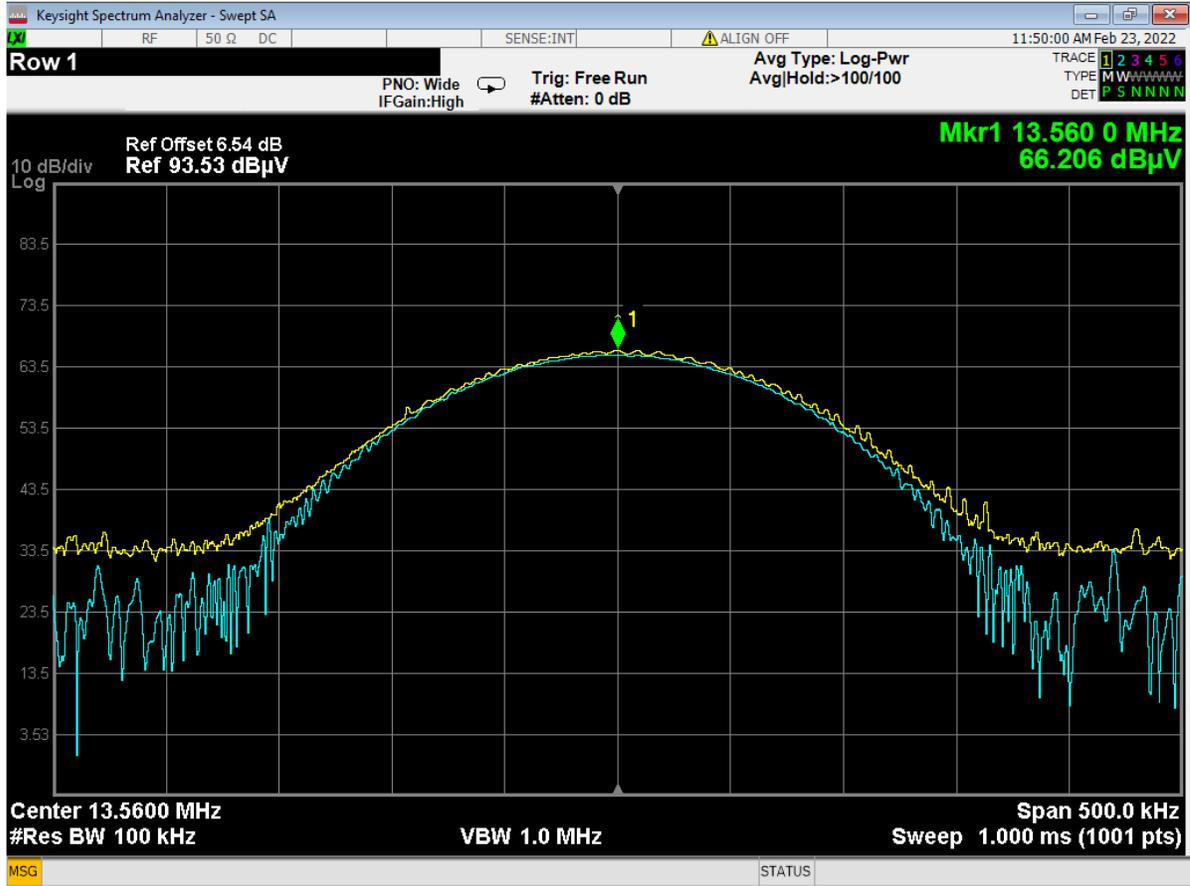


Figure 3 – NFC Field Strength Plot
Corrections included

NFC Field Strength			
Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
66.206	104.00	37.794	PASS

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

Band Edge Measurements:

Band edge /Measurement Frequency (MHz)	Corrected band level dB μ V/m @ 3m	Limit* (dBuV)	Margin	Result
13.5530	51.254	70.47	19.216	PASS
13.567	54.273	70.47	16.197	PASS
13.3483	45.400	60.51	15.110	PASS
13.7721	46.320	60.51	14.190	PASS

*Limit extrapolated to 3m test distance
all other emissions were found to be at least 20 dB below the applicable limit.

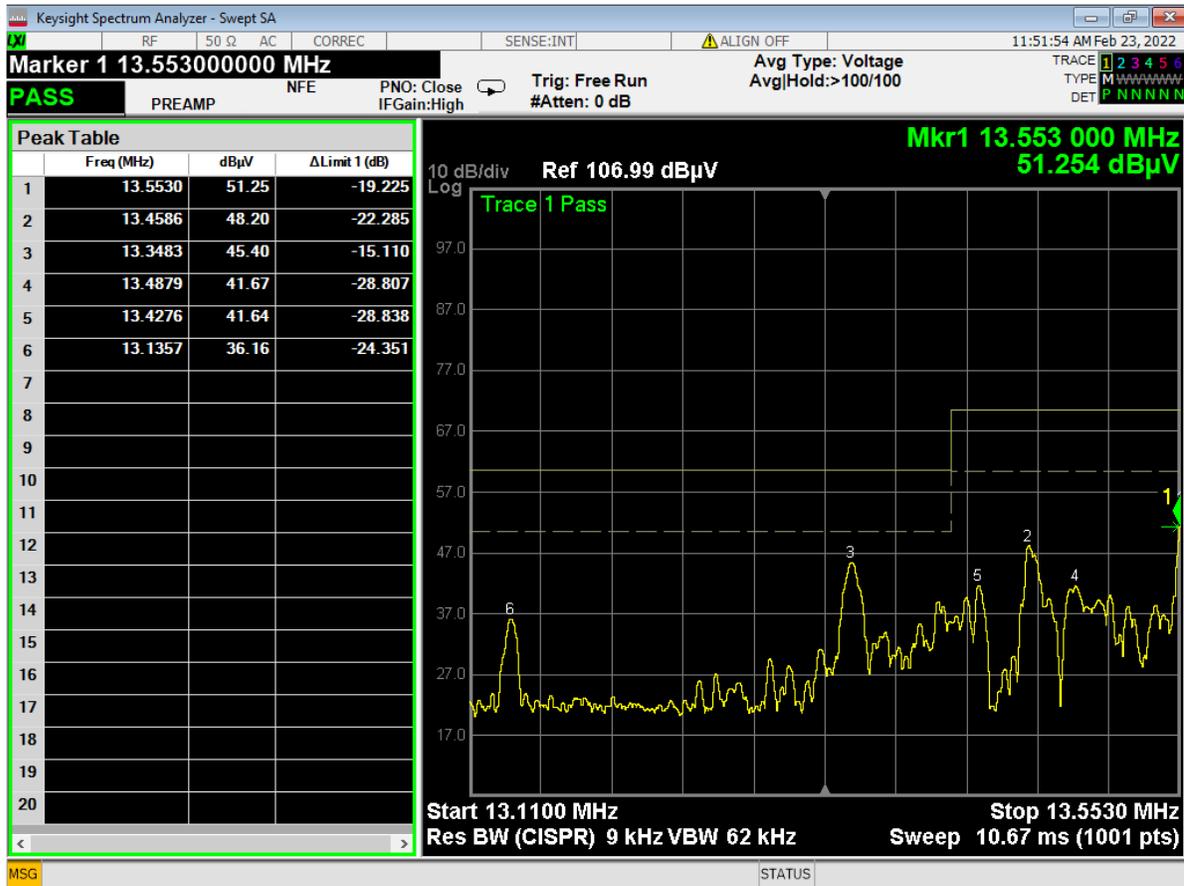


Figure 4 – NFC Lower Band-edge

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

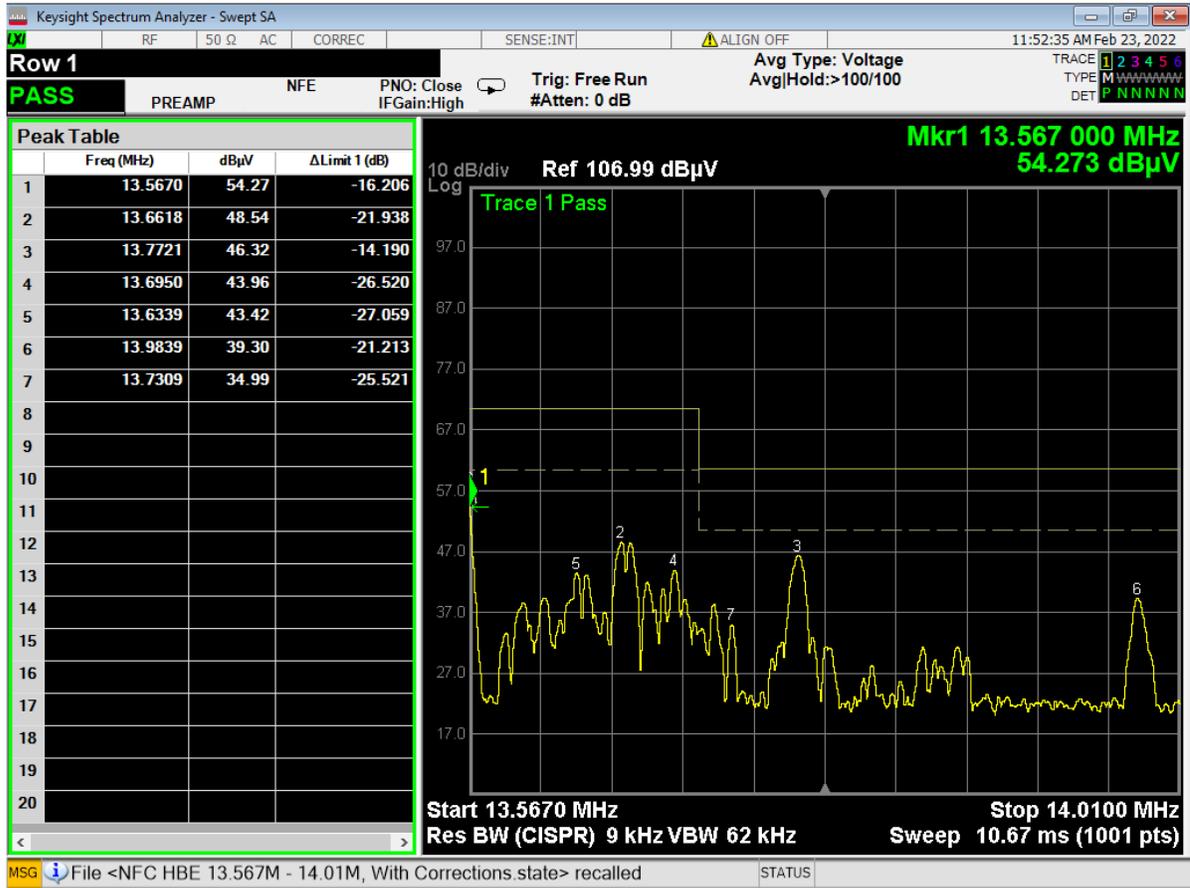


Figure 5 – NFC Higher Band-edge

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

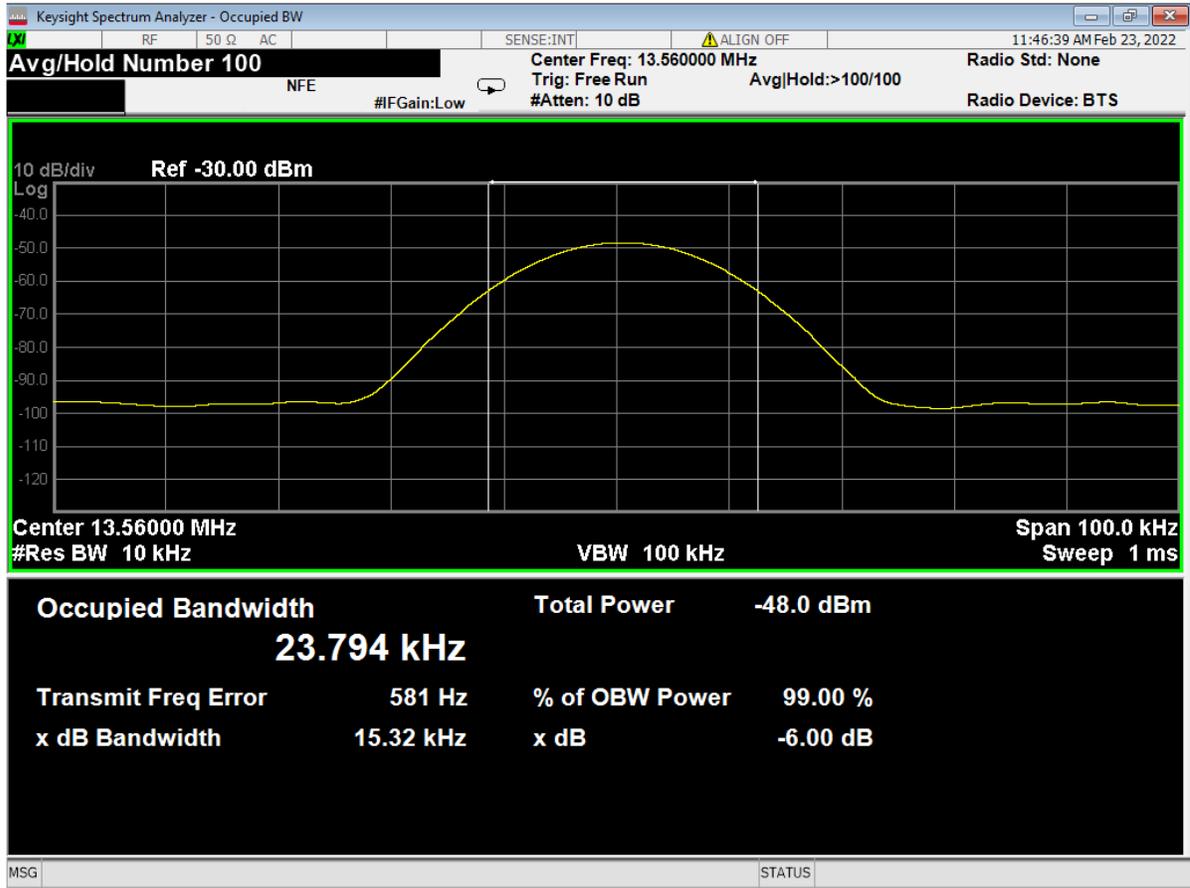


Figure 6 – NFC Occupied Bandwidth

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

3.2 Frequency Error

Test:	FCC Part 15.225 (e)
Test Result:	Complies

3.2.1 Test Description

Frequency error was determined using the built-in frequency error function of the spectrum analyzer. The analyzer finds the occupied bandwidth, calculates the center of the given band then returns the deviation with respect to the given transmit frequency. The temperature was varied from -20°C to 55°C. The voltage was not variable but the battery was let to drain, voltage of drained battery was reported.
Limit: 100 PPM

3.2.2 Test Results

No results were found to be in excess of the limits. A table of the results can be seen below.

3.2.3 Test Environment

Testing was performed at the NCEE Labs Lincoln facility.
Laboratory environmental conditions varied slightly throughout the test:
Relative humidity of $30 \pm 5\%$
Temperature of $23 \pm 2^\circ \text{C}$

3.2.4 Test Setup

See Section 2.3 for further details.

3.2.5 Test Equipment Used

See section 2.4 for the equipment list.

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

Test results

AA4308	
Temperature (°C)	Channel (Hz)
	13.56000 Nom.
-20°C	679
-10°C	658
0°C	656
10°C	591
20°C	506
30°C	469
40°C	411
55°C	423

AA4308		Battery Nom. Voltage: 3.87V
Voltage (V)	Temperature	Frequency Error (Hz)
4.39	20°C	551
4.36	20°C	484
4.35	20°C	484
4.33	20°C	484
4.01	20°C	488
3.75	20°C	496
3.50	20°C	500
3.34*	20°C	473

*Lowest battery voltage the lab could achieve at 1% battery

Limit: 100 PPM = 0.01% = 0.01 x 13.56 kHz = 1356 Hz
 Values shown in Hz.
 Uncertainty = ±500 Hz

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

3.3 Conducted AC Mains Emissions

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

Test Results:

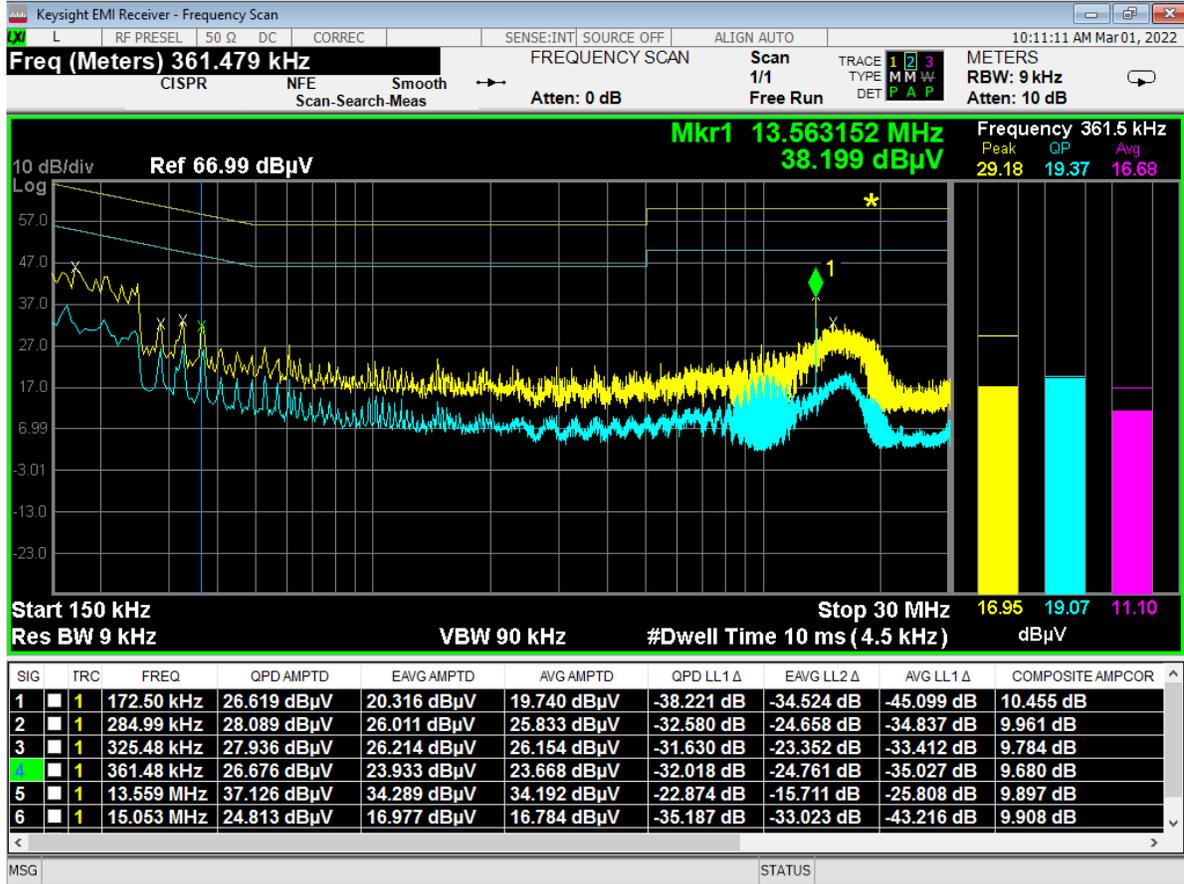


Figure 7 – Conducted Emissions Plot, Line, NFC

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

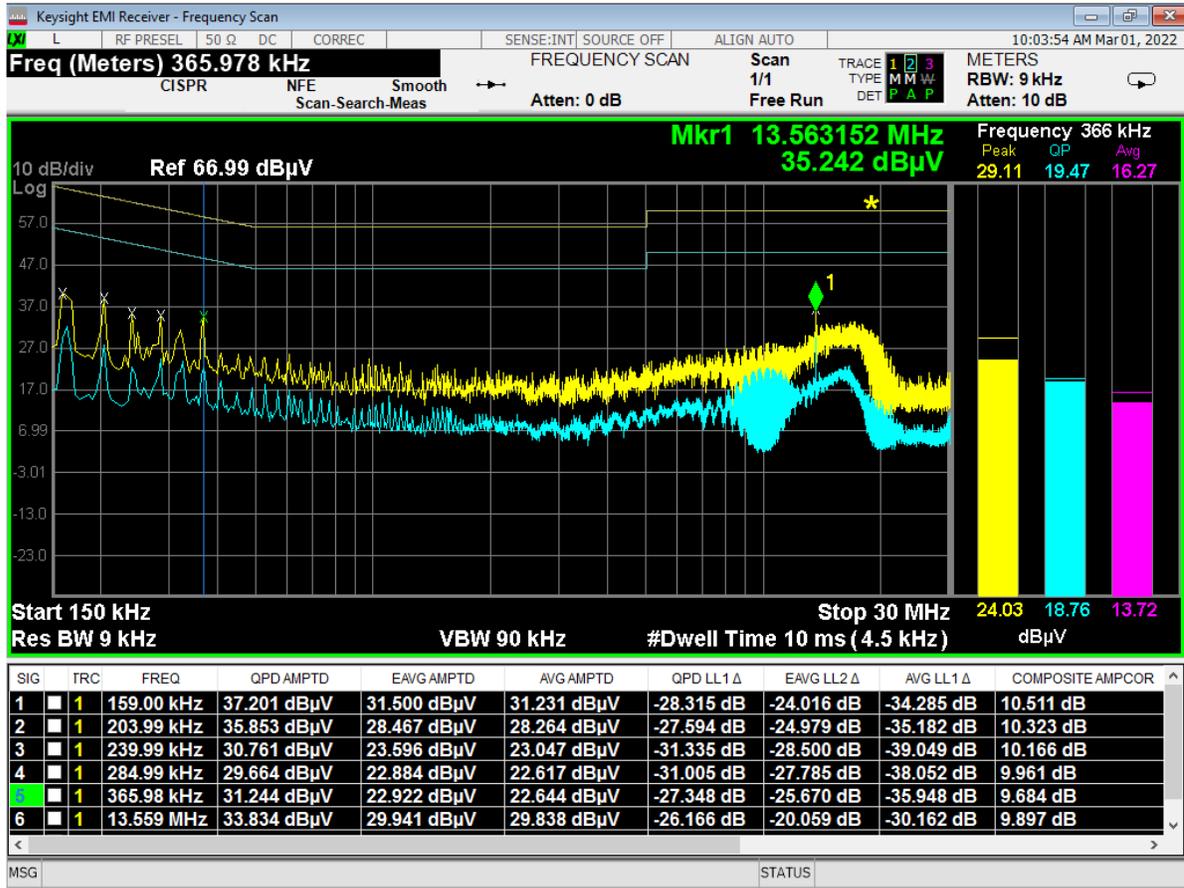


Figure 8 – Conducted Emissions Plot, Neutral, NFC

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

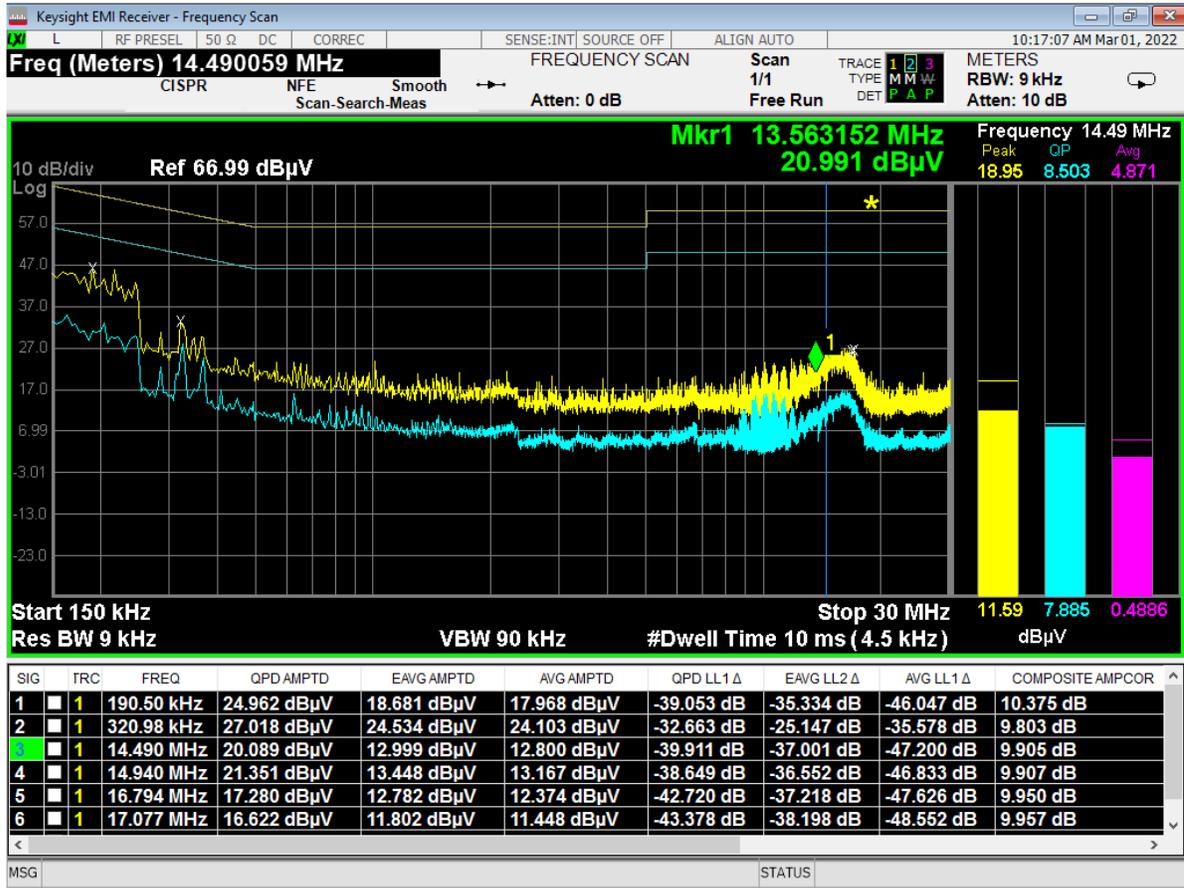


Figure 9 – Conducted Emissions Plot, Line, Idle

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

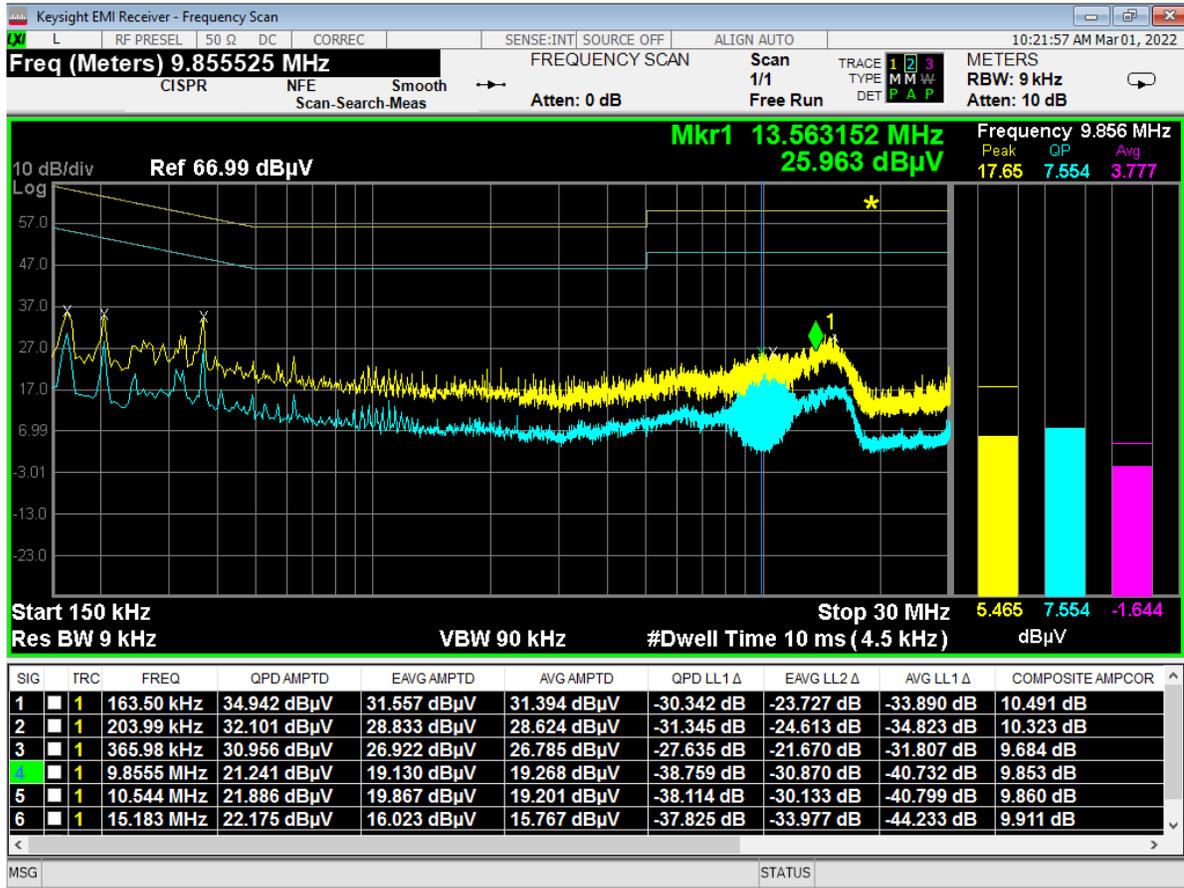


Figure 10 – Conducted Emissions Plot, Neutral, Idle

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [Field \text{ Strength (V/m)} \times antenna \text{ distance (m)}]^2 / 30$$

$$Power \text{ (watts)} = 10^{[Power \text{ (dBm)}/10]} / 1000$$

$$Voltage \text{ (dB}\mu\text{V)} = Power \text{ (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field \text{ Strength (V/m)} = 10^{[Field \text{ Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2] / 30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.

	Report Number:	R20211005-21-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

REPORT END

FCC/ISED Test Report


Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: AA4308

Test Report No: R20211005-21-E6A

Approved by:



Nic Johnson
Technical Manager
iNARTE certified EMC engineer

DATE: May 13, 2022

Total Pages: 77

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	5 March 2022	Original – KVepuri Prepared by FLane and SProbst
A	12 May 2022	Corrected tabular data Added comment to section 4.5 Increased conducted spurious data delta requirement to 30dB.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page	2
1.0 Summary of test results	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description	6
3.2 Test personnel	6
3.3 Test equipment	7
3.4 General Test Procedure and Setup for Radio Measuremnts	8
4.0 Results	9
4.1 Output Power	11
4.2 Bandwidth	12
4.3 Duty Cycle	13
4.4 Radiated emissions	14
4.5 Conducted Spurious Emissions	21
4.6 Band edges	27
4.7 Power Spectral Density	29
4.8 Conducted AC Mains Emissions	30
Appendix A: Sample Calculation	35
Appendix B – Measurement Uncertainty	37
Appendix C – Graphs and Tables	38
REPORT END	77



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	AA4308
EUT Received	6 December 2021
EUT Tested	8 December 2021- 2 March 2022
Serial No.	3392435192 (Radiated Measurements) 3392435208(Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input checked="" type="checkbox"/> GMSK <input checked="" type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

For GFSK and GMSK 1MB Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

For GMSK 2MB Transmissions:

Channel	Frequency
Low	2404 MHz
Mid	2440 MHz
High	2478 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of 35 ± 4%
 Temperature of 22 ± 3° Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing and Report
2	Karthik Vepuri	Test Engineer	Review/Editing and Report
3	Blake Winter	Test Engineer	Testing
4	Grace Larsen	Test Technician	Testing and Report
5	Samuel Probst	Test Technician	Testing and Report
6	Matthew Emory	Test Technician	Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 21, 2021	July 21, 2023
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	May 5, 2020	May 5, 2022
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A091418	July 27, 2021	July 27, 2022
EMCO Horn Antenna	3115	6415	March 16, 2020	March 16, 2022
EMCO Horn Antenna	3116	2576	March 9, 2020	March 9, 2022
Com-Power LISN 50µH / 250µH - 50Ω	LI-220C	20070017	September 22, 2020	September 22, 2022
8447F POT H64 Preampfier*	8447F POT H64	3113AD4667	February 1, 2021	February 1, 2022
Rohde & Schwarz Preampfier*	TS-PR18	3545700803	April 14, 2020	April 14, 2022
Trilithic High Pass Filter*	6HC330	23042	April 14, 2020	April 14, 2022
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	October 25, 2019	October 25, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preampfier to antenna)*	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)**	PE9128	NCEEBH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)**	PE9128	NCEEBH2	September 24, 2021	September 24, 2023

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

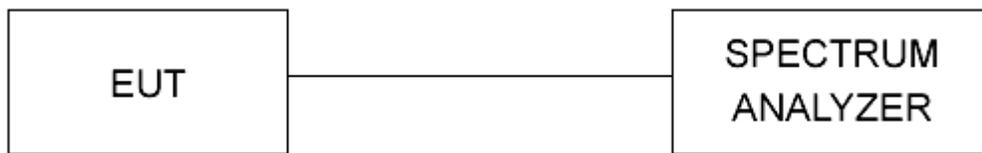


Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

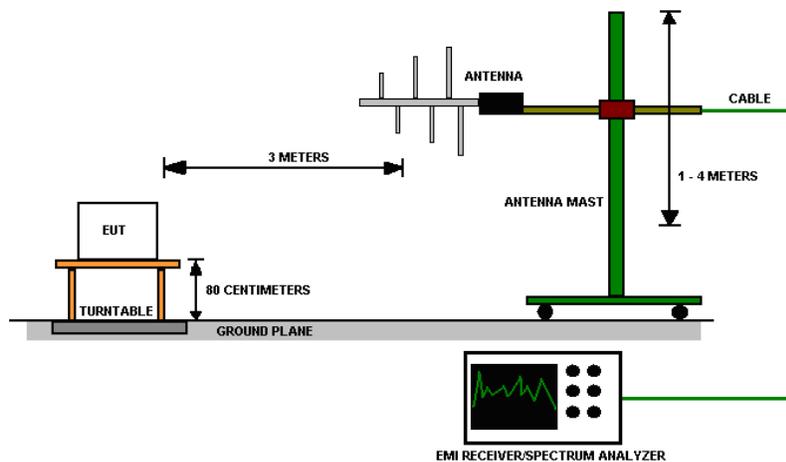


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

DTS Radio Measurements							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	GFSK	1.48260	0.9361	0.01	1.00	-12.952	PASS
Mid	GFSK	1.38220	0.8910	3.25	2.11	-12.566	PASS
High	GFSK	1.73560	0.9547	-0.71	0.85	-17.032	PASS
Low	GMSK 1Mb	2.6918	1.758	-0.83	0.83	-17.135	PASS
Mid	GMSK 1Mb	2.6336	1.491	4.70	2.95	-14.298	PASS
High	GMSK 1Mb	2.5701	1.482	1.32	1.36	-18.255	PASS
Low	GMSK 2Mb	2.4464	1.456	1.28	1.34	-14.799	PASS
Mid	GMSK 2Mb	2.4612	1.446	4.38	2.74	-14.726	PASS
High	GMSK 2Mb	2.6704	1.273	1.30	1.35	-17.943	PASS
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz				Peak Output Power Limit = 30 dBm; PSD Limit = 8 dBm			
Unrestricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	GMSK 1MB	2400.00	74.139	107.085	32.946	30.00	PASS
Low	GMSK 2MB	2400.00	69.001	110.230	41.229	30.00	PASS
Low	GFSK	2400.00	58.390	103.339	44.949	30.00	PASS
High	GMSK 1MB	2483.50	61.568	106.267	44.699	30.00	PASS
High	GMSK 2MB	2483.50	60.177	102.801	42.624	30.00	PASS
High	GFSK	2483.50	57.531	105.577	48.046	30.00	PASS
Peak Restricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	GMSK 1MB	2390.00	51.05	Peak	73.98	22.93	PASS
Low	GMSK 2MB	2390.00	52.90	Peak	73.98	21.08	PASS
Low	GFSK	2390.00	51.59	Peak	73.98	22.39	PASS
High	GMSK 1MB	2483.50	55.06	Peak	73.98	18.92	PASS
High	GMSK 2MB	2483.50	59.05	Peak	73.98	14.93	PASS
High	GFSK	2483.50	53.96	Peak	73.98	20.02	PASS
*Limit shown is the peak limit taken from FCC Part 15.209							



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

Average Restricted Band-Edge

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	GMSK 1MB	2390.00	39.68	Average	53.98	14.31	PASS
Low	GMSK 2MB	2390.00	43.64	Average	53.98	10.34	PASS
Low	GFSK	2390.00	39.86	Average	53.98	14.12	PASS
High	GMSK 1MB	2483.50	45.18	Average	53.98	8.80	PASS
High	GMSK 2MB	2483.50	49.94	Average	53.98	4.04	PASS
High	GFSK	2483.50	44.36	Average	53.98	9.62	PASS

*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method: All measurements were performed using the section 11.9.2.2.2 from ANSI C63.10.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

4.3 DUTY CYCLE

Test Method:

All Modulations/transmitters found to have a duty cycle of >98%.

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

Test procedures:

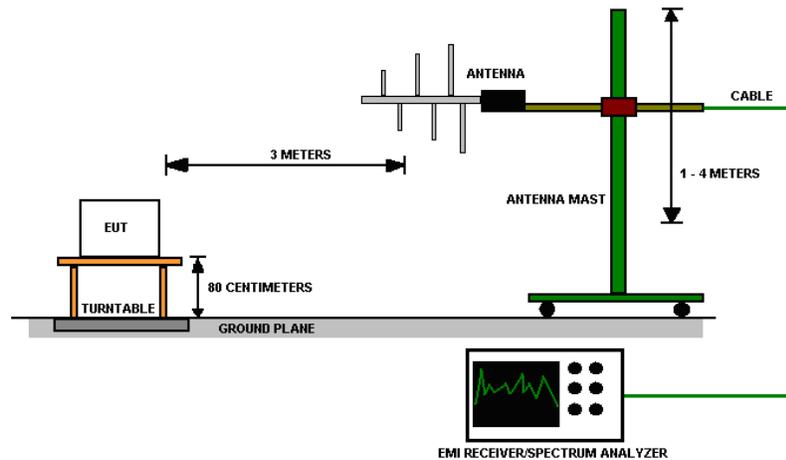- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

Figure 3 - Radiated Emissions Test Setup
NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

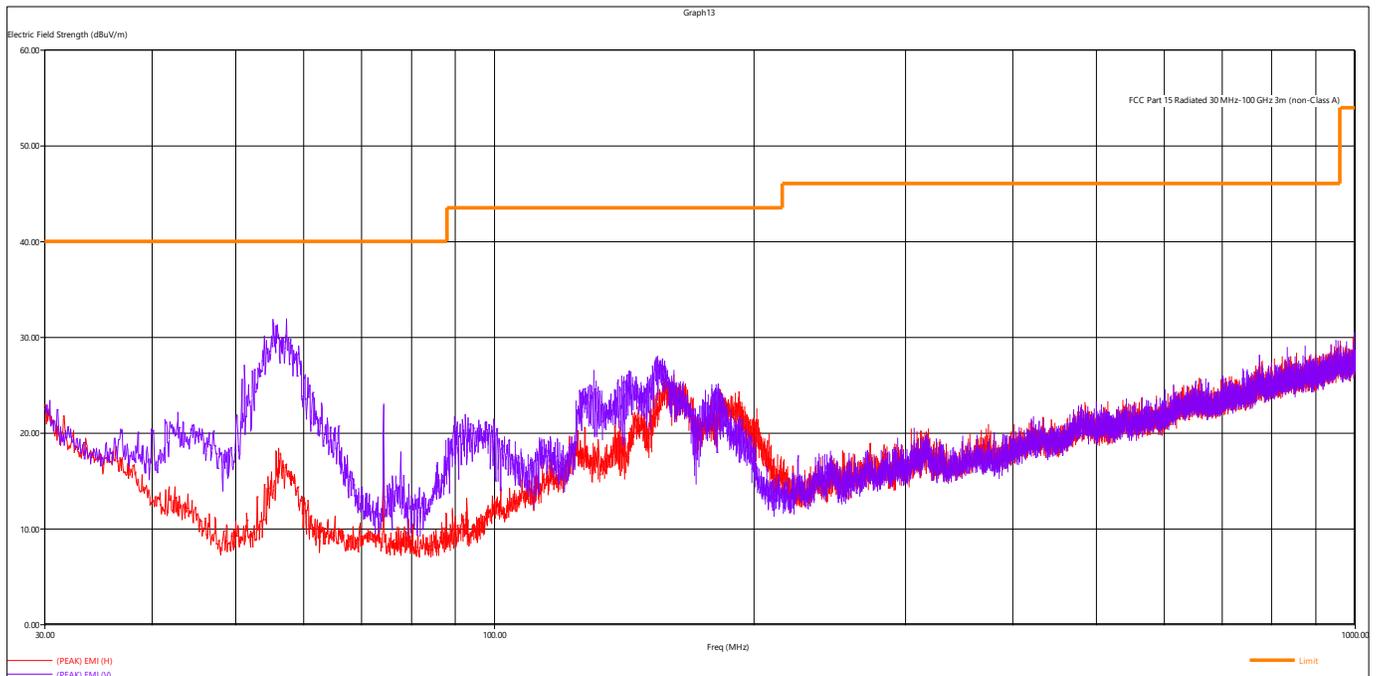


Figure 4 - Radiated Emissions Plot, Receive

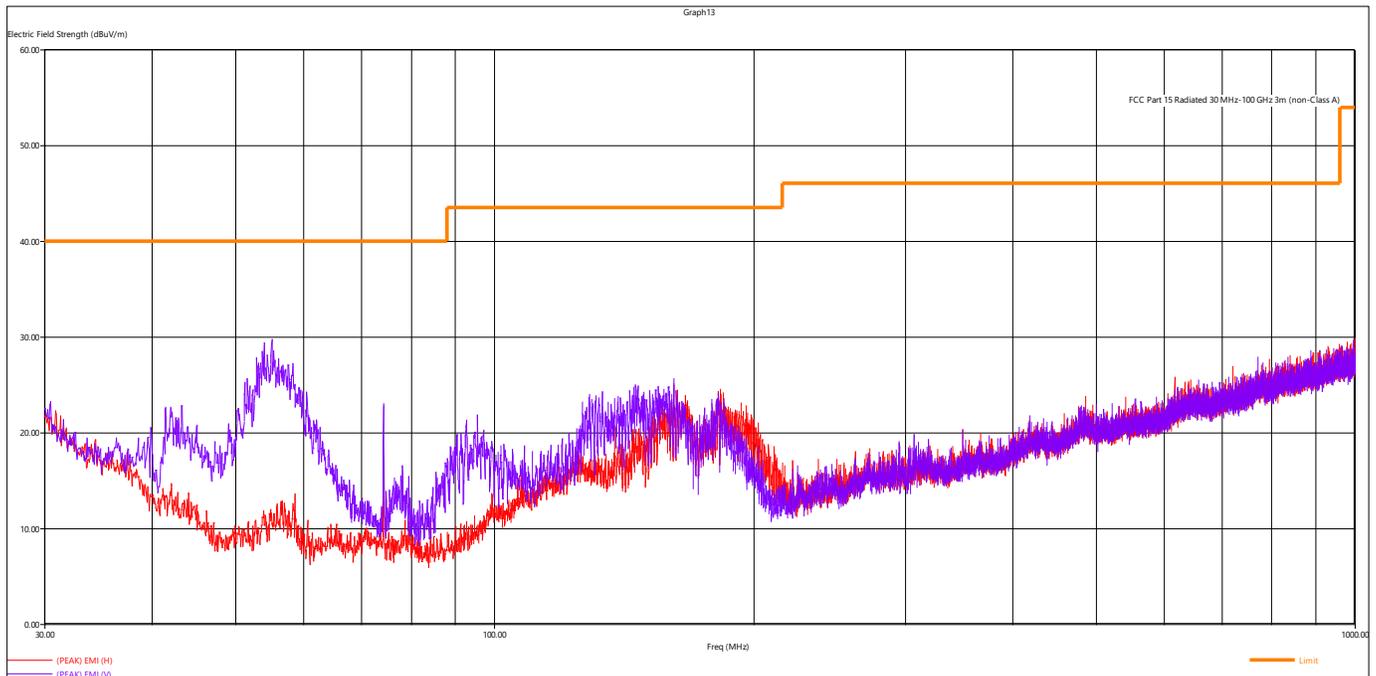


Figure 5 - Radiated Emissions Plot, GFSK

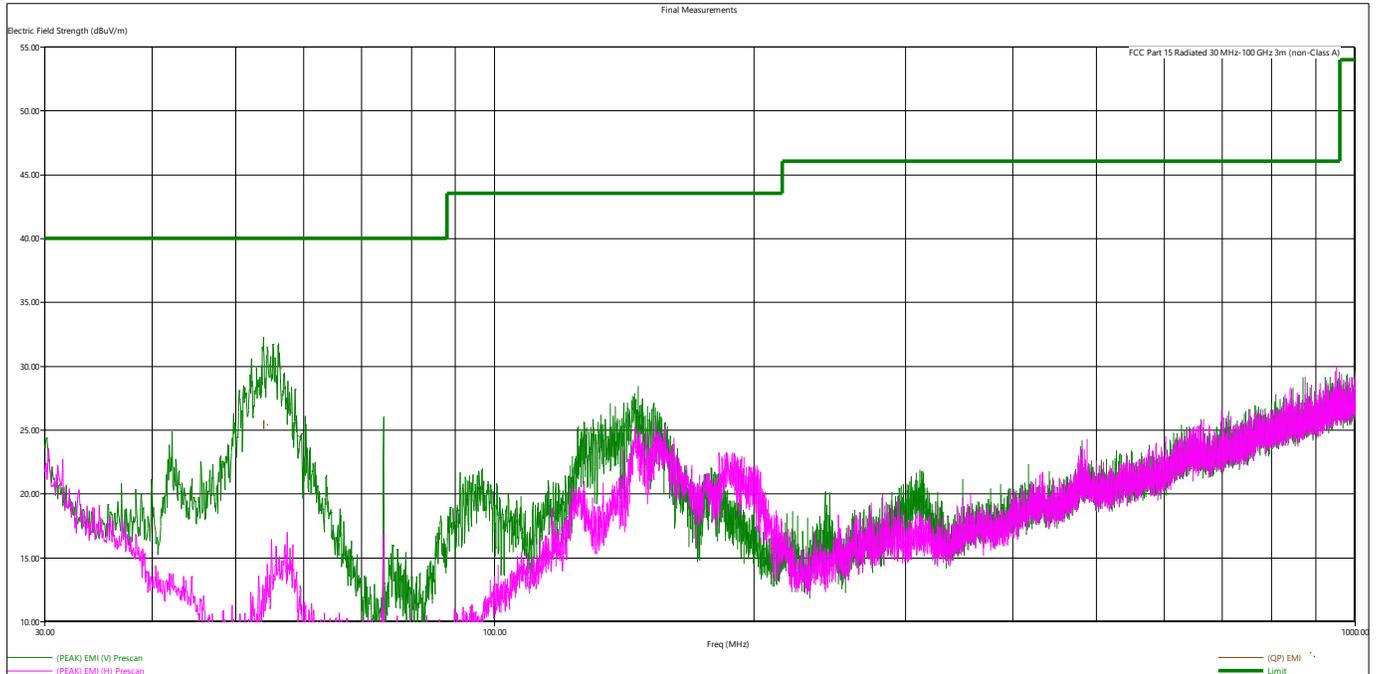


Figure 6 - Radiated Emissions Plot, GSK 1MB

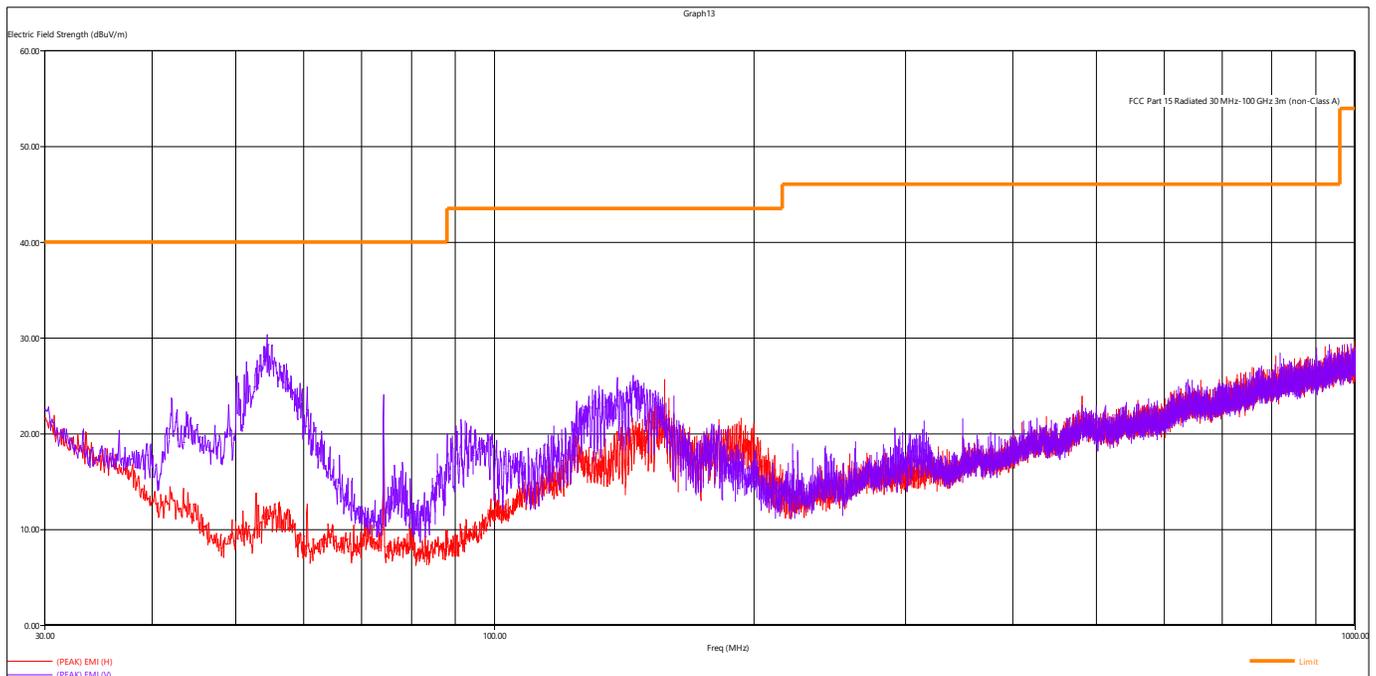


Figure 7 - Radiated Emissions Plot, GSK 2MB

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit Value - Emission level



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

Quasi-Peak Measurements, GMSK-GFSK								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
53.851440	25.32	40.00	14.68	149.00	352.00	V	Low	GMSK 1MB

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above.
All measurements not listed were found to be at least 6 dB Below the limit.

Peak Measurements, GMSK-GFSK								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
2402.272000	97.93	NA	NA	475.00	100.00	H	Low	GFSK
2439.676000	100.20	NA	NA	169.00	237.00	H	Mid	GFSK
2479.630000	96.66	NA	NA	197.00	232.00	H	High	GFSK
2401.464000	72.83	NA	NA	535.00	88.00	H	Low	GMSK 1MB
2439.784000	100.17	NA	NA	208.00	232.00	H	Mid	GMSK 1MB
2479.638000	96.27	NA	NA	198.00	230.00	H	High	GMSK 1MB
2402.334000	78.85	NA	NA	140.00	225.00	V	Low	GMSK 2MB
2439.430000	79.87	NA	NA	122.00	75.00	H	Mid	GMSK 2MB
2480.370000	77.30	NA	NA	479.00	80.00	H	High	GMSK 2MB
7320.674000	54.63	73.98	19.35	196.00	154.00	H	Mid	GFSK
7439.456000	55.03	73.98	18.95	138.00	150.00	H	High	GFSK
7205.226000	57.24	73.98	16.74	202.00	153.00	H	Low	GMSK 1MB
7319.818000	53.27	73.98	20.71	170.00	148.00	H	Mid	GMSK 1MB
7439.158000	55.19	73.98	18.79	184.00	151.00	H	High	GMSK 1MB
9920.232000	52.76	73.98	21.22	199.00	18.00	V	High	GMSK 1MB
7207.904000	56.72	73.98	17.26	134.00	143.00	H	Low	GMSK 2MB
7321.648000	57.27	73.98	16.71	133.00	143.00	H	Mid	GMSK 2MB
7442.310000	53.90	73.98	20.08	149.00	147.00	H	High	GMSK 2MB

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above.
All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

Average Measurements, GMSK-GFSK								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
2402.272000	94.73	NA	NA	475.00	100.00	H	Low	GFSK
2439.676000	96.74	NA	NA	169.00	237.00	H	Mid	GFSK
2479.630000	92.43	NA	NA	197.00	232.00	H	High	GFSK
2401.464000	65.99	NA	NA	535.00	88.00	H	Low	GMSK 1MB
2439.784000	97.91	NA	NA	208.00	232.00	H	Mid	GMSK 1MB
2479.638000	92.22	NA	NA	198.00	230.00	H	High	GMSK 1MB
2402.334000	72.41	NA	NA	140.00	225.00	V	Low	GMSK 2MB
2439.430000	71.36	NA	NA	122.00	75.00	H	Mid	GMSK 2MB
2480.370000	69.43	NA	NA	479.00	80.00	H	High	GMSK 2MB
7320.674000	45.92	53.98	8.06	196.00	154.00	V	Mid	GFSK
7439.456000	45.54	53.98	8.44	138.00	150.00	H	High	GFSK
7205.226000	48.75	53.98	5.23	202.00	153.00	H	Low	GMSK 1MB
7319.818000	43.75	53.98	10.23	170.00	148.00	H	Mid	GMSK 1MB
7439.158000	45.94	53.98	8.04	184.00	151.00	H	High	GMSK 1MB
9920.232000	40.92	53.98	13.06	199.00	18.00	V	High	GMSK 1MB
7207.904000	46.55	53.98	7.43	134.00	143.00	H	Low	GMSK 2MB
7321.648000	47.52	53.98	6.46	133.00	143.00	H	Mid	GMSK 2MB
7442.310000	42.06	53.98	11.92	149.00	147.00	H	High	GMSK 2MB

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above. All measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report. The line shown in the plot is not a limit line. It is a reference line placed at -20dBm

Deviations from test standard:

Test was performed at 120kHz RBW

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Note that the limit shown on the plots does not apply. The spurious emissions were compared to the peak emission at the fundamental frequency within a 120 kHz band.

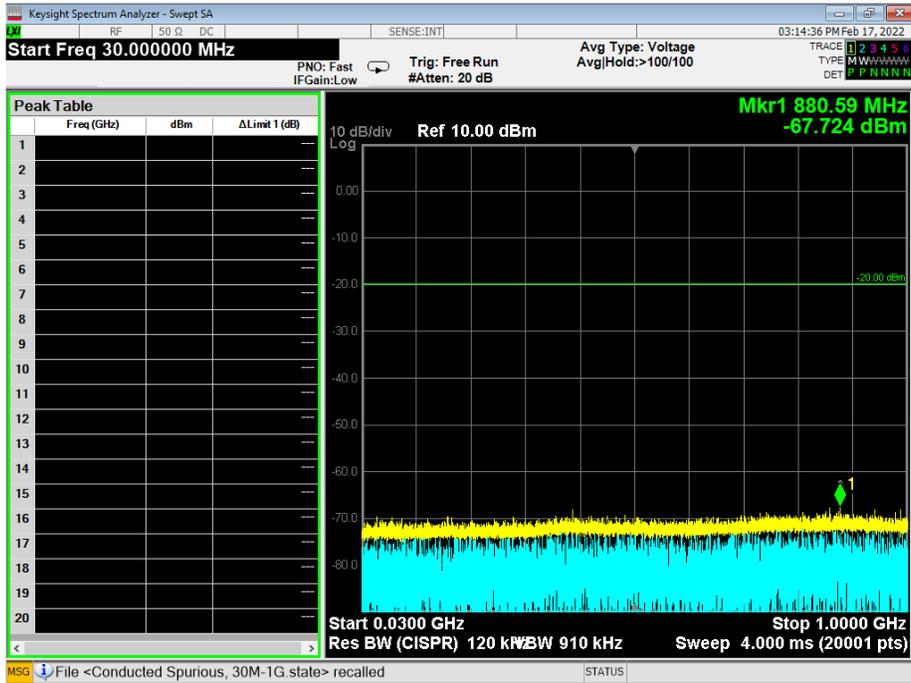


Figure 8 - Radiated Emissions Plot, GFSK, 30M – 1G, Low

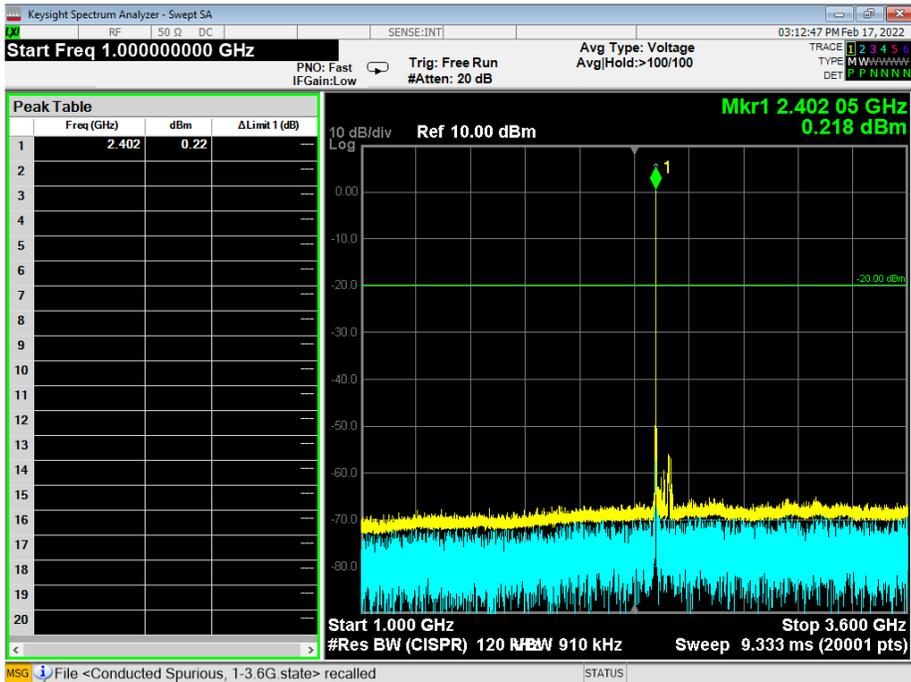


Figure 9 - Radiated Emissions Plot, GFSK, 1G – 3.6G, Low

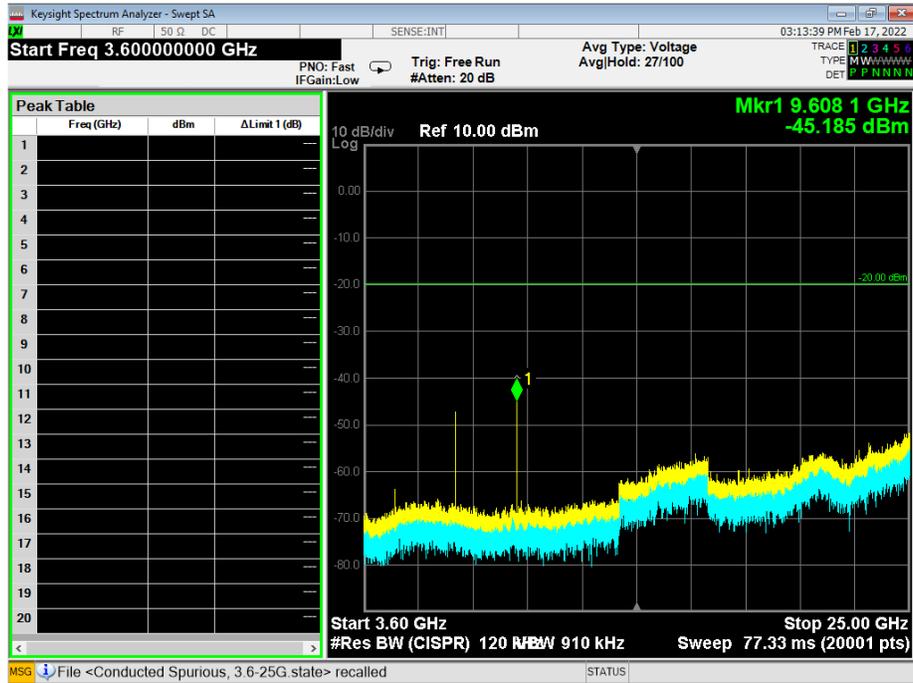


Figure 10 - Radiated Emissions Plot, GFSK, 3.6G – 25G, Low

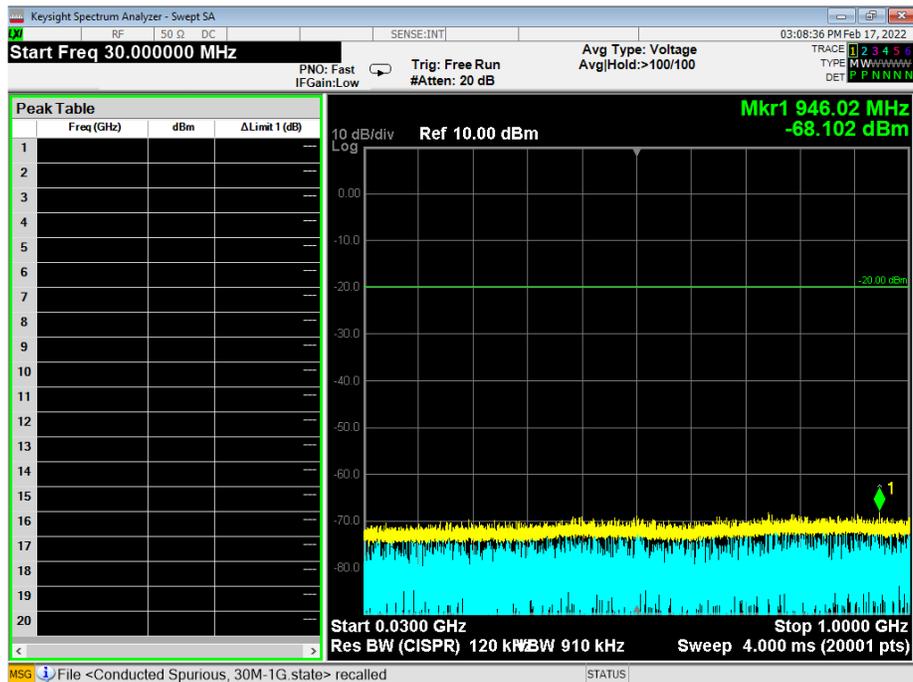


Figure 11 - Radiated Emissions Plot, GMSK 1MB, 30M – 1G, Low

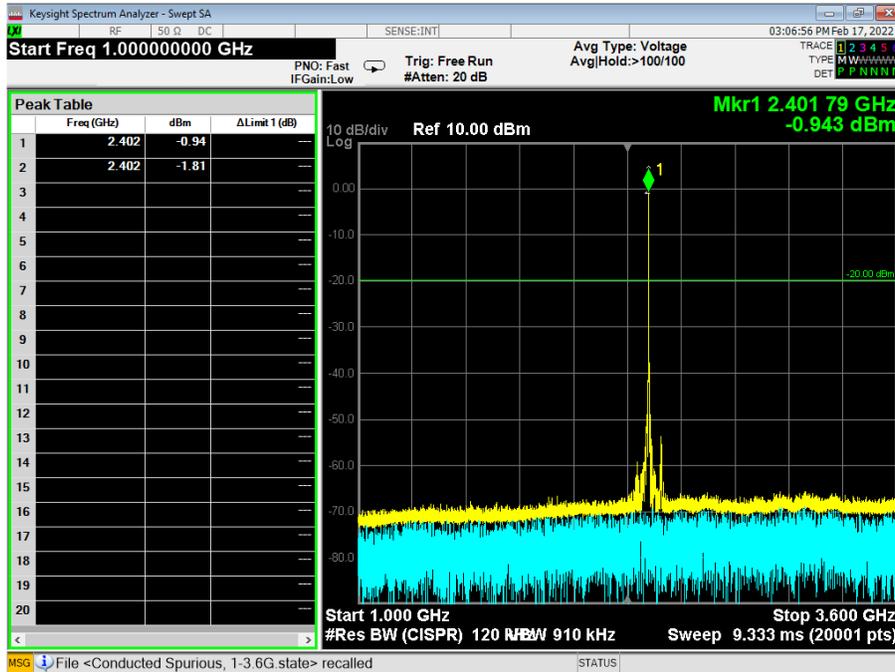


Figure 12 - Radiated Emissions Plot, GMSK 1MB, 1G – 3.6G, Low

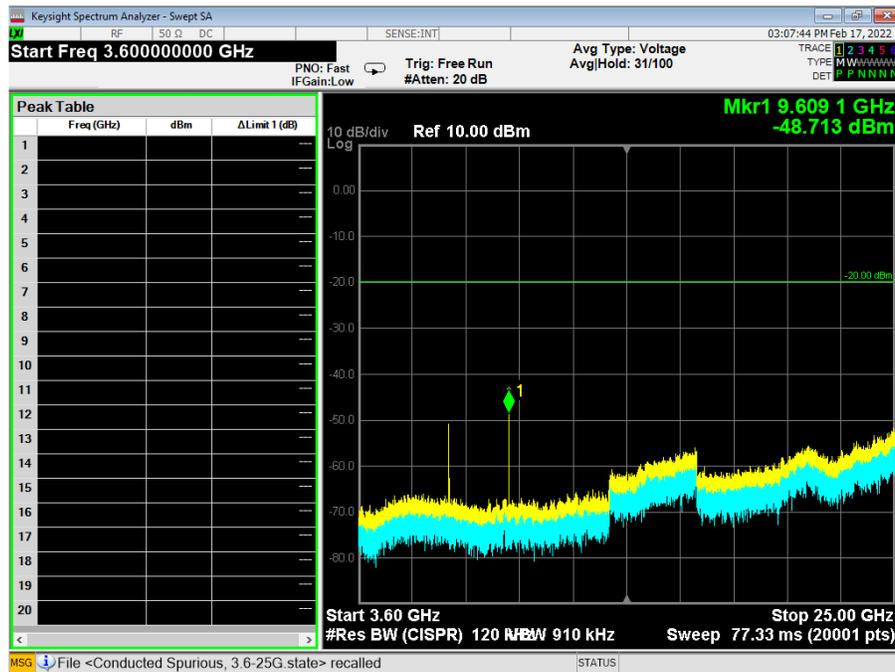


Figure 13 - Radiated Emissions Plot, GMSK 1MB, 3.6G – 25G, Low

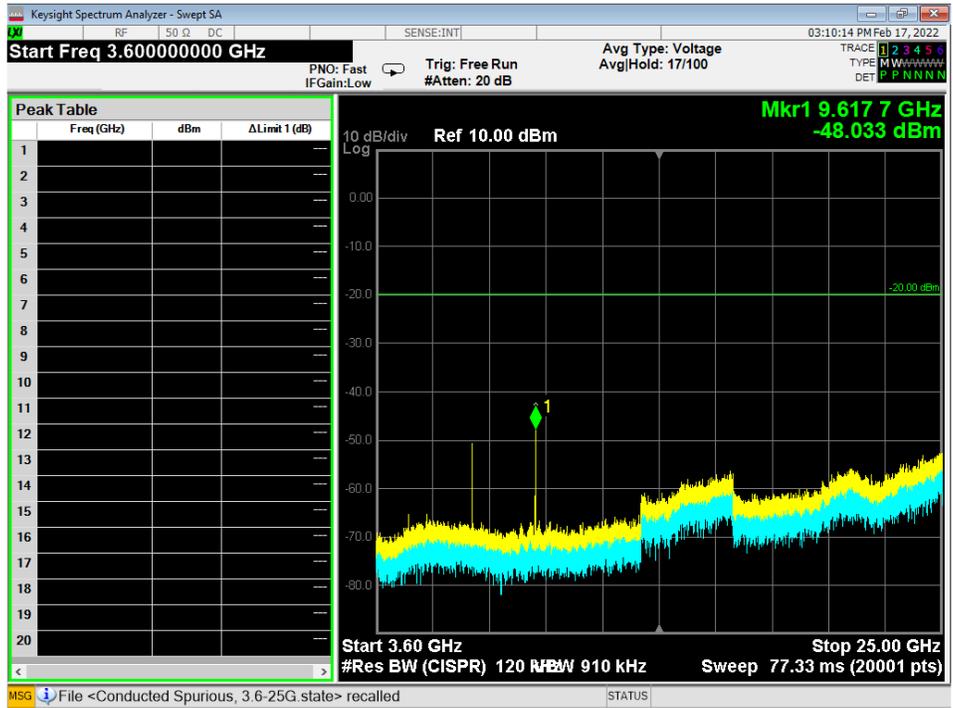


Figure 16 - Radiated Emissions Plot, GMSK 2MB, 3.6G – 25G, Low



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

4.6 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

4.7 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.

4.8 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

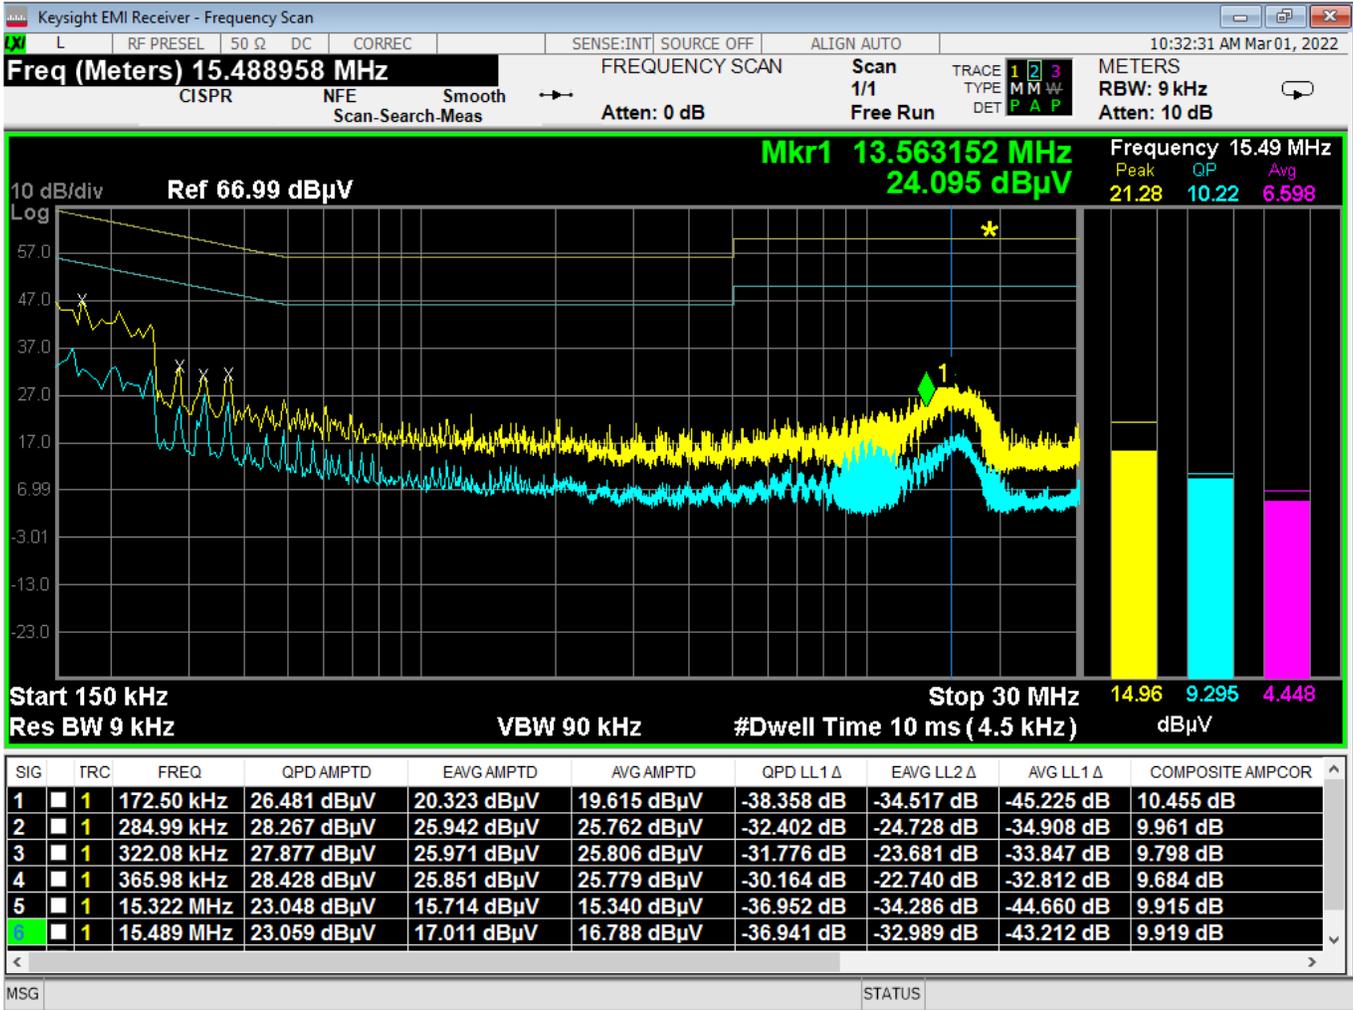


Figure 17 - Conducted Emissions Plot, Line, TX

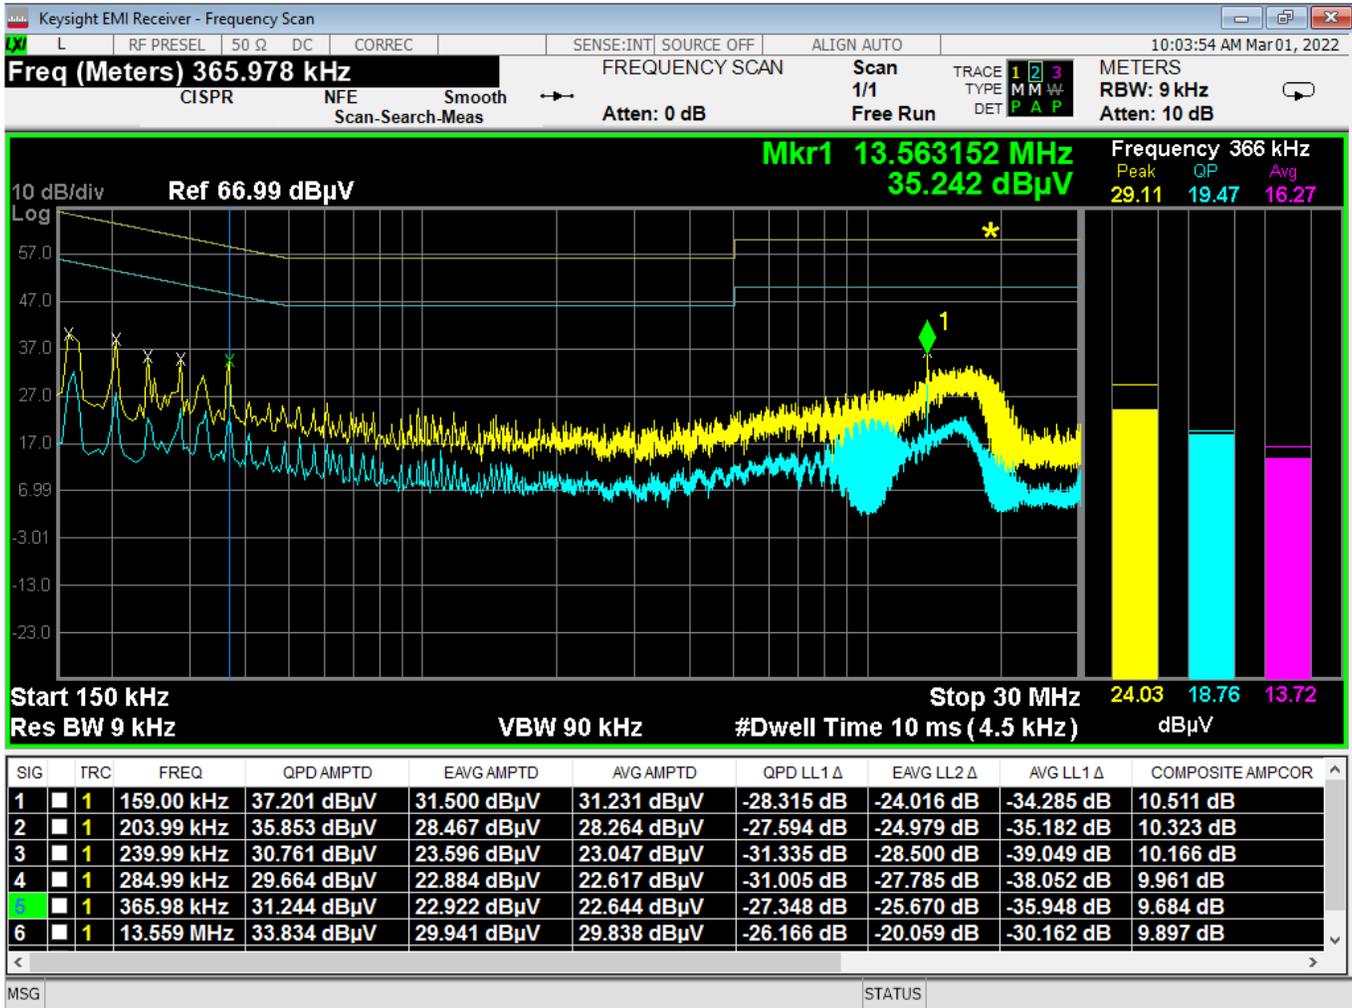


Figure 18 - Conducted Emissions Plot, Neutral, TX

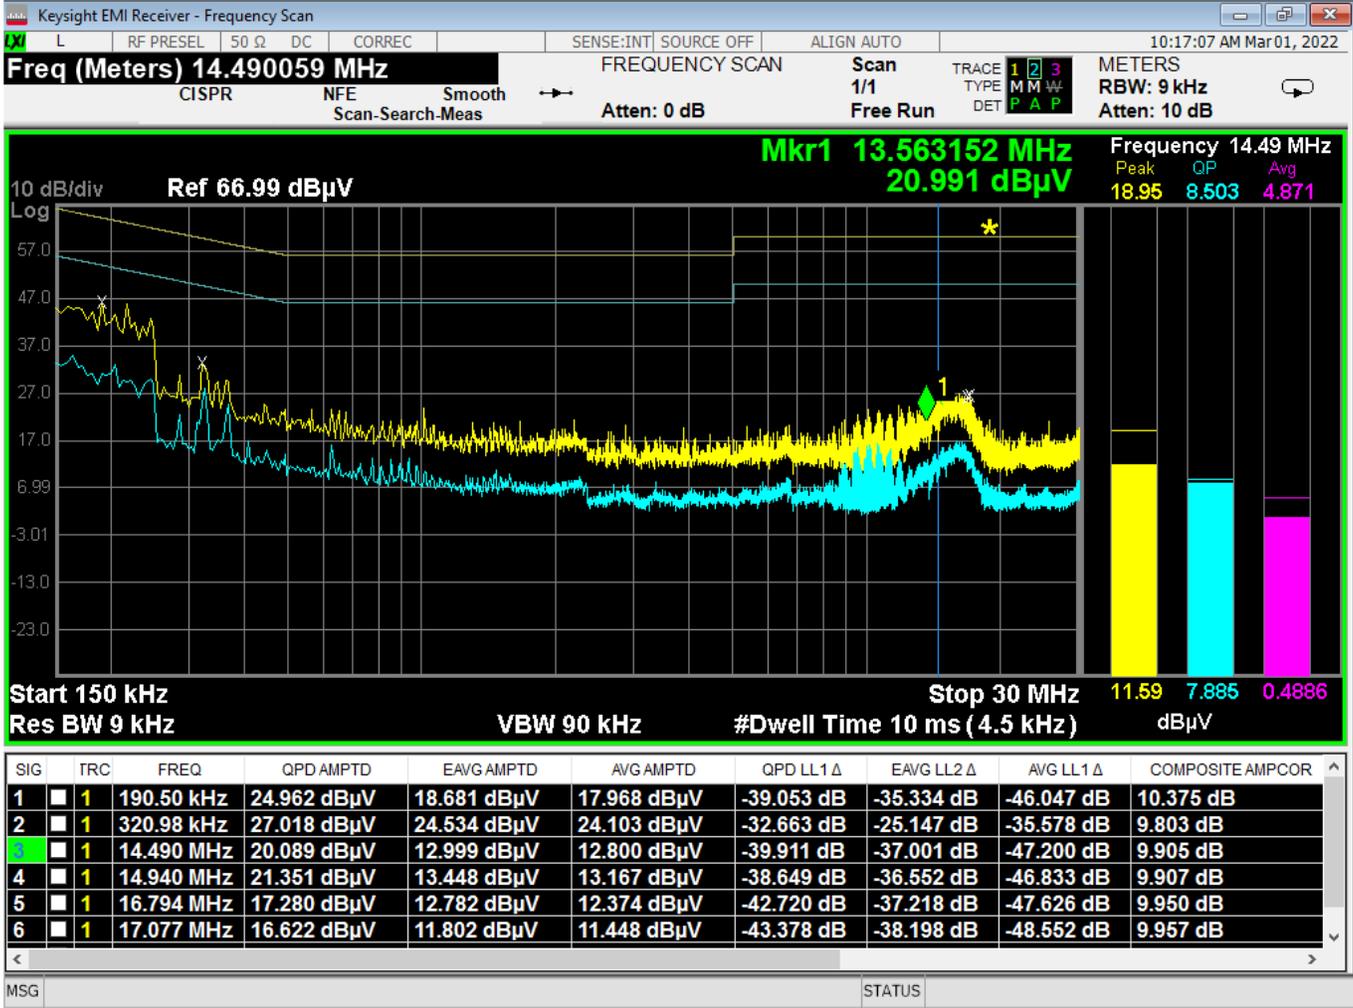


Figure 19 - Conducted Emissions Plot, Line, IDLE

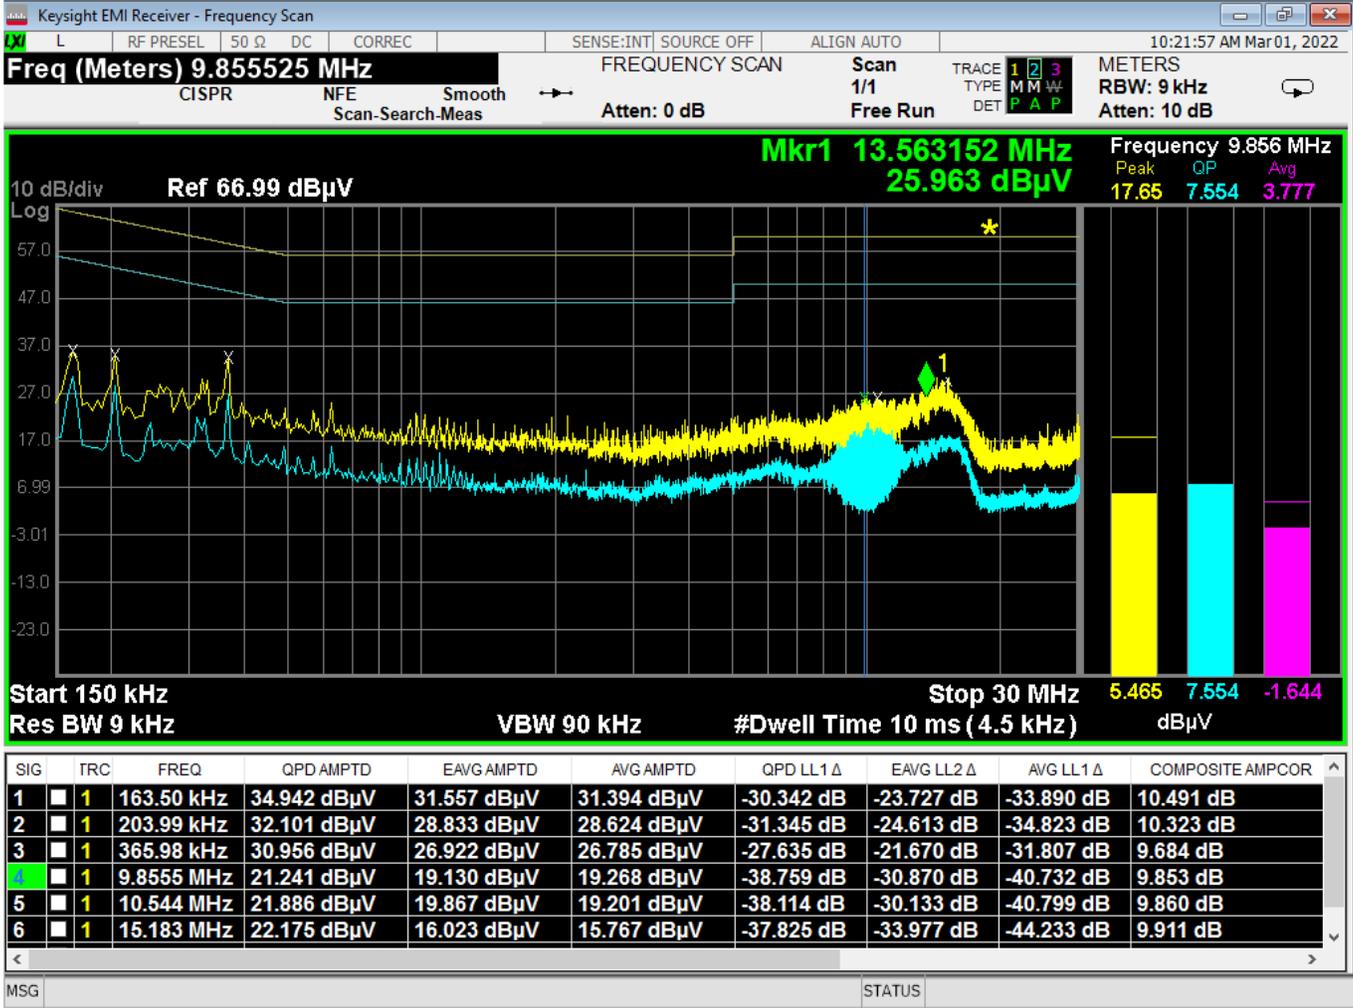


Figure 20 - Conducted Emissions Plot, Neutral, IDLE



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

	Report Number:	R20211005-21-E6A	Rev	A
	Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [\text{Field Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$\text{Power (watts)} = 10^{[\text{Power (dBm)}/10]} / 1000$$

$$\text{Voltage (dB}\mu\text{V)} = \text{Power (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{[\text{Field Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$\text{Gain} = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [\text{FS (V/m)} \times d^2] / 30 = \text{FS} [0.3] \quad \text{for } d = 3$$

$$EIRP(\text{dBm}) = \text{FS}(\text{dB}\mu\text{V/m}) - 10(\log 10^9) + 10\log[0.3] = \text{FS}(\text{dB}\mu\text{V/m}) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

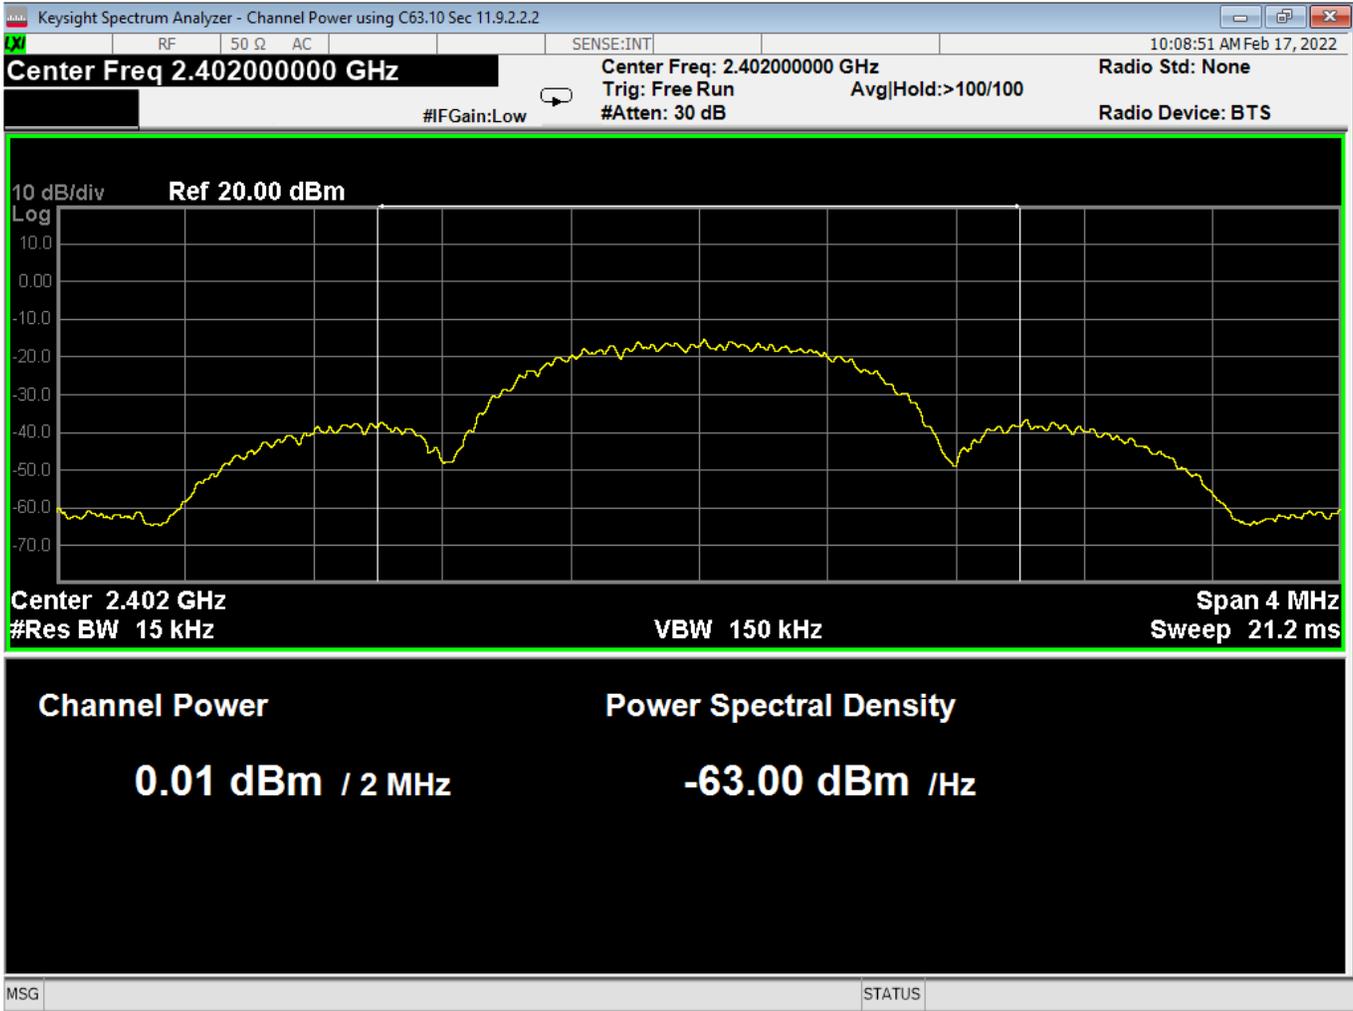
APPENDIX C – GRAPHS AND TABLES



01 Average Output Power, Low Channel ANT GFSK




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

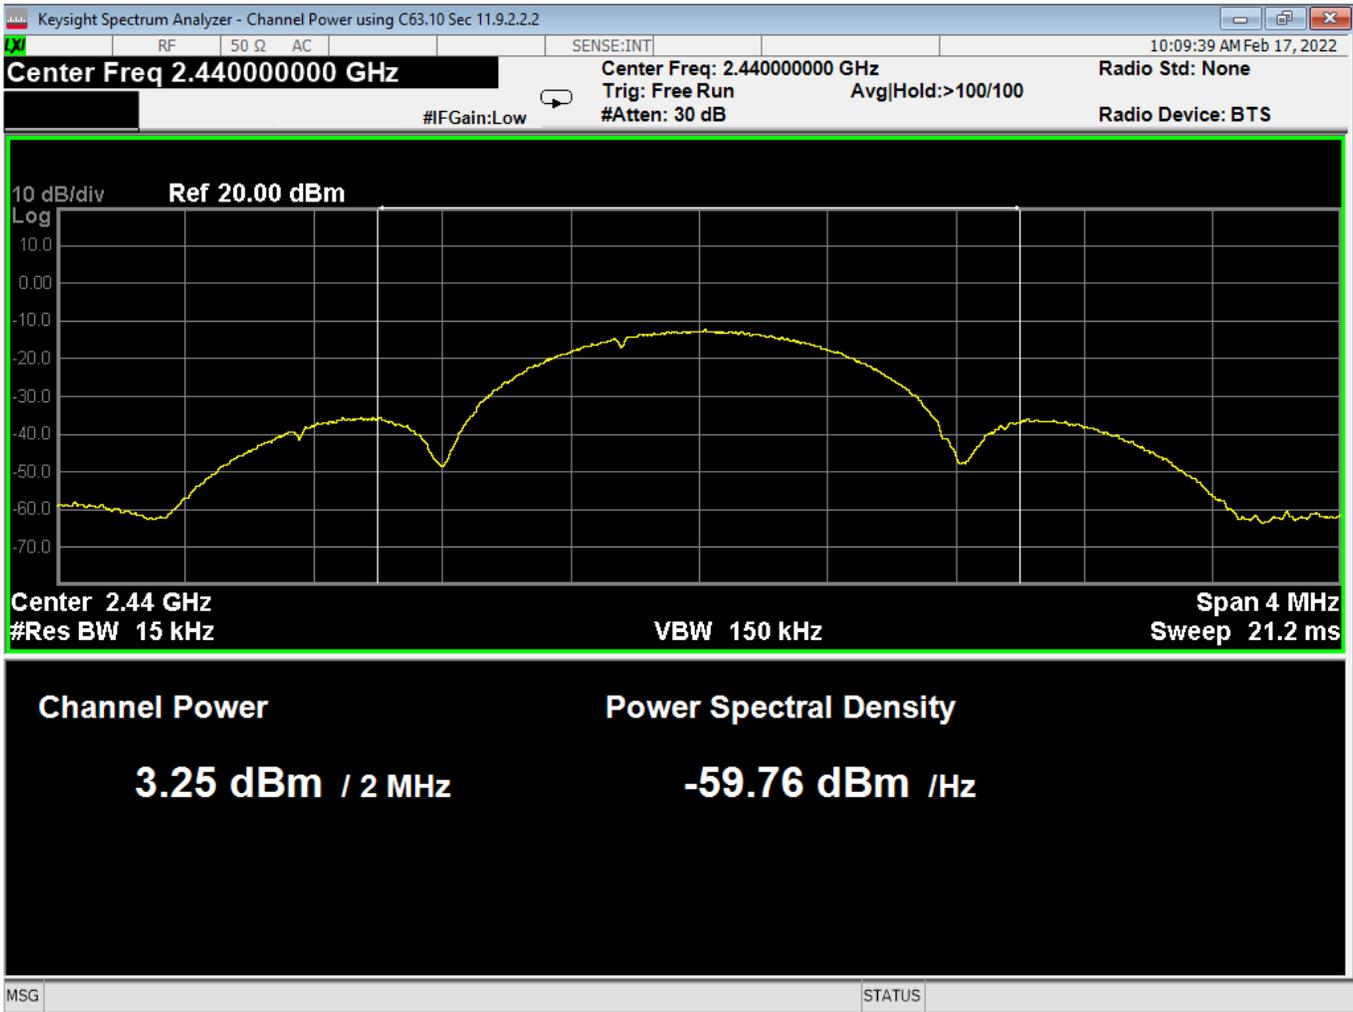

02 Average Output Power, Mid Channel ANT GFSK




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

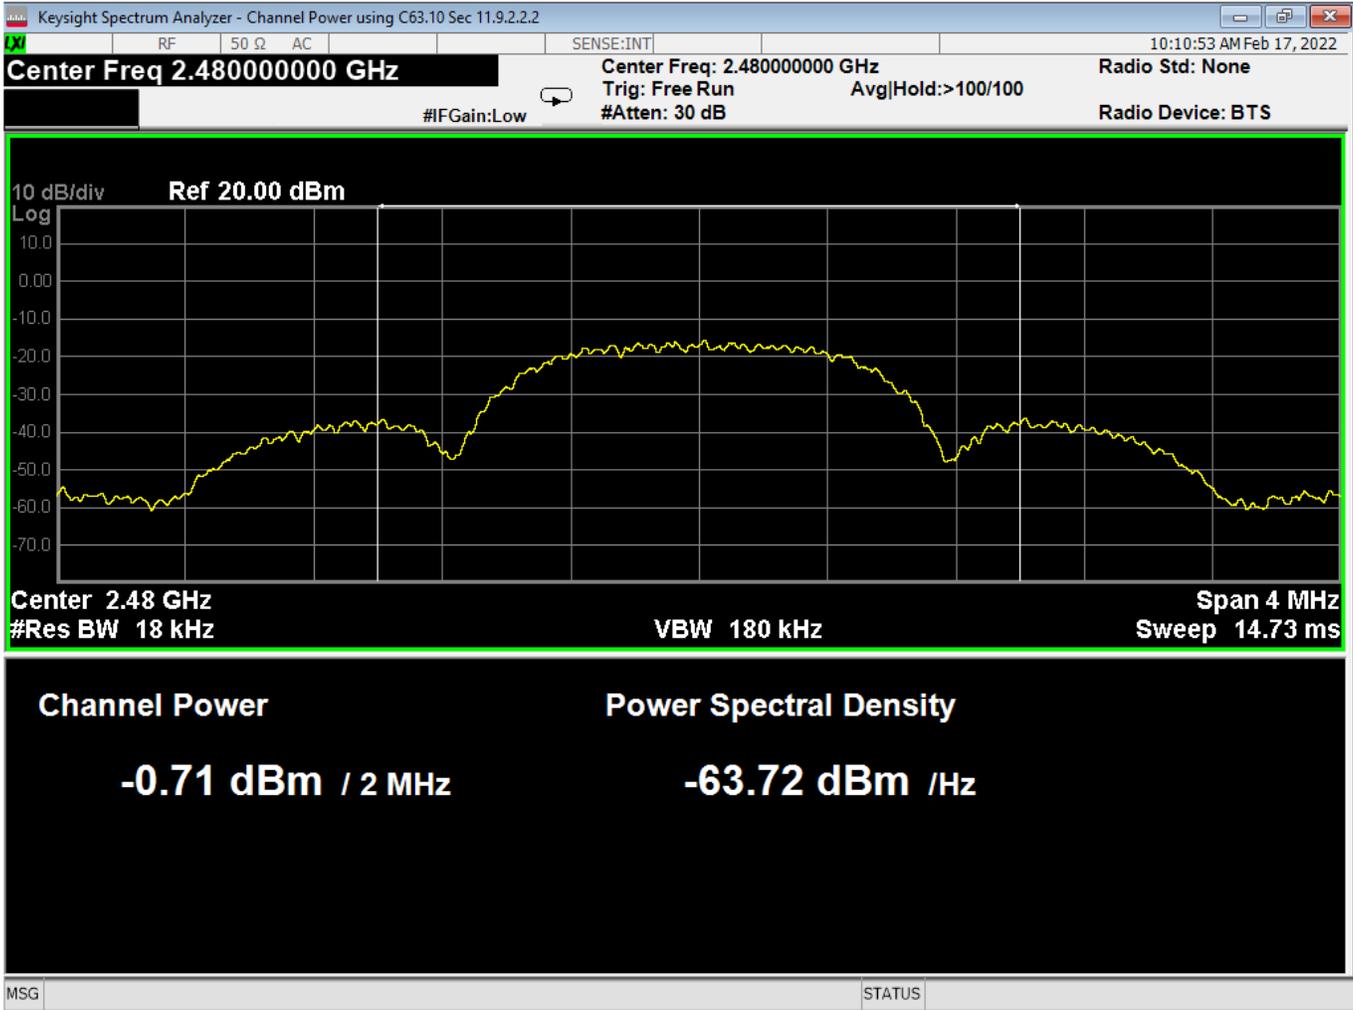

03 Average Output Power, High Channel ANT GFSK




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

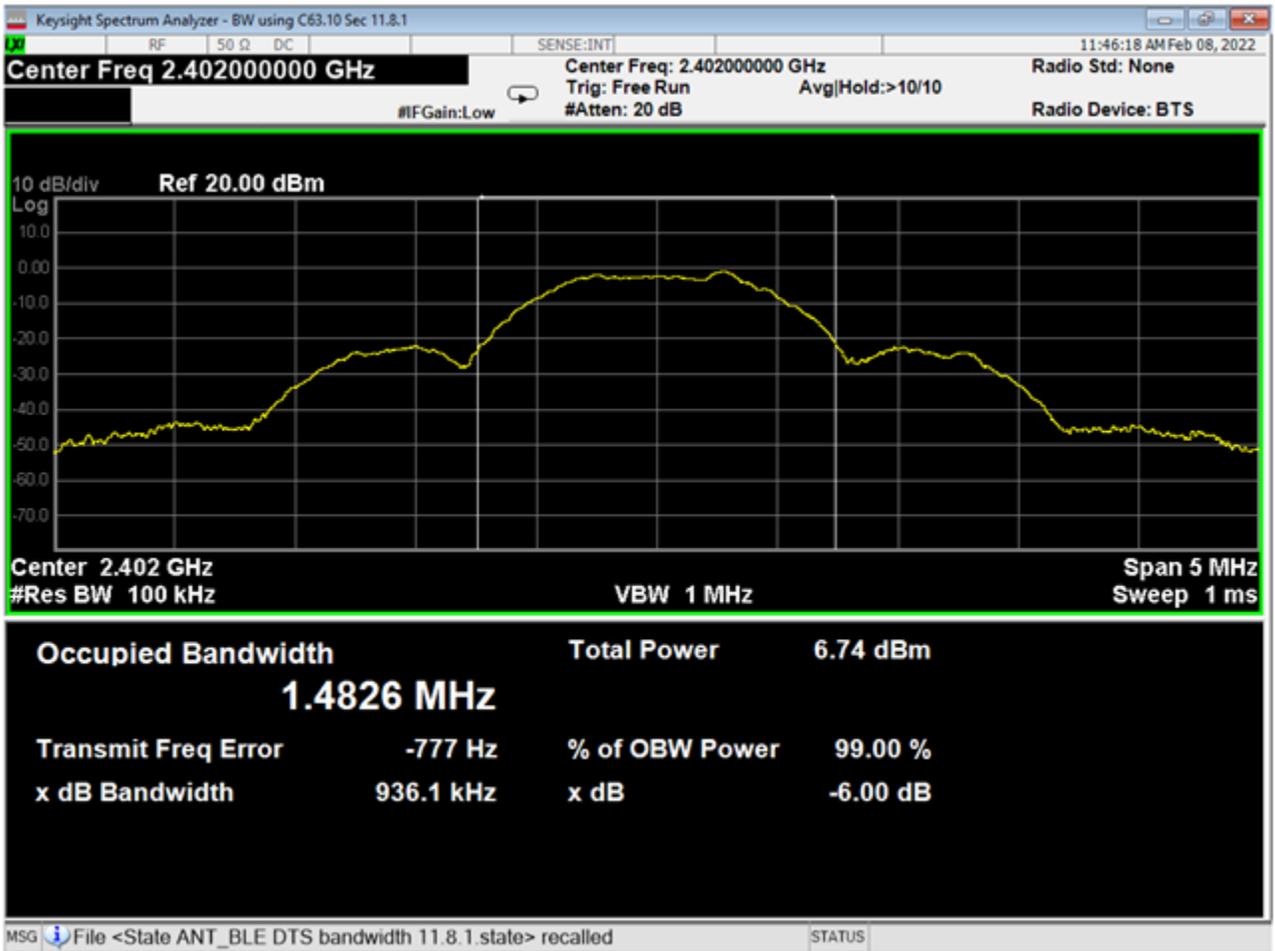


04 Bandwidth, Low Channel ANT GFSK




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

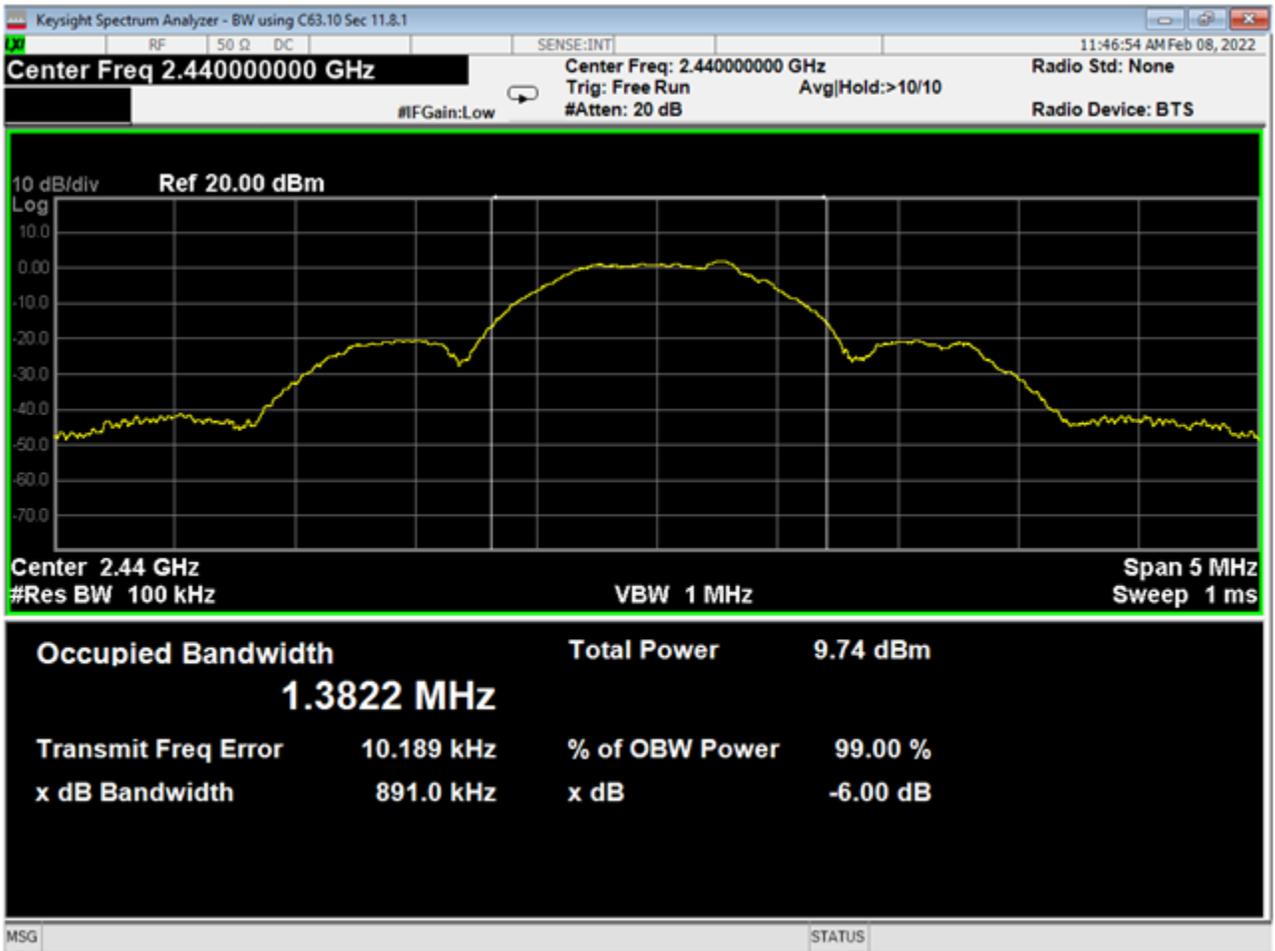


05 Bandwidth, Mid Channel ANT GFSK

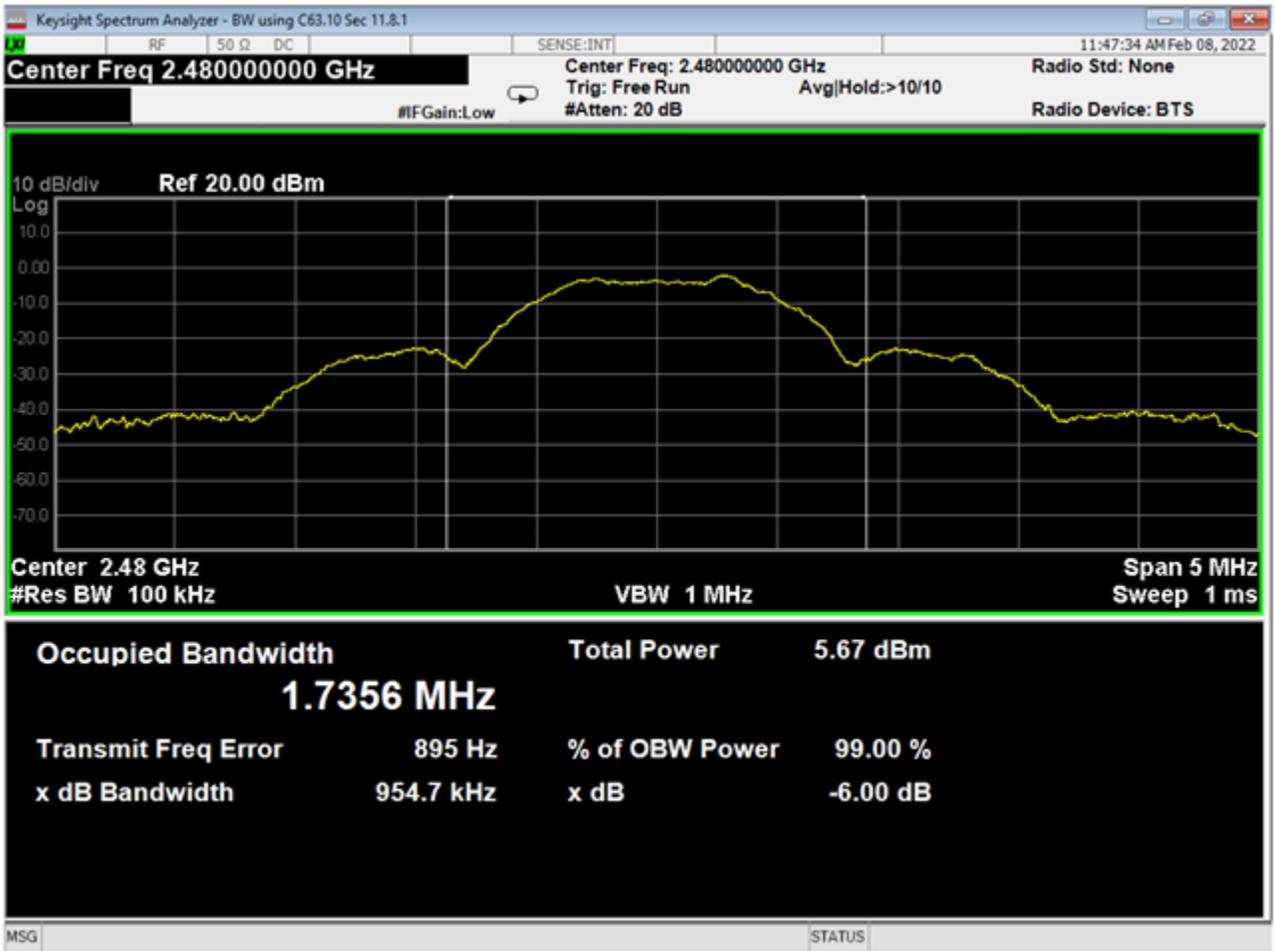


06 Bandwidth, High Channel ANT GFSK

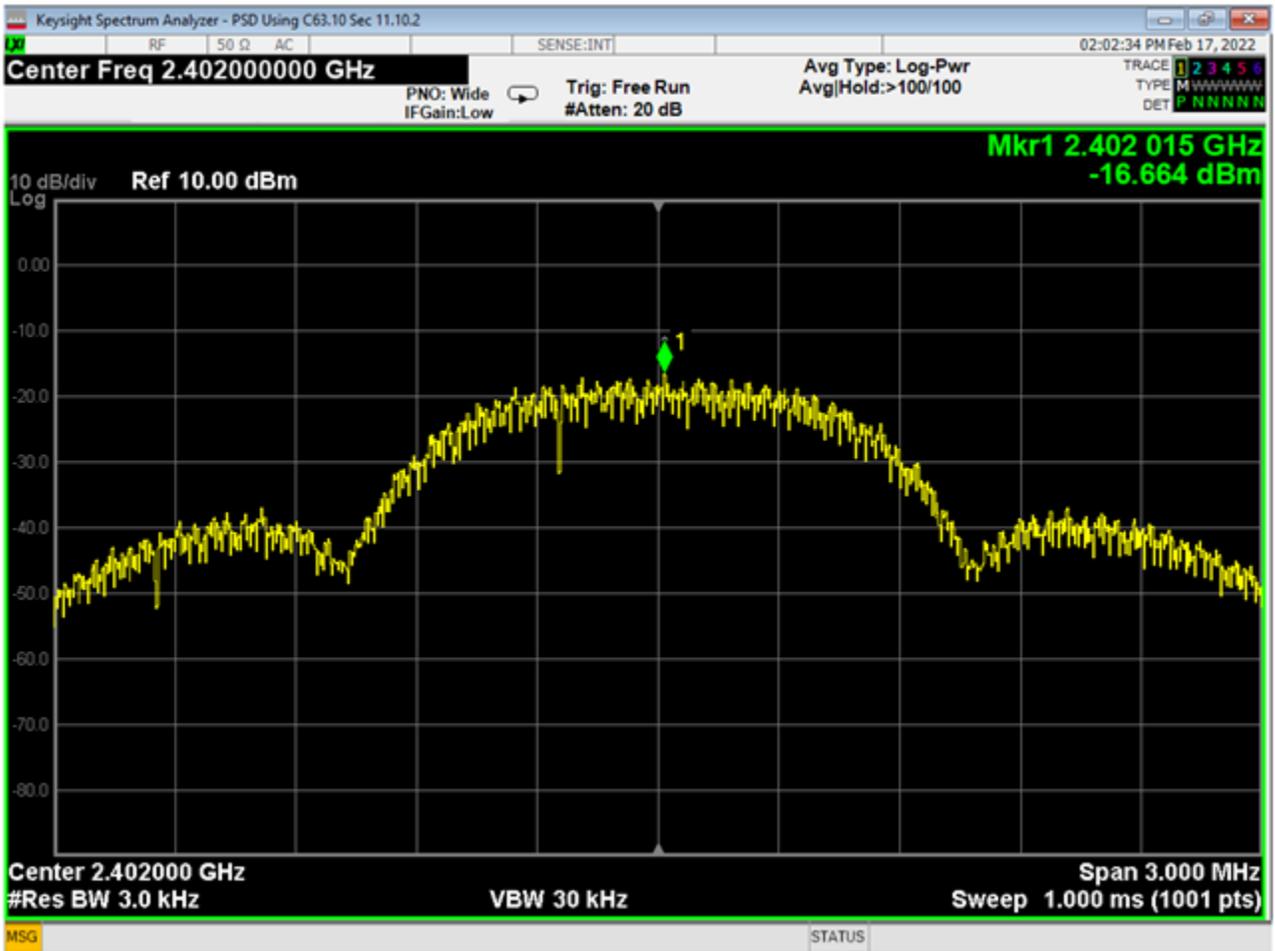

07 PSD, Low Channel ANT GFSK

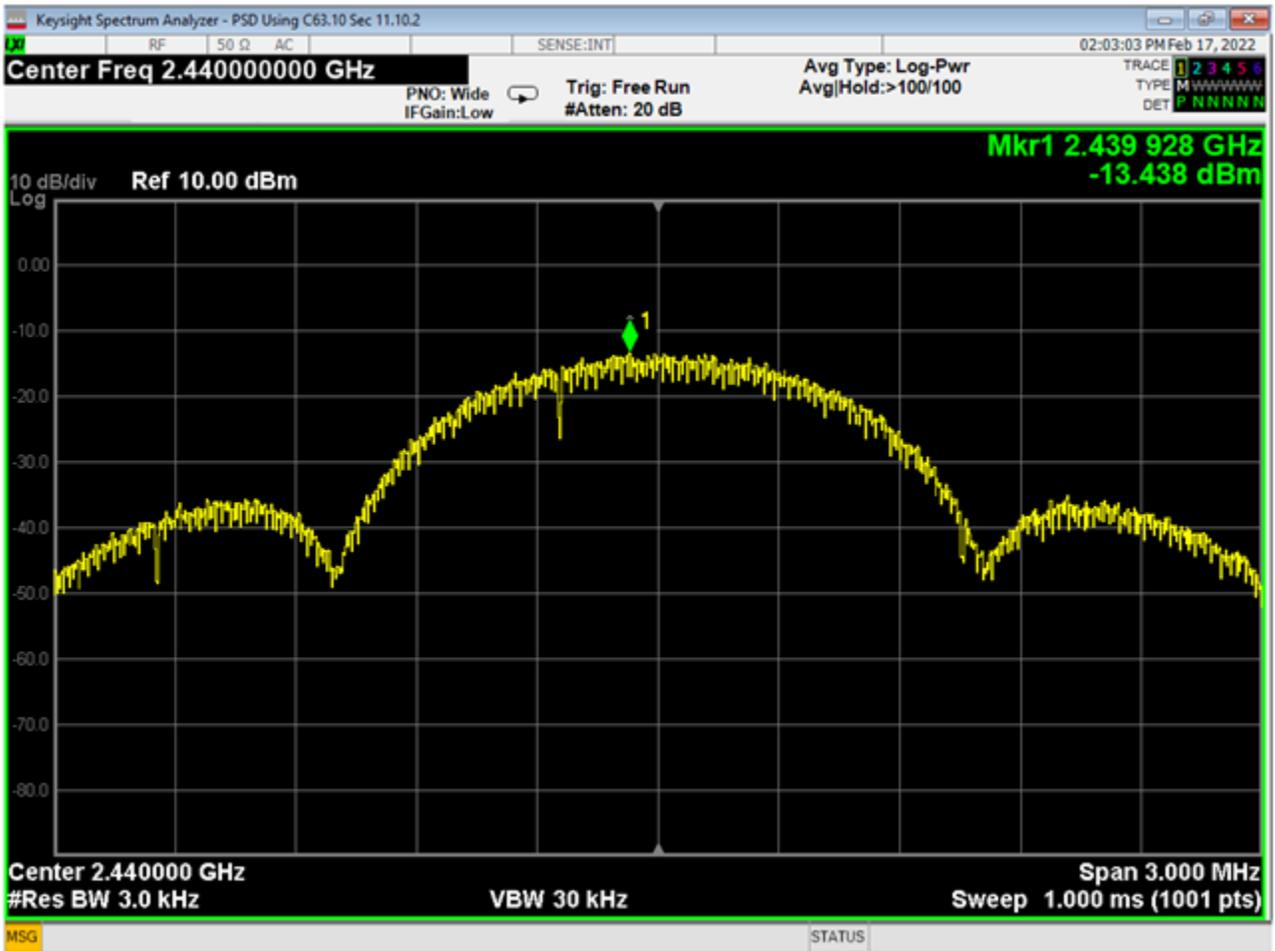


08 PSD, Mid Channel ANT GFSK

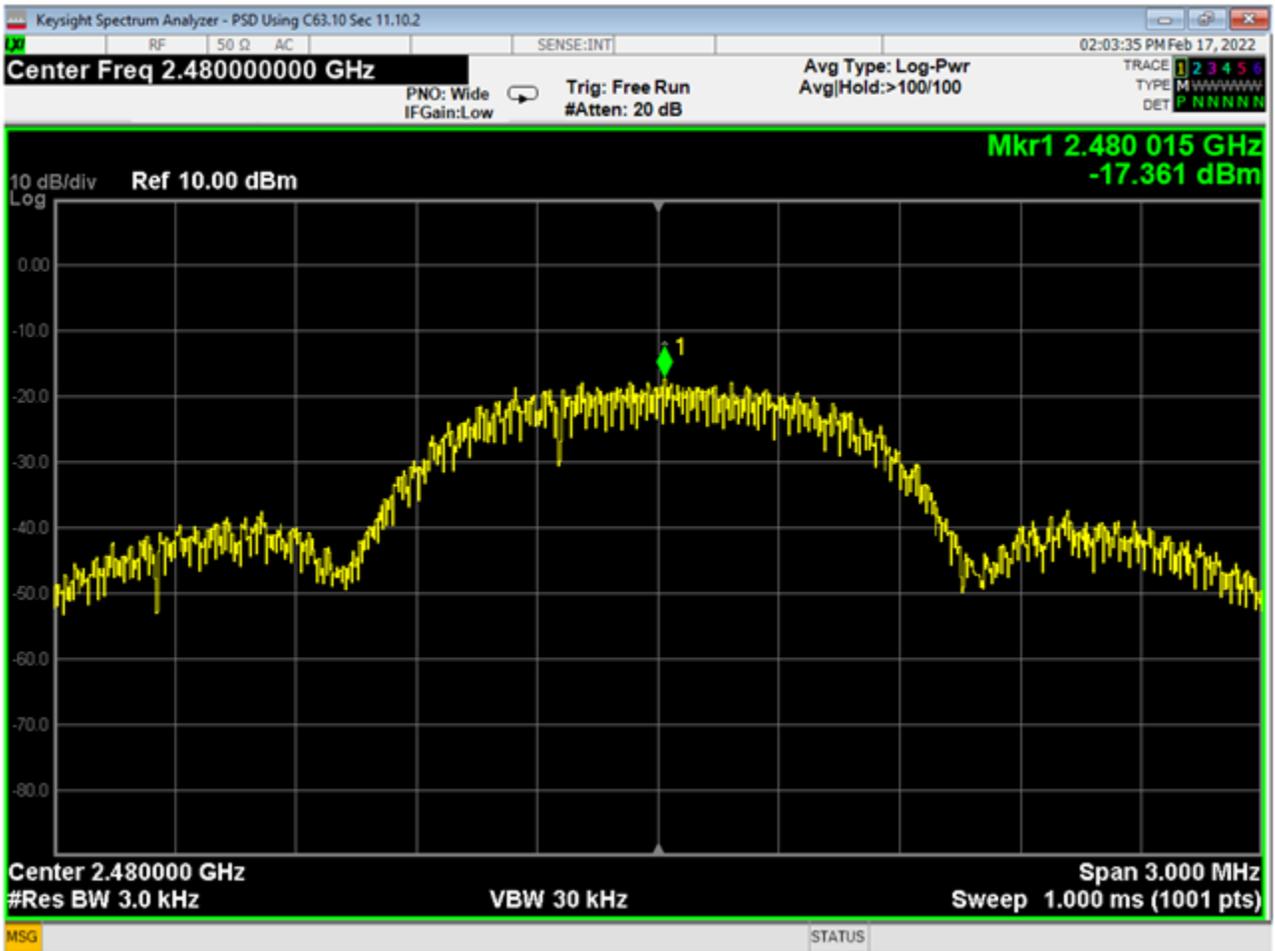

09 PSD, High Channel ANT GFSK



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

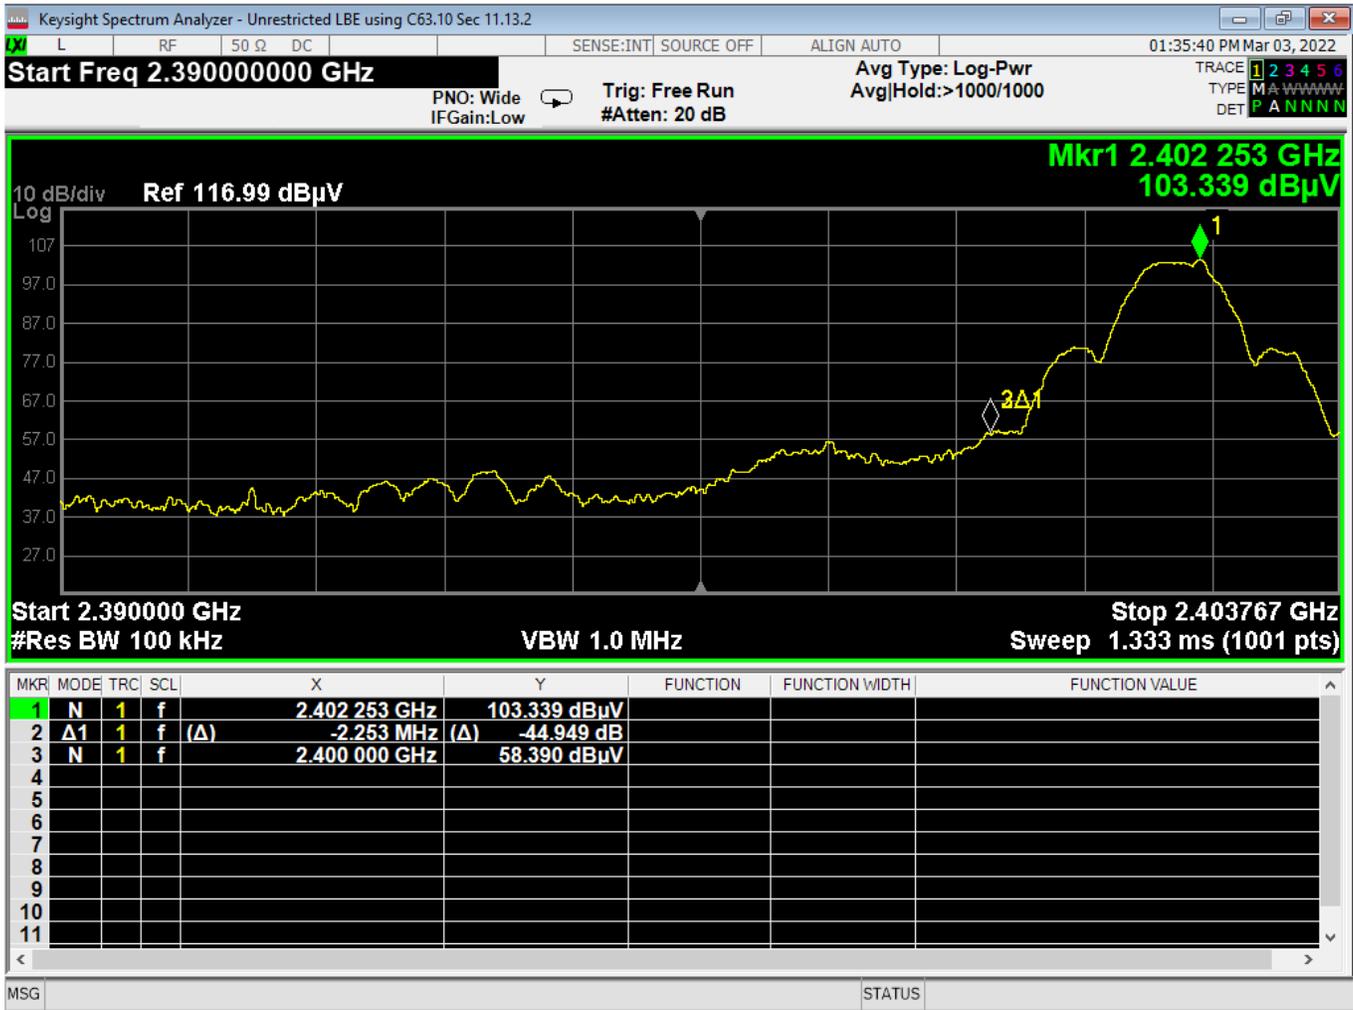

10 LBE, Unrestricted, ANT GFSK



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		



11 HBE, Unrestricted ANT GFSK



Report Number:

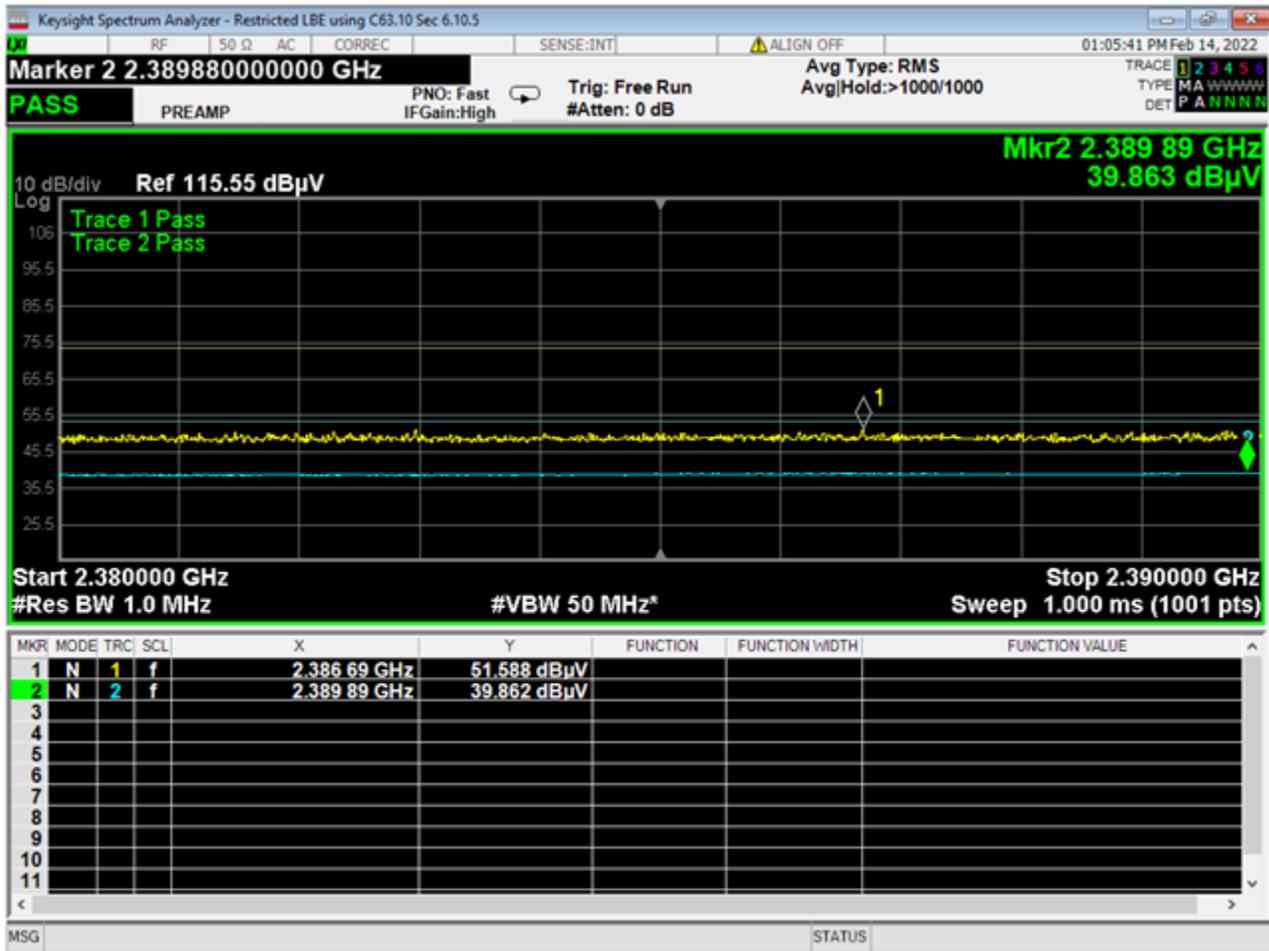
R20211005-21-E6A

Rev

A

Prepared for:


Garmin International, Inc.



12 Lower Bandedge, Restricted, GFSK




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

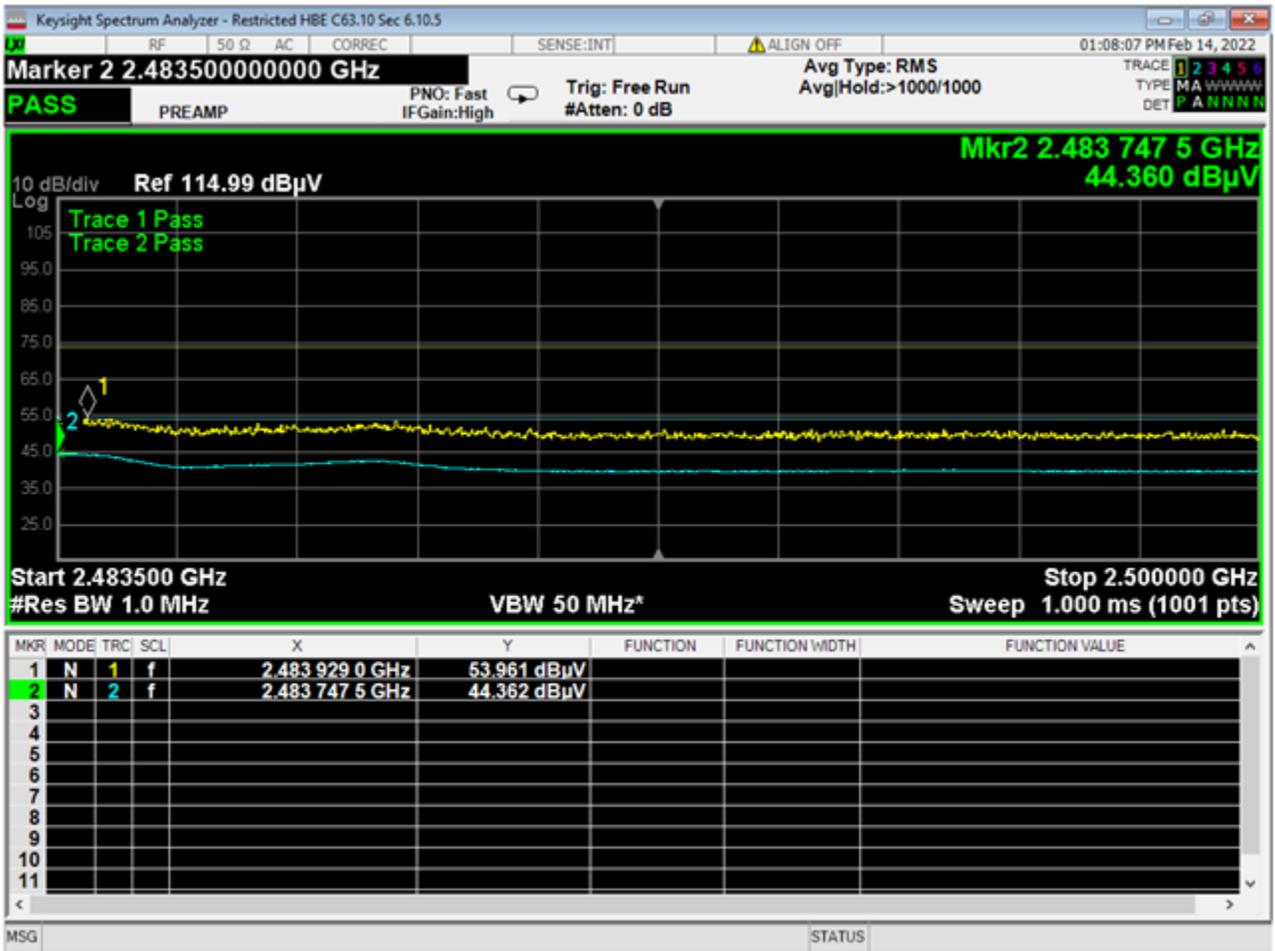

13 Higher Bandedge, Restricted, GFSK




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

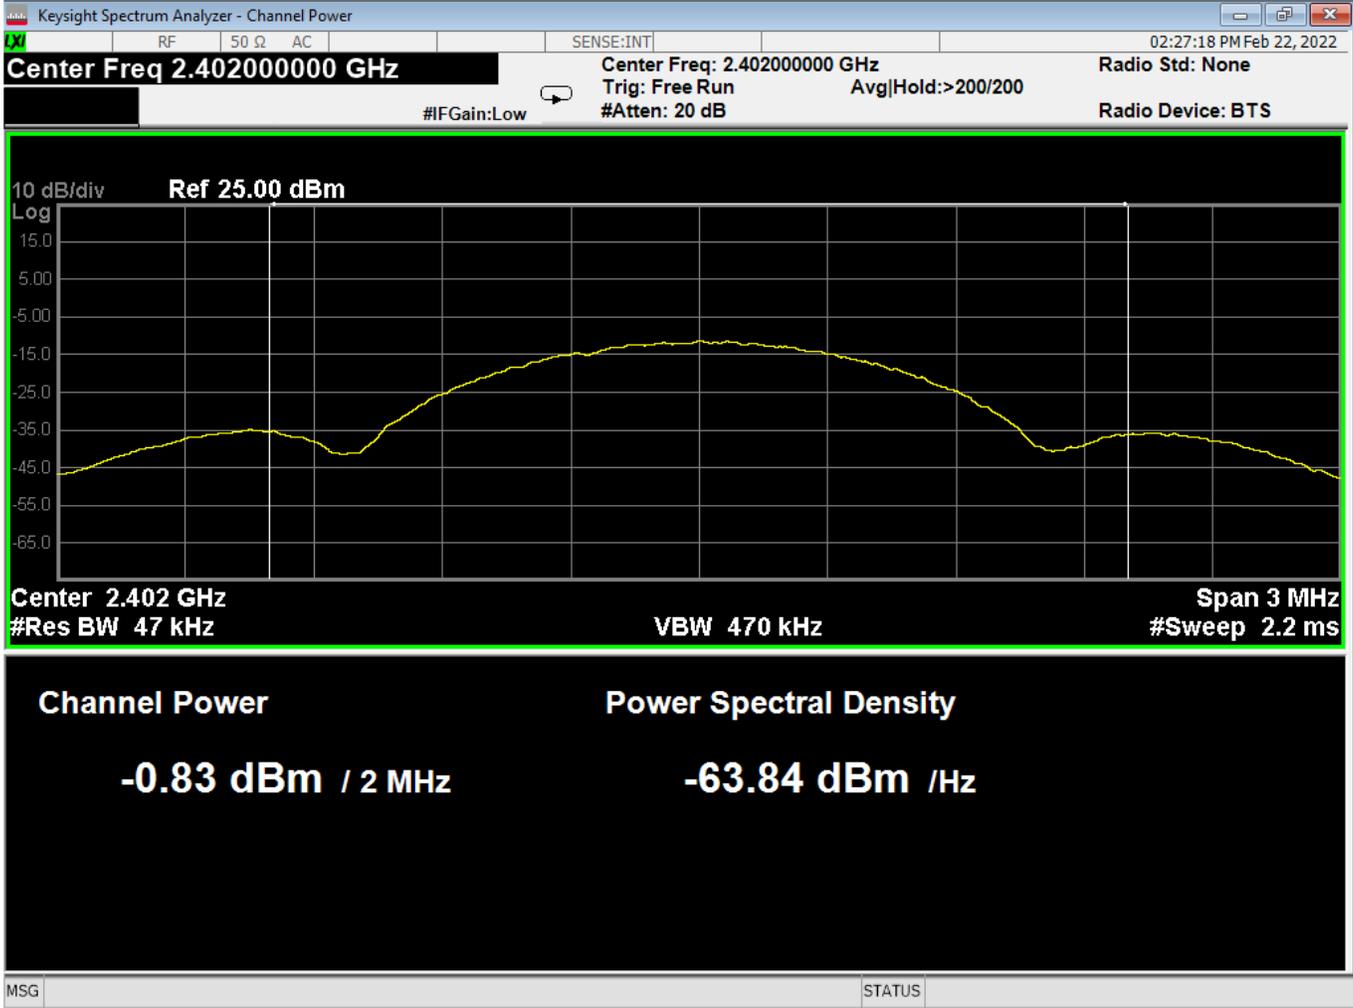

01 Average Output Power, Low Channel GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

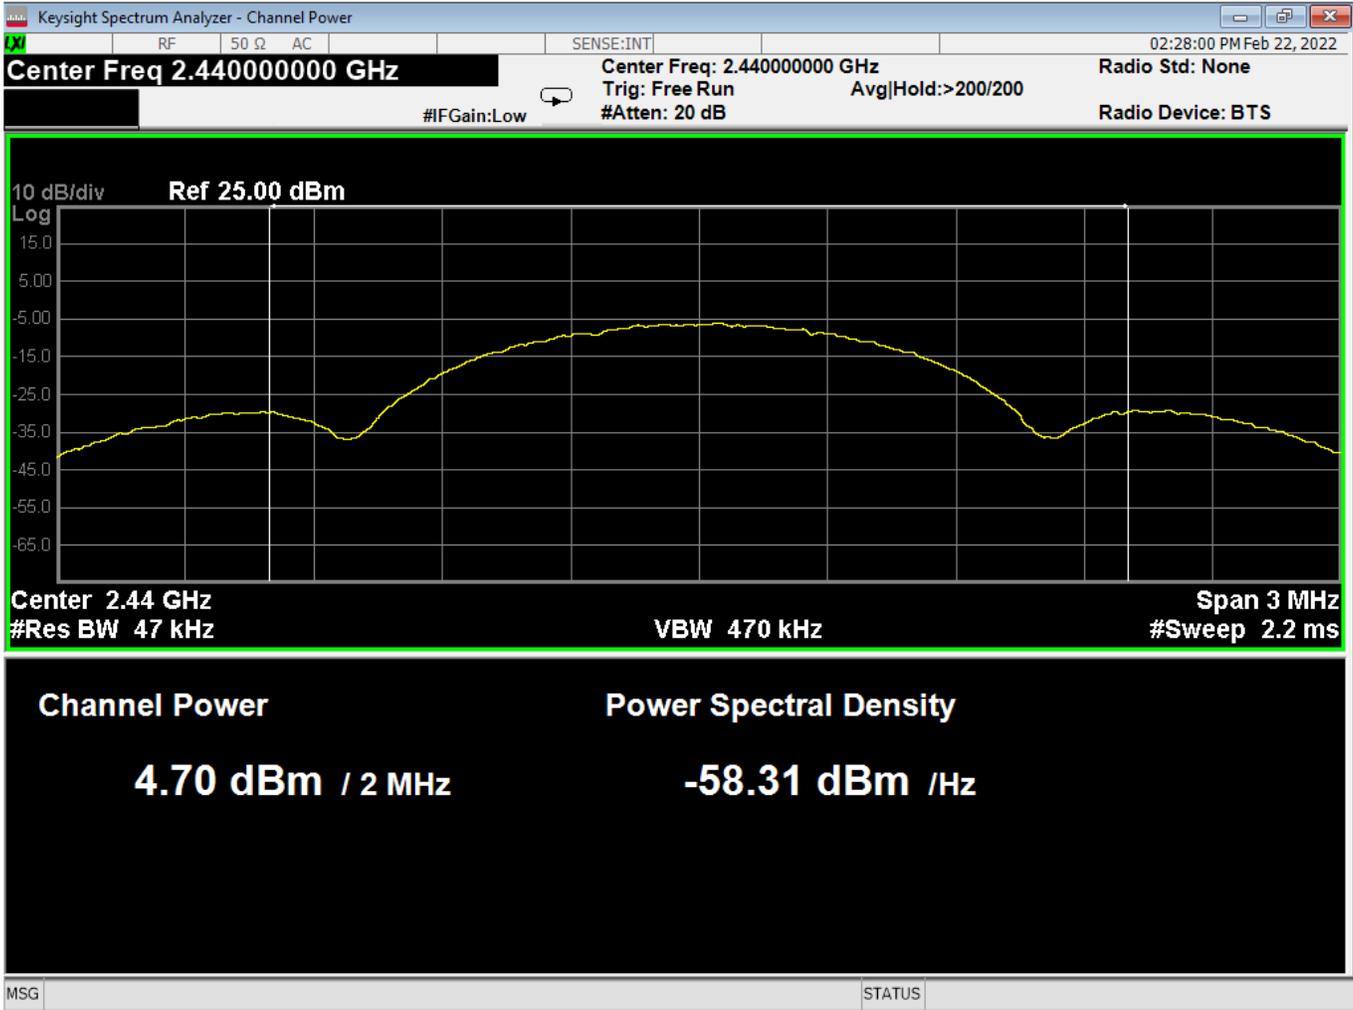

02 Average Output Power, Mid Channel GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

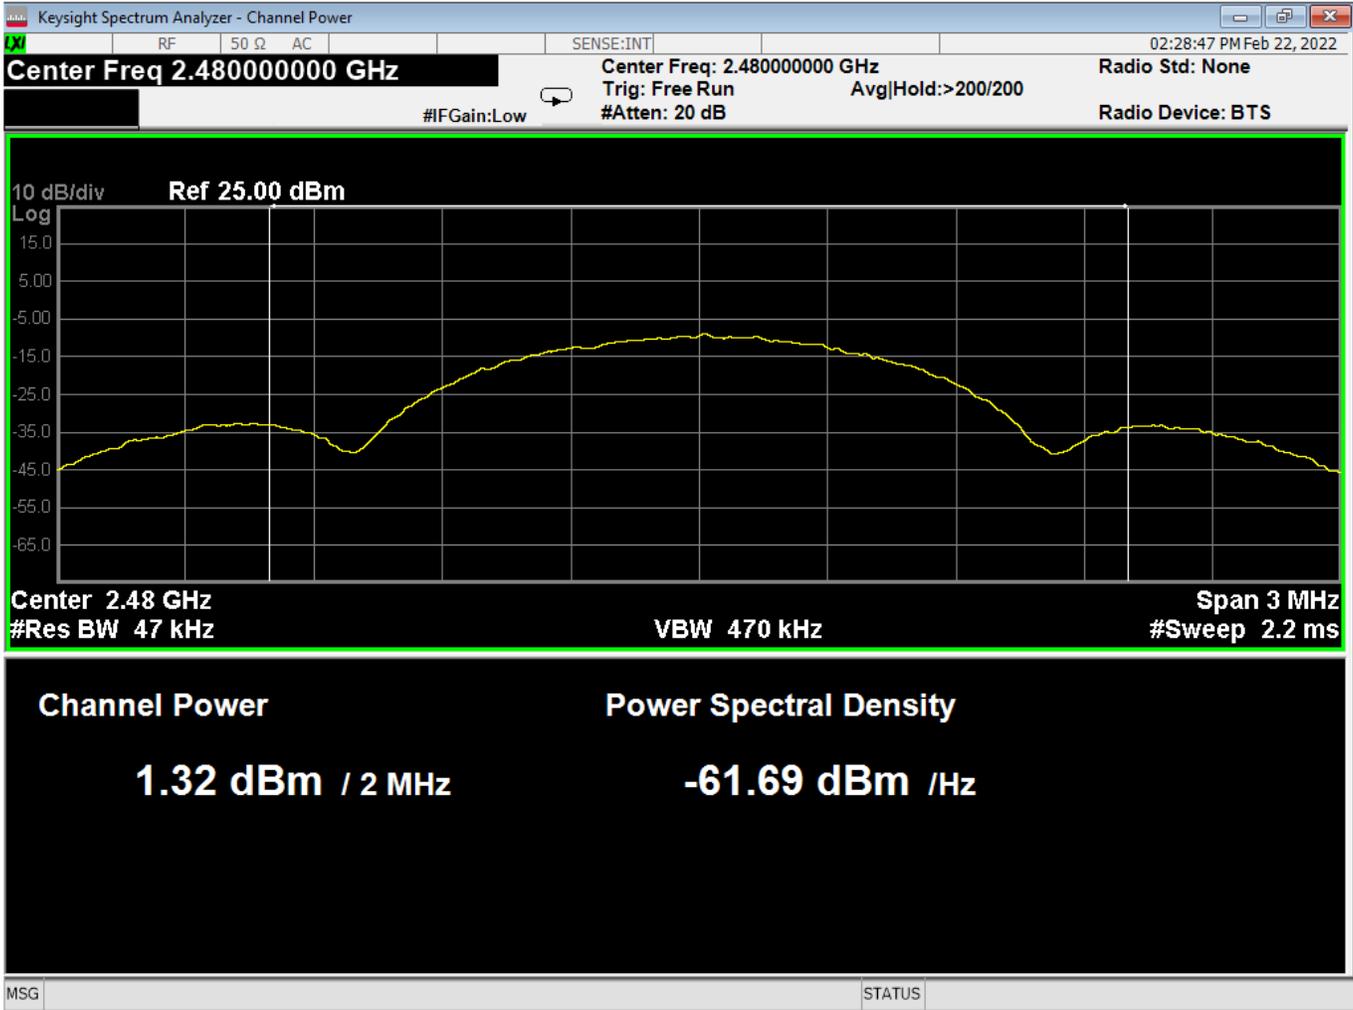

03 Average Output Power, High Channel GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

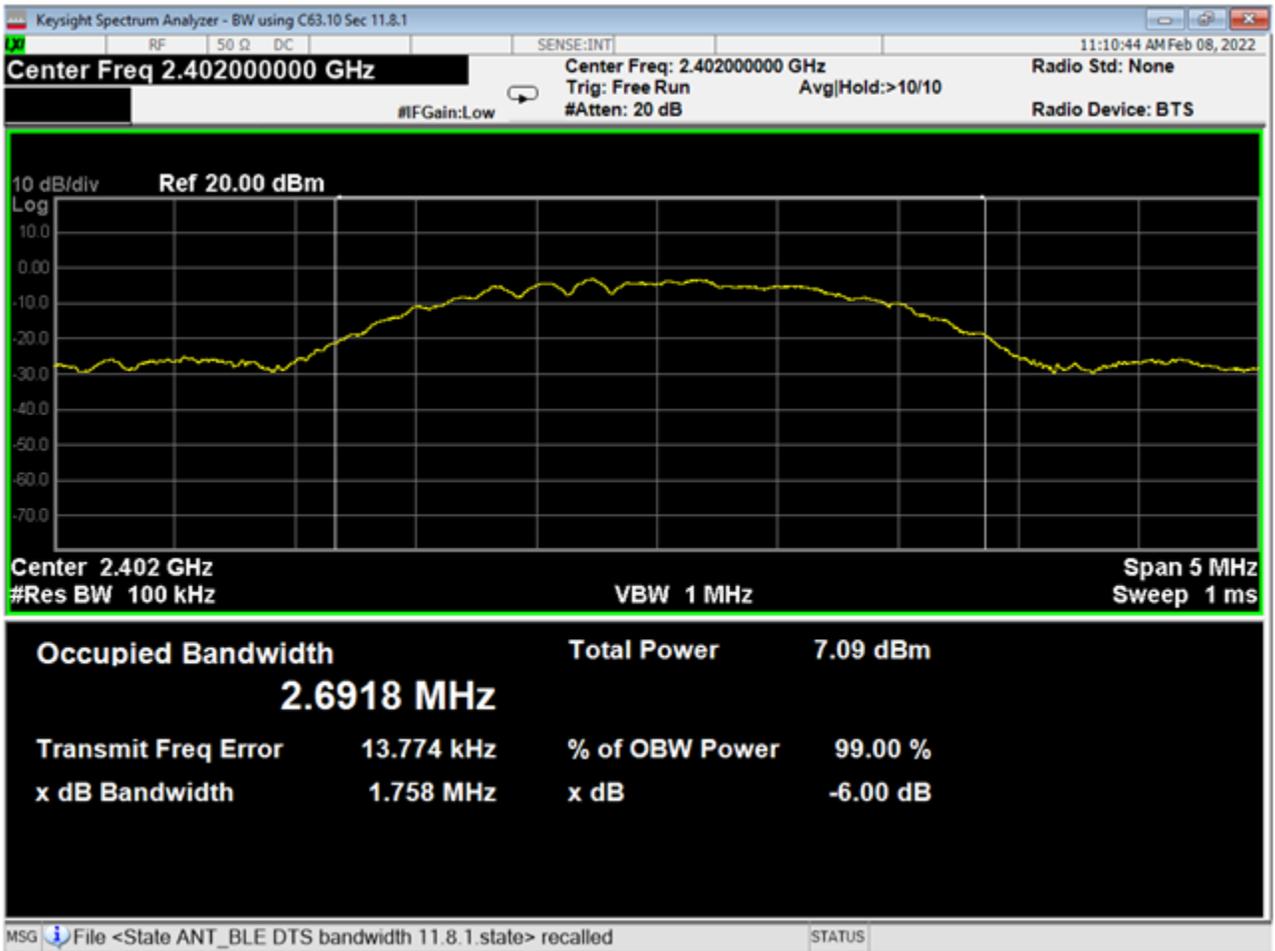

04 Bandwidth, Low Channel GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

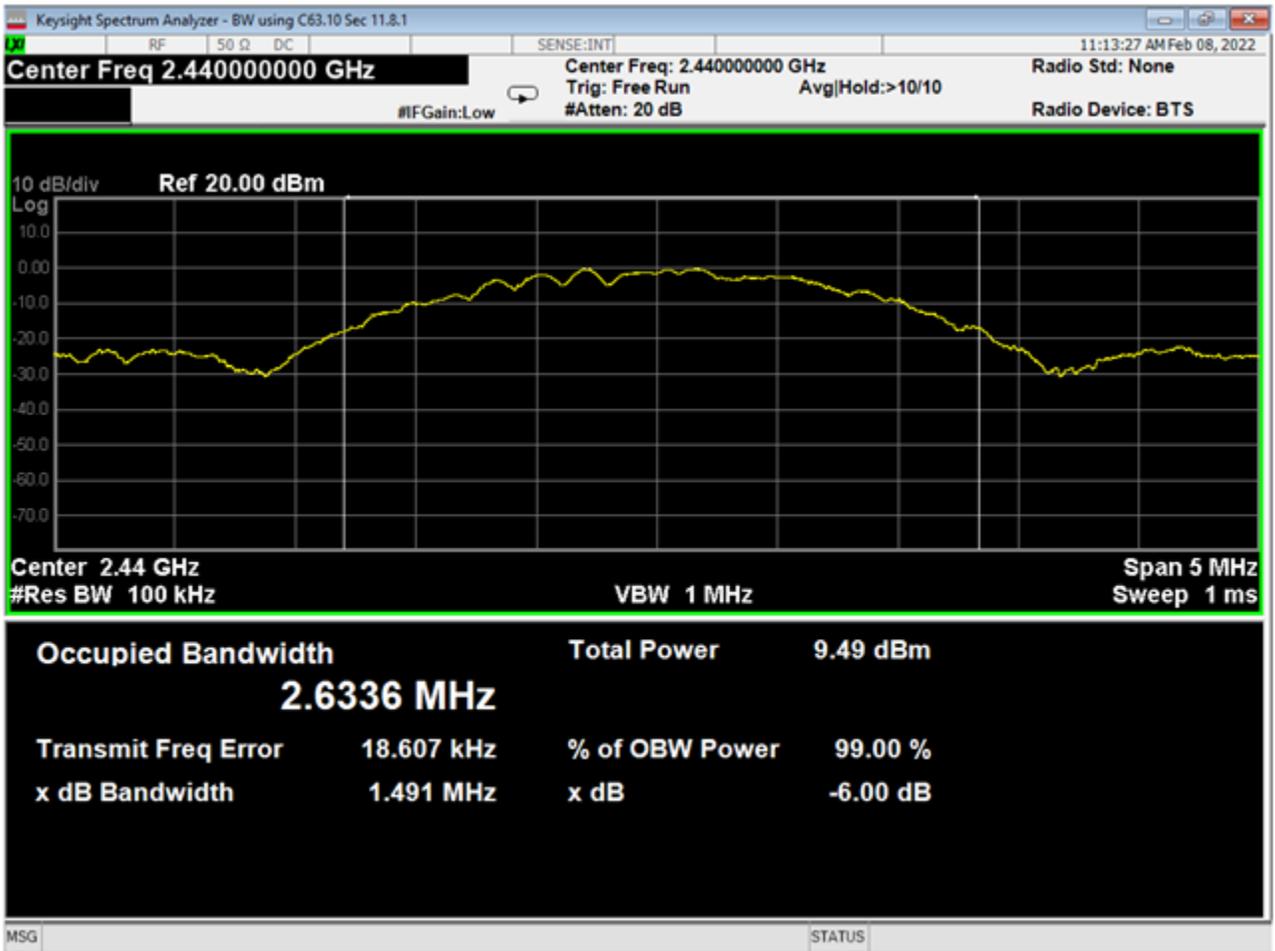


05 Bandwidth, Mid Channel GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

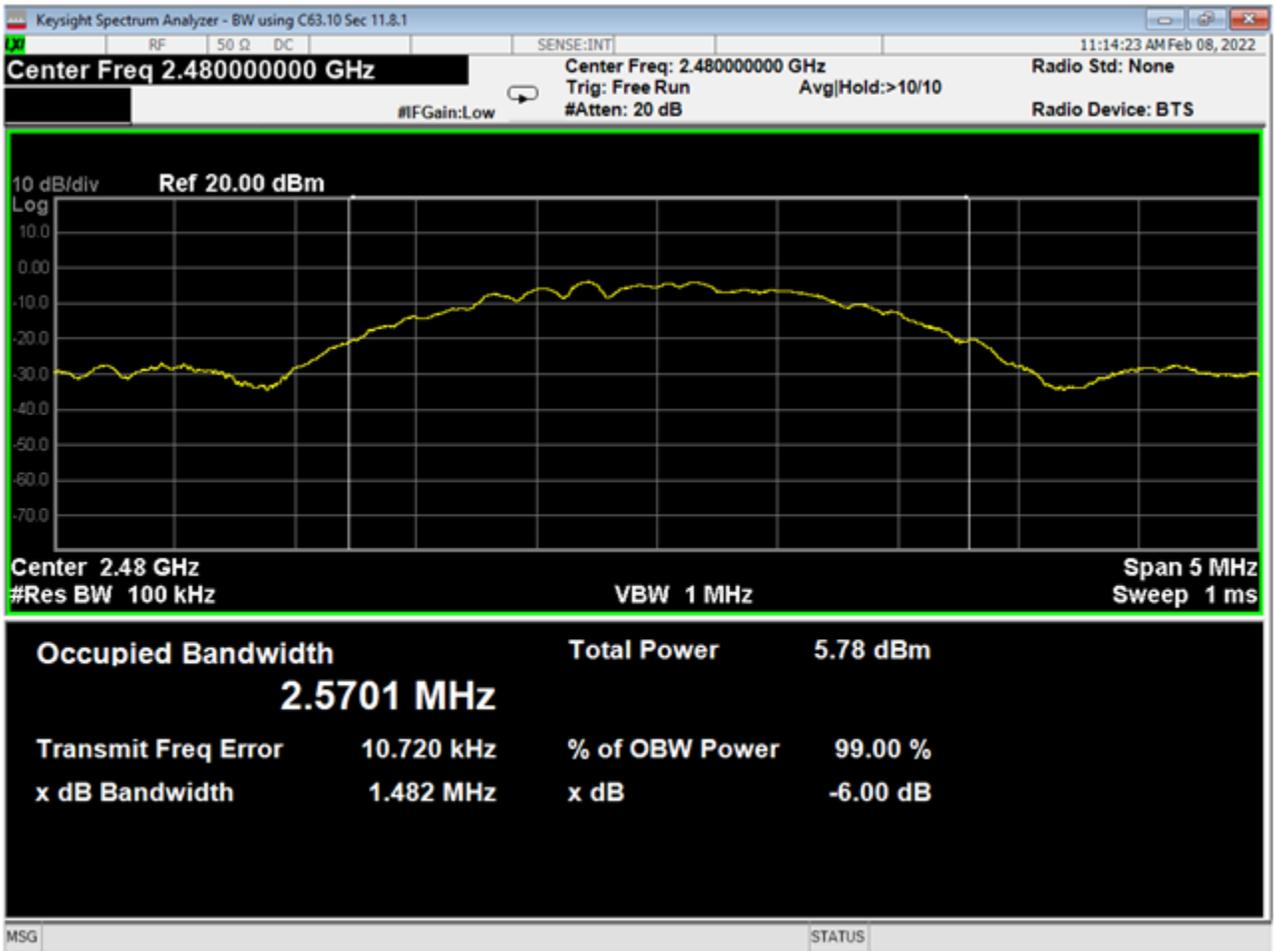


06 Bandwidth, High Channel GMSK 1MB

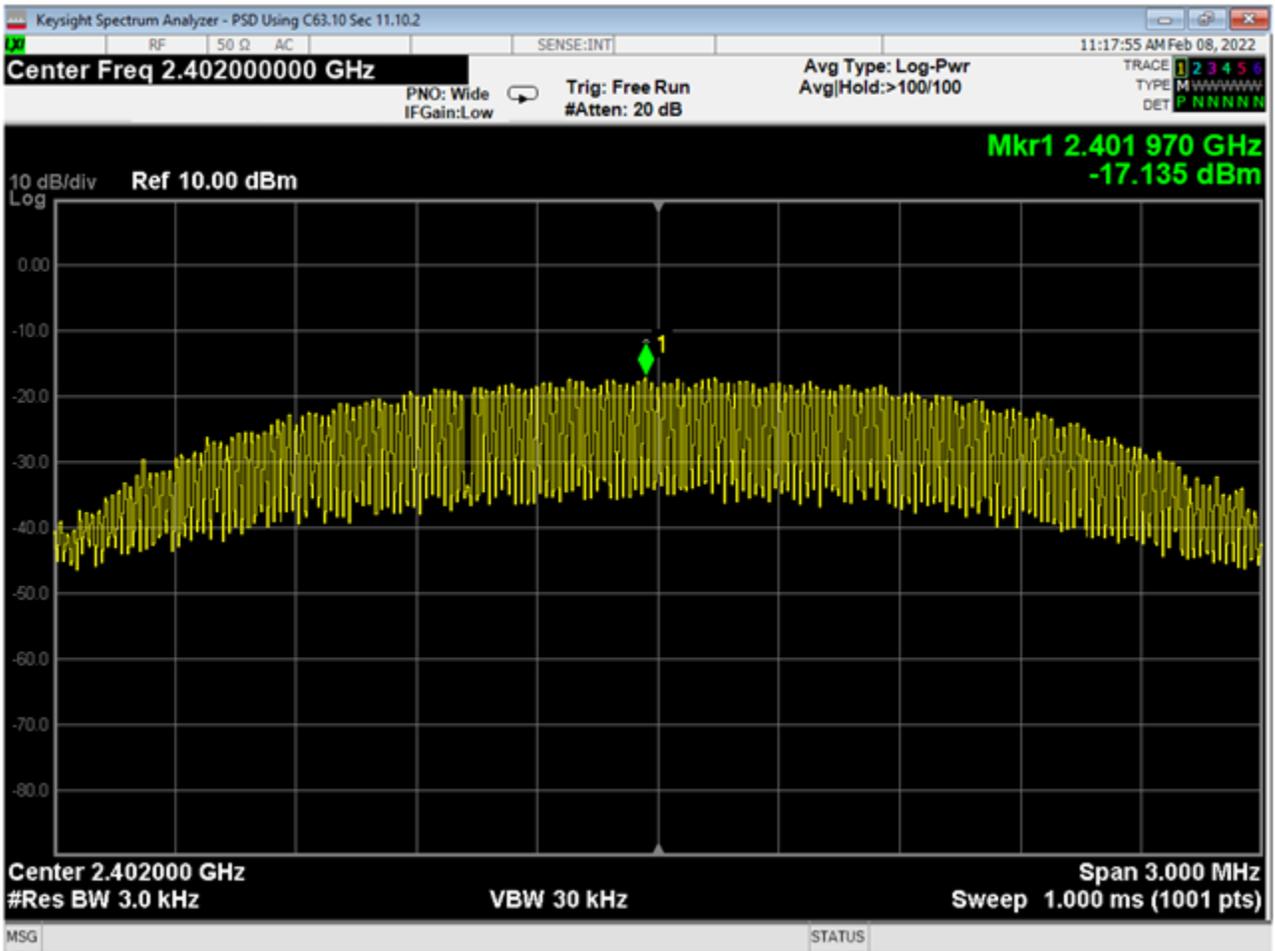

07 PSD, Low Channel GMSK 1MB

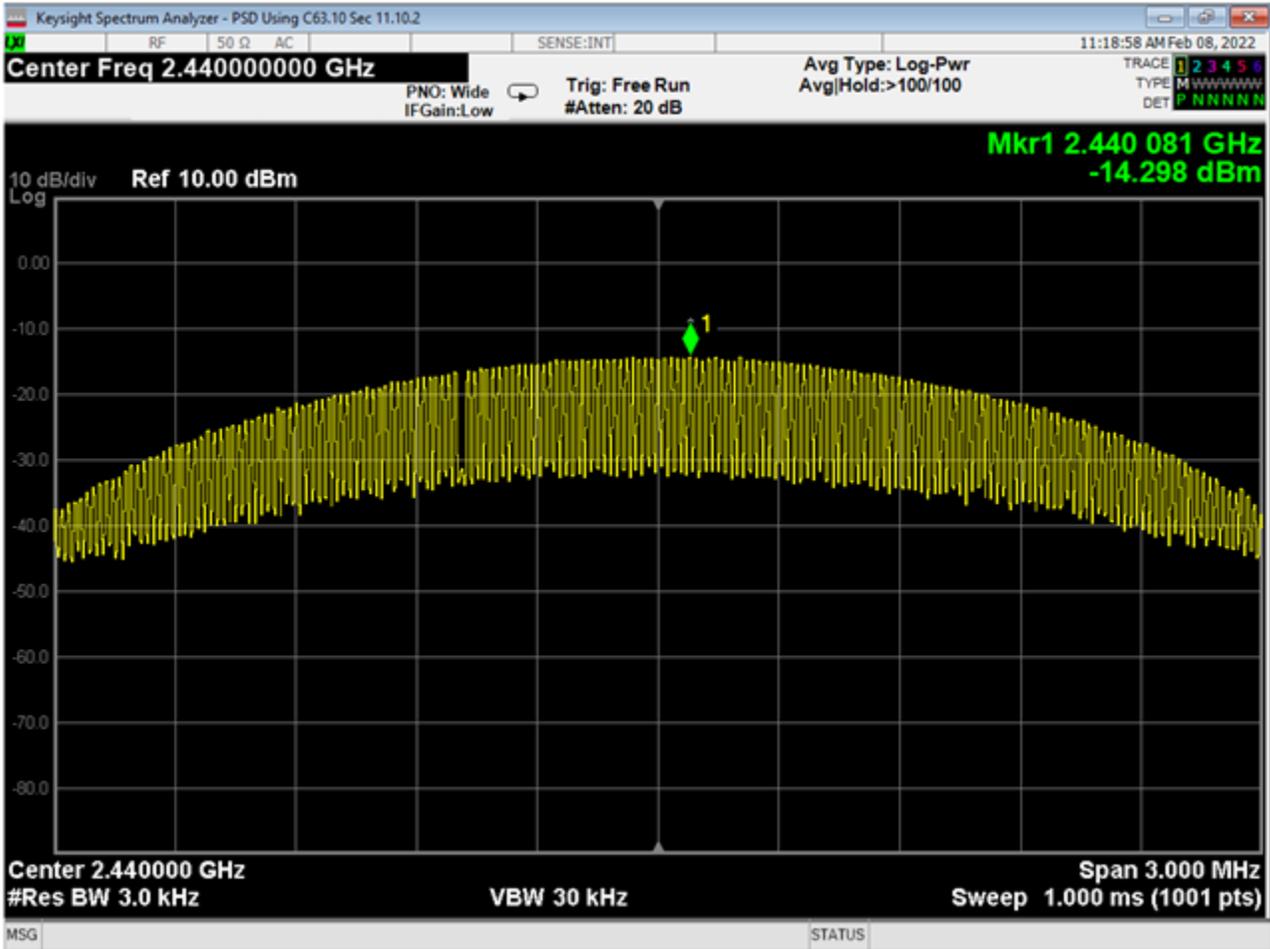


08 PSD, Mid Channel GMSK 1MB

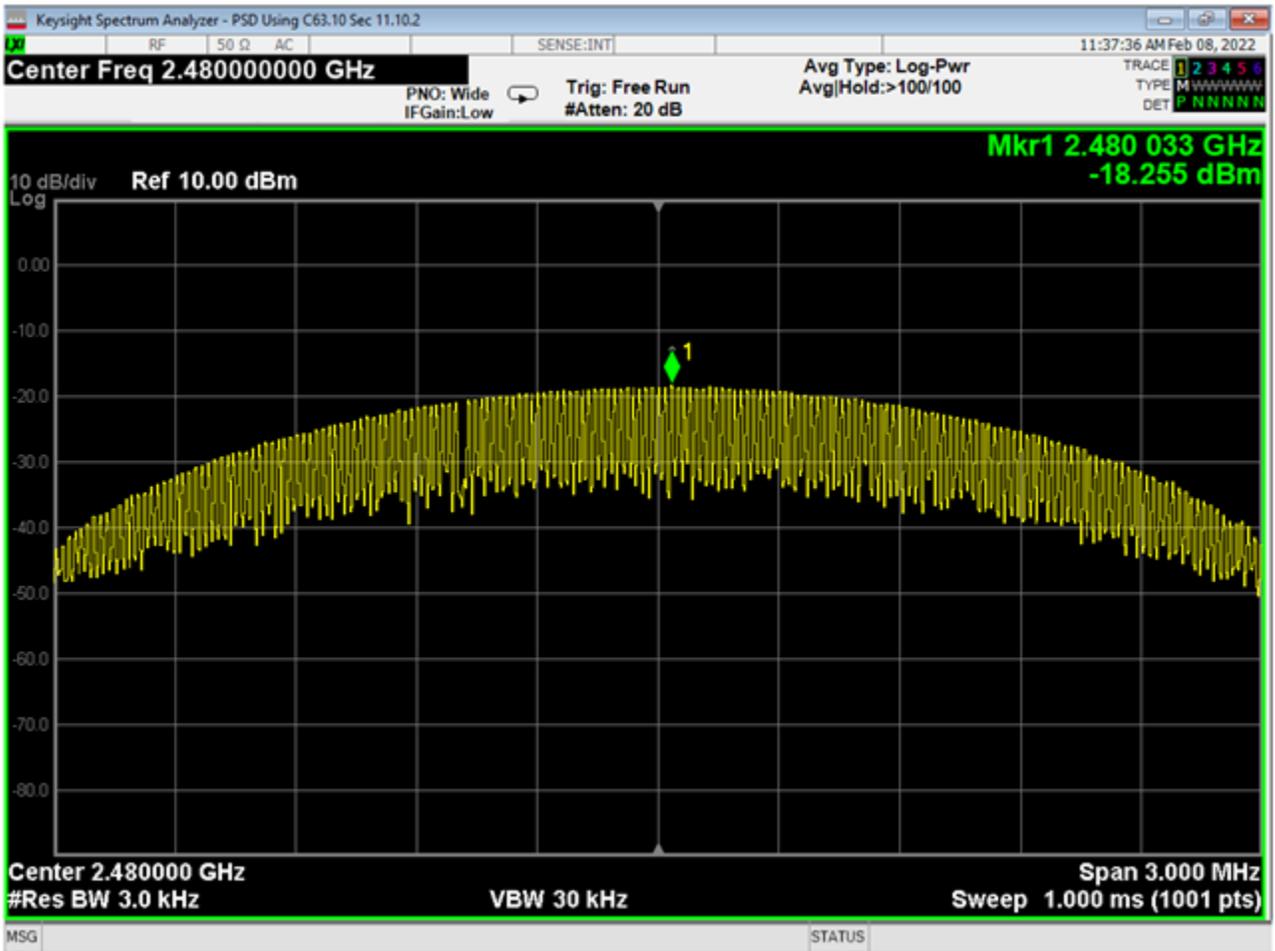

09 PSD, High Channel GMSK 1MB



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

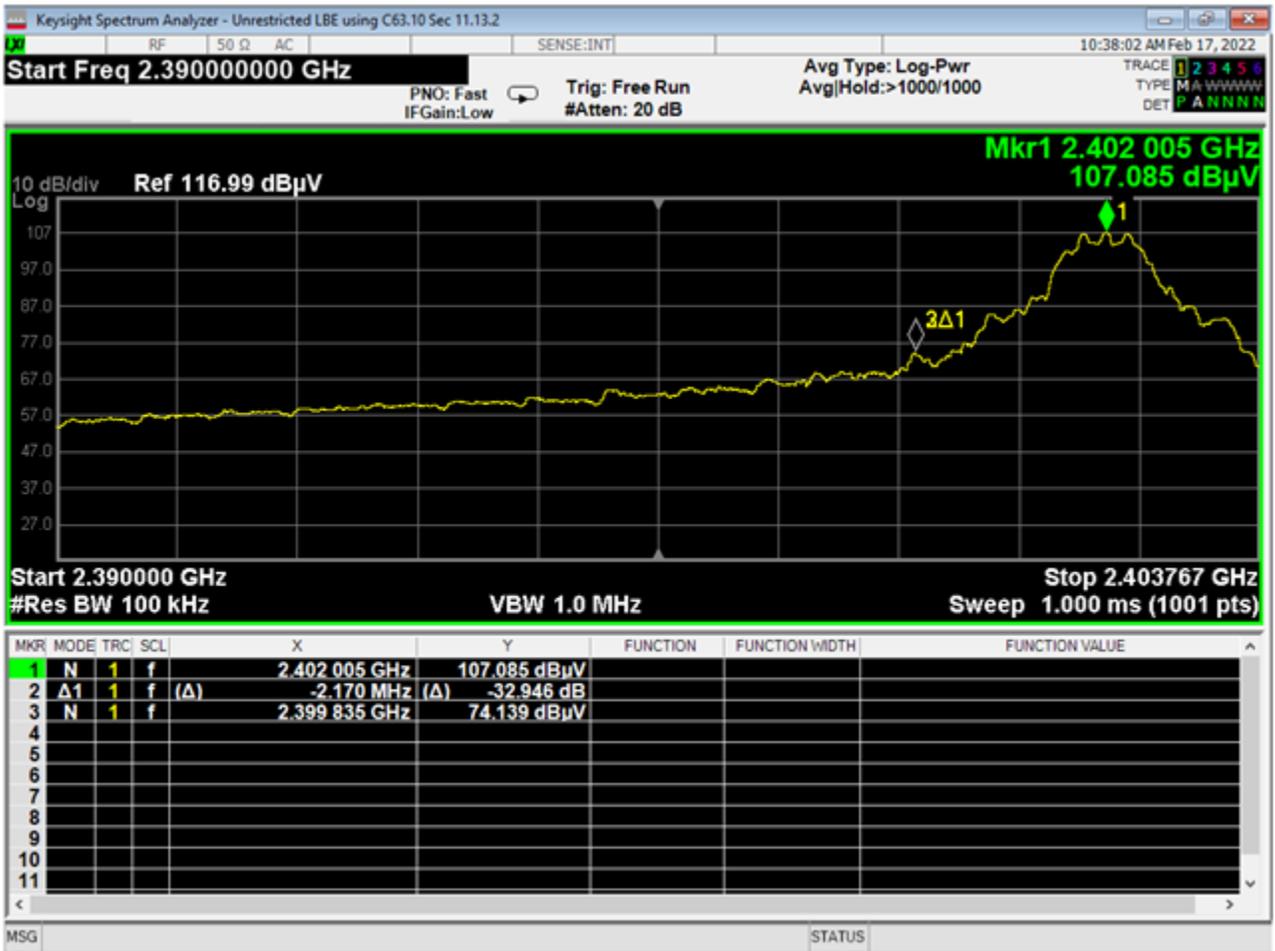


10 LBE, unrestricted GMSK 1MB



11 HBE, unrestricted GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

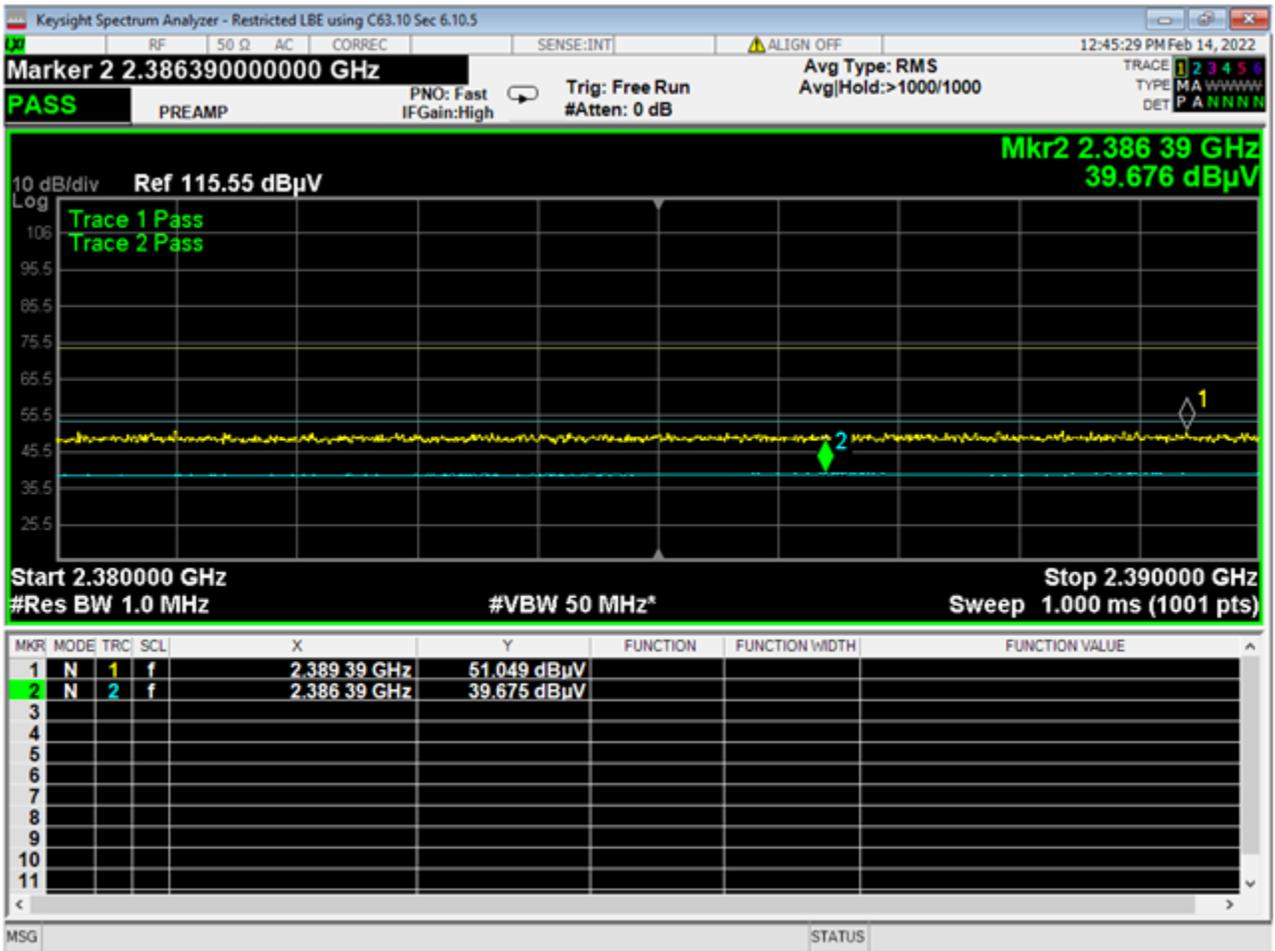

12 LBE, Restricted GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

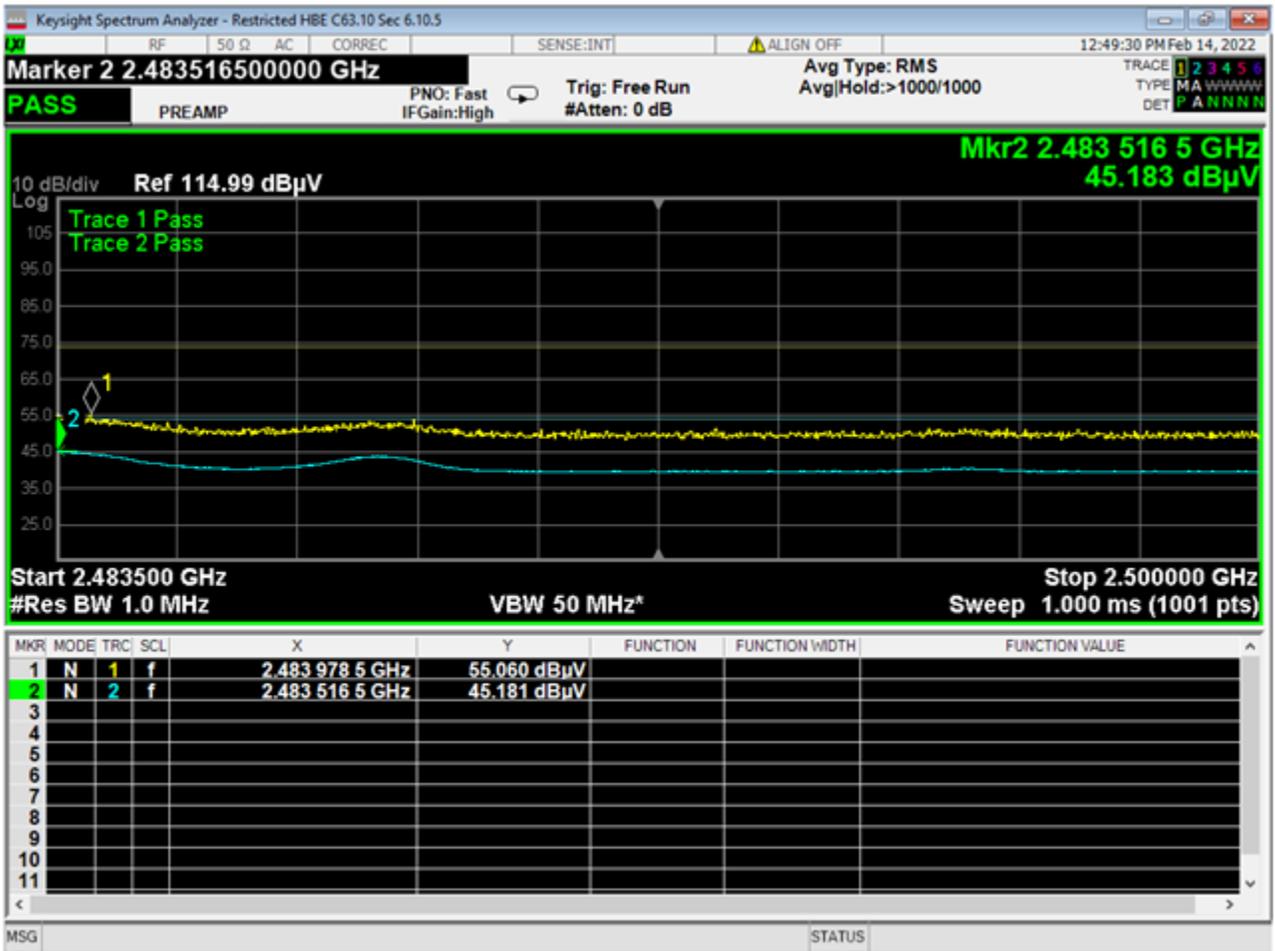

13 HBE, Restricted GMSK 1MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

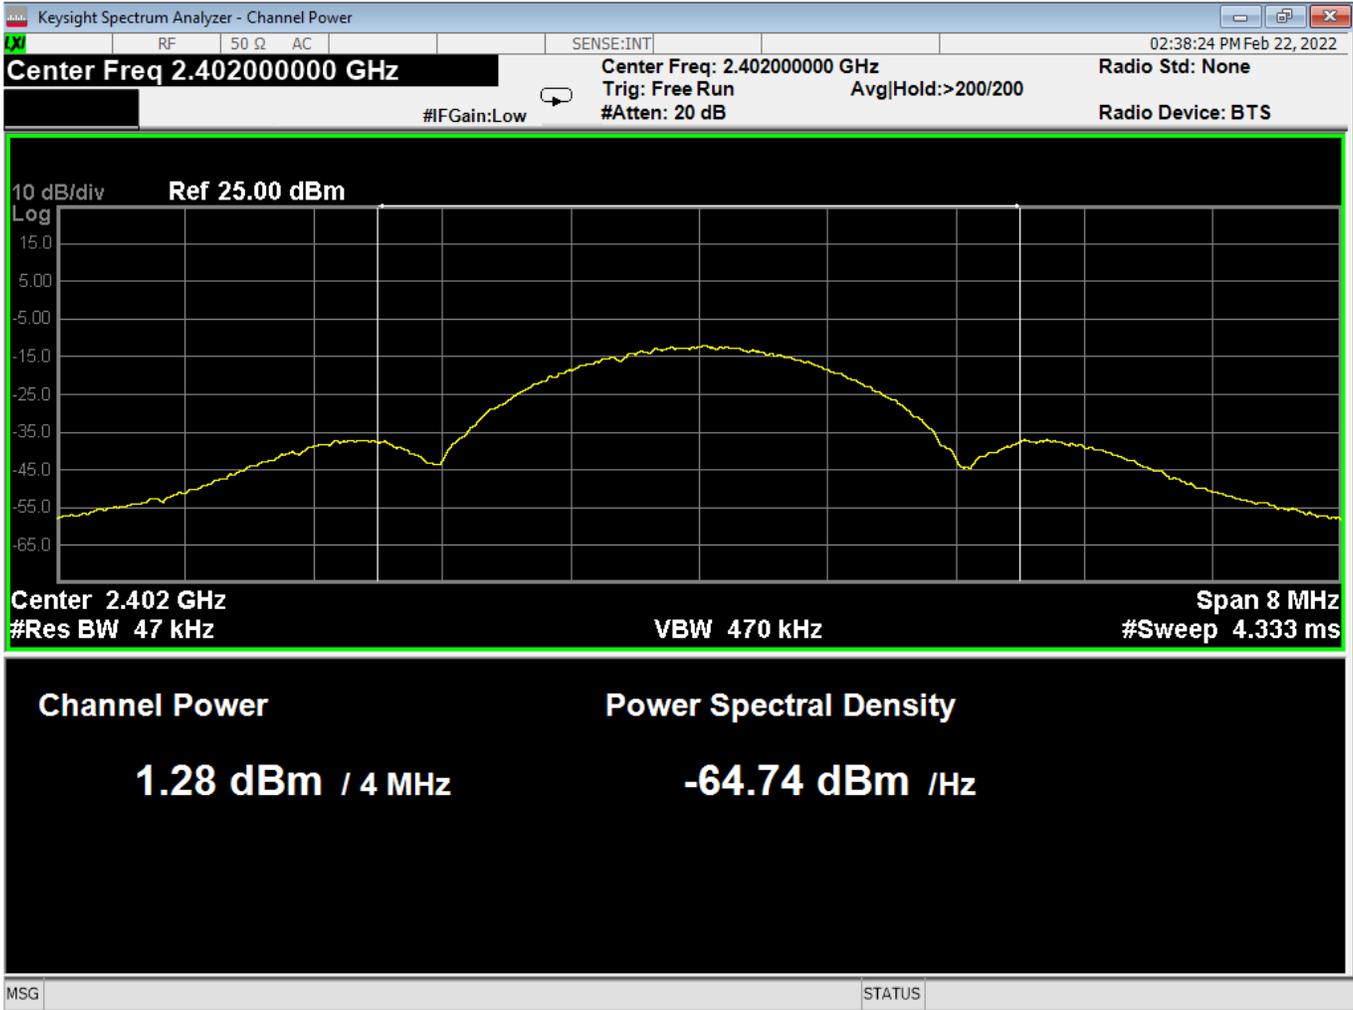

01 Average Power, Low Channel, GMSK 2MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

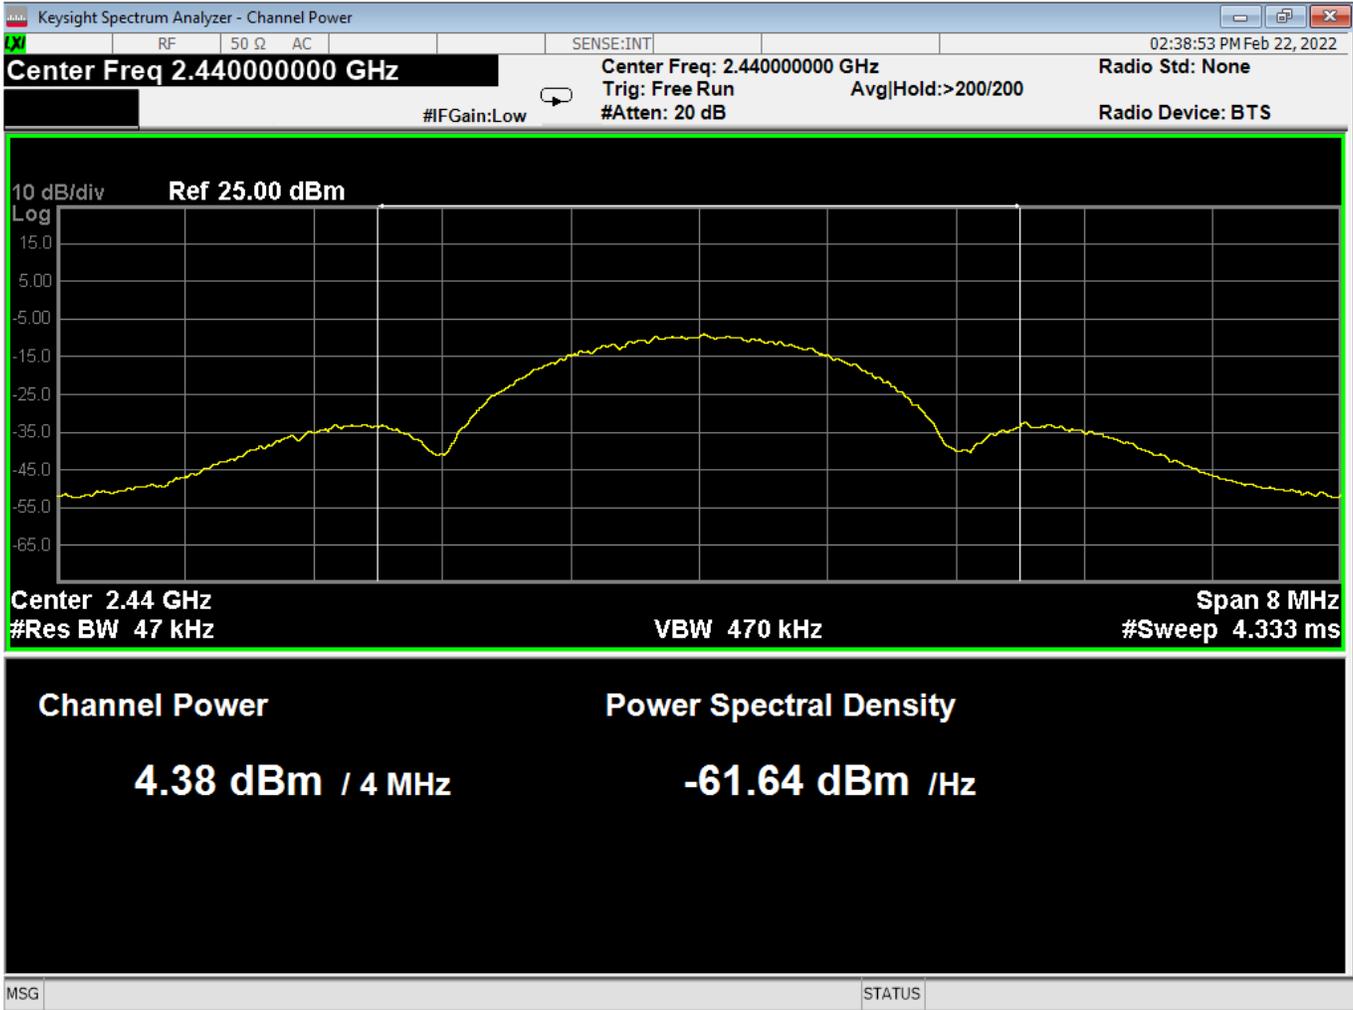


02 Average Power, Mid Channel, GMSK 2MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

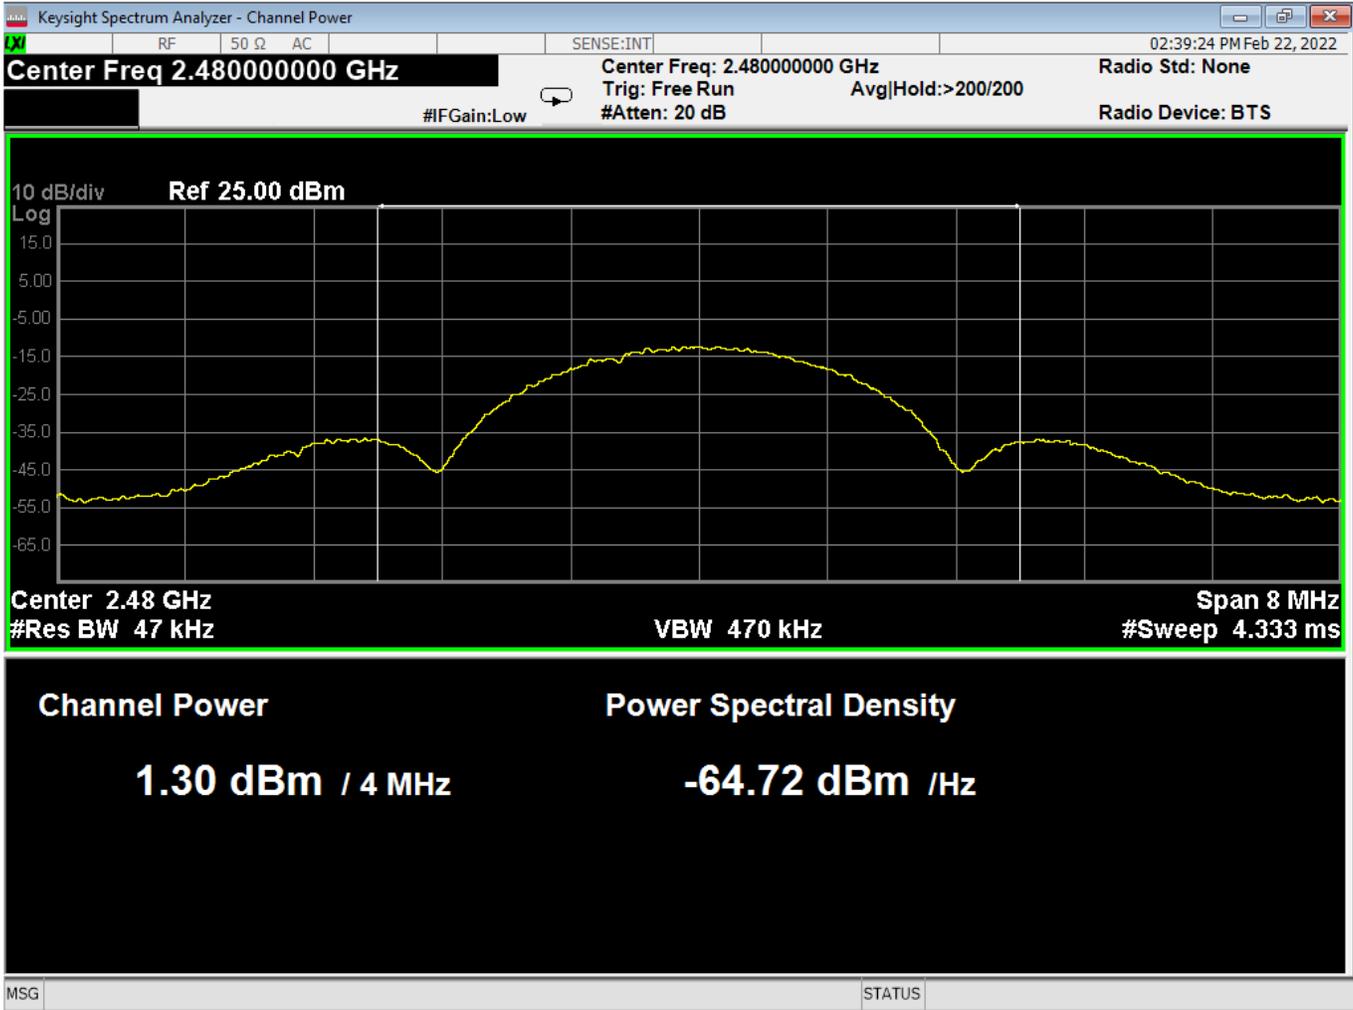

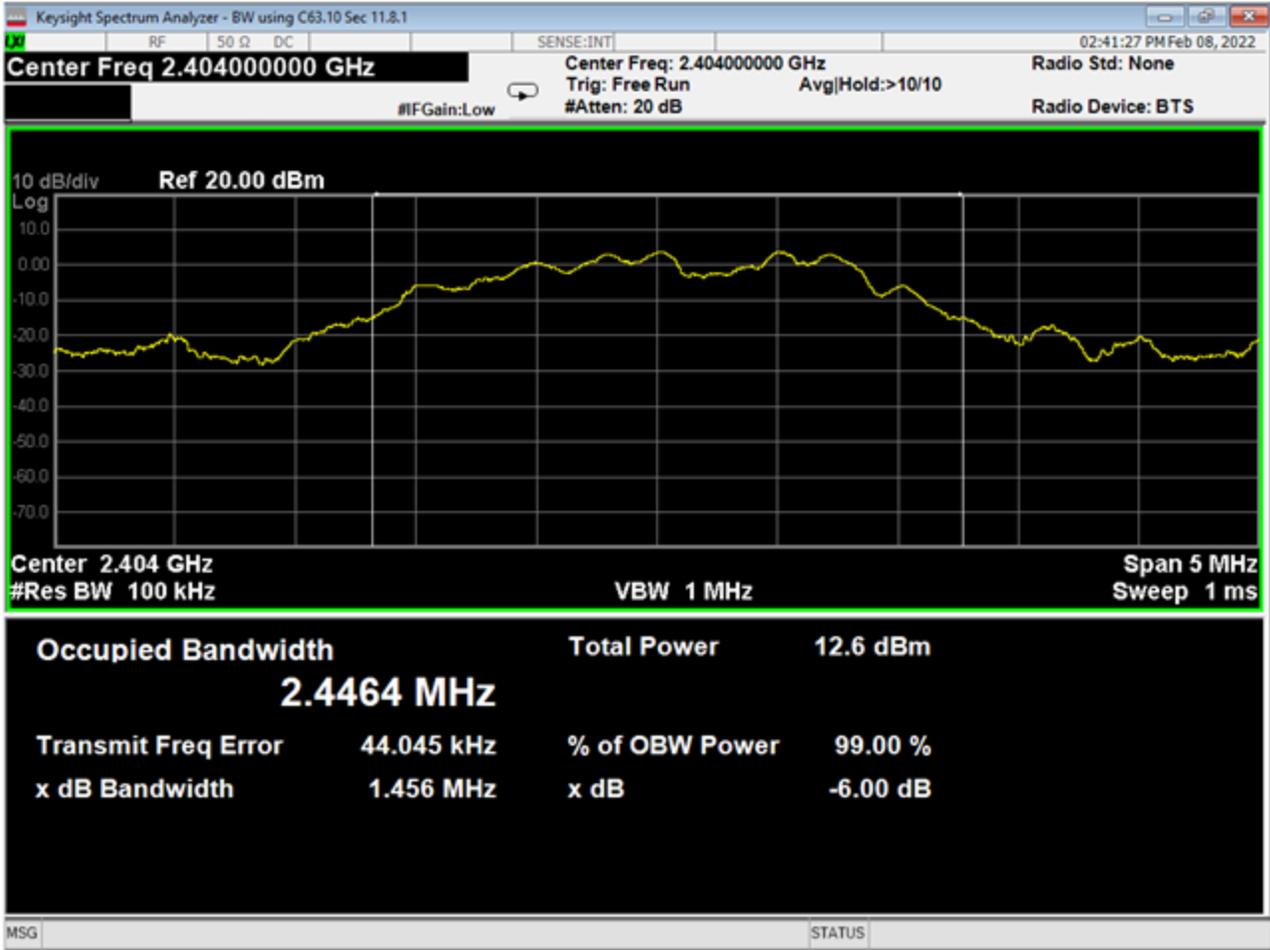03 Average Power, High Channel, GMSK 2MB




04 Bandwidth, Low Channel, GMSK 2MB

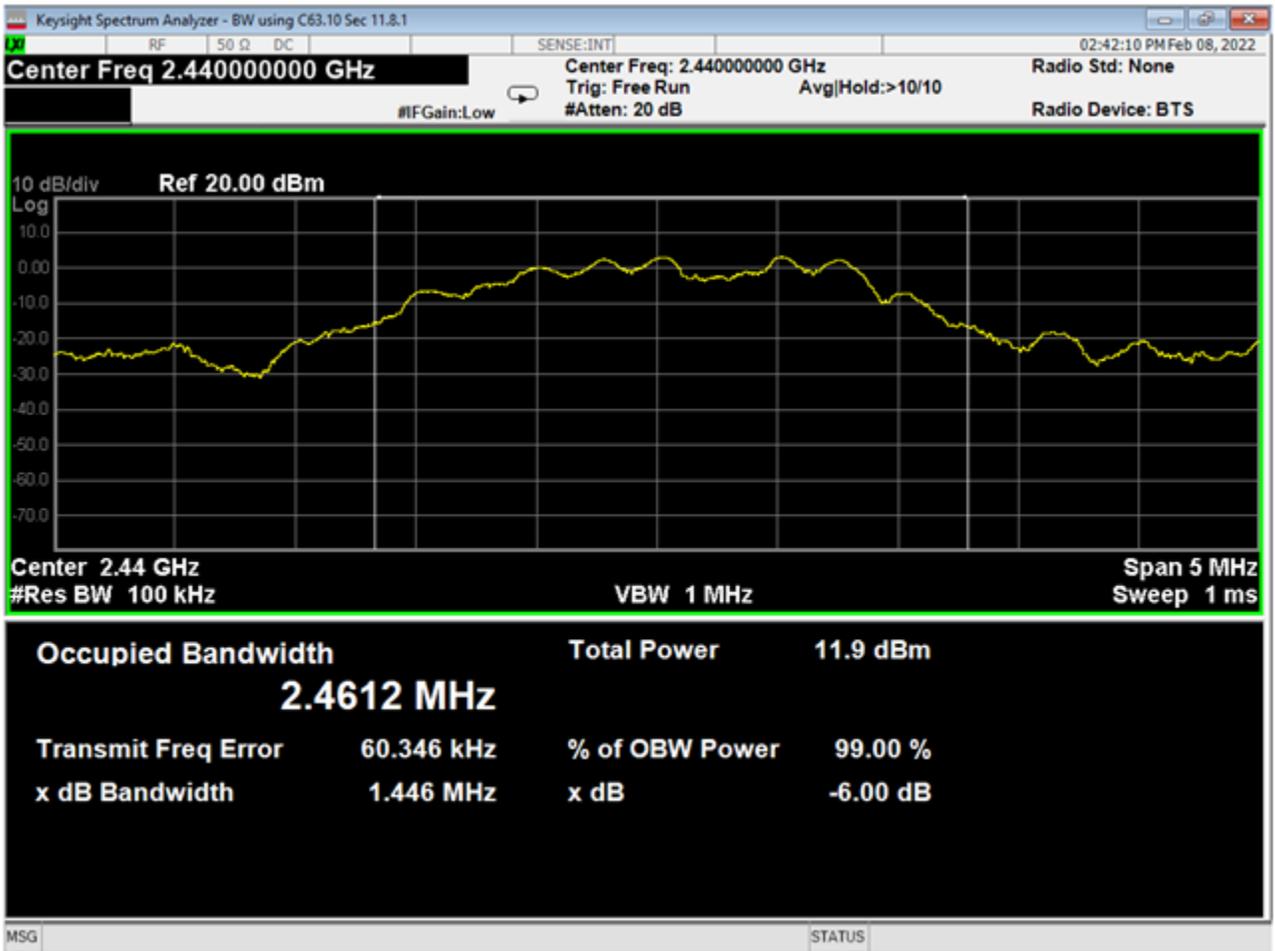


05 Bandwidth, Mid Channel, GMSK 2MB



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

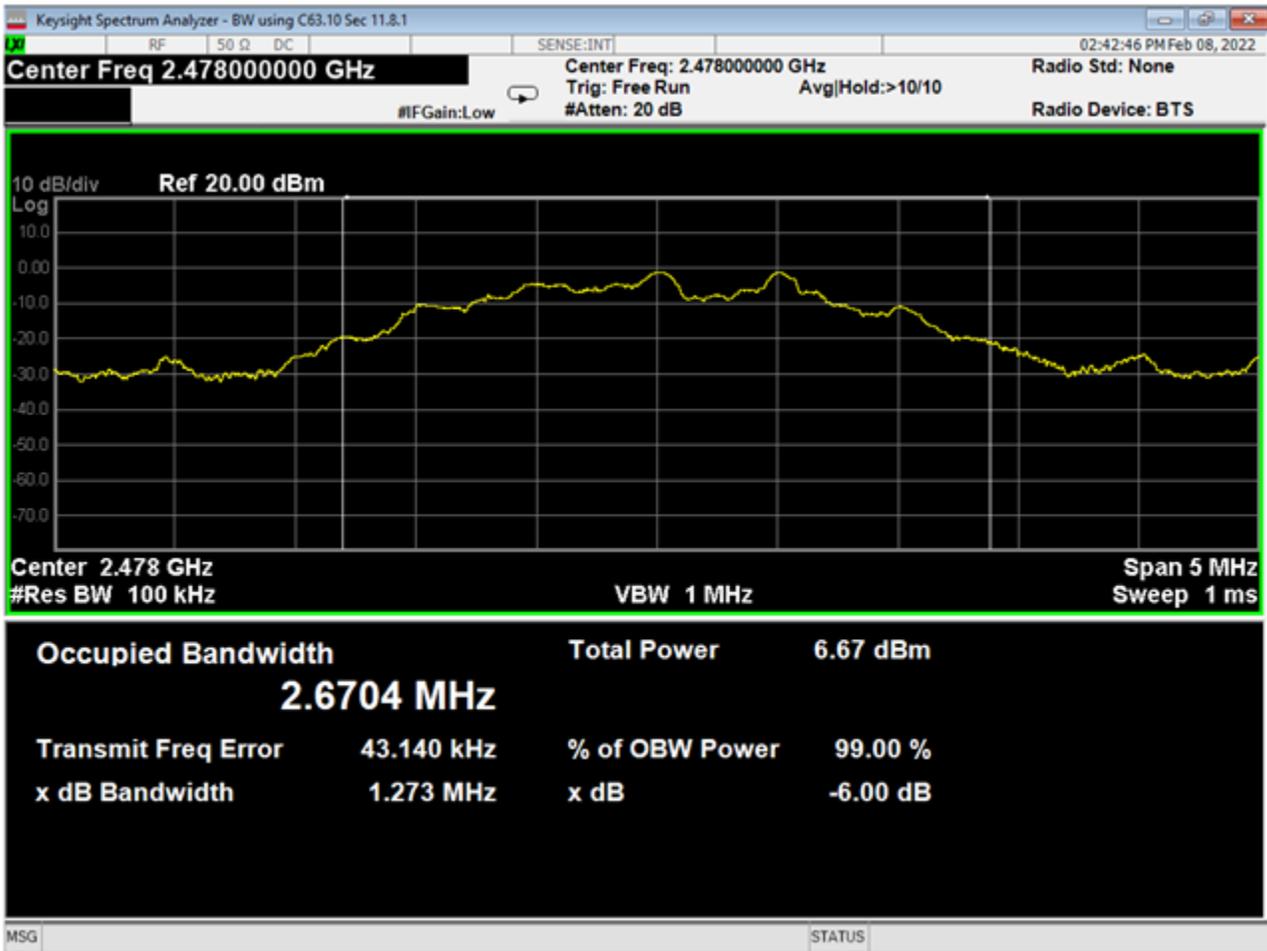


06 Bandwidth, High Channel, GMSK 2MB

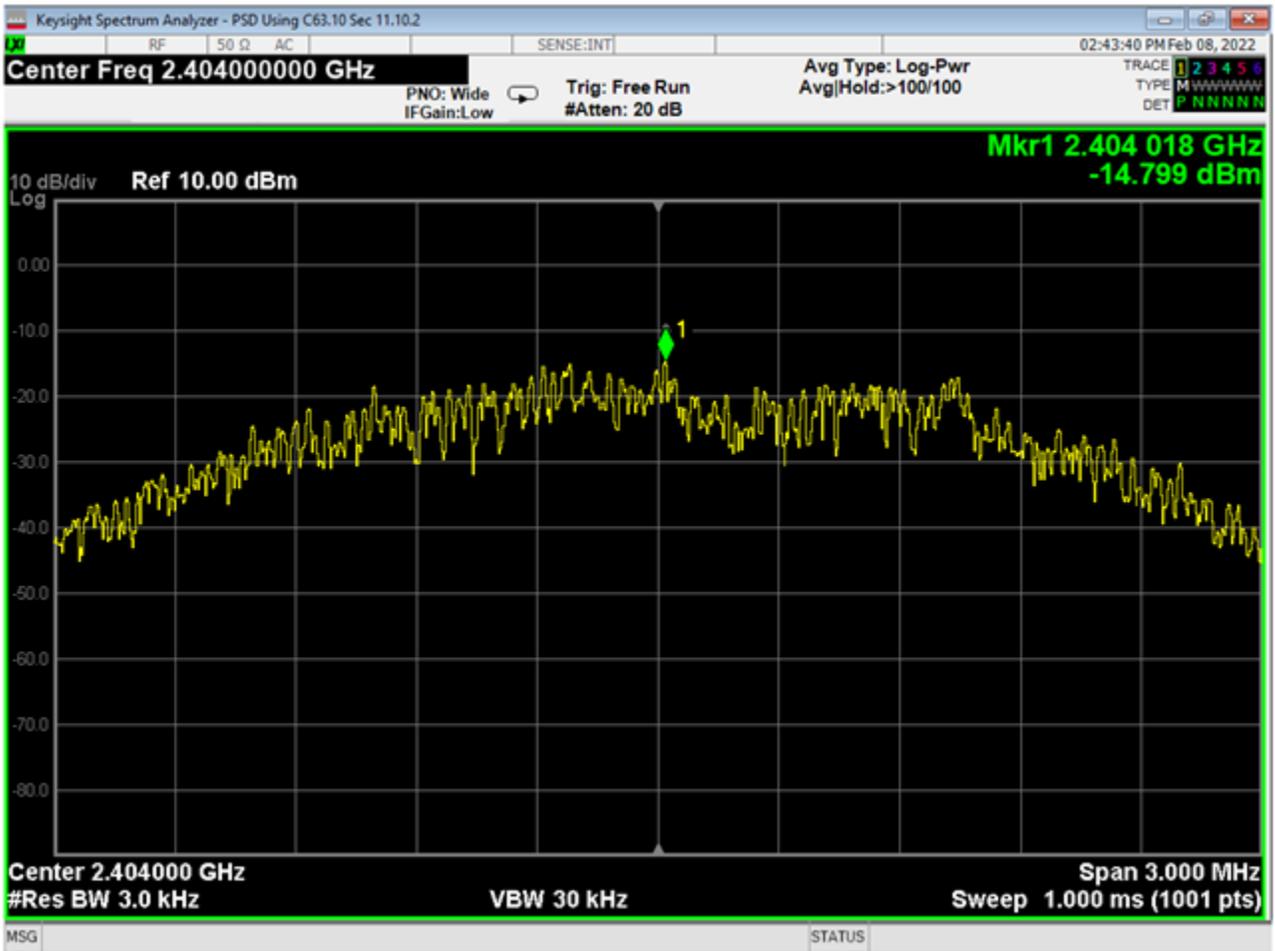


07 PSD, Low Channel, GMSK 2MB



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

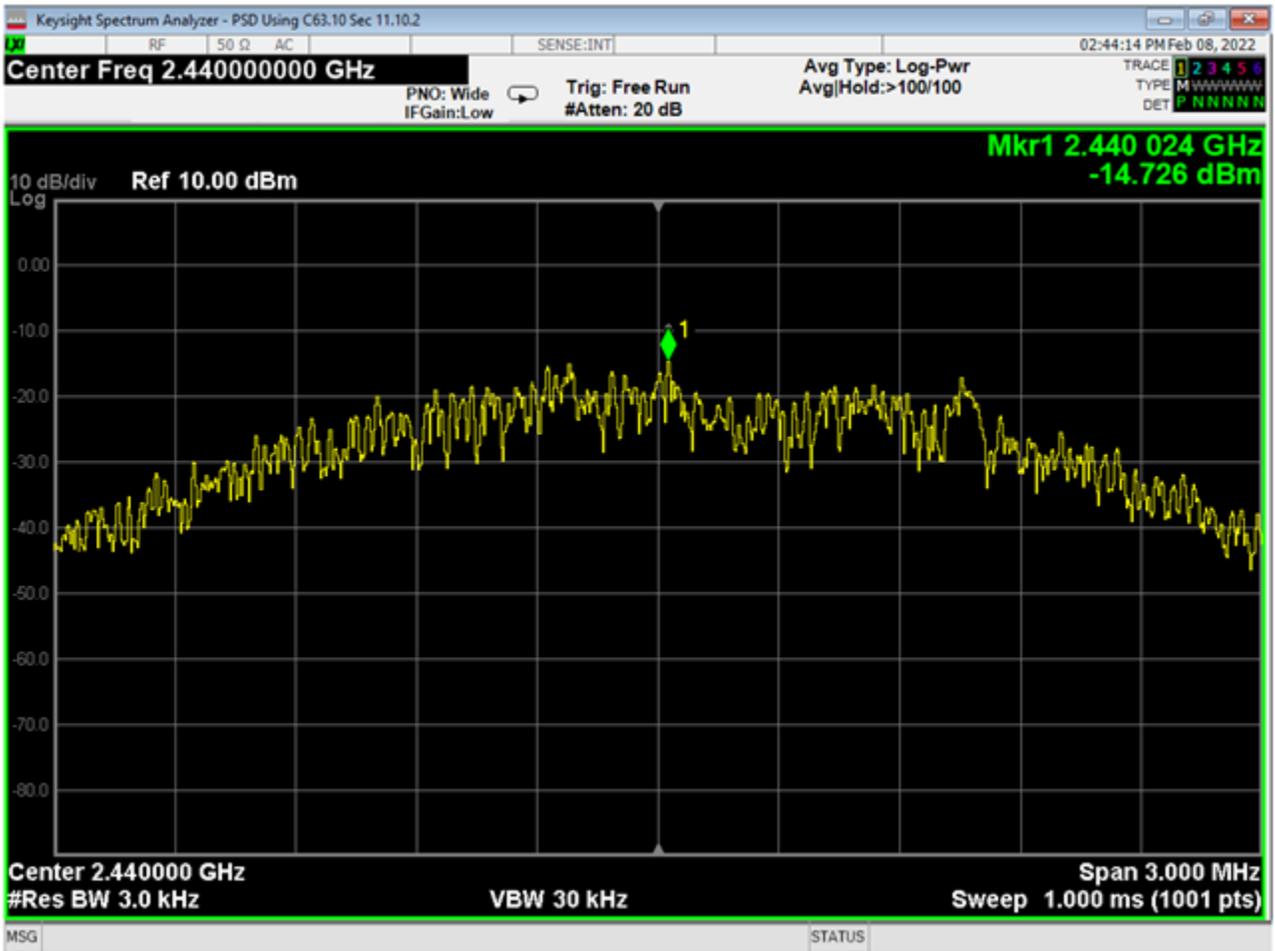


08 PSD, Mid Channel, GMSK 2MB

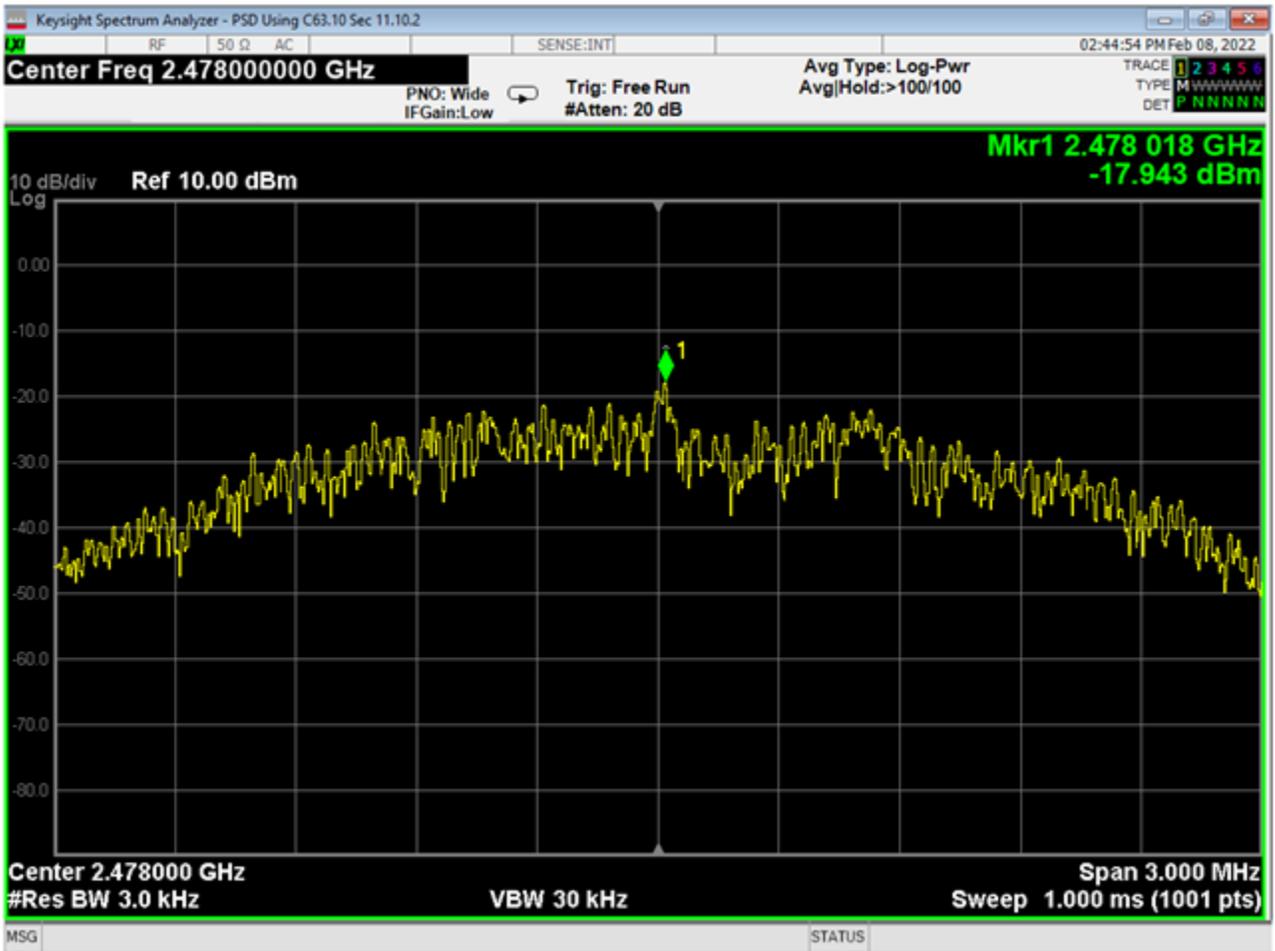

09 PSD, High Channel, GMSK 2MB




Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

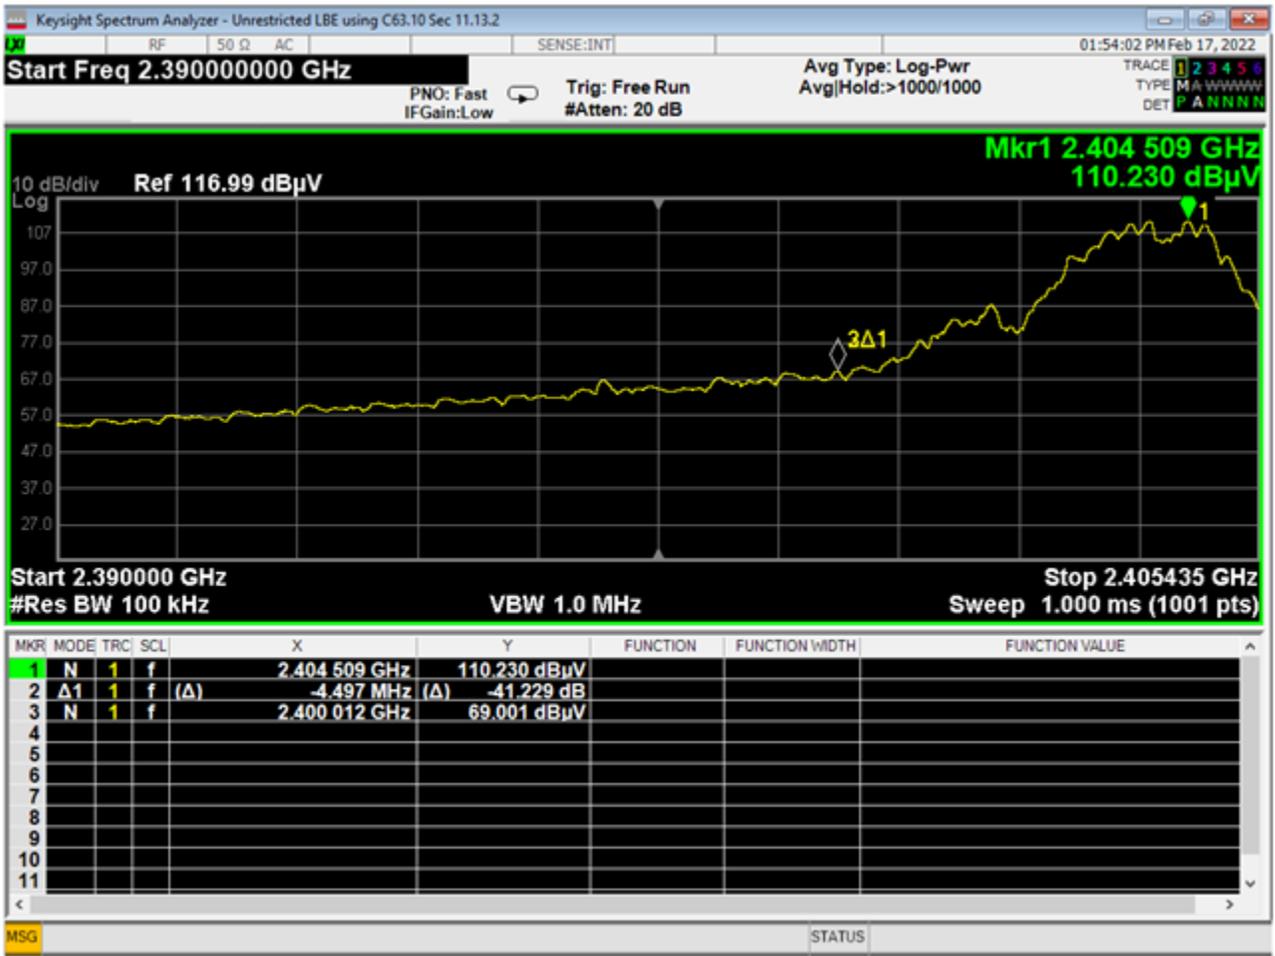


10 Lower Bandedge, Unrestricted, GMSK 2MB



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

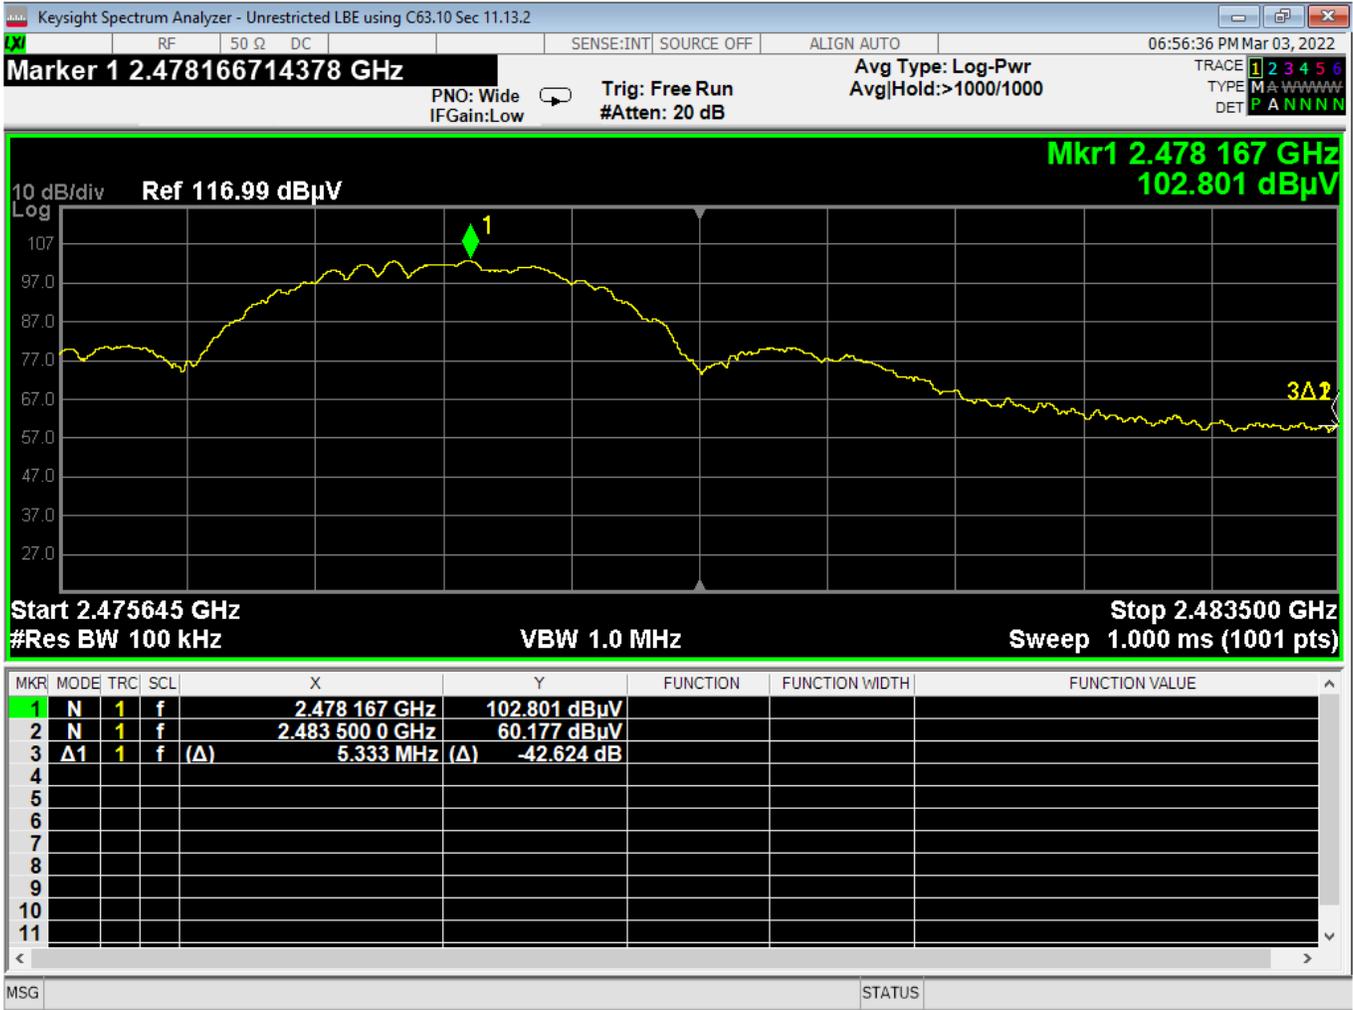

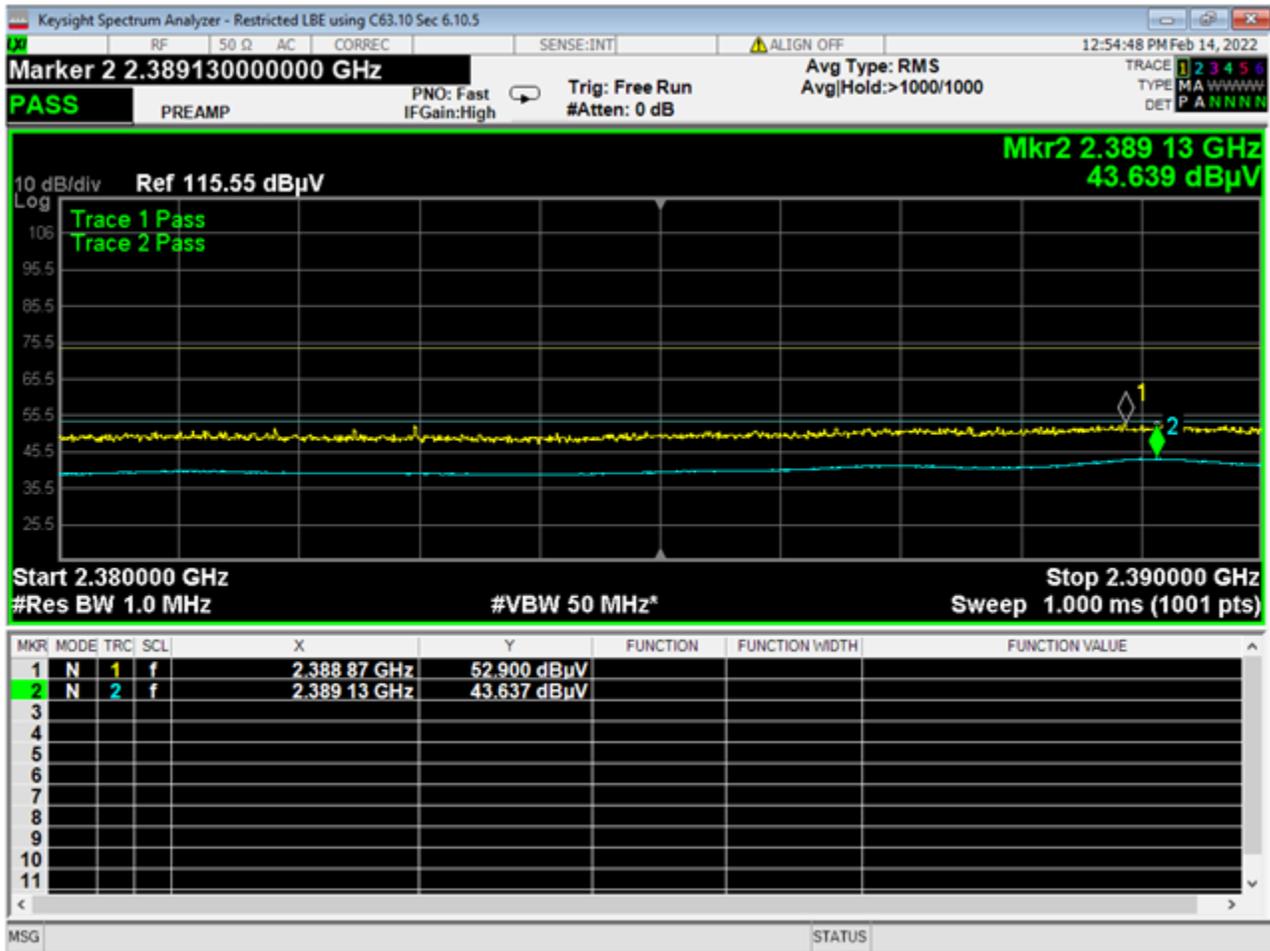
11 Higher Bandedge, Unrestricted, GMSK 2MB



12 Lower Bandedge, Restricted, GMSK 2MB



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

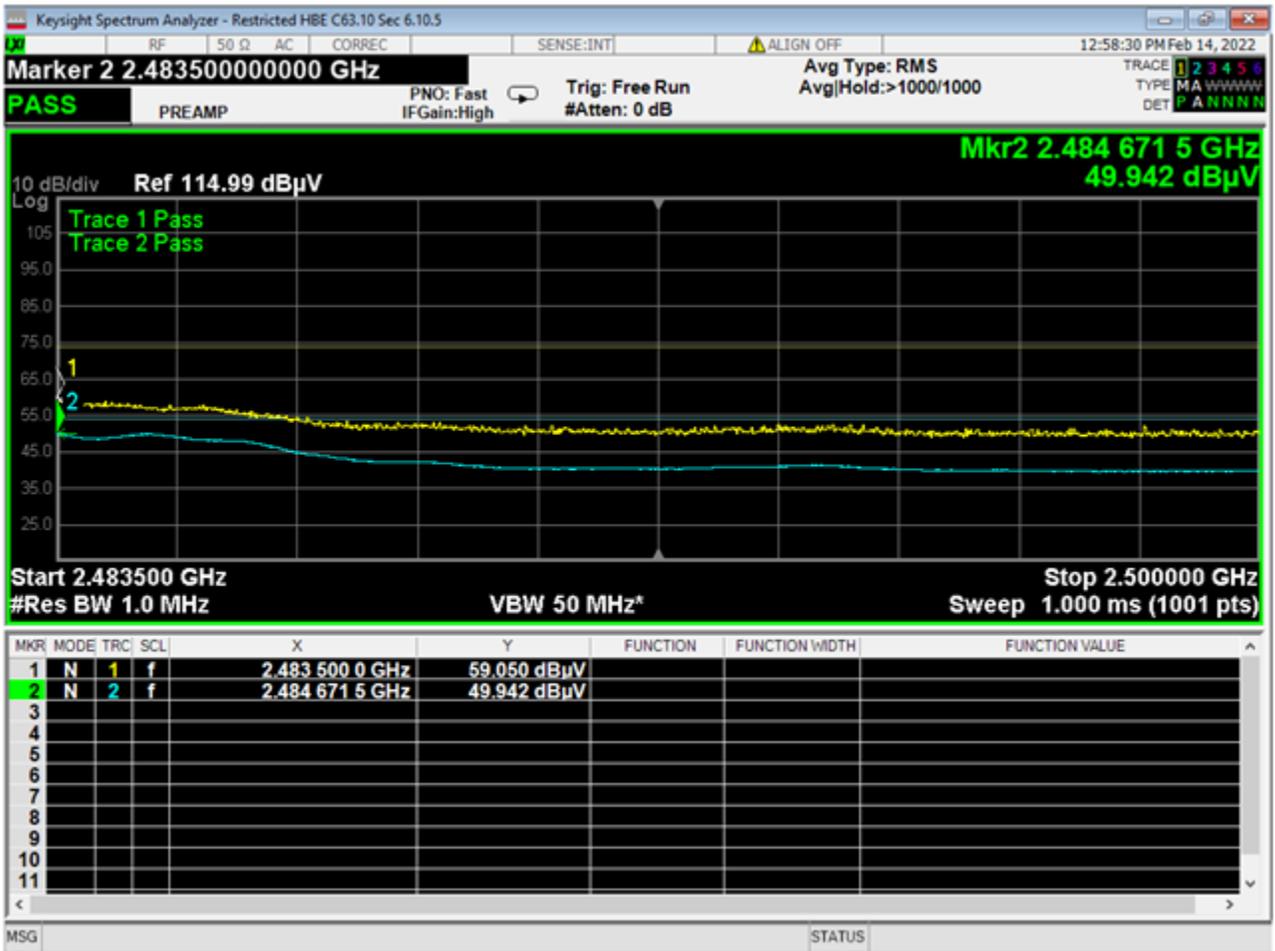

13 Higher Bandedge, Restricted, GMSK 2MB



Report Number:	R20211005-21-E6A	Rev	A
Prepared for:	Garmin International, Inc.		

REPORT END


FCC/ISED Test Report

Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: AA4308

Test Report No: R20211006-20-E7A

Approved by: 
Fox Lane
EMC Test Engineer,

DATE: May 13, 2022

Total Pages: 51

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	3 March 2022	Original – KVepuri Prepared by FLane and SProbst
A	12 May 2022	Added DCCF to tabular data Added comment to section 4.5 Corrected tabular data to match plots



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page	2
1.0 Summary of test results	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description	6
3.2 Test personnel	6
3.3 Test equipment	7
3.4 General Test Procedure and Setup for Radio Measuremnts	8
4.0 Results	9
4.1 Output Power	11
4.2 Bandwidth	12
4.3 Duty Cycle	13
4.4 Radiated emissions	14
4.5 Conducted Spurious Emissions	19
4.6 Band edges	23
4.7 Conducted AC Mains Emissions	25
Appendix A: Sample Calculation	30
Appendix B – Measurement Uncertainty	32
Appendix C – Graphs and Tables	33
REPORT END	51



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(1) RSS-247 Issue 2 Section 5.1(b)	Peak output power	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.1 (b)	Bandwidth	Pass
FCC Part 15.247(a)(1)(iii) RSS-247 Issue 2 Section 5.1(d)	Frequency Hopping System	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	AA4308
EUT Received	6 December 2021
EUT Tested	8 December 2021- 2 March 2022
Serial No.	3392435192 (Radiated Measurements) 3392435208(Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input checked="" type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

For BTBR Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521
 A2LA Certificate Number: 1953.01
 FCC Accredited Test Site Designation No: US1060
 Industry Canada Test Site Registration No: 4294A-1
 NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of 35 ± 4%
 Temperature of 22 ± 3° Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing and Report
2	Karthik Vepuri	Test Engineer	Review/Editing and Report
3	Blake Winter	Test Engineer	Testing
4	Grace Larsen	Test Technician	Testing and report
5	Samuel Probst	Test Technician	Testing
6	Matthew Emory	Test Technician	Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 21, 2021	July 21, 2023
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	May 5, 2020	May 5, 2022
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A091418	July 27, 2021	July 27, 2022
EMCO Horn Antenna	3115	6416	July 28, 2021	July 28, 2022
EMCO Horn Antenna	3116	2576	March 9, 2020	March 9, 2022
Com-Power LISN 50μH / 250μH - 50Ω	LI-220C	20070017	September 22, 2020	September 22, 2022
8447F POT H64 Preampfier*	8447F POT H64	3113AD4667	February 1, 2021	February 1, 2023
Rohde & Schwarz Preampfier*	TS-PR18	3545700803	April 14, 2020	April 14, 2022
Trilithic High Pass Filter*	6HC330	23042	April 14, 2020	April 14, 2022
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	October 25, 2019	October 25, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preampfier to antenna)*	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)**	PE9128	NCEE BH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)**	PE9128	NCEE BH2	September 24, 2021	September 24, 2023

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

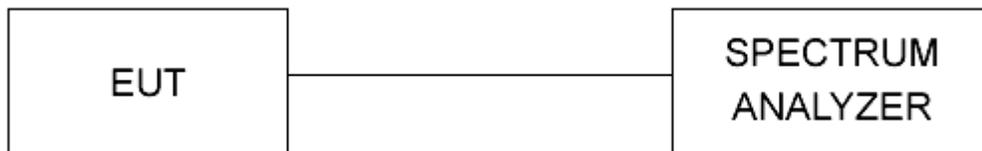


Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

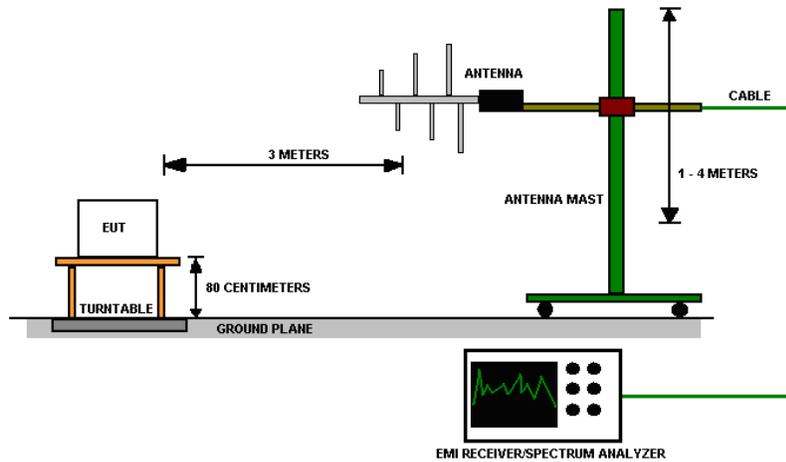


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

DSS Radio Measurements						
CHANNEL	Transmitter	Occupied Bandwidth (kHz)	20 dB Bandwidth (kHz)	RESULT	No. of Hopping Channels	ON Time (μs)
					79	387
Low	Continuous	970.76	1123.00	PASS	Channel Separation (MHz)	Time of Occupancy (s)
Mid	Continuous	970.86	1114.00	PASS		
High	Continuous	967.89	1128.00	PASS	1.020	.12384

Occupied Bandwidth = N/A;
Channel Separation Limit: $> 2/3 * 20 \text{ dB Bandwidth}$.

Time of Occupancy Limit $< 0.4\text{s}$;
Time of Occupancy = ON Time * # of transmissions over, period of time of occupancy = $0.000387 * 32 * 10$ (See Figure 11 in appendix C) = 0.12384 s
Period of Time of Occupancy = $0.4 * \# \text{ of Channels} = 0.4 * 79 = 31.6\text{s}$

Unrestricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	Continuous	2400.00	69.993	117.494	47.465	30.00	PASS
Low	Hopping	2400.00	67.374	116.344	67.374	30.00	PASS
High	Continuous	2483.50	53.760	117.044	63.284	30.00	PASS
High	Hopping	2483.50	56.766	116.697	59.930	30.00	PASS

Peak Restricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit* (dBuV/m @ 3m)	Margin	Result
Low	Continuous	2390.00	52.857	Peak	73.98	21.123	PASS
High	Continuous	2483.50	55.009	Peak	73.98	18.971	PASS

*Limit shown is the peak limit taken from FCC Part 15.209

Average Restricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)**	Measurement Type	Limit (dBuV/m @ 3m)*	Margin	Result
Low	Continuous	2390.00	42.456	Average	53.98	11.52	PASS
High	Continuous	2483.50	47.236	Average	53.98	6.74	PASS

*Limit shown is the average limit taken from FCC Part 15.209

**Average Highest out of band level = SA Average Level – DCCF(For Emissions). C63.10 Sec. 11.12.2.5.2
See Sec 4.3 for more information on DCCF



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

Average Restricted Band-Edge									
CH	Mode	Band edge /Measurement Frequency (MHz)	Raw Average Highest out of band level (dBuV/m @ 3m)	DCCF (For Emissions)	Average Highest out of band level (dBuV/m @ 3m)**	Measurement Type	Limit (dBuV/m @ 3m)*	Margin	Result
Low	Continuous	2390.00	40.186	-2.27	42.456	Average	53.98	11.558	PASS
High	Continuous	2483.50	44.966	-2.27	47.236	Average	53.98	11.369	PASS

*Limit shown is the average limit taken from FCC Part 15.209
 **Average Highest out of band level = SA Average Level – DCCF (For Emissions). C63.10 Sec. 11.12.2.5.2
 See Sec 4.3 for more information on DCCF

DTS Radio Measurements						
CH	Transmitter	RAW AVERAGE OUTPUT POWER (dBm)	DCCF (For Power)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	RESULT
Low	BTBR	10.61	1.13	11.73	14.89	PASS
Mid	BTBR	11.80	1.13	12.92	19.59	PASS
High	BTBR	11.57	1.13	12.69	18.58	PASS

Peak Output Power Limit = 125mW;
 Average Output Power = (Raw Average Output Power) + (DCCF For Power)



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method: All the radio measurements were performed using the section 11.9.2.2.4 from ANSI C63.10.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed peak output power is 125mW.

Test procedures:

Details can be found in section 3.4 of this report. See section 4.3 for Duty cycle used.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables below.
4. Compiled values can be found in the Results section, 4.0.



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.

4.3 DUTY CYCLE

Test Method:

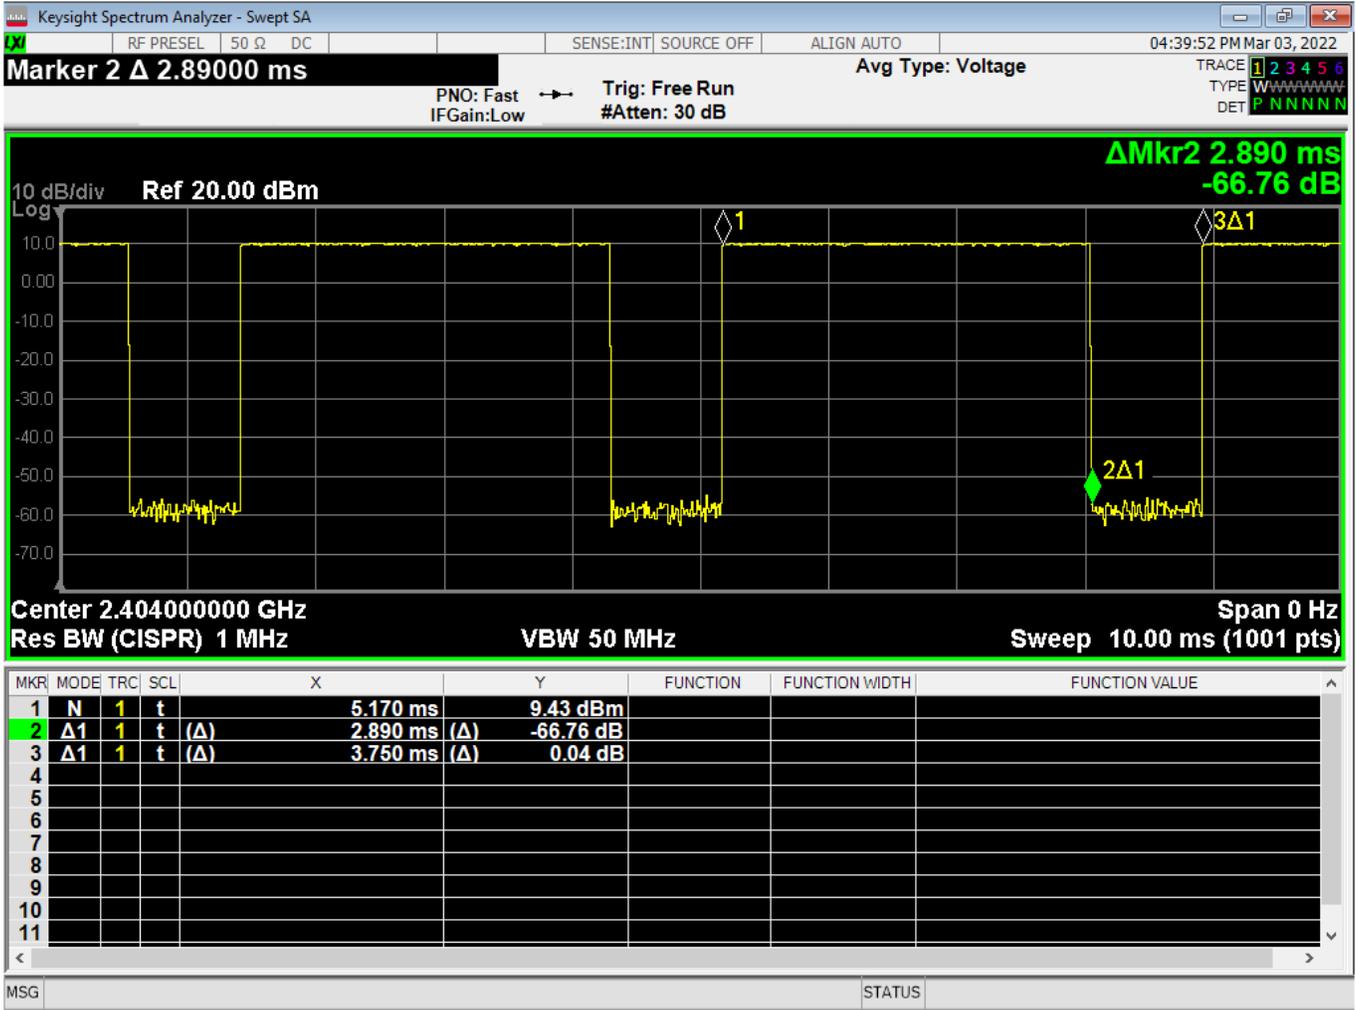


Figure 3 - Radiated Emissions Plot, BTBR, Duty Cycle

$$\text{DCCF For Emissions (Duty Cycle Correction Factor)} = 20 * \text{Log}(\text{Duty Cycle} / 100)$$

$$-2.27 = 20 * \text{Log}(77 / 100)$$

$$\text{DCCF For Power (Duty Cycle Correction Factor)} = 10 * \text{Log}(\text{Duty Cycle} / 100)$$

$$1.13 = 10 * \text{Log}(1 / 0.77)$$

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

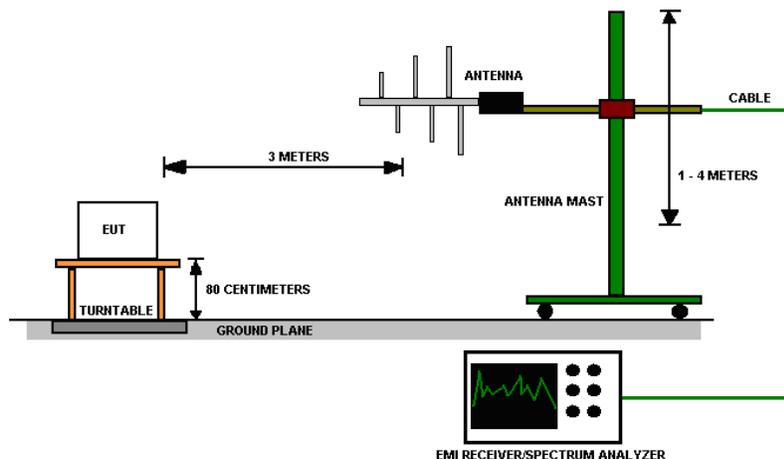


Figure 4 - Radiated Emissions Test Setup

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

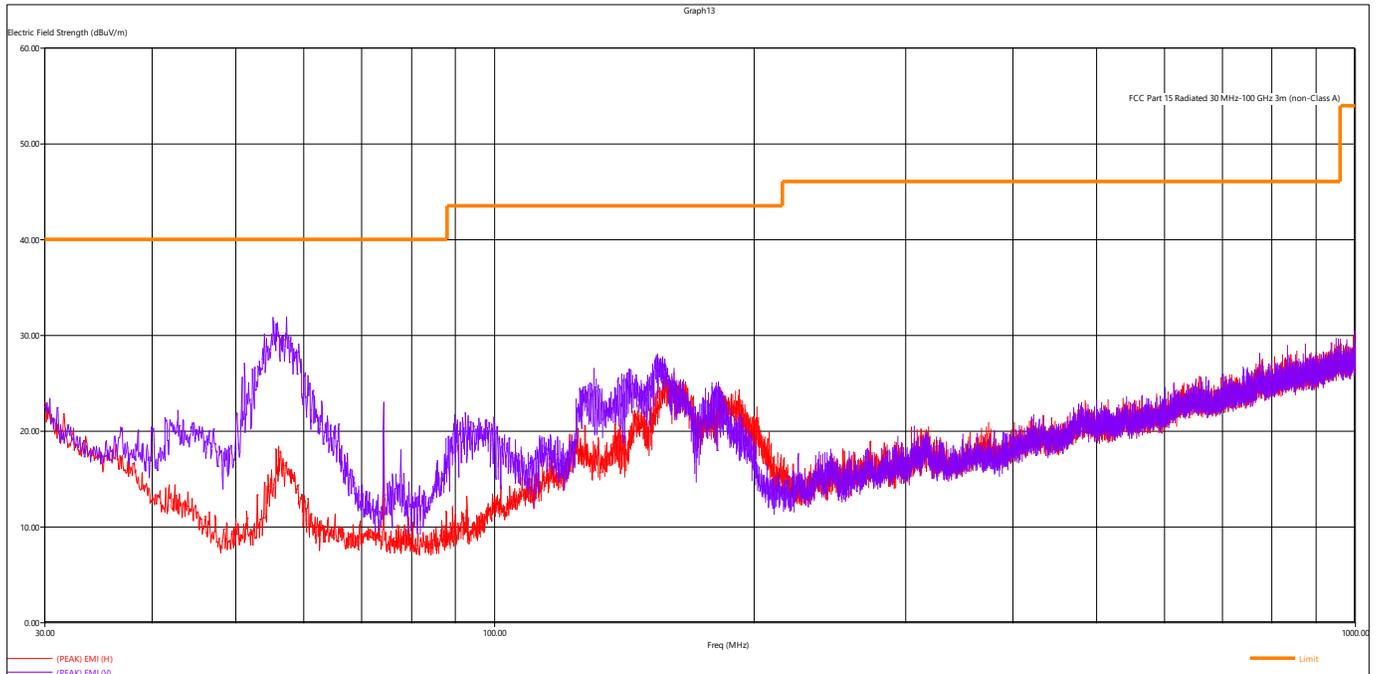


Figure 5 - Radiated Emissions Plot, Receive

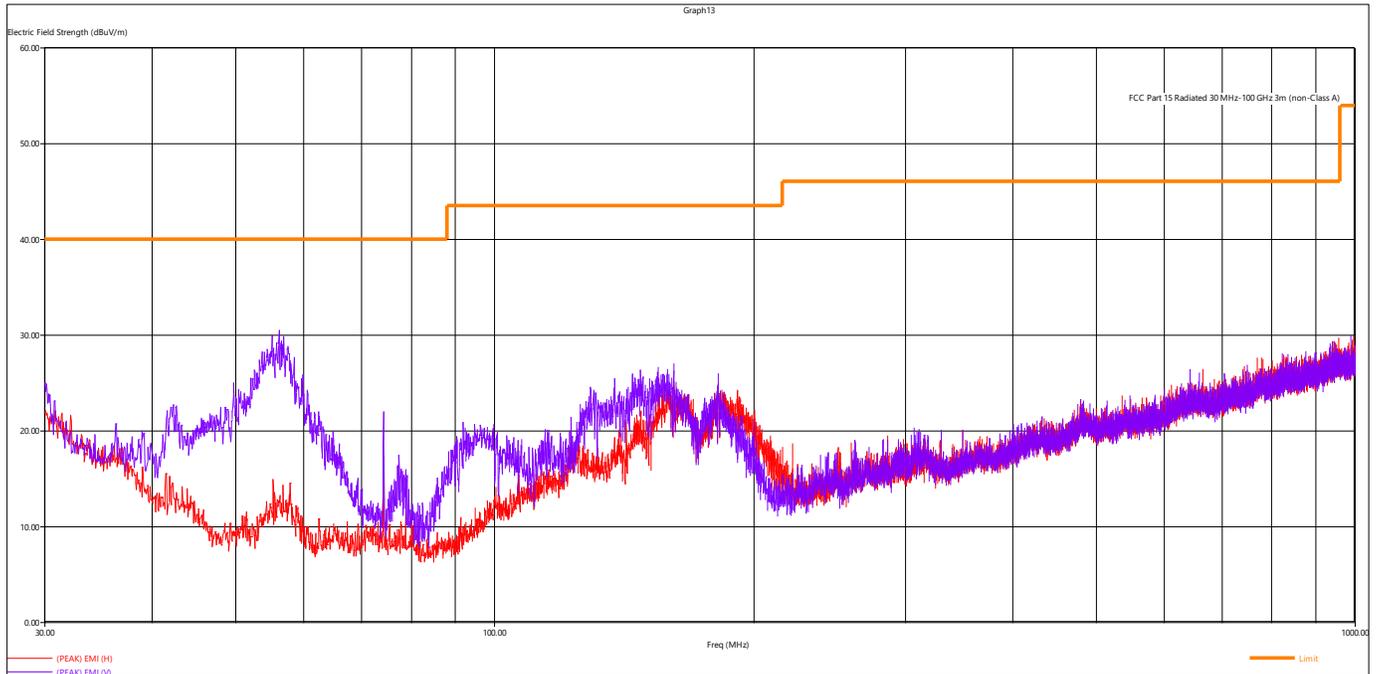


Figure 6 - Radiated Emissions Plot, BTBR, Low Channel

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level.
5. Emissions found to be at least 10dB below limit line and were not reported.



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

Peak Measurements, BTBR								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
2401.788000	107.99	NA	NA	400.00	113.00	H	Low	BTBR
2439.690000	107.58	NA	NA	132.00	117.00	H	Mid	BTBR
2480.690000	107.23	NA	NA	139.00	115.00	H	High	BTBR
All other emissions found to be at least 6dB below limit line								

Average Measurements, BTBR								
Frequency	Level*	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
2401.788000	105.72	NA	NA	400.00	113.00	H	Low	BTBR
2439.690000	105.31	NA	NA	132.00	117.00	H	Mid	BTBR
2480.690000	104.96	NA	NA	139.00	115.00	H	High	BTBR
*Average Levels Obtained from; Average Level = Peak Level + DCCF (For Emissions), for more information on DCCF see Sec 4.3 All other emissions found to be at least 6dB below limit line								



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report.

Deviations from test standard:

Test was performed with a 120kHz RBW

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

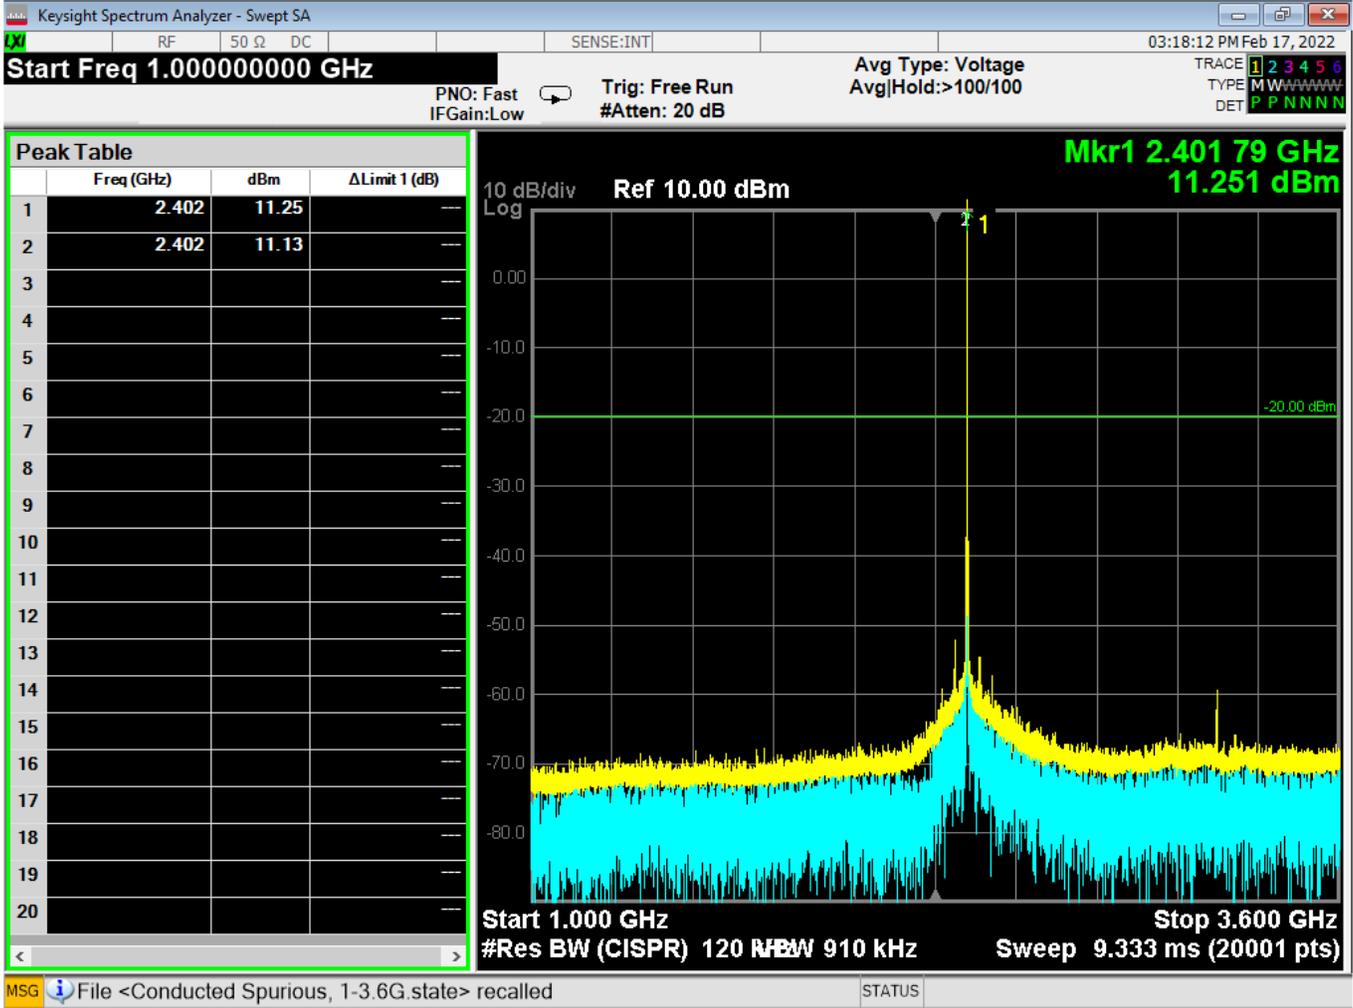


Figure 8 - Radiated Emissions Plot, BTBR, 1G – 3.6G

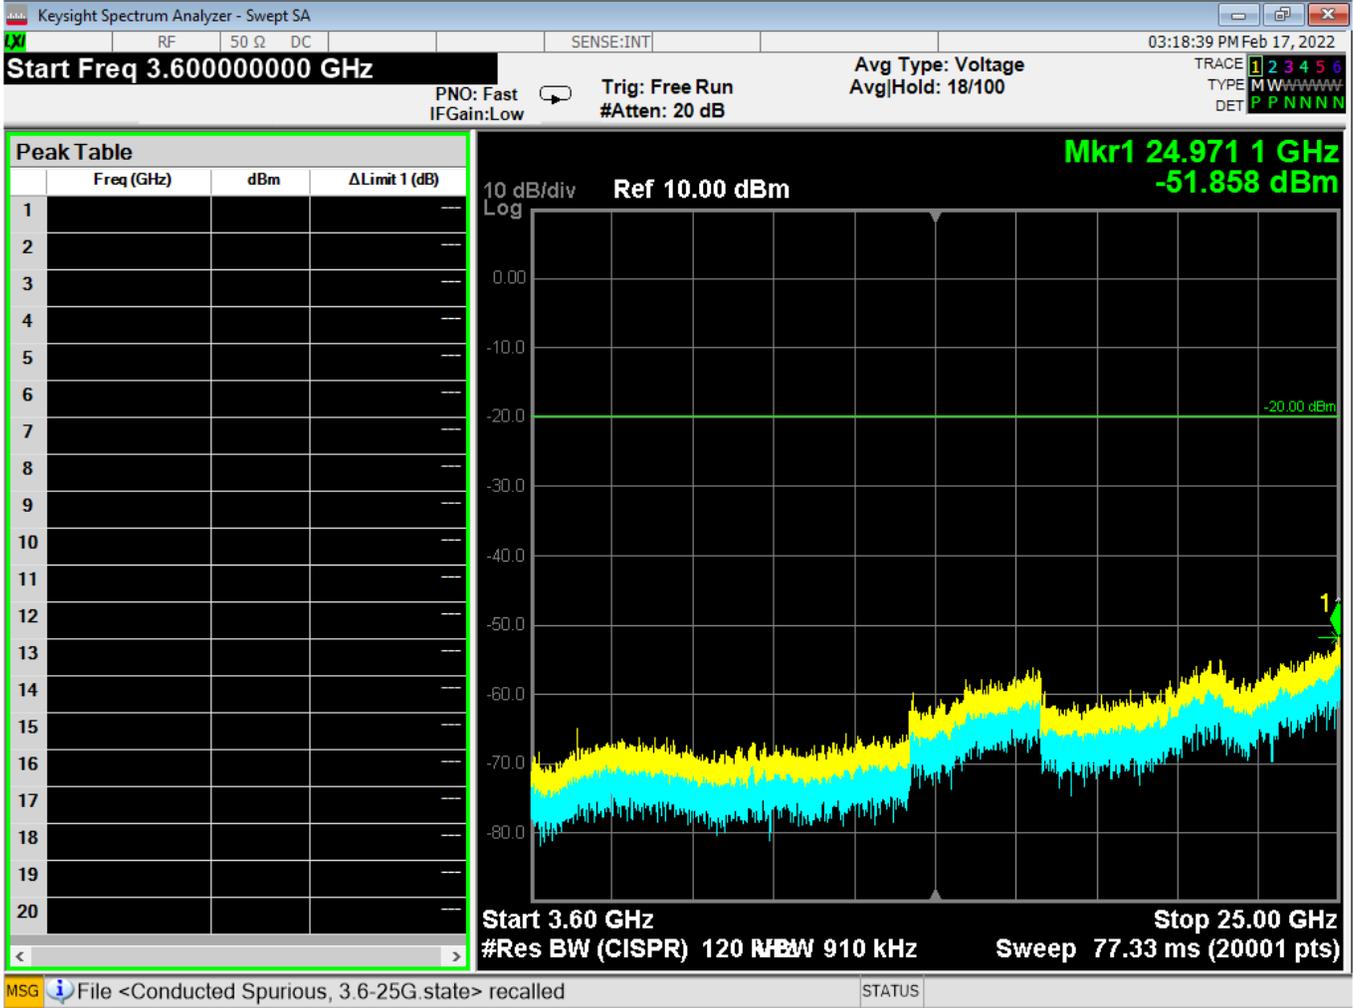


Figure 9 - Radiated Emissions Plot, BTBR, 3.6G – 25G



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

4.6 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10. Restricted band edges are using Sec 6.10.5.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.

4.7 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

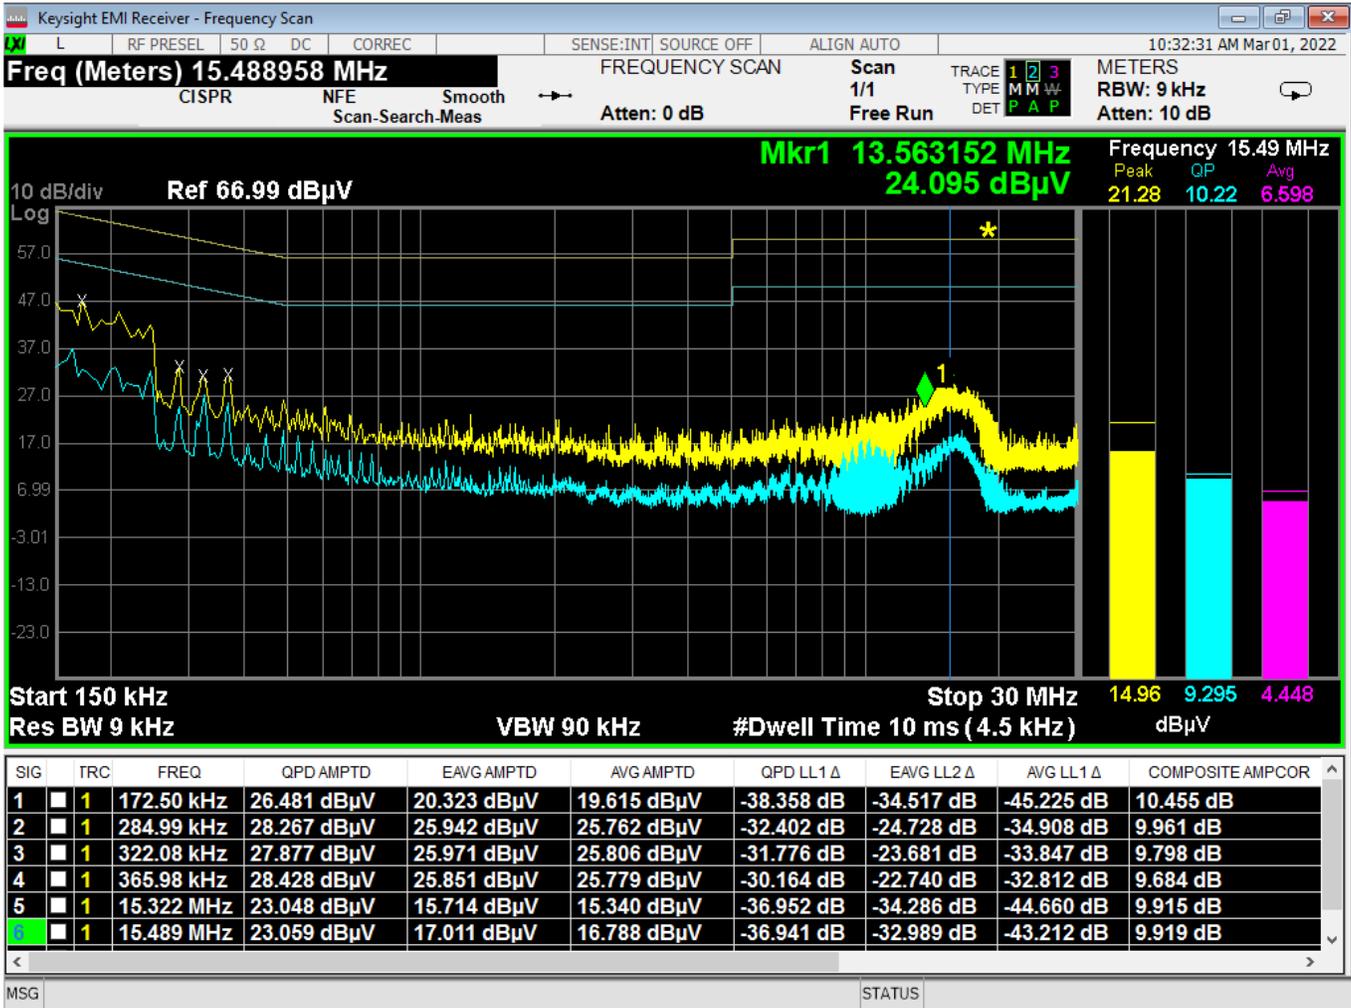


Figure 10 - Conducted Emissions Plot, Line, TX

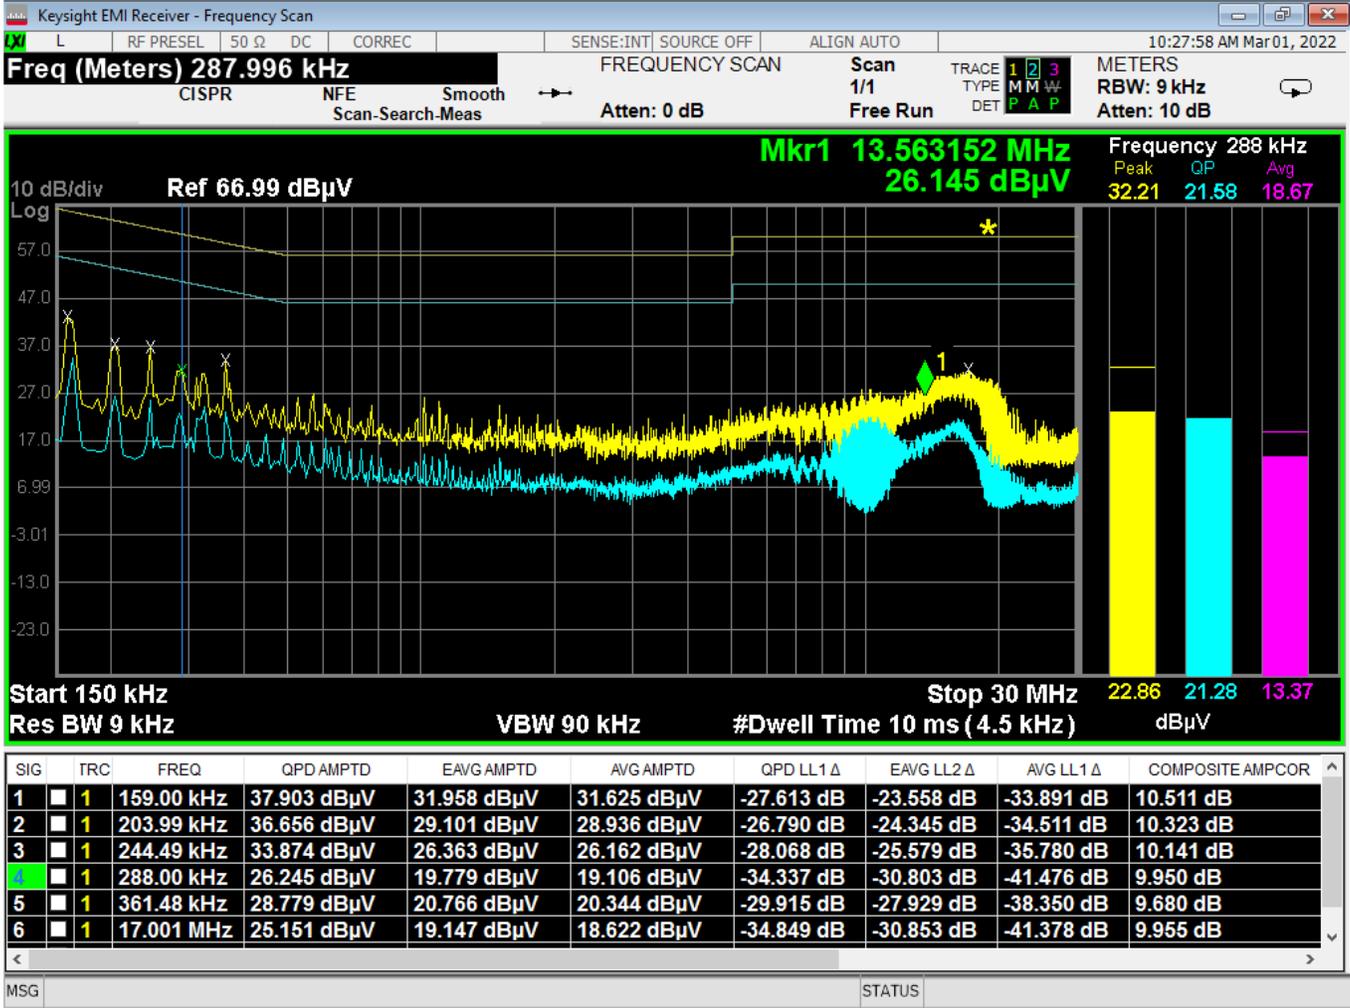


Figure 11 - Conducted Emissions Plot, Neutral, TX

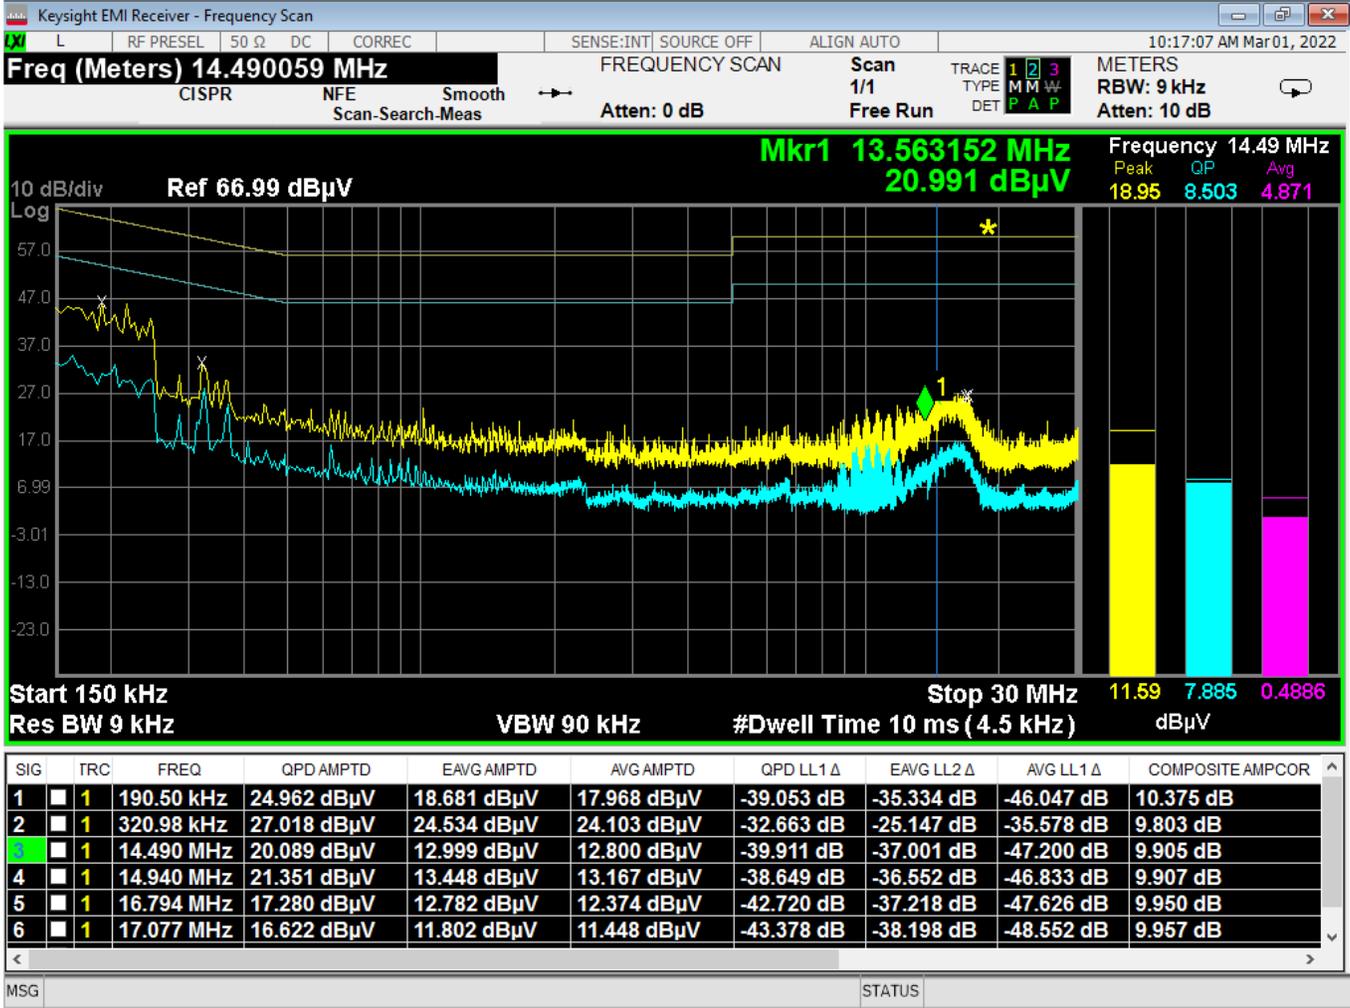


Figure 12 - Conducted Emissions Plot, Line, IDLE

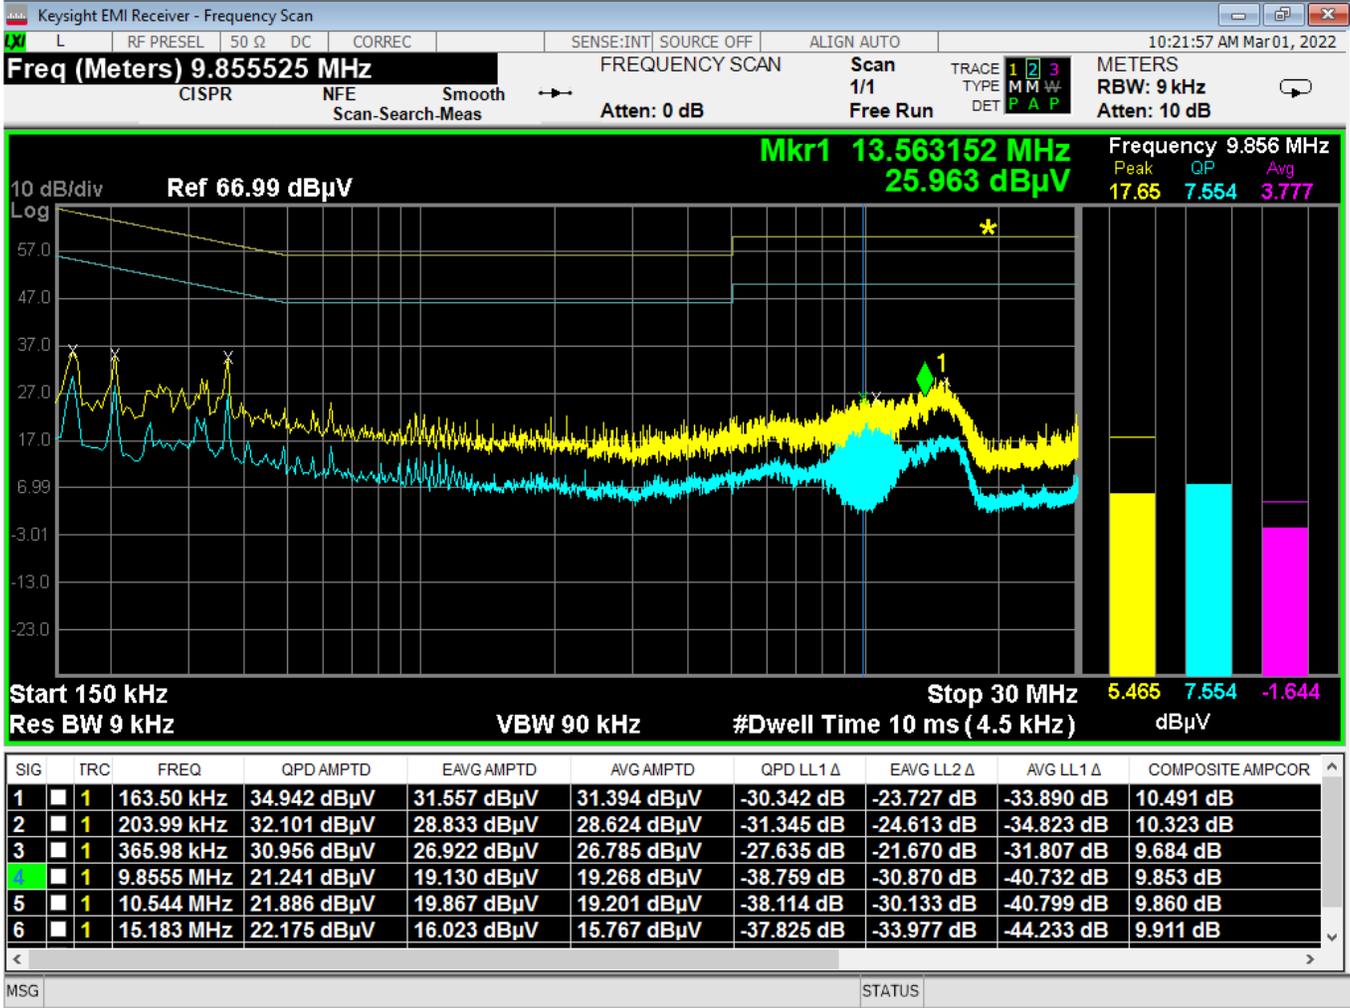


Figure 13 - Conducted Emissions Plot, Neutral, IDLE



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		


APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.

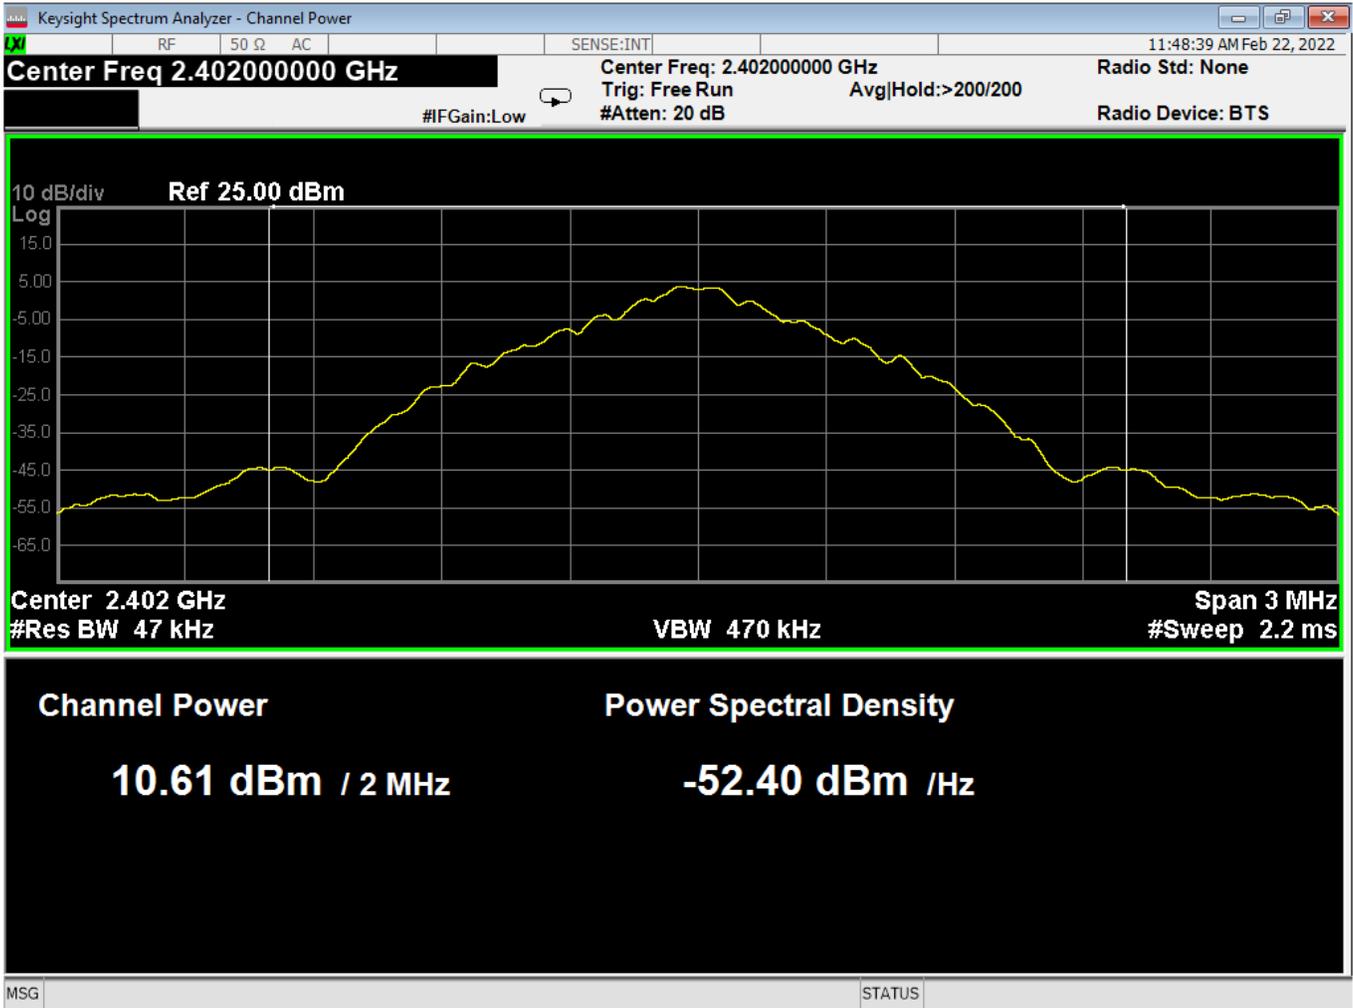APPENDIX C – GRAPHS AND TABLES




01 Average Power, Low Channel, BTBR

Average Output Power = (Average Output Power on Analyzer) + (DCCF for power from section 4.3)



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

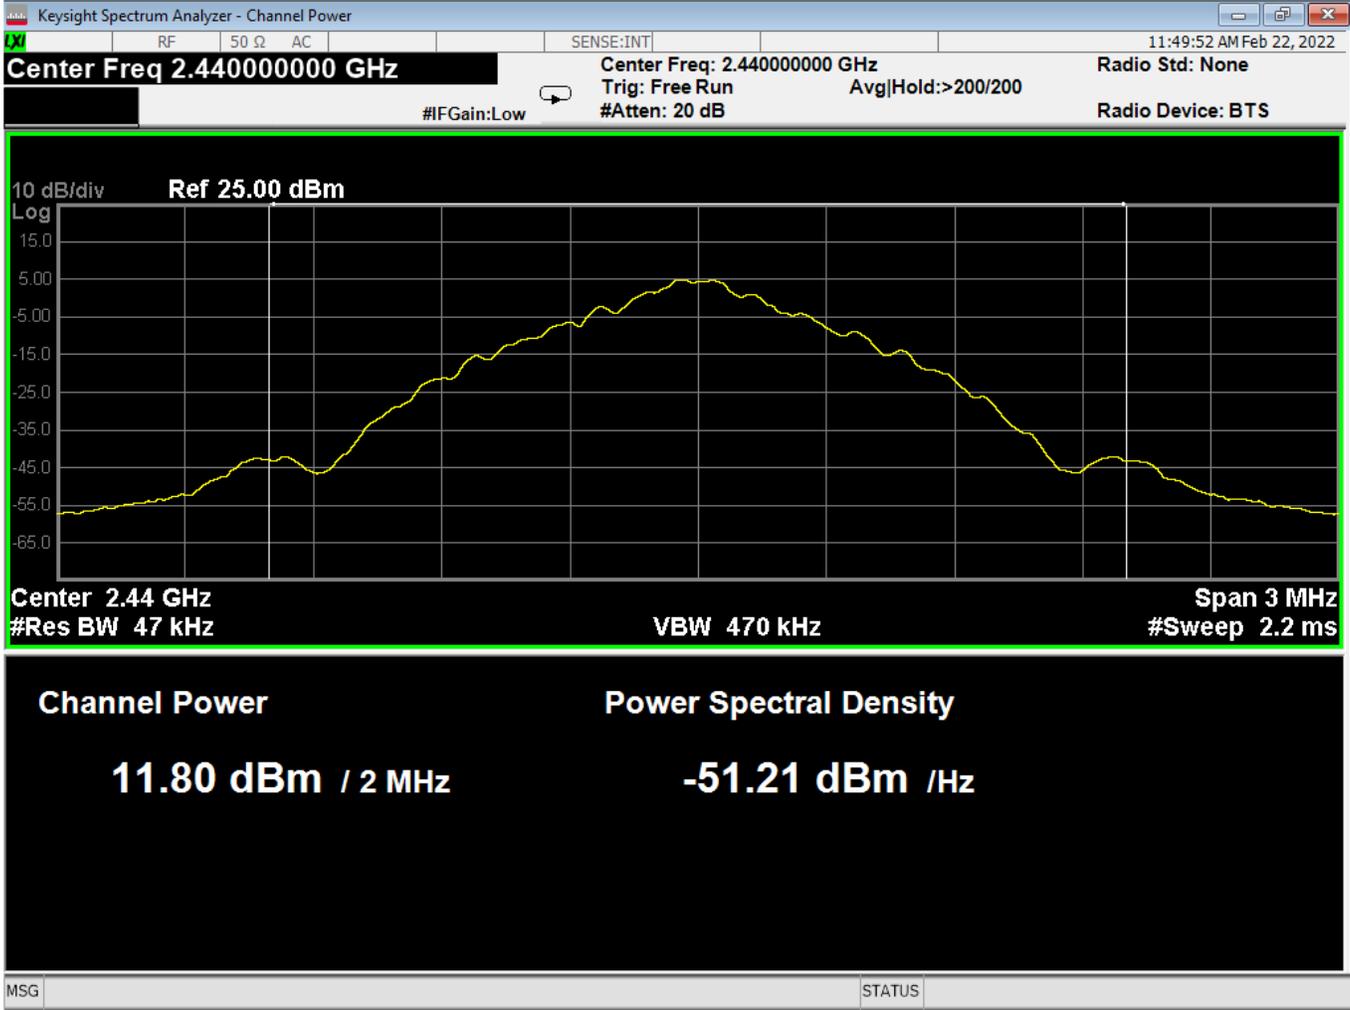


02 Average Power, Mid Channel, BTBR

Average Output Power = (Average Output Power on Analyzer) + (DCCF for power from section 4.3)



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

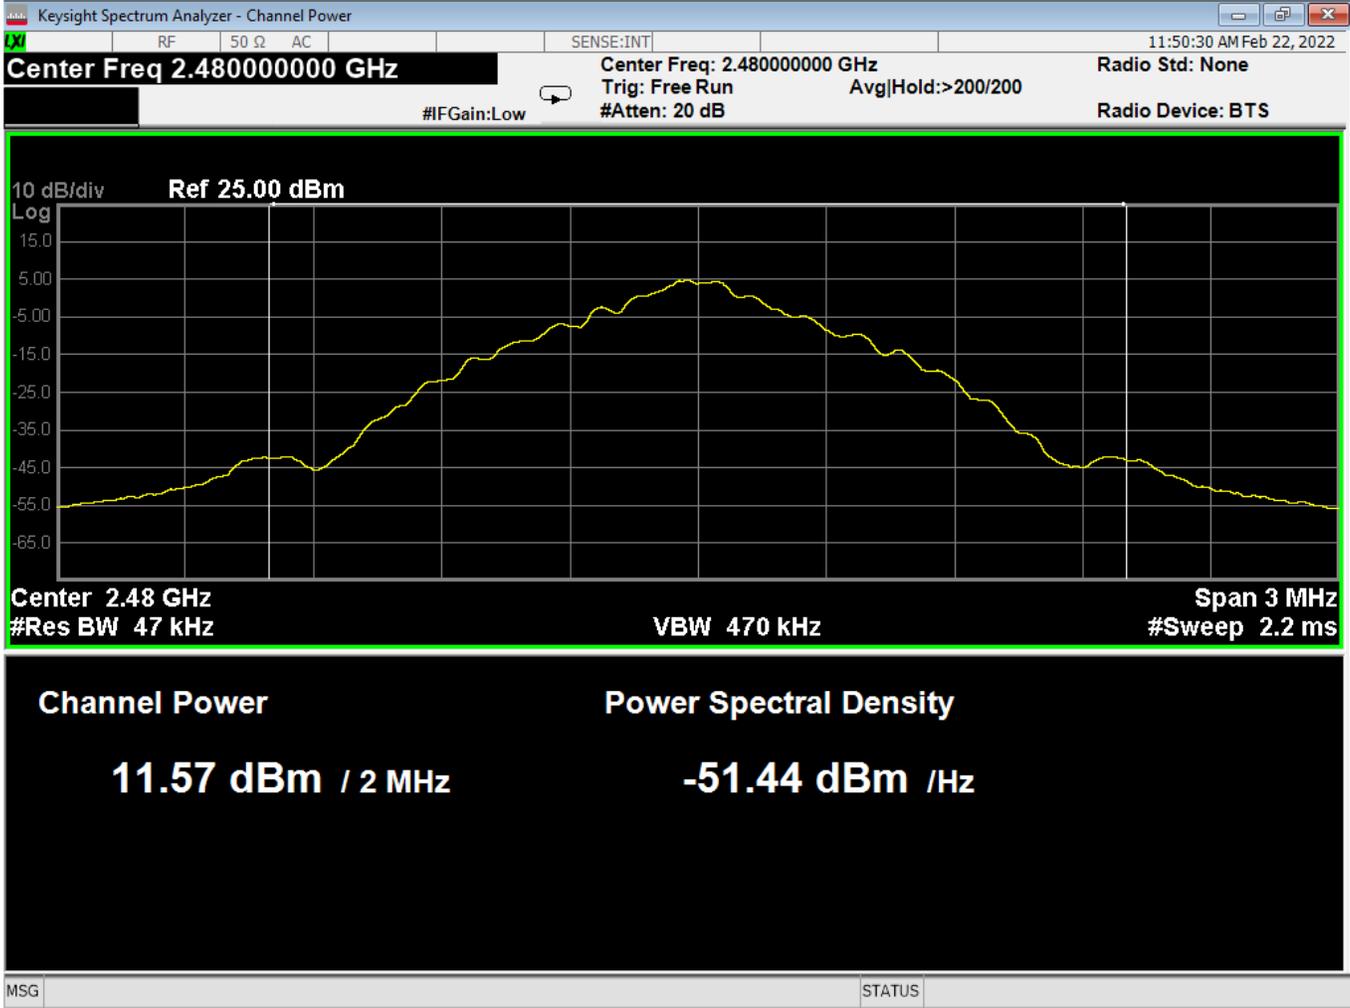


03 Average Power, High Channel, BTBR

Average Output Power = (Average Output Power on Analyzer) + (DCCF for power from section 4.3)




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

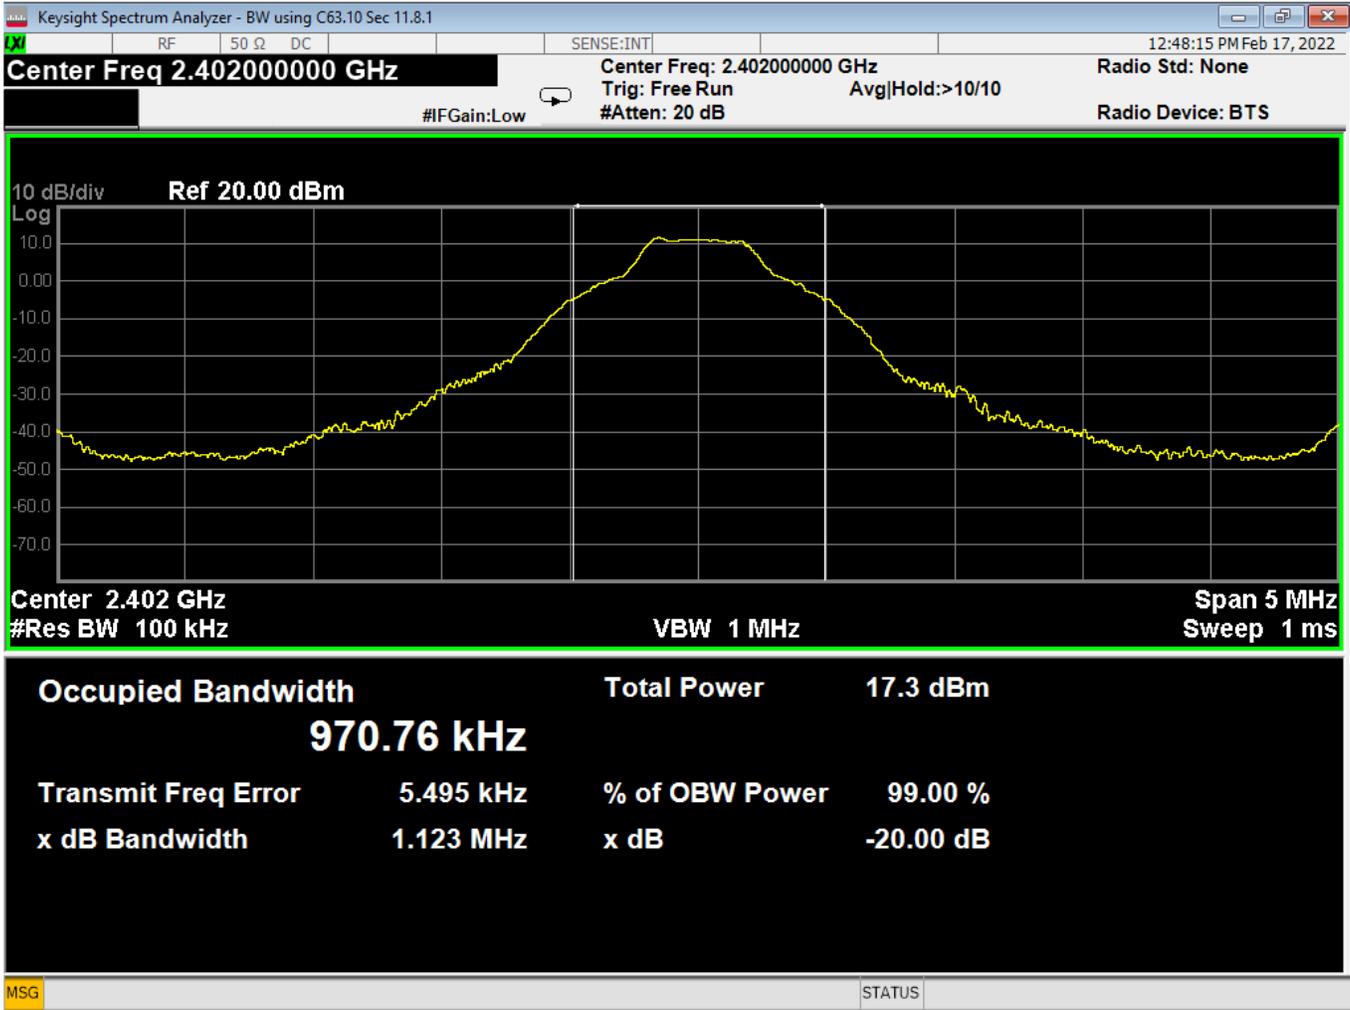

04 OBW-20dB, Low Channel, BTBR




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

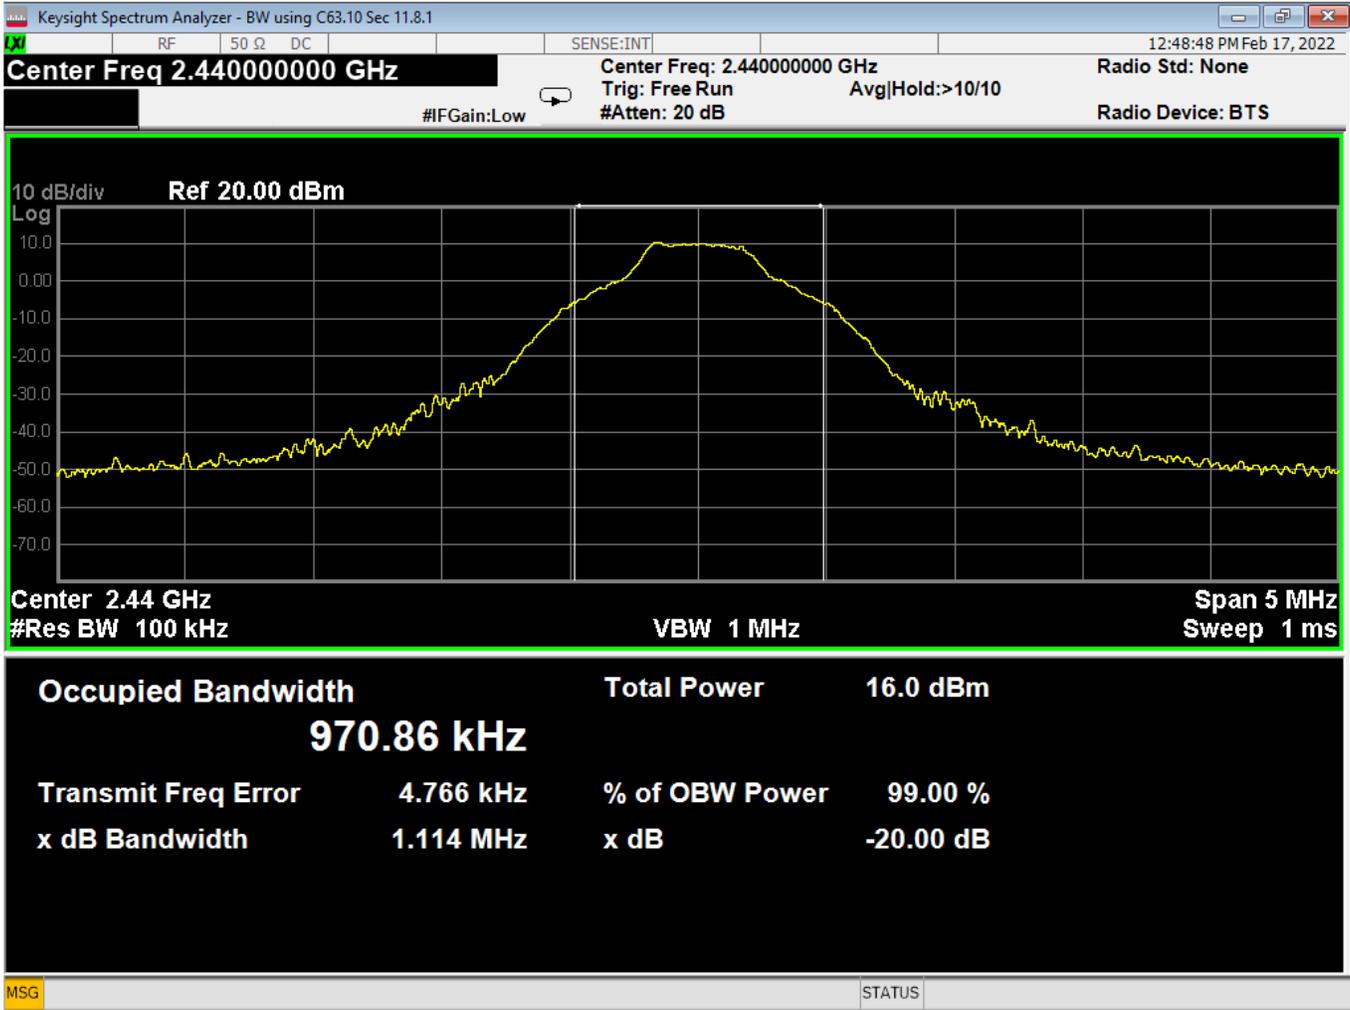

05 OBW-20dB, Mid Channel, BTBR




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

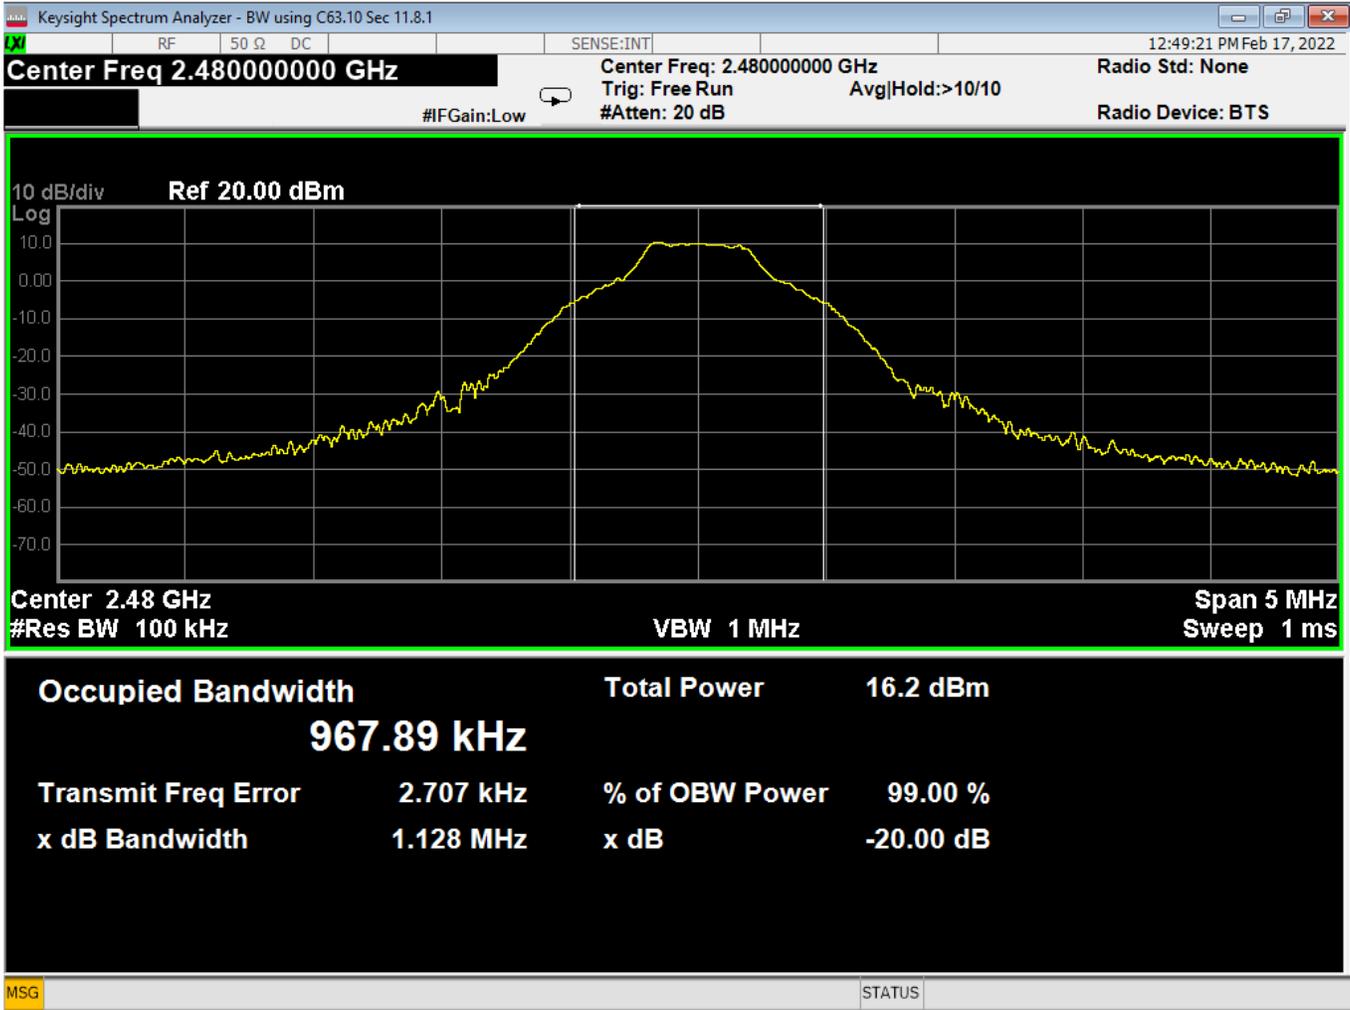

06 OBW-20dB, High Channel, BTBR




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

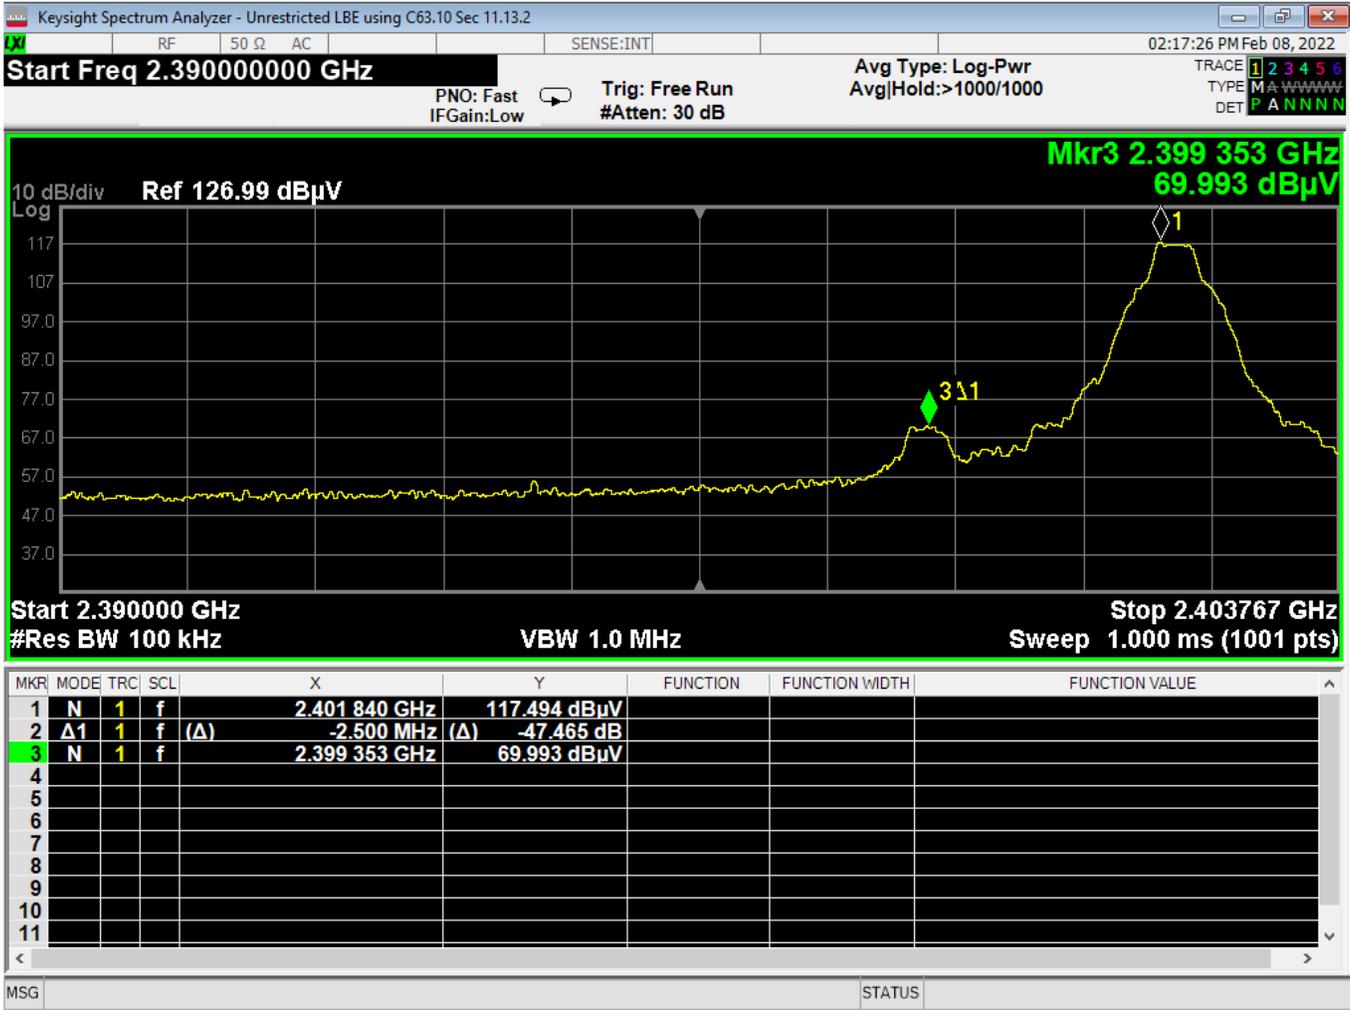

07 Lower Bandedge, Unrestricted, BTBR



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

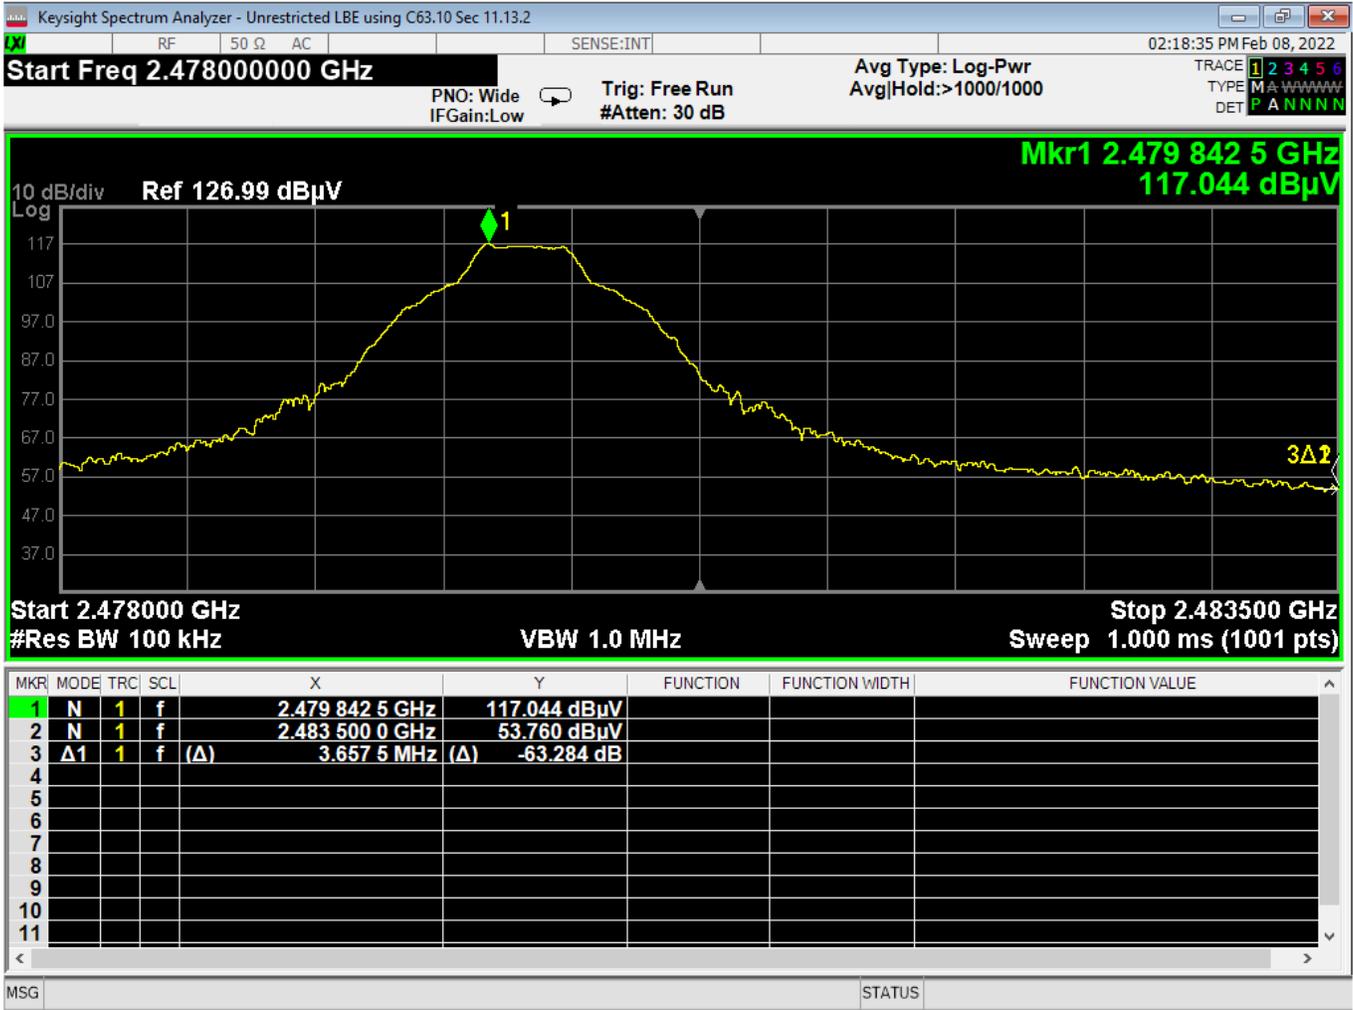

08 Higher Bandedge, Unrestricted, BTBR




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		



09 Lower Bandedge, Restricted, BTBR




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

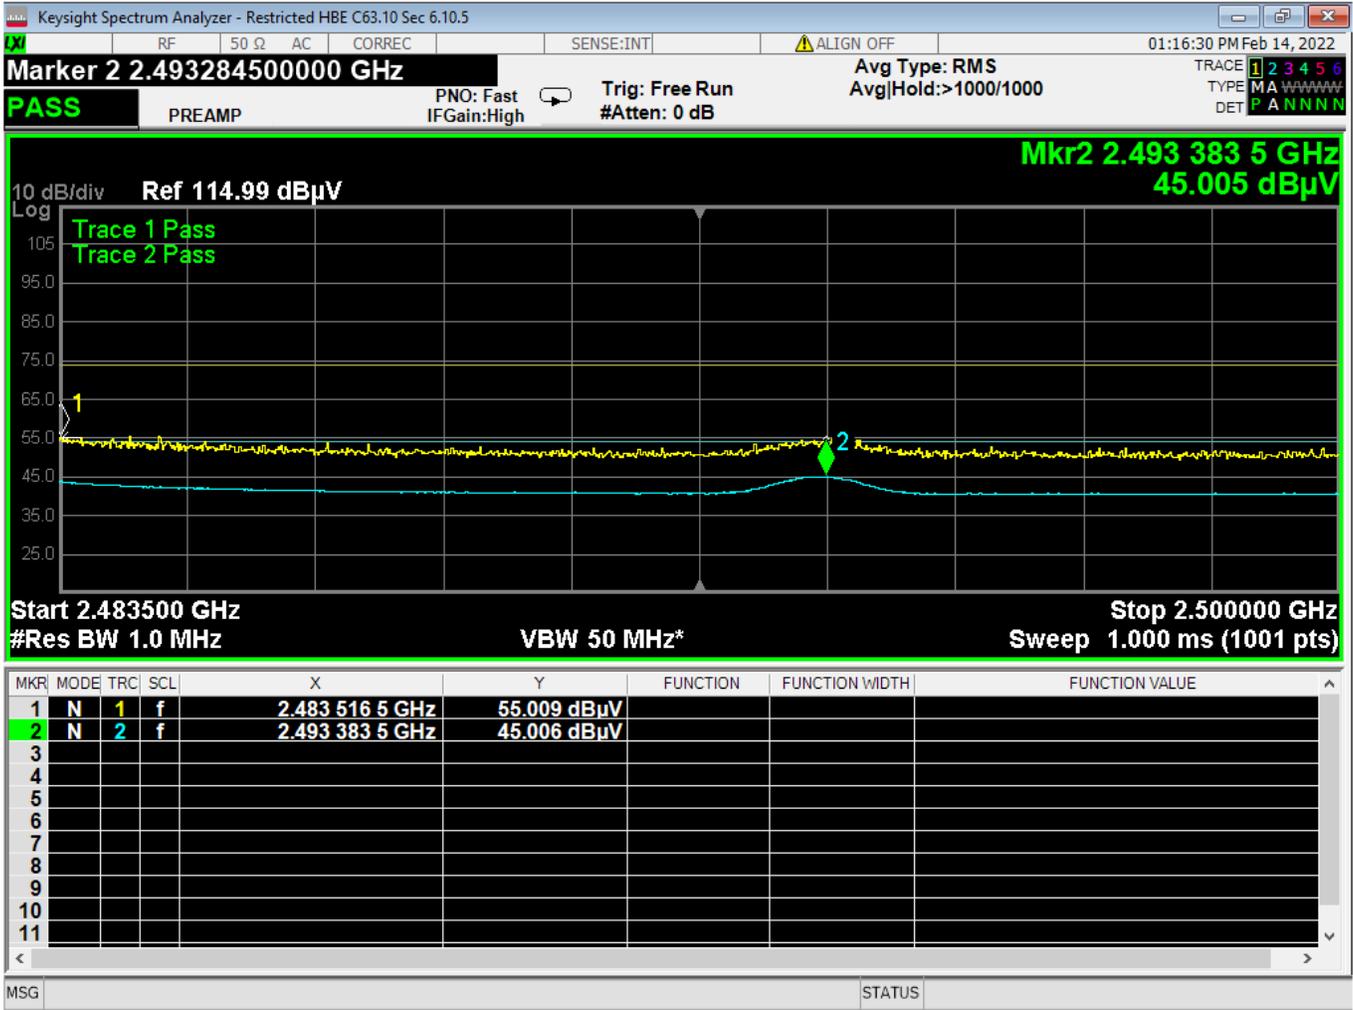

10 Higher Bandedge, Restricted, BTBR




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

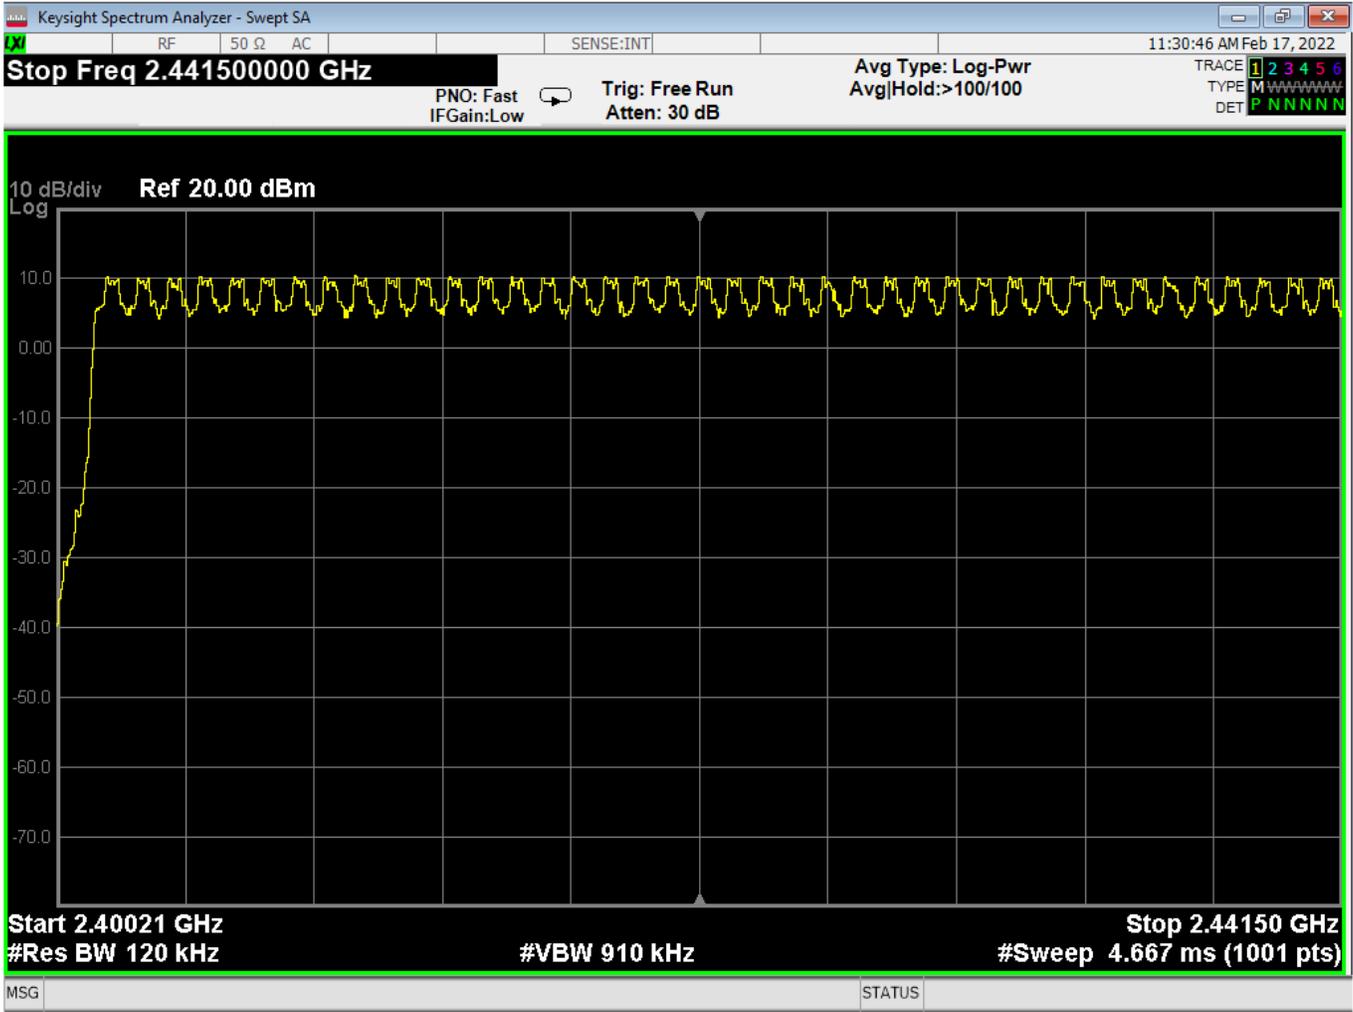

13 Channel Count, 2400-2441.5M




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

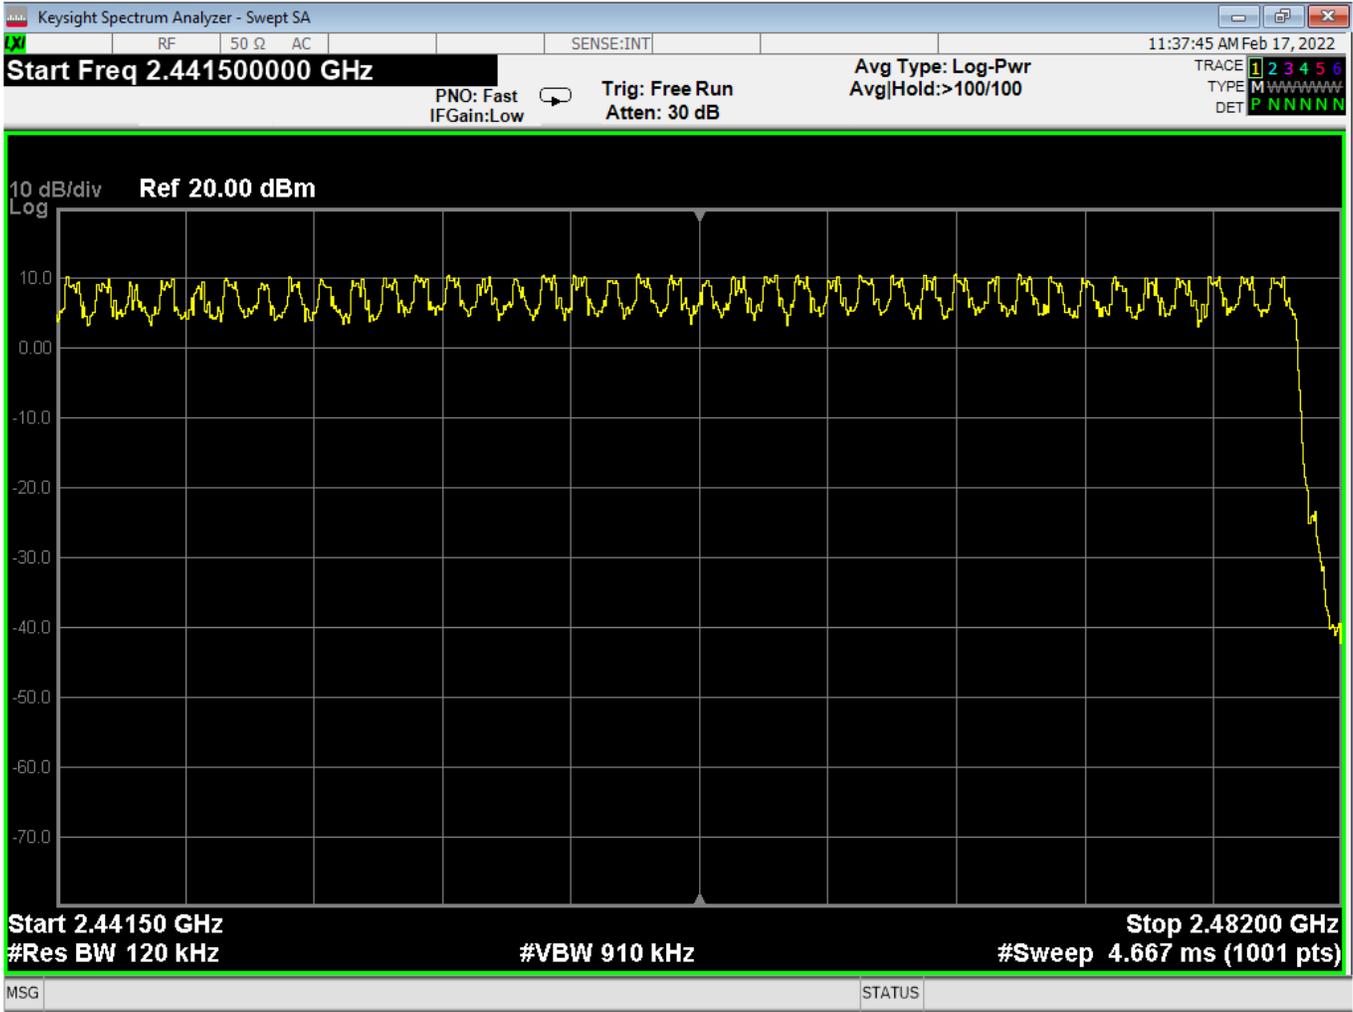

14 Channel Count, 2441.5-2482M




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

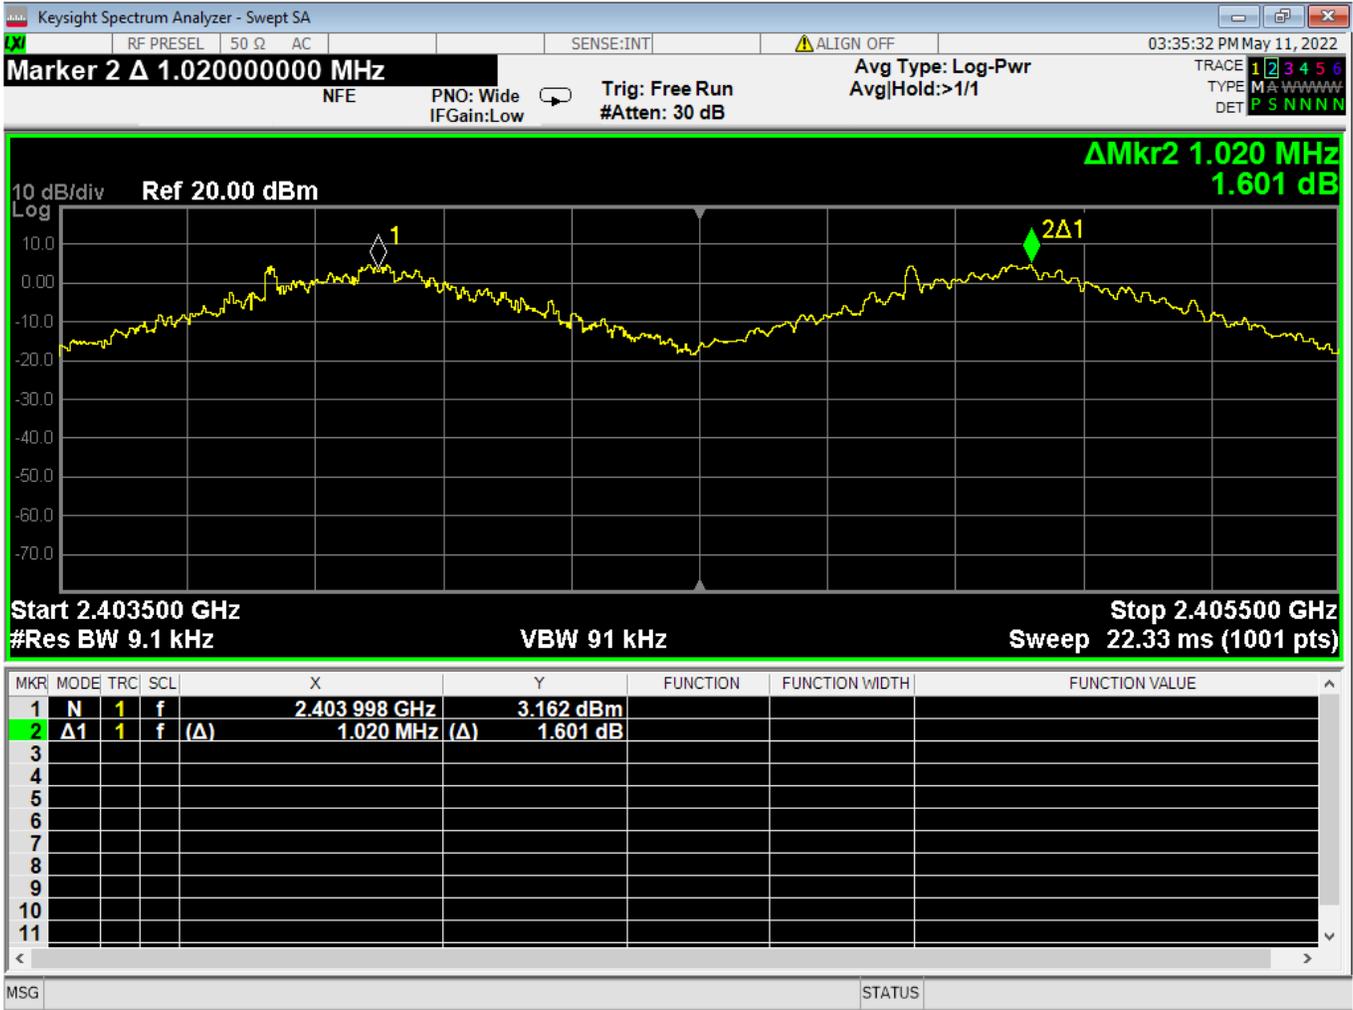

15 Frequency Separation




Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

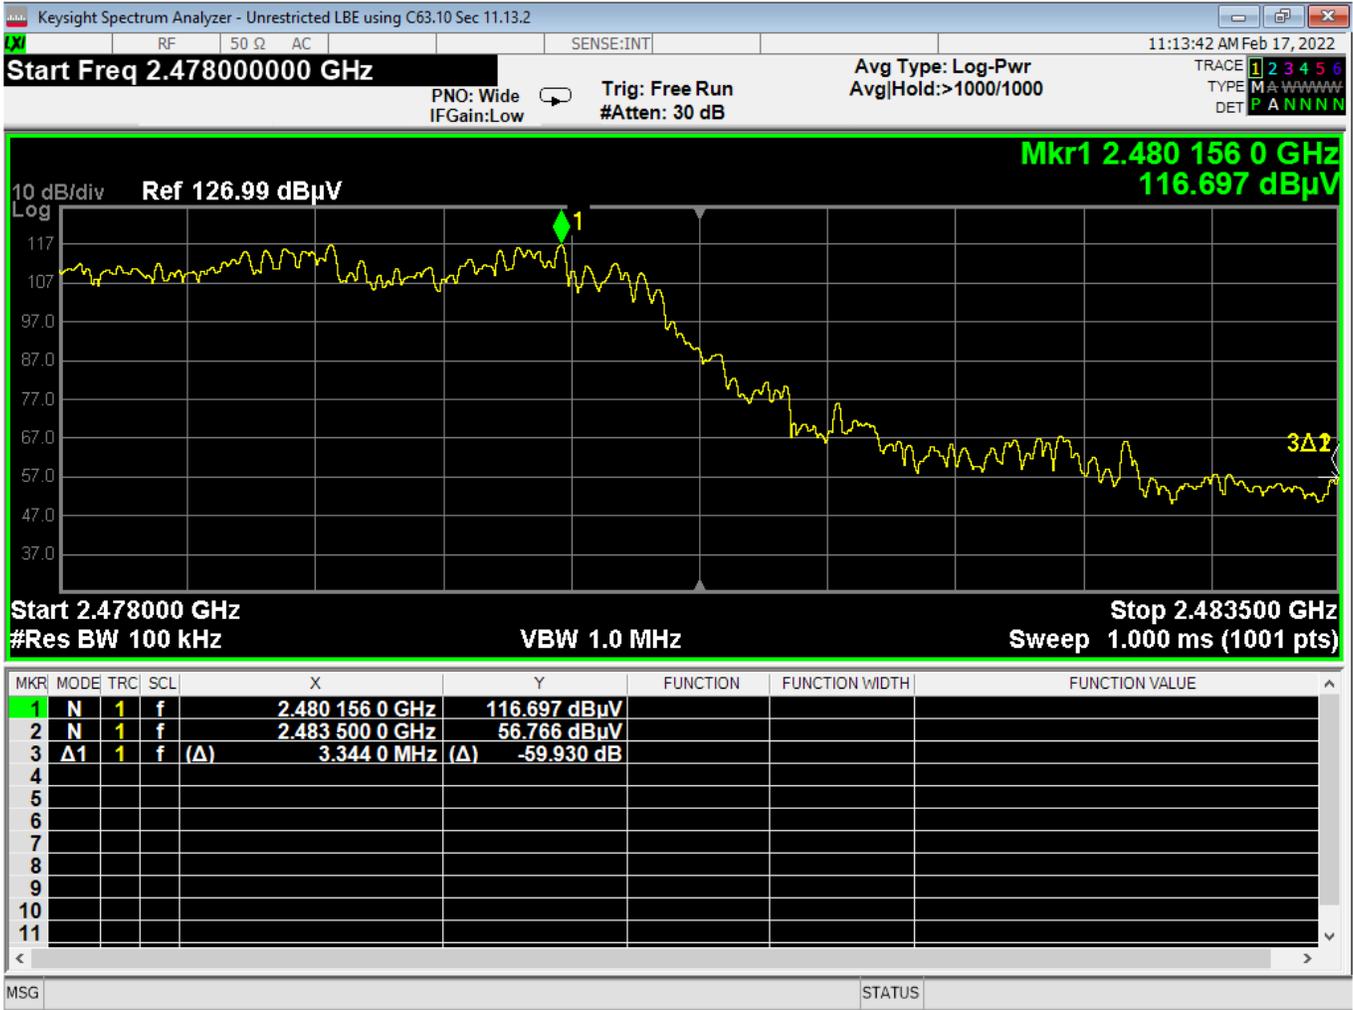


16 Higher Bandedge, Unrestricted, Hopping



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

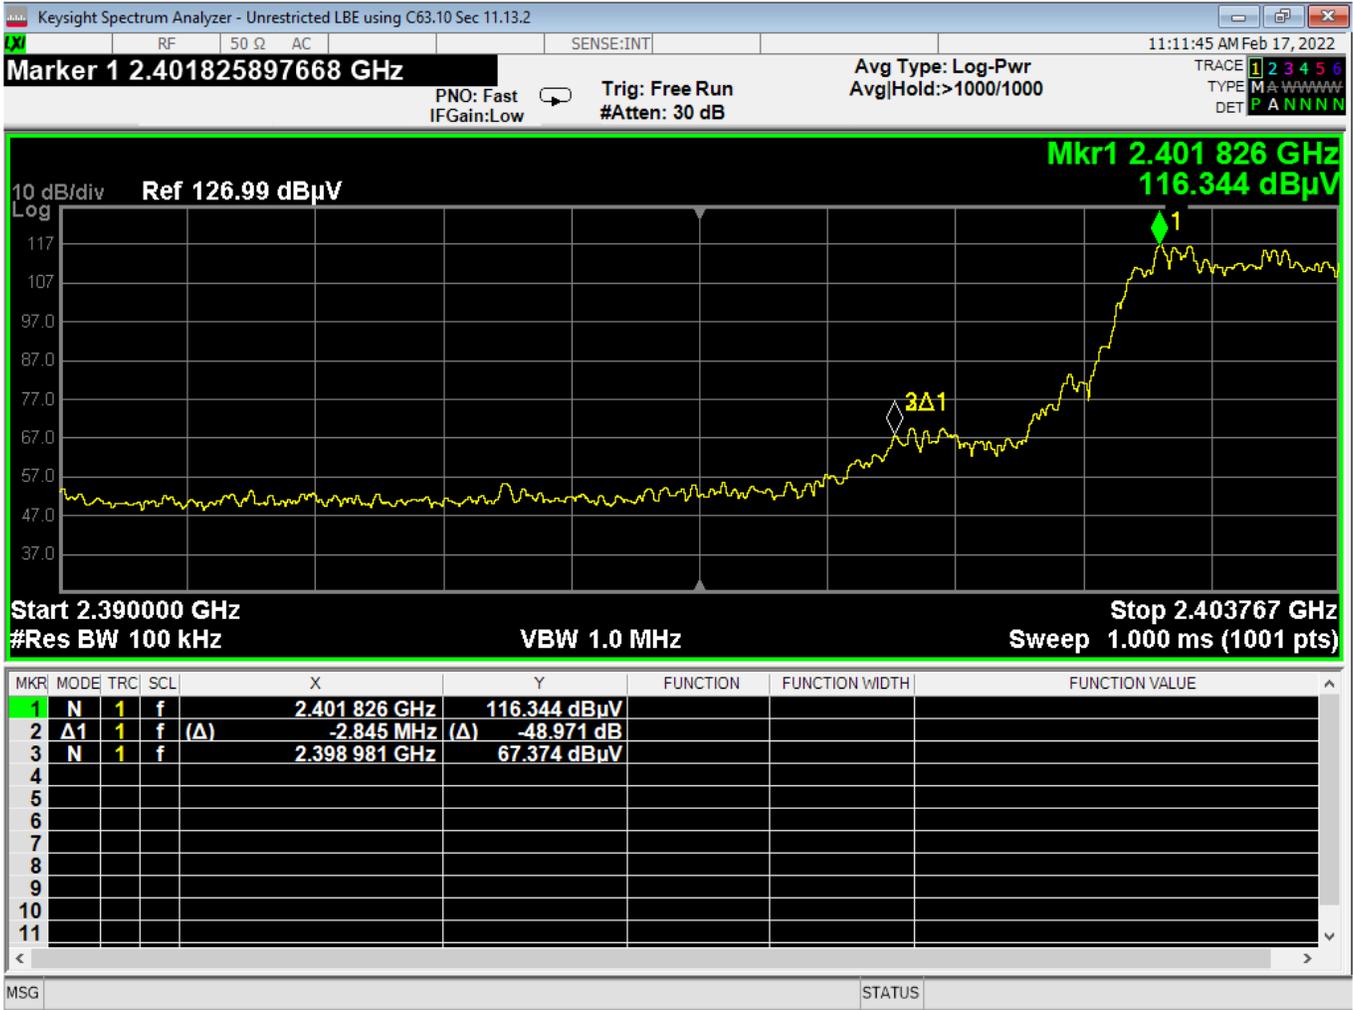

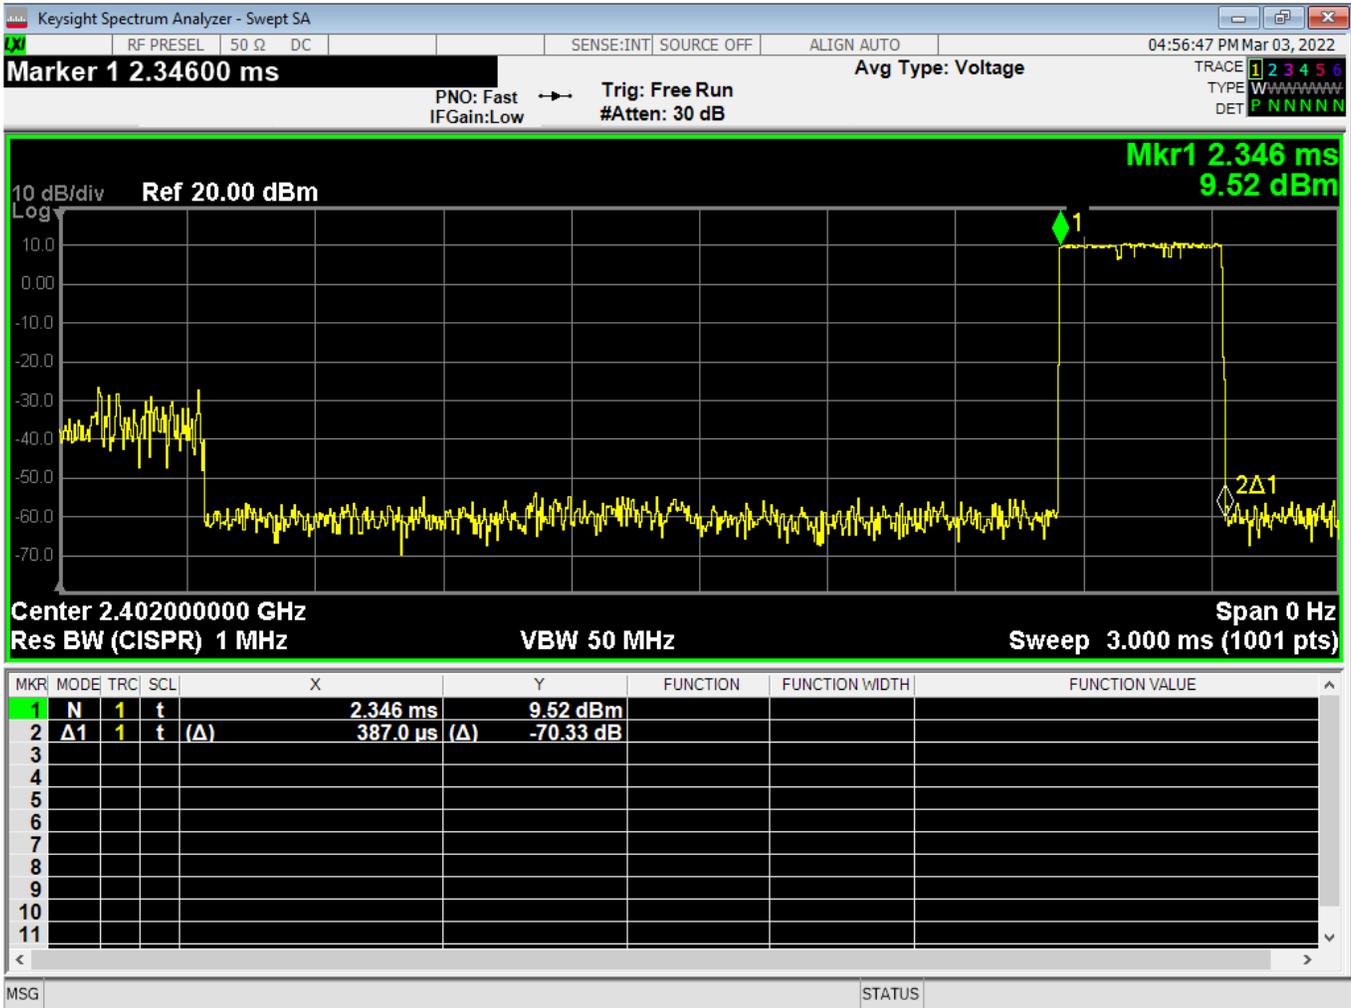17 Lower Bandedge, Unrestricted, Hopping



18 ON Time BTBR Hopping



Report Number:	R20211006-20-E7A	Rev	A
Prepared for:	Garmin International, Inc.		

REPORT END


FCC/ISED Test Report

Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: AA4308

Test Report No: R20211005-21-E8A

Approved by: 
Fox Lane
EMC Test Engineer,

DATE: May 13, 2022

Total Pages: 62

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	5 March 2022	Original – KVepuri Prepared by FLane and SProbst
A	5 March 2022	Added comment to Sec 4.5 Added DCCF to tabular data Corrected tabular data Updated delta to fundamental



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page	2
1.0 Summary of test results	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description	6
3.2 Test personnel	6
3.3 Test equipment	7
3.4 General Test Procedure and Setup for Radio Measuremnts	8
4.0 Results	9
4.1 Output Power	11
4.2 Bandwidth	12
4.3 Duty Cycle	13
4.4 Radiated emissions	15
4.5 Conducted Spurious Emissions	21
4.6 Band edges	25
4.7 Power Spectral Density	27
4.8 Conducted AC Mains Emissions	28
Appendix A: Sample Calculation	33
Appendix B – Measurement Uncertainty	35
Appendix C – Graphs and Tables	36
REPORT END	62



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section (Please see the checked box below for the rule part used):

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	AA4308
EUT Received	6 December 2021
EUT Tested	8 December 2021- 2 March 2022
Serial No.	3392435192 (Radiated Measurements) 3392435208(Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input checked="" type="checkbox"/> BT EDR 2MB <input checked="" type="checkbox"/> BT EDR 3MB <input type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

For Bluetooth Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of 35 ± 4%
 Temperature of 22 ± 3° Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing and Report
2	Karthik Vepuri	Test Engineer	Review/Editing and Report
3	Blake Winter	Test Engineer	Testing
4	Grace Larsen	Test Technician	Testing and Report
5	Samuel Probst	Test Technician	Testing and Report
6	Matthew Emory	Test Technician	Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 21, 2021	July 21, 2023
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	May 5, 2020	May 5, 2022
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A091418	July 27, 2021	July 27, 2022
EMCO Horn Antenna	3115	6416	July 28, 2021	July 28, 2022
EMCO Horn Antenna	3116	2576	March 9, 2020	March 9, 2022
Com-Power LISN 50µH / 250µH - 50Ω	LI-220C	20070017	September 22, 2020	September 22, 2022
8447F POT H64 Preamplifier*	8447F POT H64	3113AD4667	February 1, 2021	February 1, 2023
Rohde & Schwarz Preamplifier*	TS-PR18	3545700803	April 14, 2020	April 14, 2022
Trilithic High Pass Filter*	6HC330	23042	April 14, 2020	April 14, 2022
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	October 25, 2019	October 25, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preamplifier to antenna)*	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)**	PE9128	NCEE BH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)**	PE9128	NCEE BH2	September 24, 2021	September 24, 2023

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

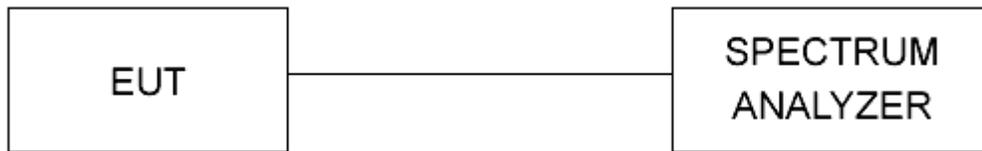


Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

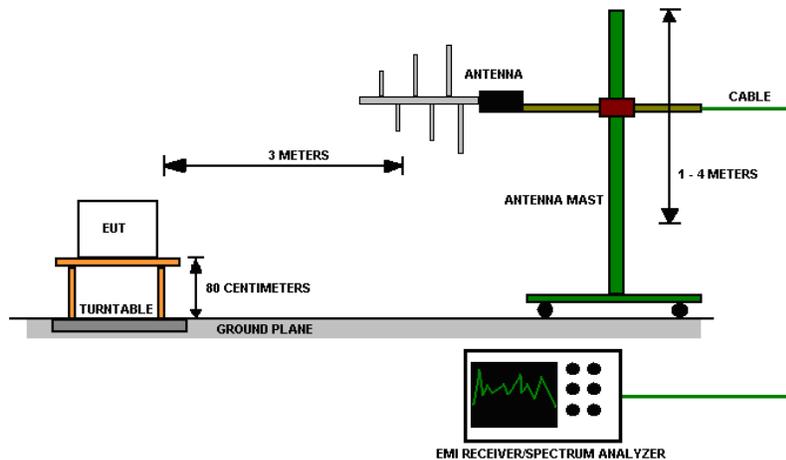


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

DTS Radio Measurements

CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	PSD (dBm)	RESULT
Low	2EDR	1.2387	1.030	-5.125	PASS
Mid	2EDR	1.2407	1.027	-5.088	PASS
High	2EDR	1.2390	1.017	-5.148	PASS
Low	3EDR	1.2318	1.019	-5.032	PASS
Mid	3EDR	1.2322	1.036	-5.530	PASS
High	3EDR	1.2337	1.034	-5.480	PASS

Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz | PSD Limit = 8 dBm

Unrestricted Band-Edge

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	2EDR	2400.00	73.191	117.413	44.222	30.00	PASS
Low	3EDR	2400.00	72.090	116.805	44.701	30.00	PASS
High	2EDR	2483.50	56.000	117.055	61.055	30.00	PASS
High	3EDR	2483.50	55.782	116.443	60.661	30.00	PASS

Peak Restricted Band-Edge

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	2EDR	2390.00	51.980	Peak	73.98	22.00	PASS
Low	3EDR	2390.00	53.296	Peak	73.98	20.684	PASS
High	2EDR	2483.50	58.999	Peak	73.98	14.981	PASS
High	3EDR	2483.50	58.937	Peak	73.98	15.043	PASS

*Limit shown is the peak limit taken from FCC Part 15.209

Average Restricted Band-Edge

CH	Mode	Band edge /Measurement Frequency (MHz)	Raw Average Highest out of band level (dBuV/m @ 3m)	DCCF (For Emissions)	Average Highest out of band level (dBuV/m @ 3m)**	Measurement Type	Limit (dBuV/m @ 3m)*	Margin	Result
Low	2EDR	2390.00	40.101	-2.27	42.371	Average	53.98	11.609	PASS
Low	3EDR	2390.00	41.277	-2.27	43.547	Average	53.98	10.433	PASS
High	2EDR	2483.50	44.589	-2.27	46.859	Average	53.98	7.121	PASS
High	3EDR	2483.50	44.832	-2.27	47.102	Average	53.98	6.878	PASS

*Limit shown is the average limit taken from FCC Part 15.209

**Average Highest out of band level = SA Average Level – DCCF (For Emissions). C63.10 Sec. 11.12.2.5.2

See Sec 4.3 for more information on DCCF



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

DTS Radio Measurements						
CH	Transmitter	RAW AVERAGE OUTPUT POWER (dBm)	DCCF (For Power)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	RESULT
Low	2EDR	8.67	1.14	9.81	9.57	PASS
Mid	2EDR	8.54	1.14	9.68	9.29	PASS
High	2EDR	8.77	1.14	9.91	9.79	PASS
Low	3EDR	8.13	1.14	9.27	8.45	PASS
Mid	3EDR	7.67	1.14	8.81	7.60	PASS
High	3EDR	8.30	1.14	9.44	8.79	PASS

Peak Output Power Limit = 125mW;
Average Output Power = (Raw Average Output Power) + (DCCF For Power)



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, Sec. 11.9.2.2.4

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables below.
4. Compiled values can be found in the Results section, 4.0.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.

4.3 DUTY CYCLE

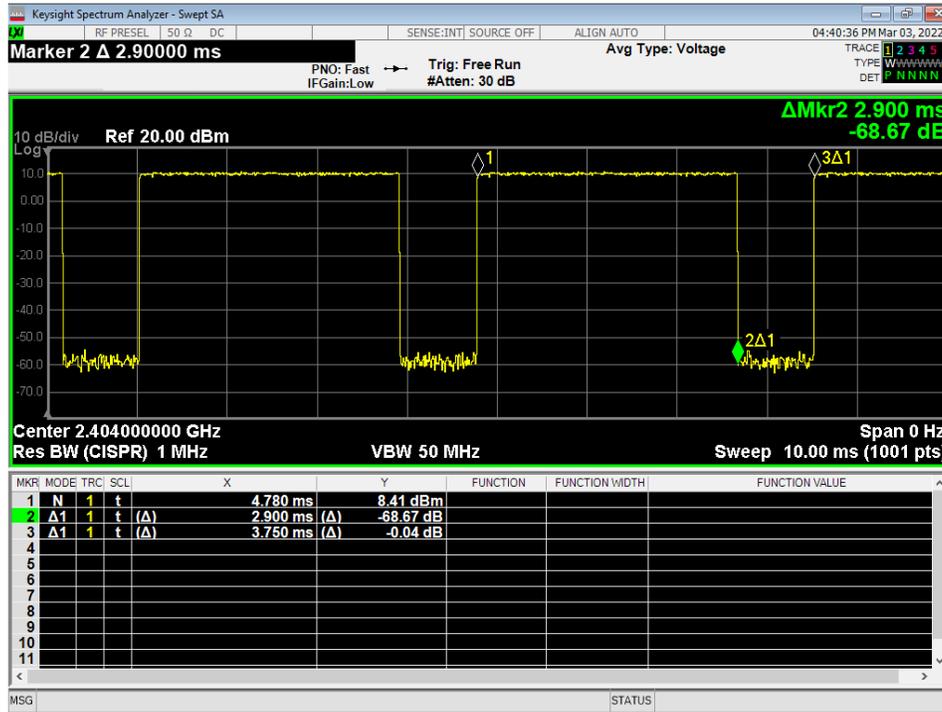


Figure 3 – Duty Cycle, 2EDR

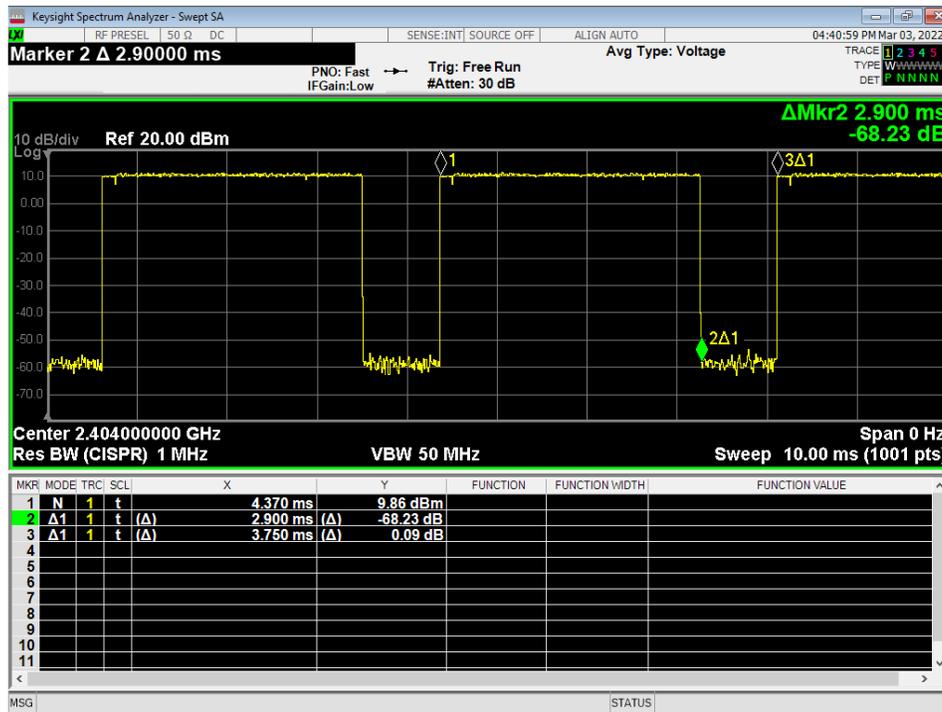


Figure 4 – Duty Cycle, 3EDR



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

DCCF For Emissions (Duty Cycle Correction Factor) = $20 * \text{Log}(\text{Duty Cycle})$
 $-2.27 = 20 * \text{Log}(77 / 100)$

DCCF For Power (Duty Cycle Correction Factor) = $10 * \text{Log}(1/\text{Duty Cycle})$
 $1.14 = 10 * \text{Log}(1 / 0.77)$

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

Test procedures:

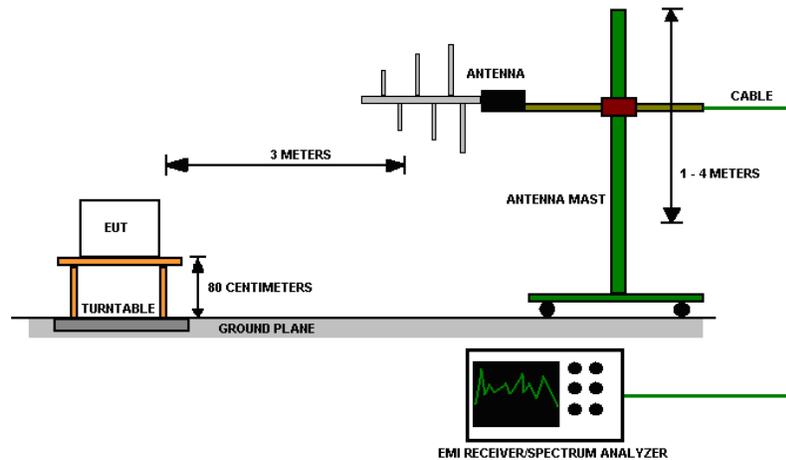- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

Figure 5 - Radiated Emissions Test Setup
NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

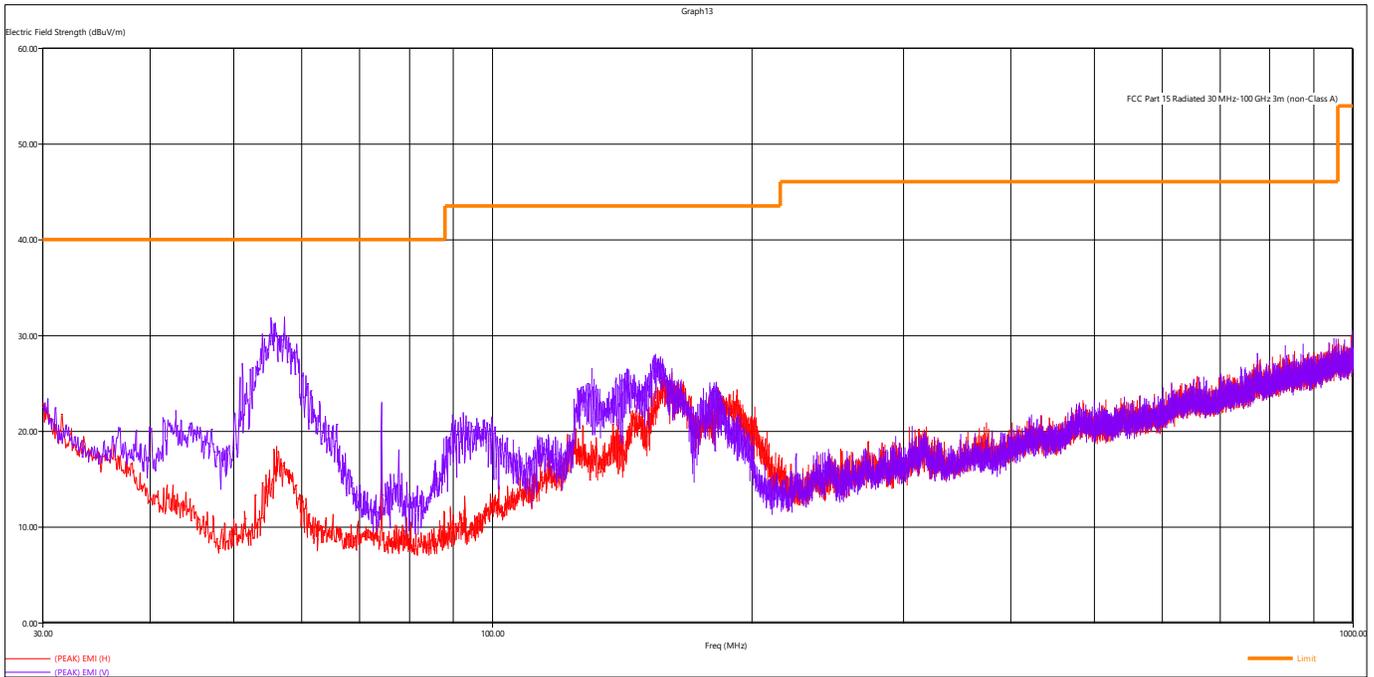


Figure 6 - Radiated Emissions Plot, Receive

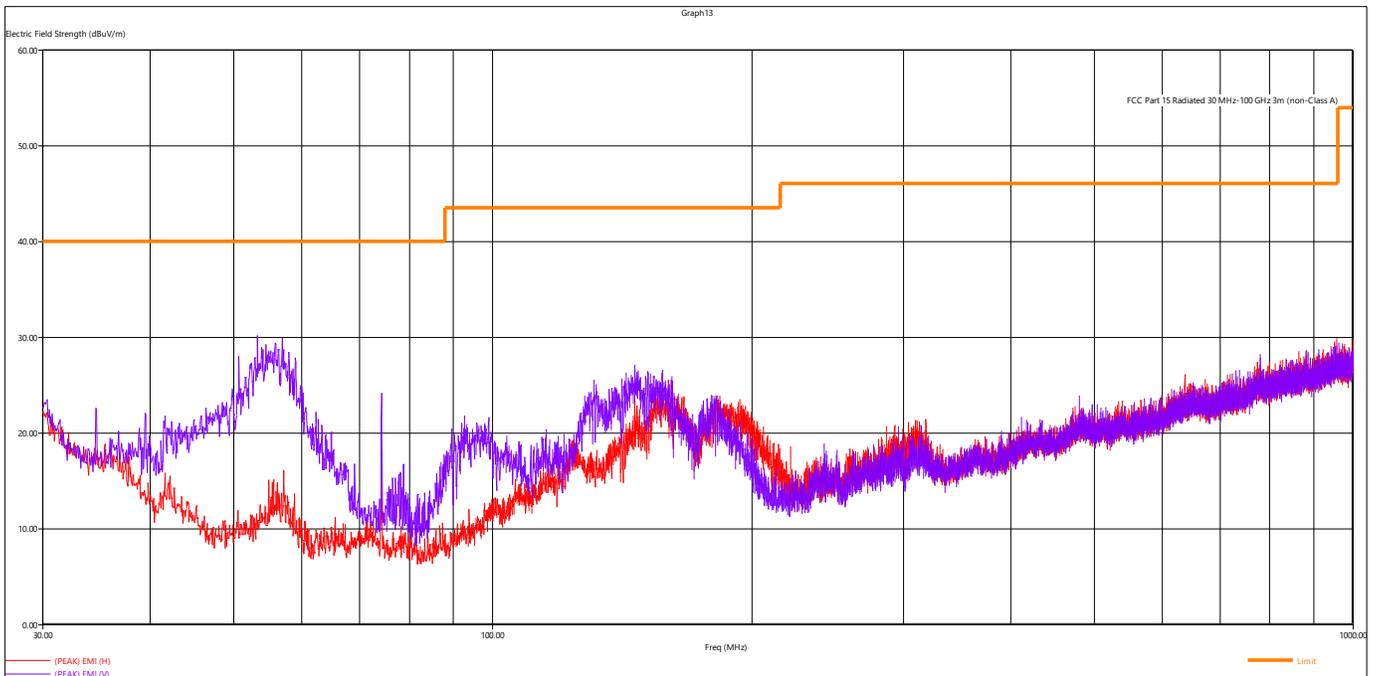


Figure 7 - Radiated Emissions Plot, BT EDR 2MB

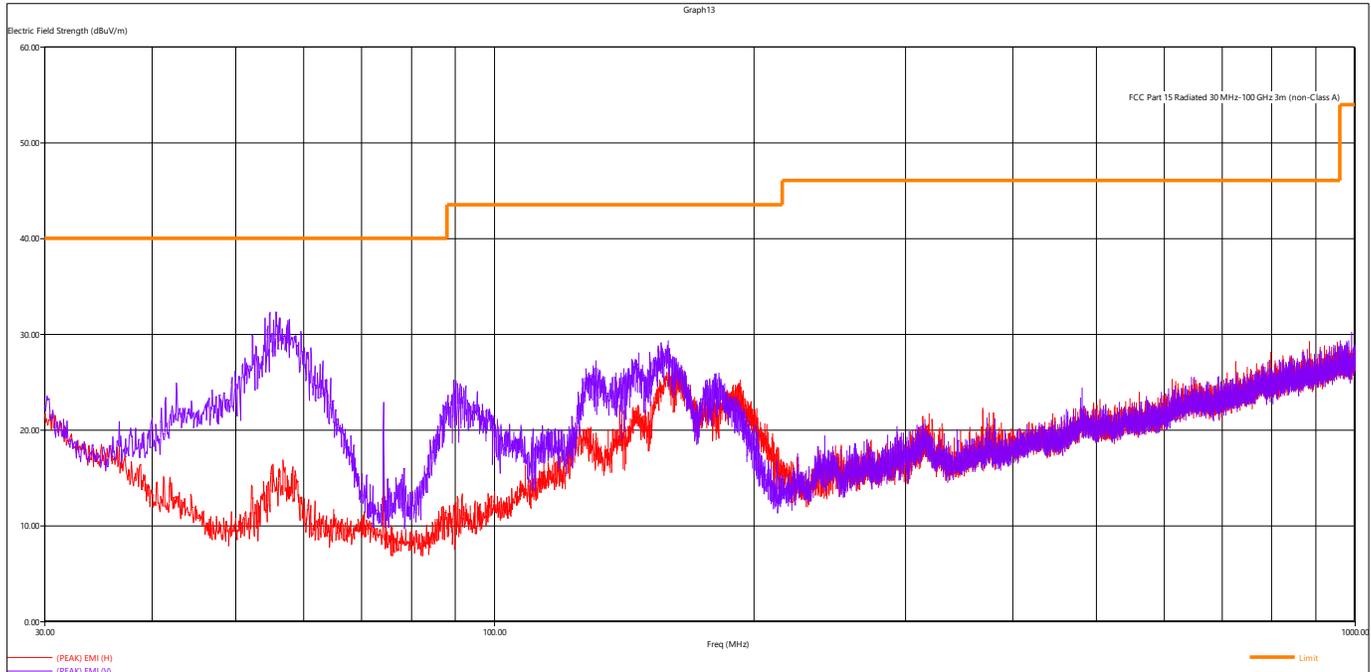


Figure 8 - Radiated Emissions Plot, BT EDR 3MB

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level
5. Emissions found to be at least 6dB below limit line and were not reported.

Peak Measurements								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
2401.840000	107.45	NA	NA	524.00	119.00	H	Low	2EDR
2440.202000	109.51	NA	NA	234.00	271.00	H	Mid	2EDR
2479.806000	109.10	NA	NA	126.00	127.00	H	High	2EDR
2401.188000	102.73	NA	NA	259.00	238.00	H	Low	2EDR
2439.844000	107.53	NA	NA	208.00	231.00	H	Mid	2EDR
2480.384000	107.96	NA	NA	289.00	126.00	H	High	2EDR

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above. All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

Average Measurements								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
2401.840000	105.18	NA	NA	524.00	119.00	H	Low	2EDR
2440.202000	107.24	NA	NA	234.00	271.00	H	Mid	2EDR
2479.806000	106.83	NA	NA	126.00	127.00	H	High	2EDR
2401.188000	100.46	NA	NA	259.00	238.00	H	Low	2EDR
2439.844000	105.26	NA	NA	208.00	231.00	H	Mid	2EDR
2480.384000	105.69	NA	NA	289.00	126.00	H	High	2EDR

*Average Level = Peak level + DCCF (For Emissions),
See Sec 4.3 for more information on DCCF
All other emissions found to be at least 6dB below limit line



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report. The line shown in the plots is not a limit line. It is a reference line placed at -20dBm

Deviations from test standard:

120kHz RBW was used for testing.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

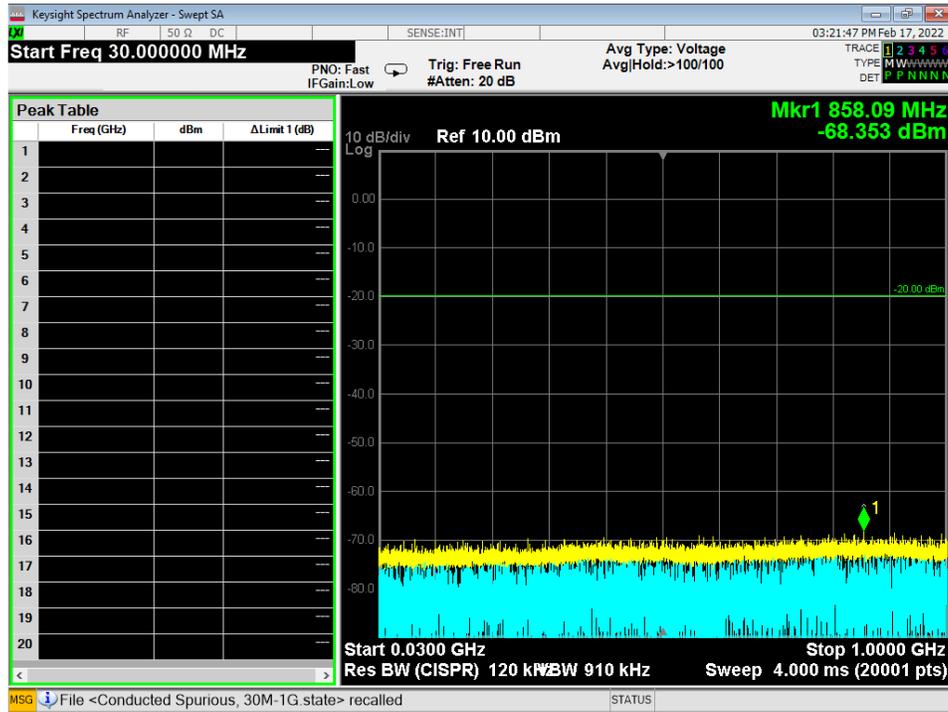


Figure 9 - Radiated Emissions Plot, 2EDR, 30M – 1G

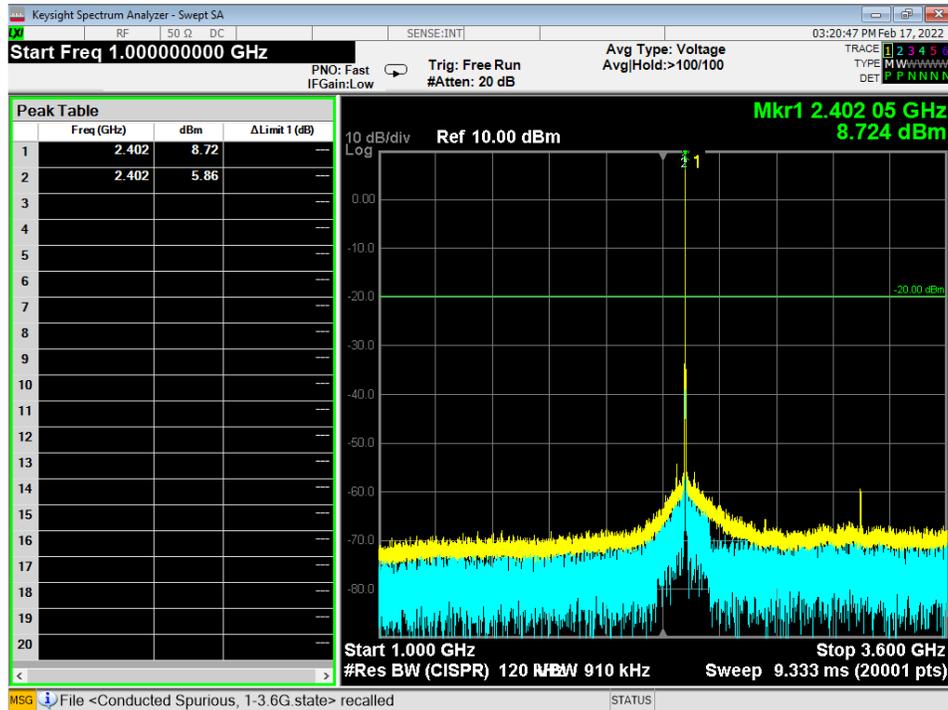


Figure 10 - Radiated Emissions Plot, 2EDR, 1G – 3.6G

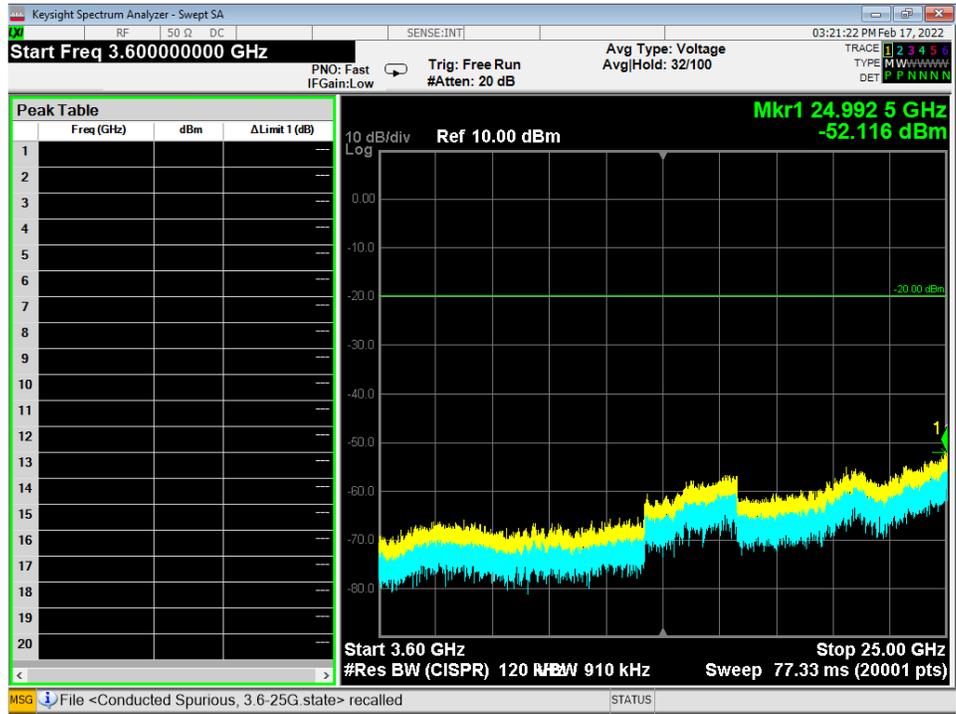


Figure 11 - Radiated Emissions Plot, 2EDR, 3.6G – 25G

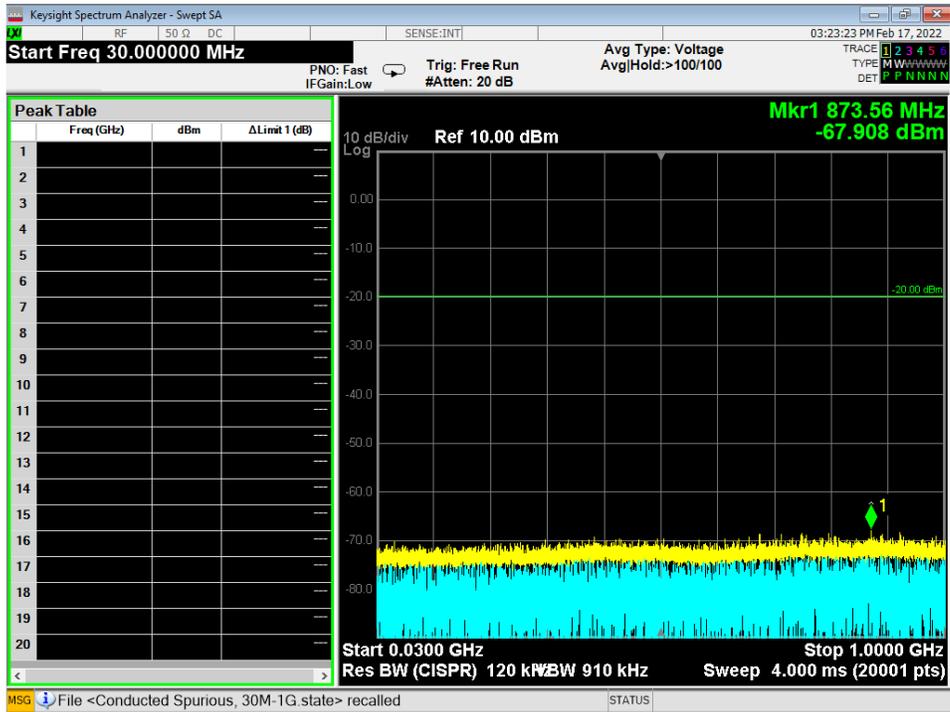


Figure 12 - Radiated Emissions Plot, 3EDR, 30M – 1G

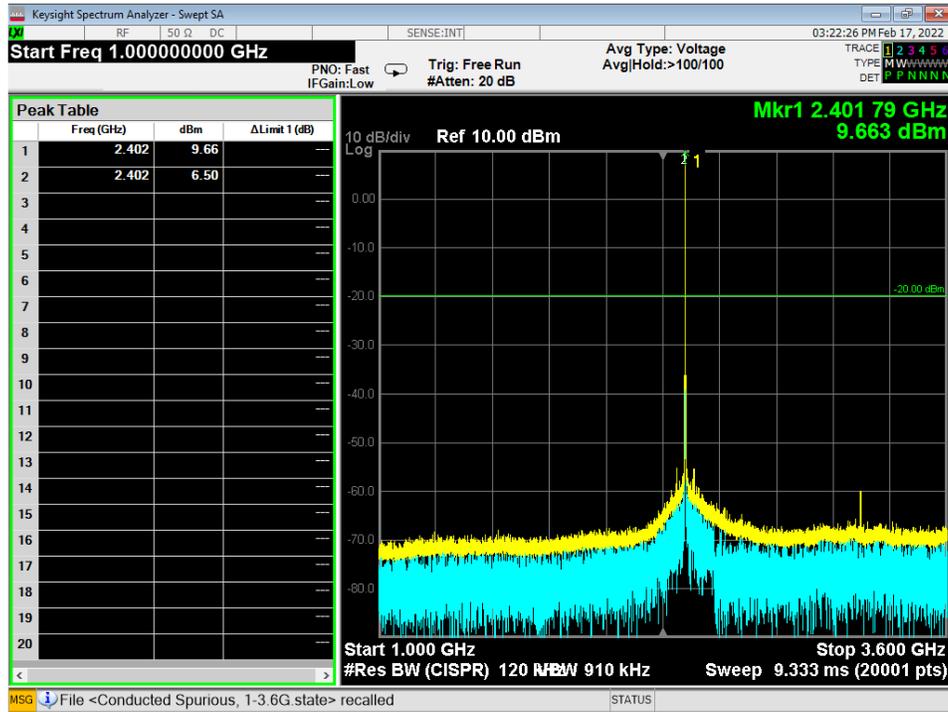


Figure 13 - Radiated Emissions Plot, 3EDR, 1G – 3.6G

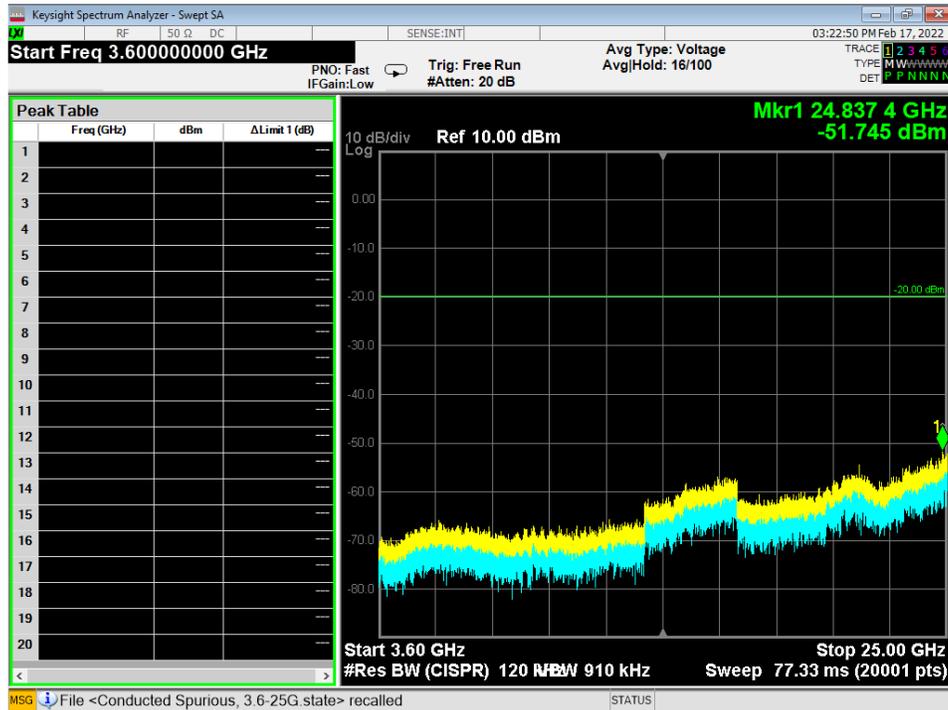


Figure 14 - Radiated Emissions Plot, 3EDR, 3.6G – 25G



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

4.6 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

4.7 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are reported on the graph.

4.8 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

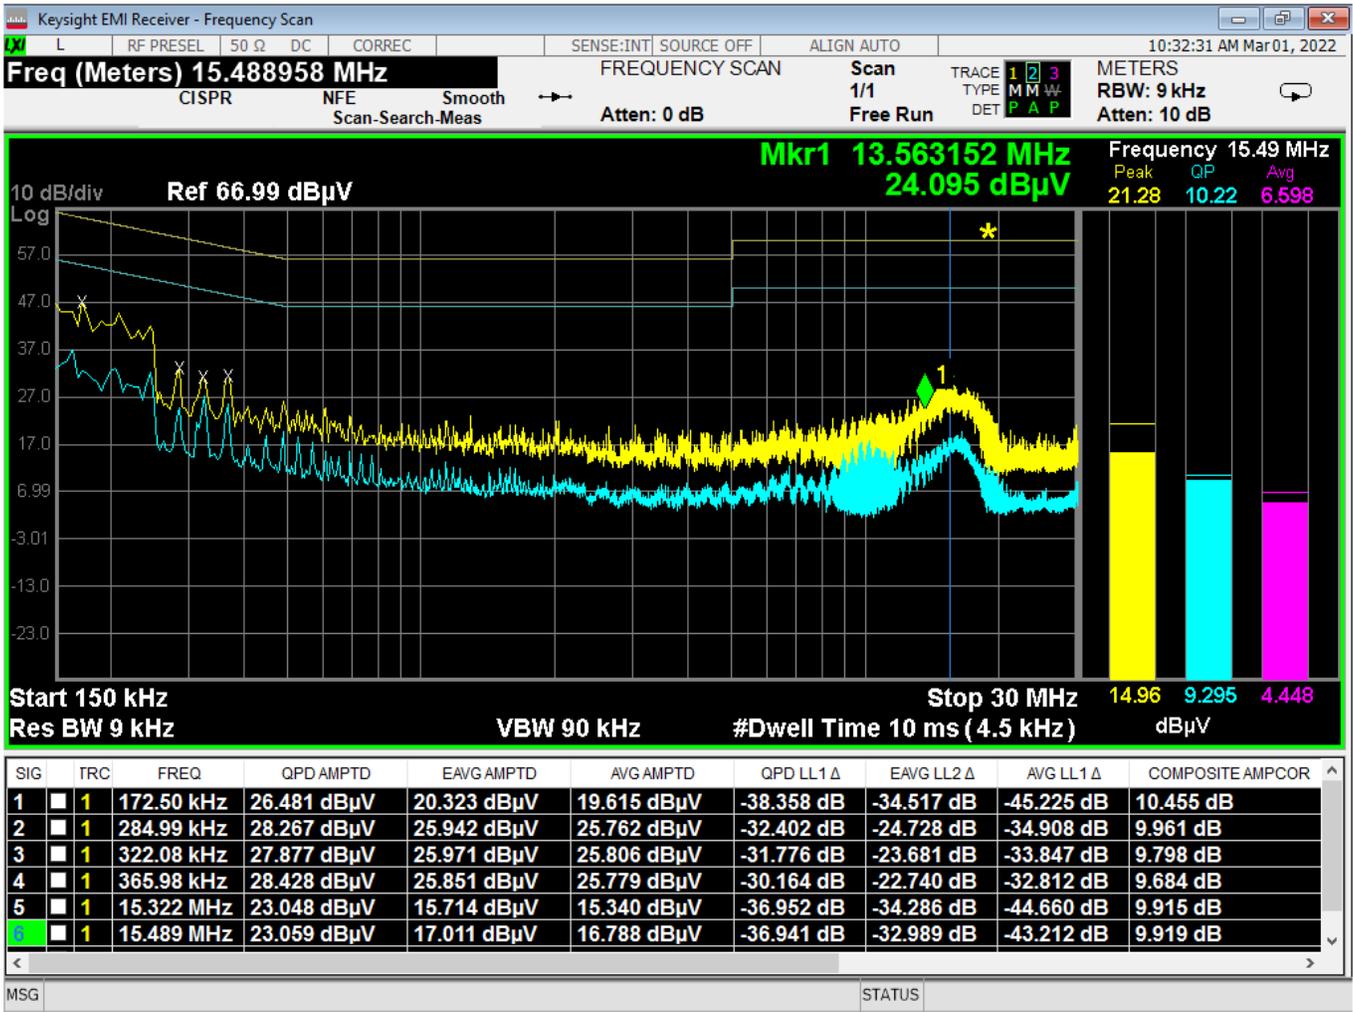


Figure 15 - Conducted Emissions Plot, Line, TX

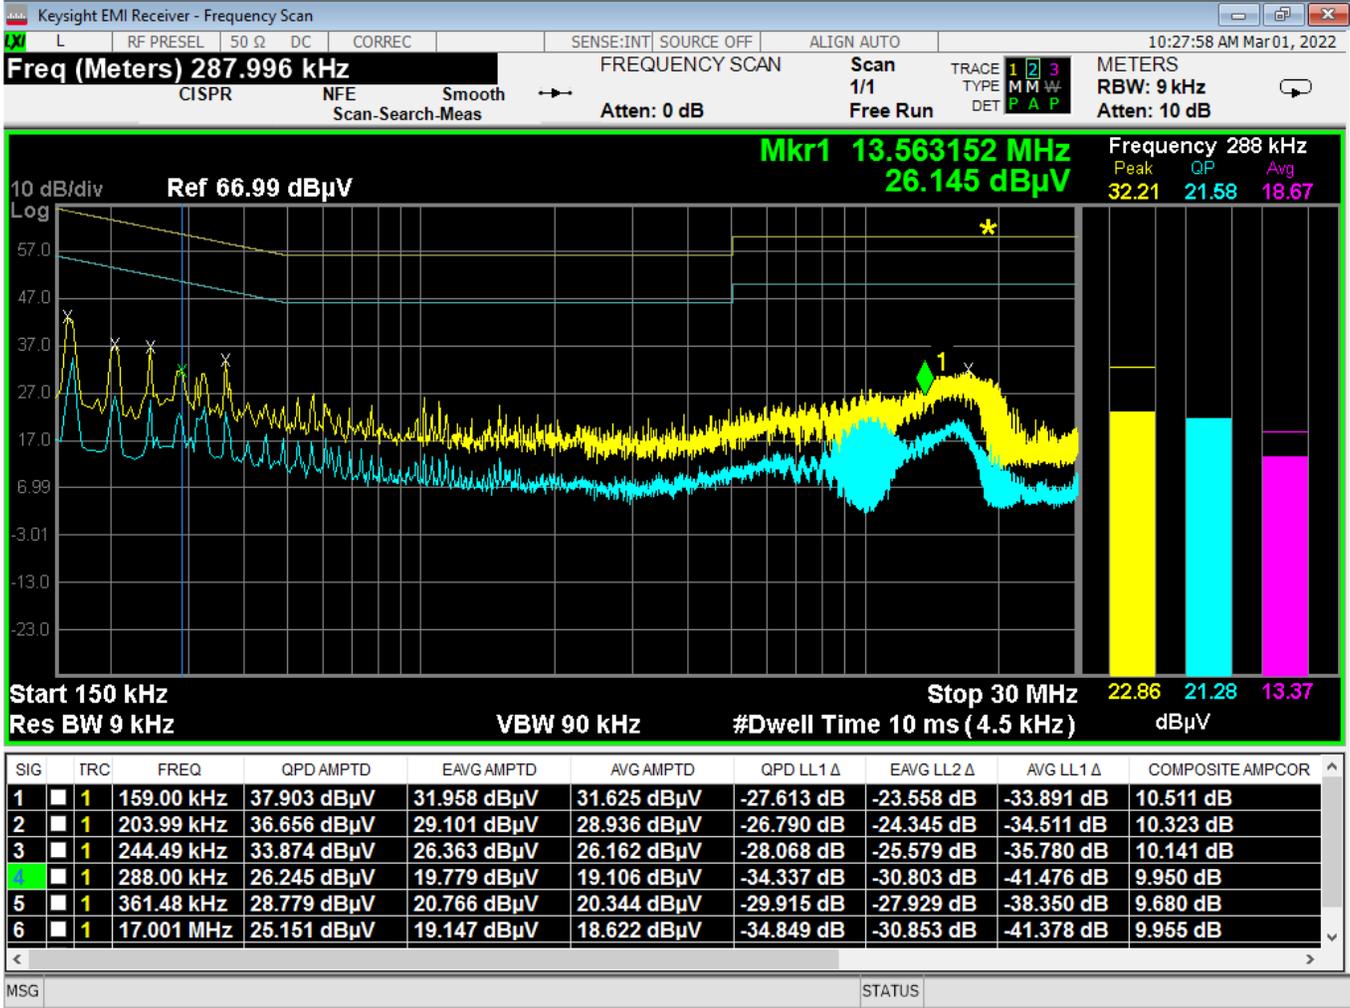


Figure 16 - Conducted Emissions Plot, Neutral, TX

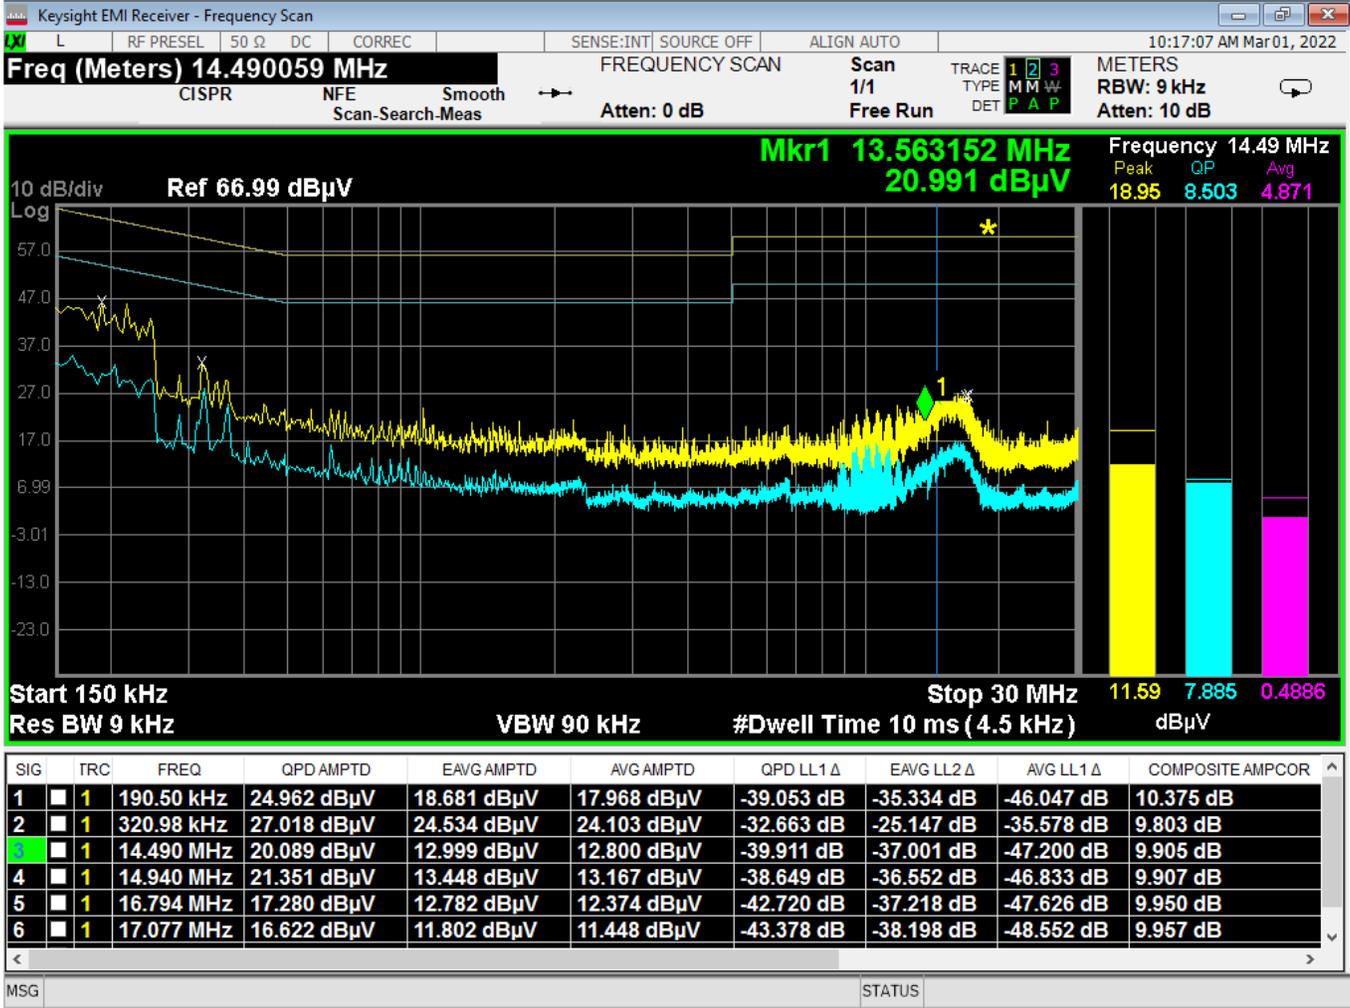


Figure 17 - Conducted Emissions Plot, Line, IDLE

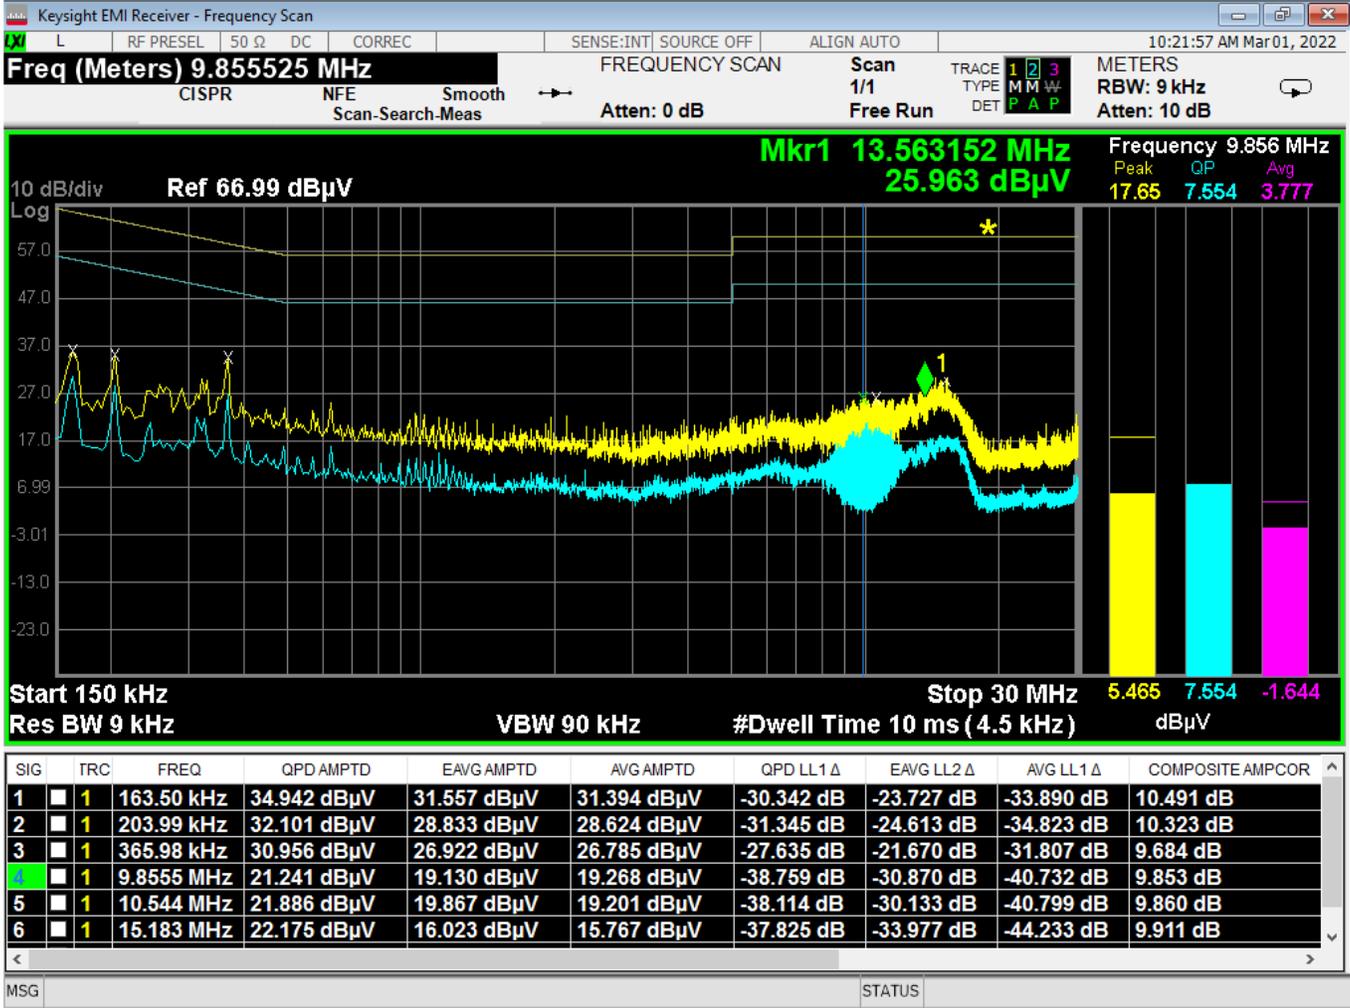


Figure 18 - Conducted Emissions Plot, Neutral, IDLE



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

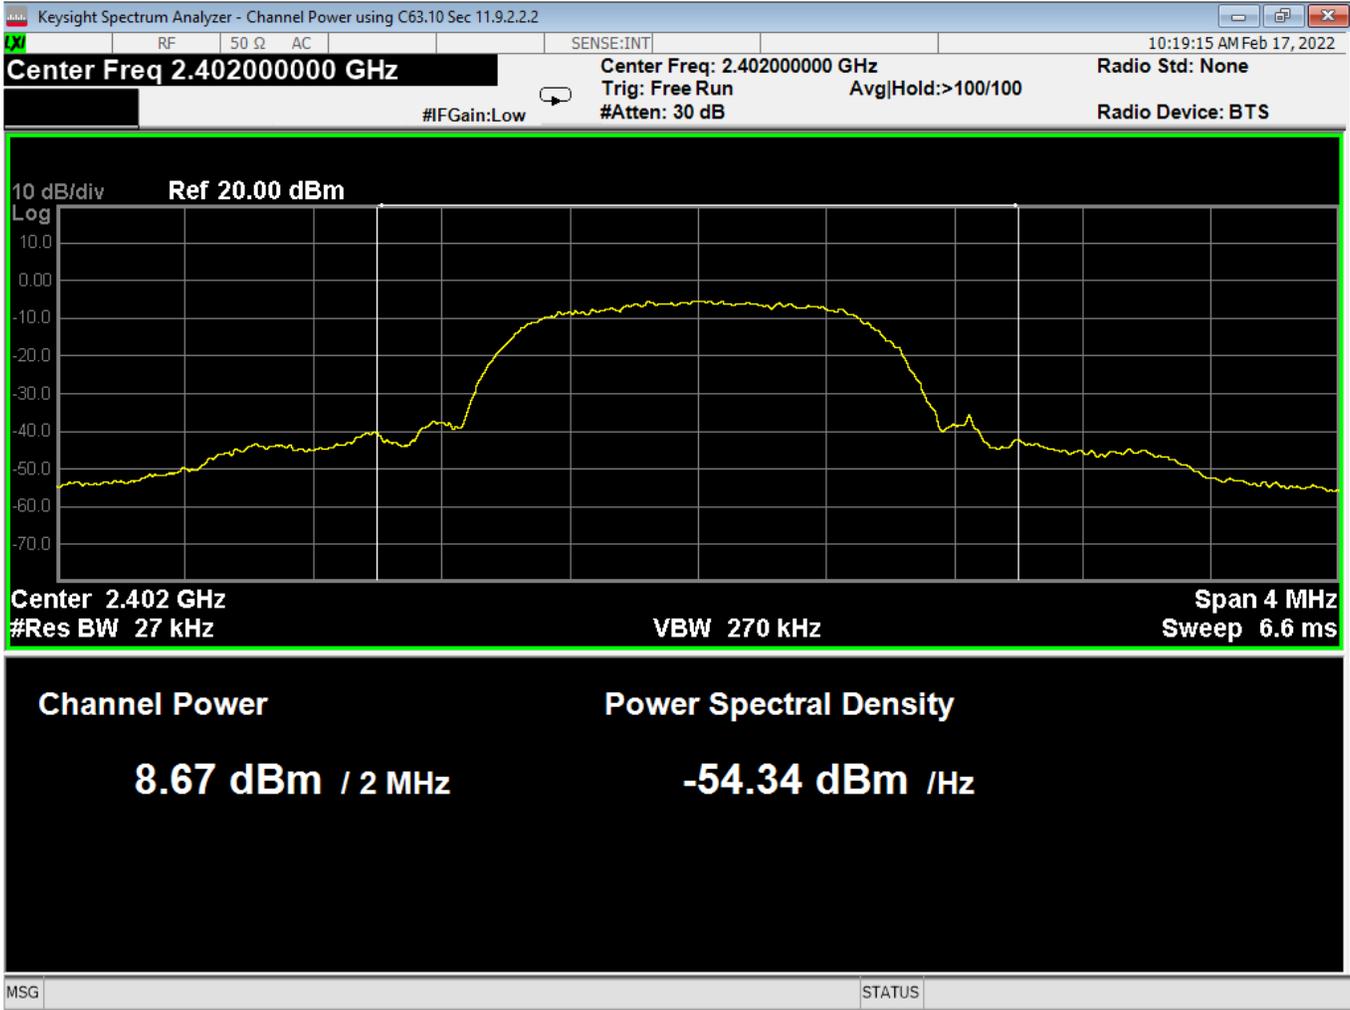
APPENDIX C – GRAPHS AND TABLES



01 Average Power, Low Channel, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

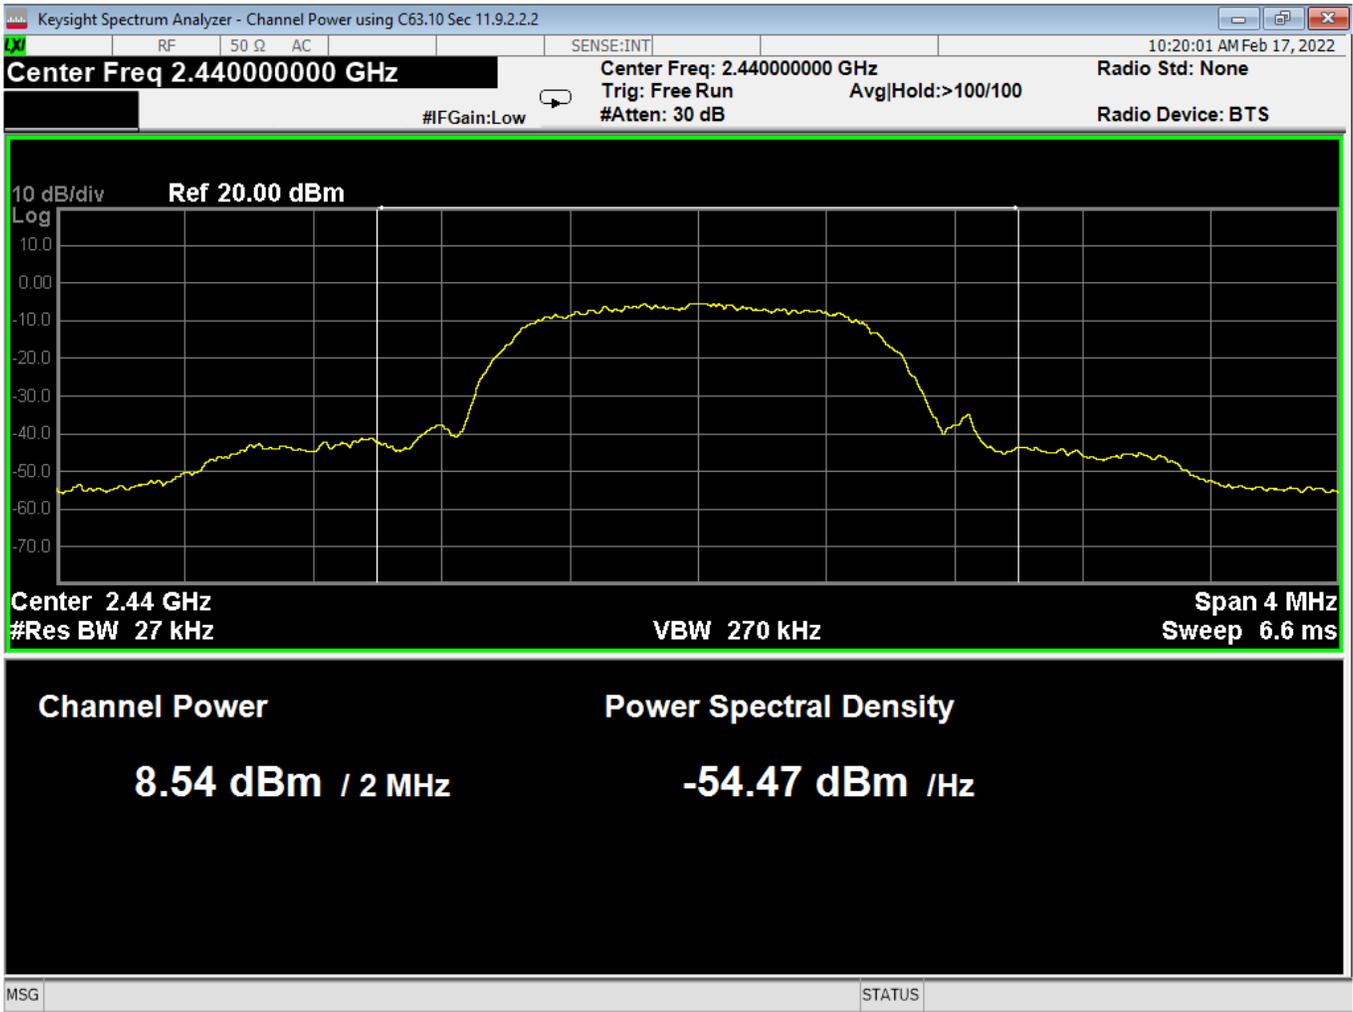

02 Average Power, Mid Channel, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

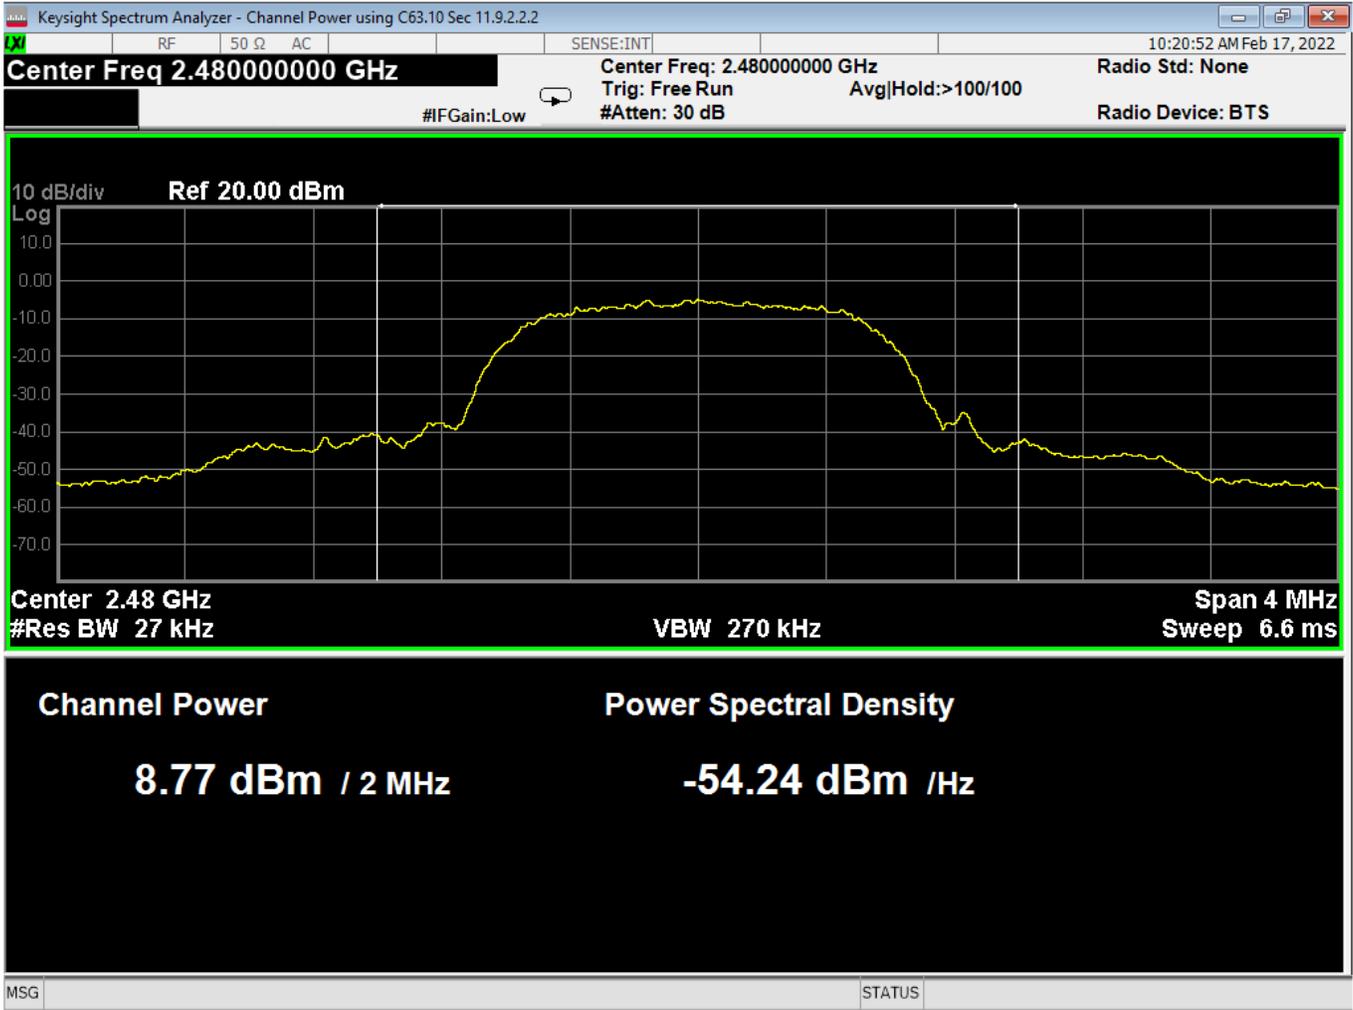

03 Average Power, High Channel, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

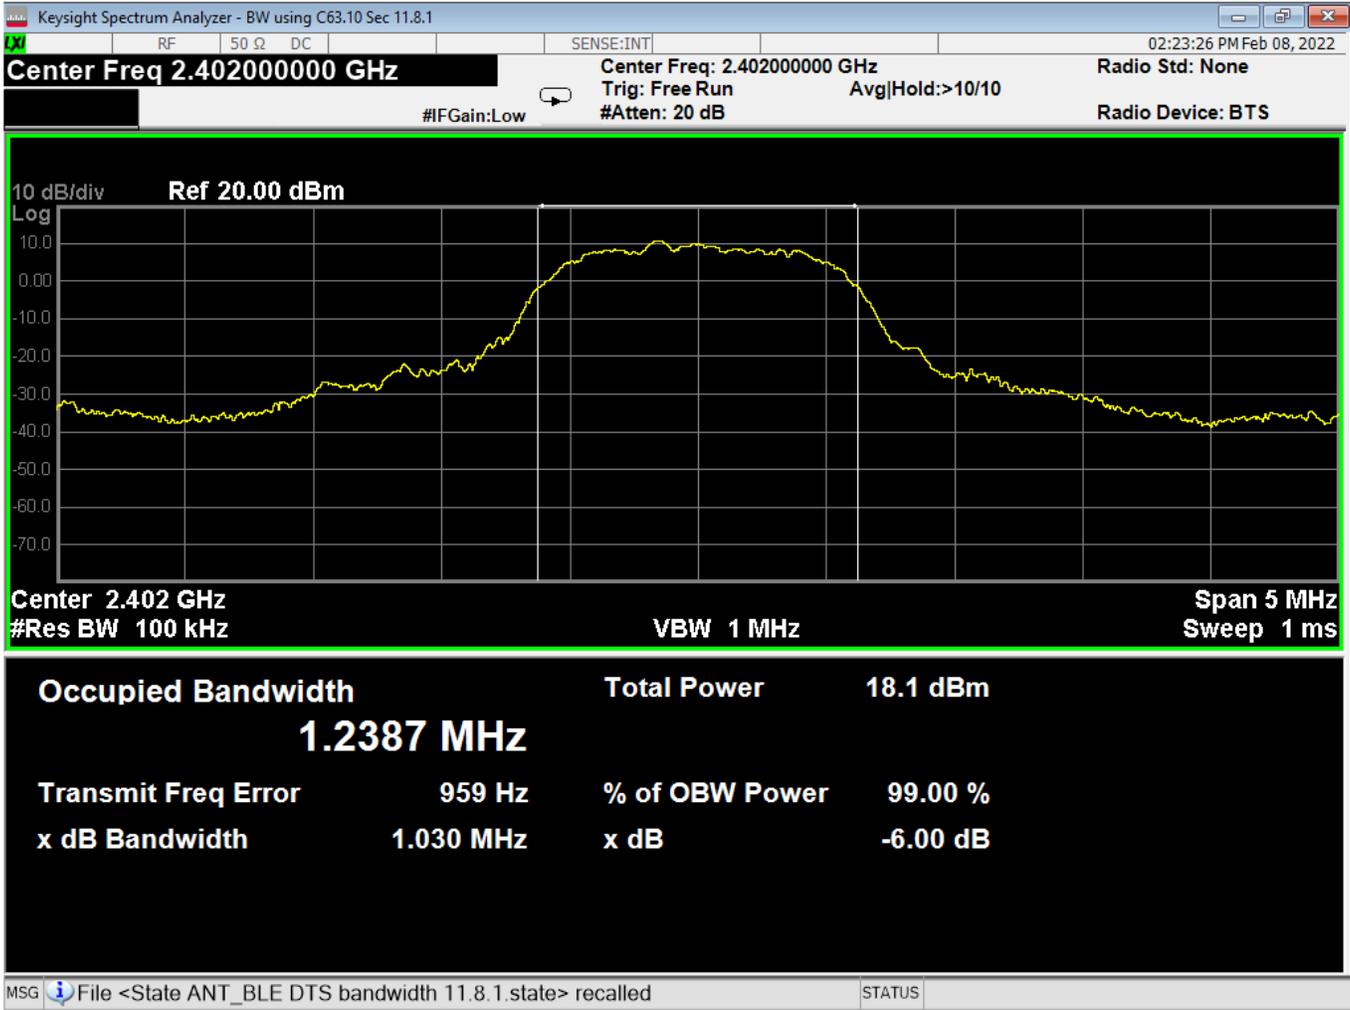

04 Bandwidth, Low Channel, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

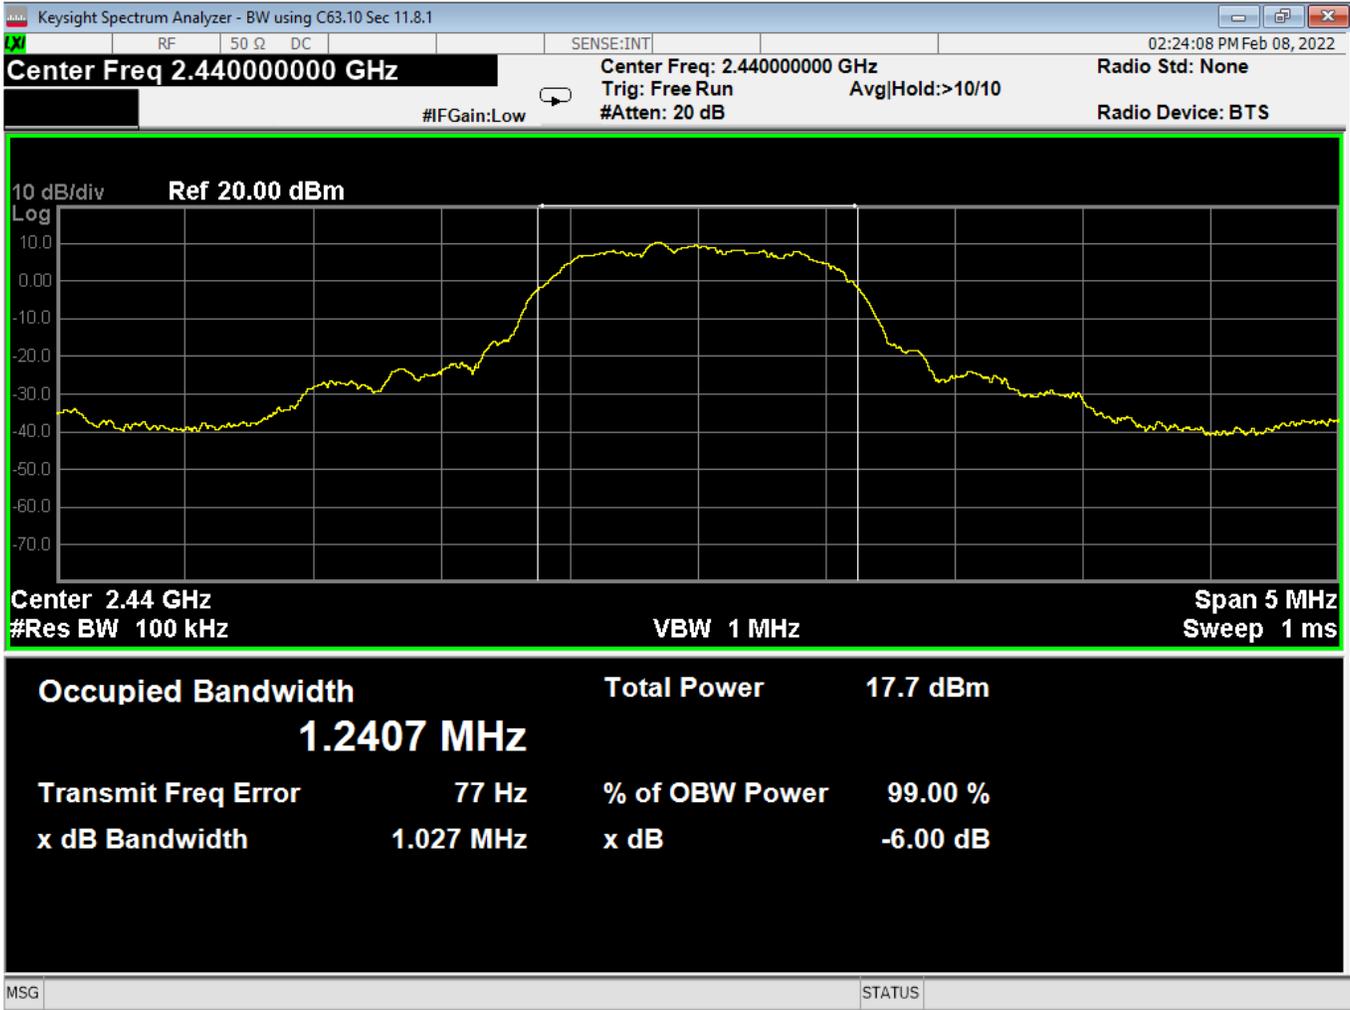

05 Bandwidth, Mid Channel, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

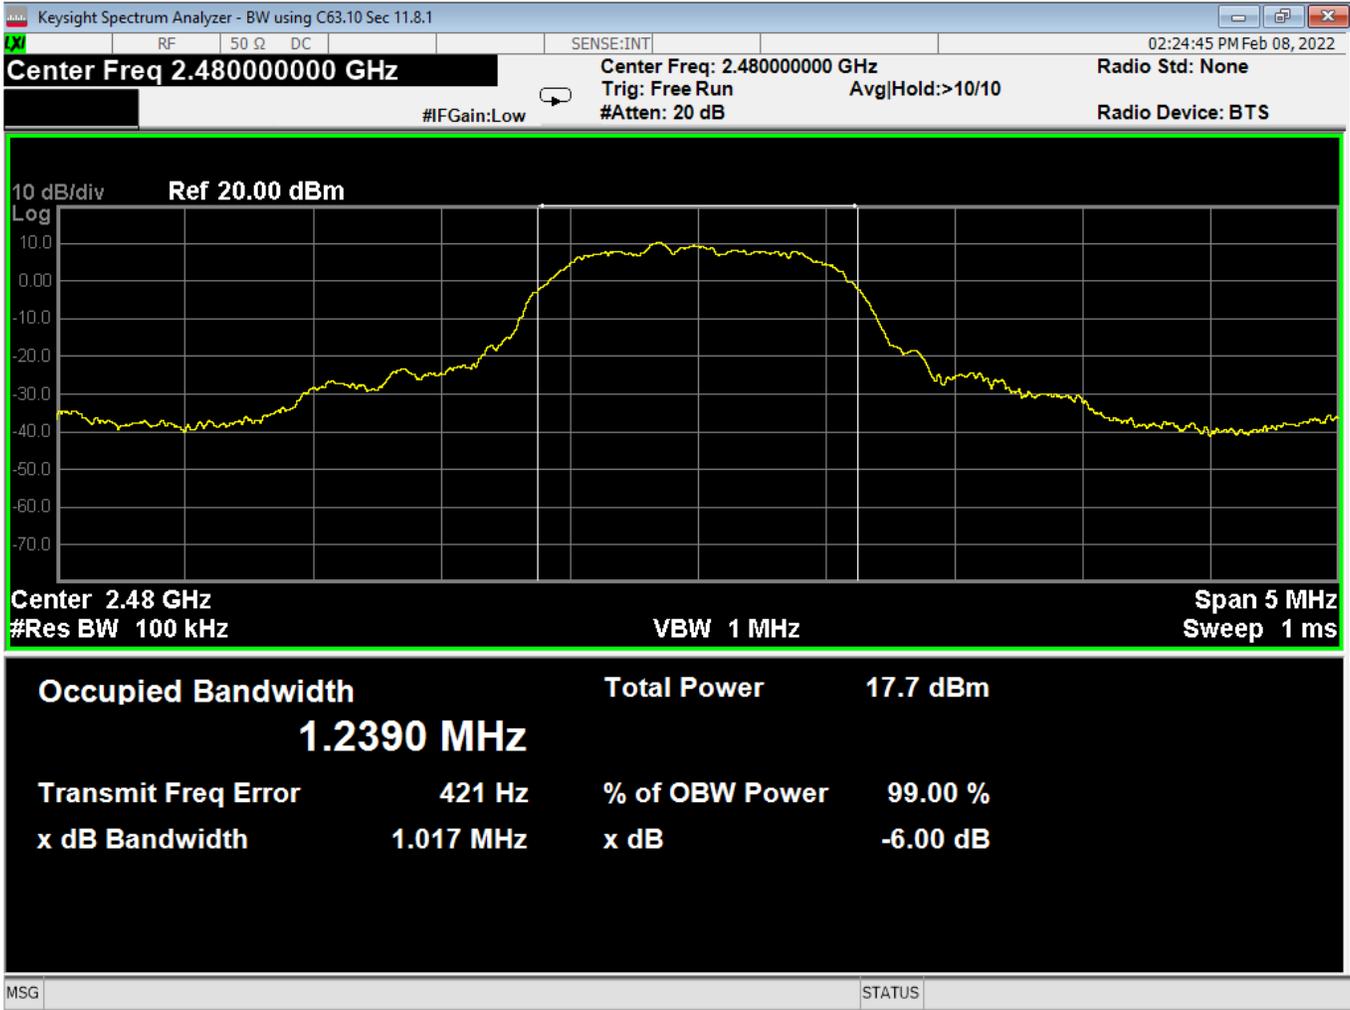

06 Bandwidth, High Channel, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

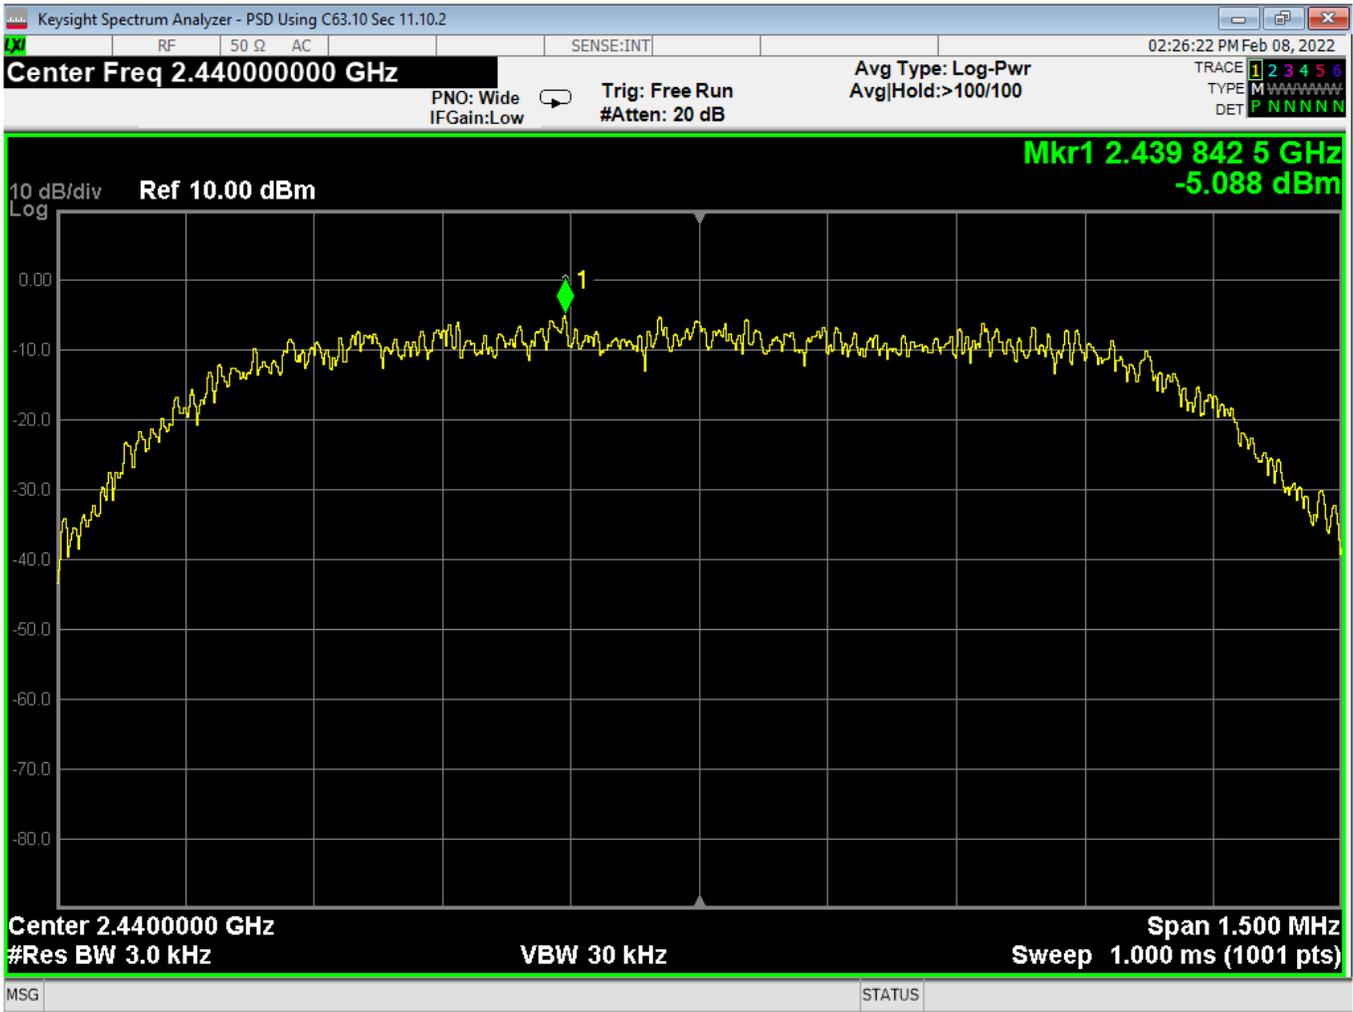

08 PSD, Mid Channel, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

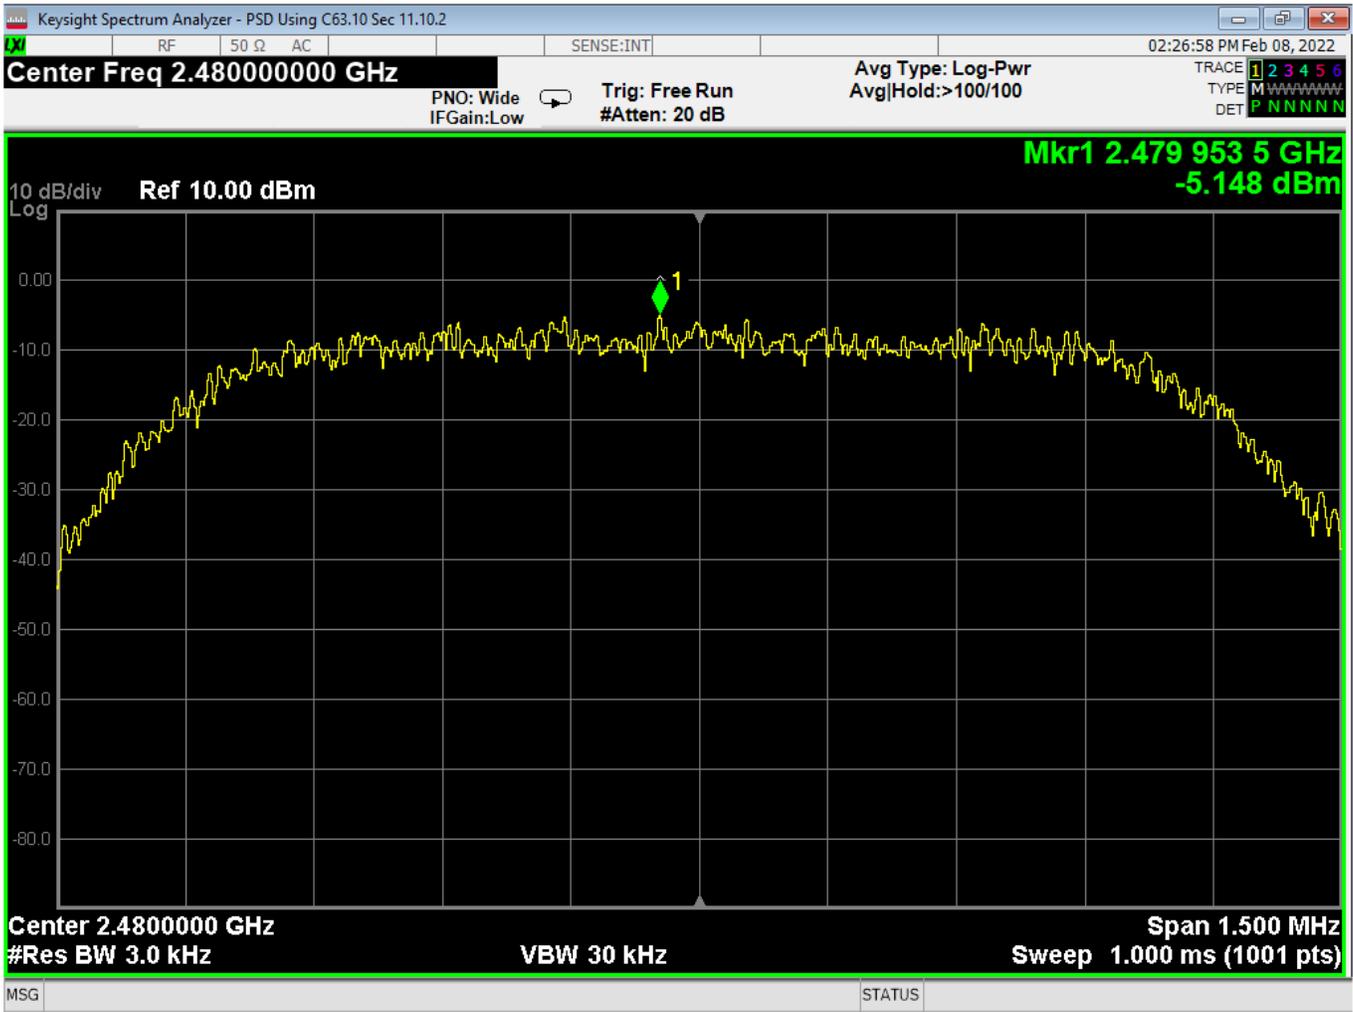

09 PSD, High Channel, 2EDR



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

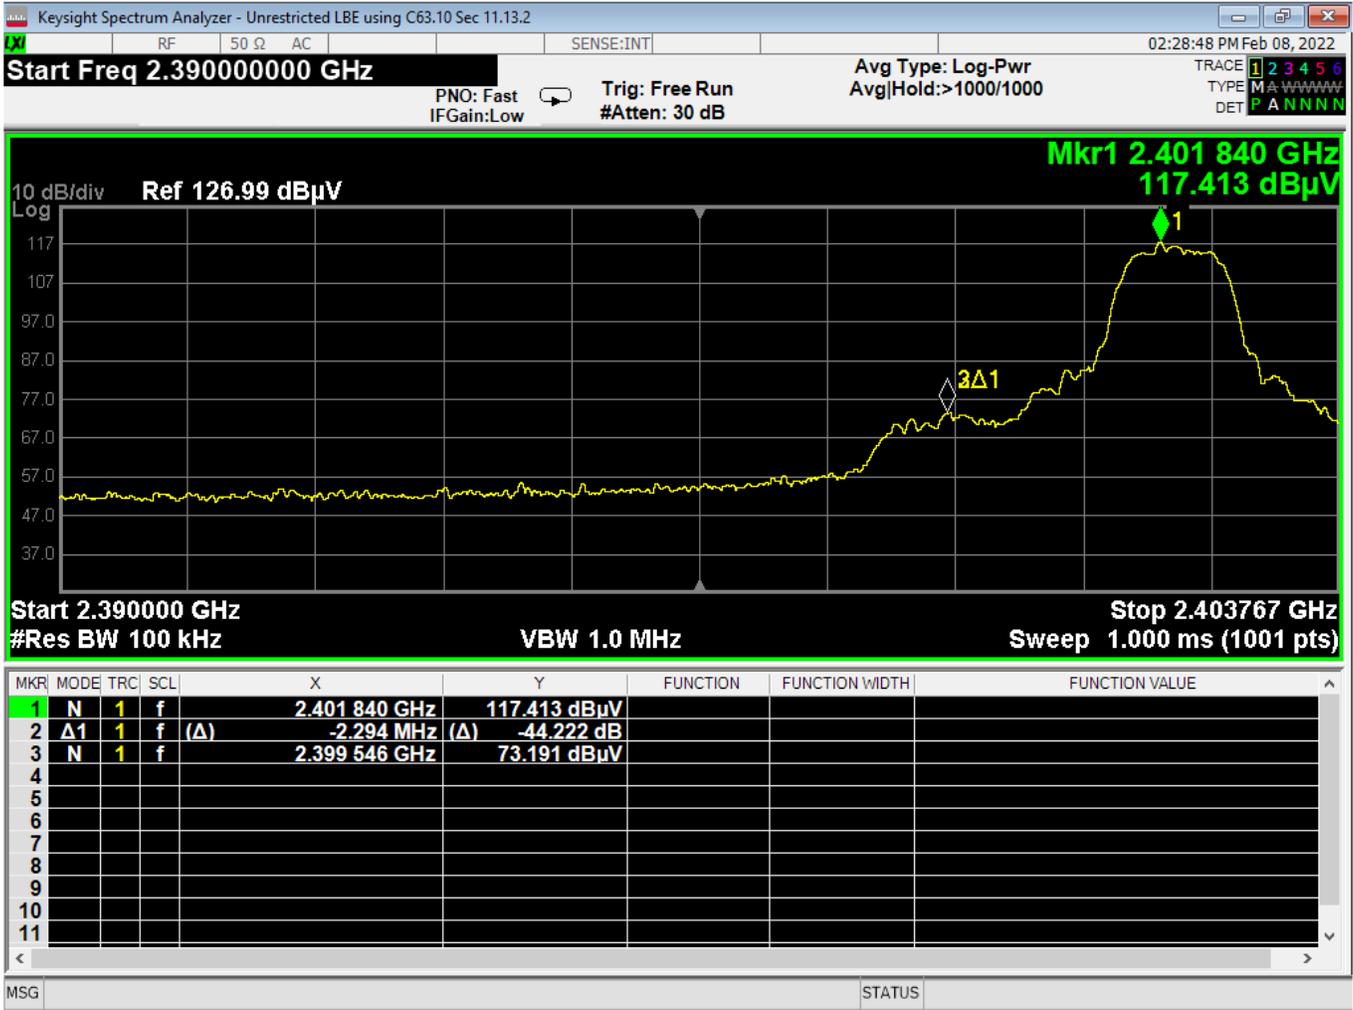

10 Lower Bandedge, Unrestricted, 2EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		



11 Higher Bandedge, Unrestricted, 2EDR



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

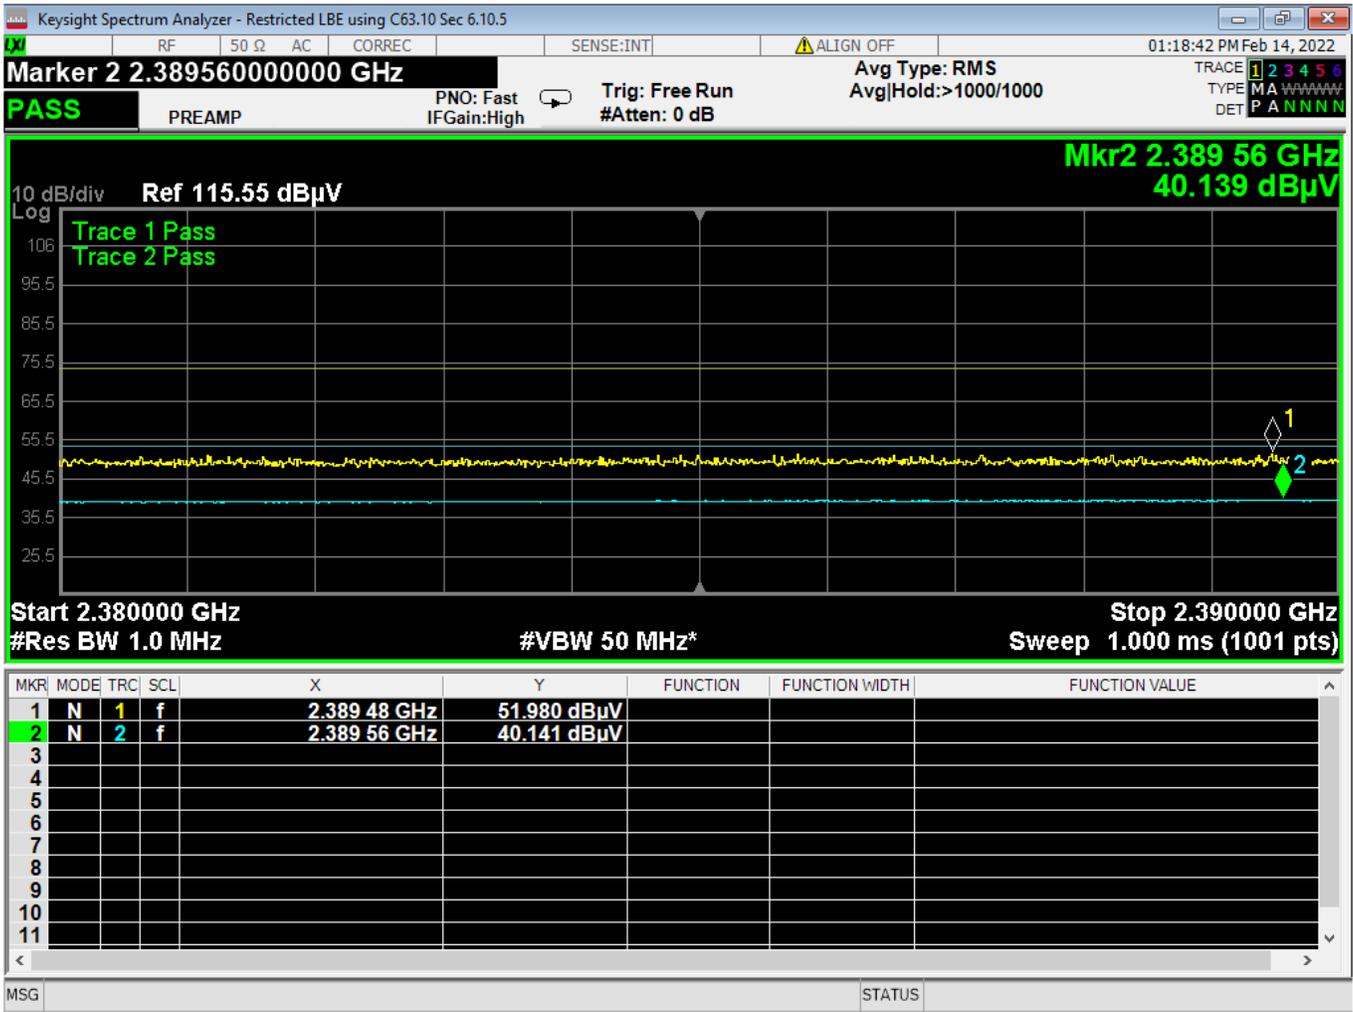


12 Lower Bandedge, Restricted, 2EDR

*Measurement is corrected for losses, but not corrected for DCCF, see section 4.3 for more information on DCCF. See section 4.0 for fully corrected values.



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

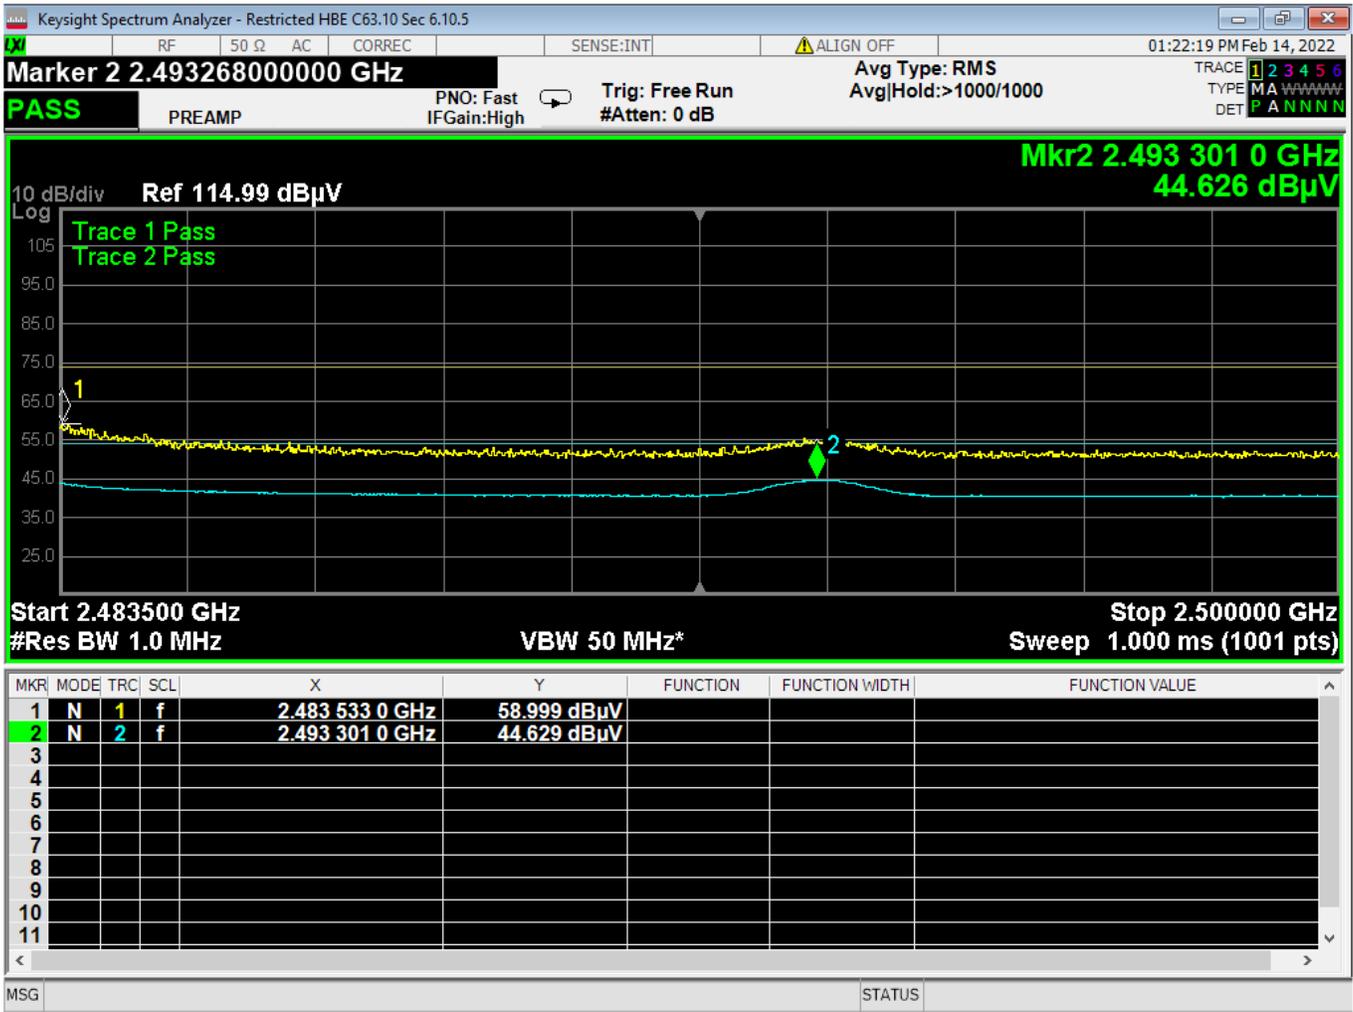


13 Higher Bandedge, Restricted, 2EDR

*Measurement is corrected for losses, but not corrected for DCCF, see section 4.3 for more information on DCCF. See section 4.0 for fully corrected values.




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

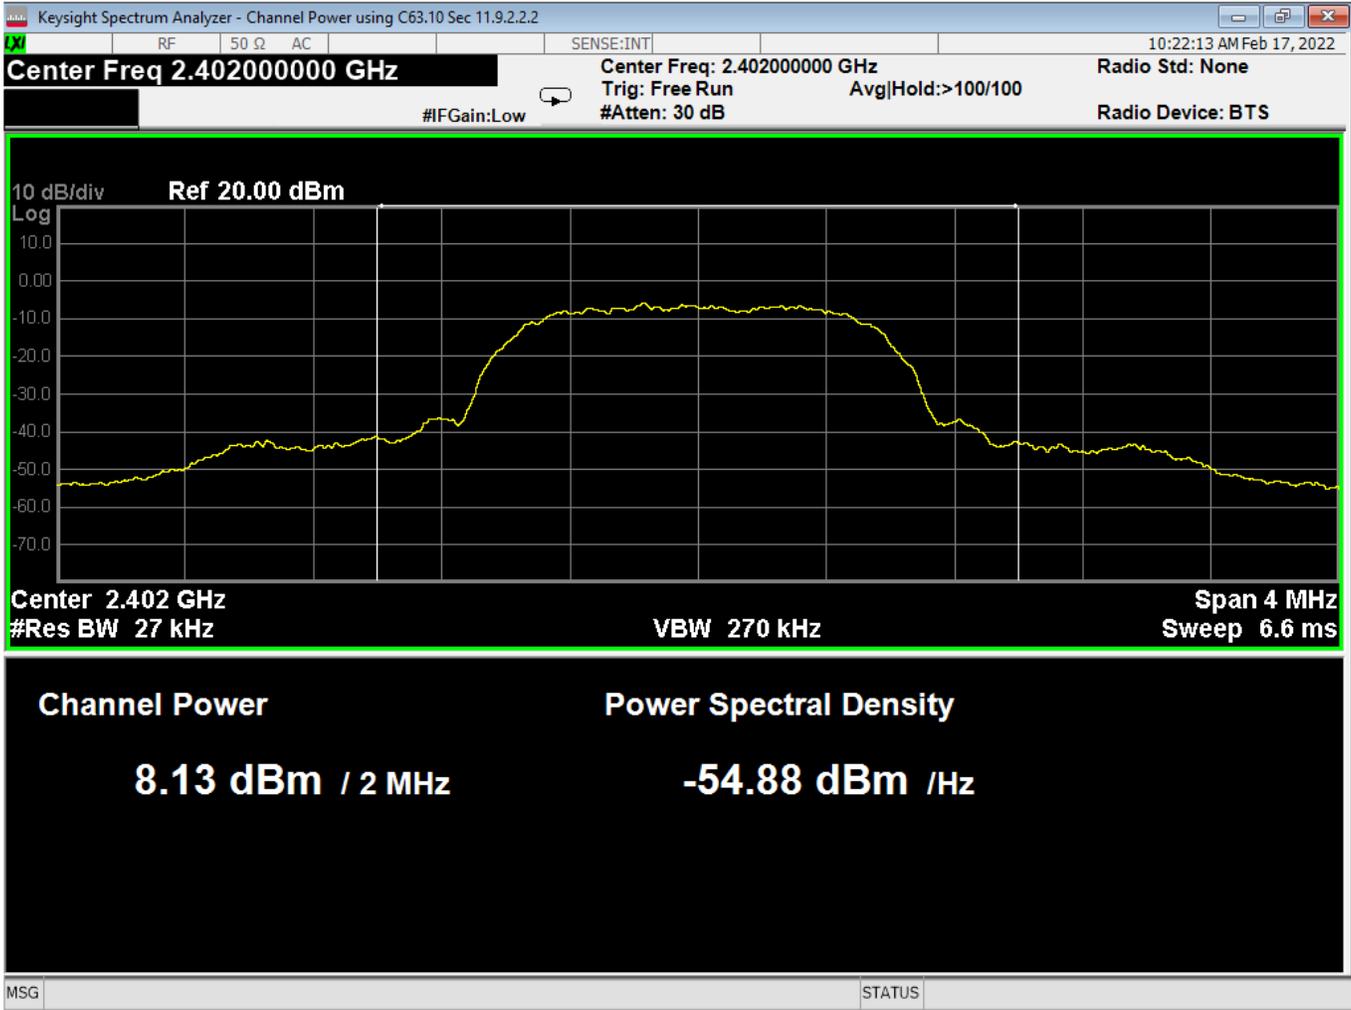

14 Average Power, Low Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

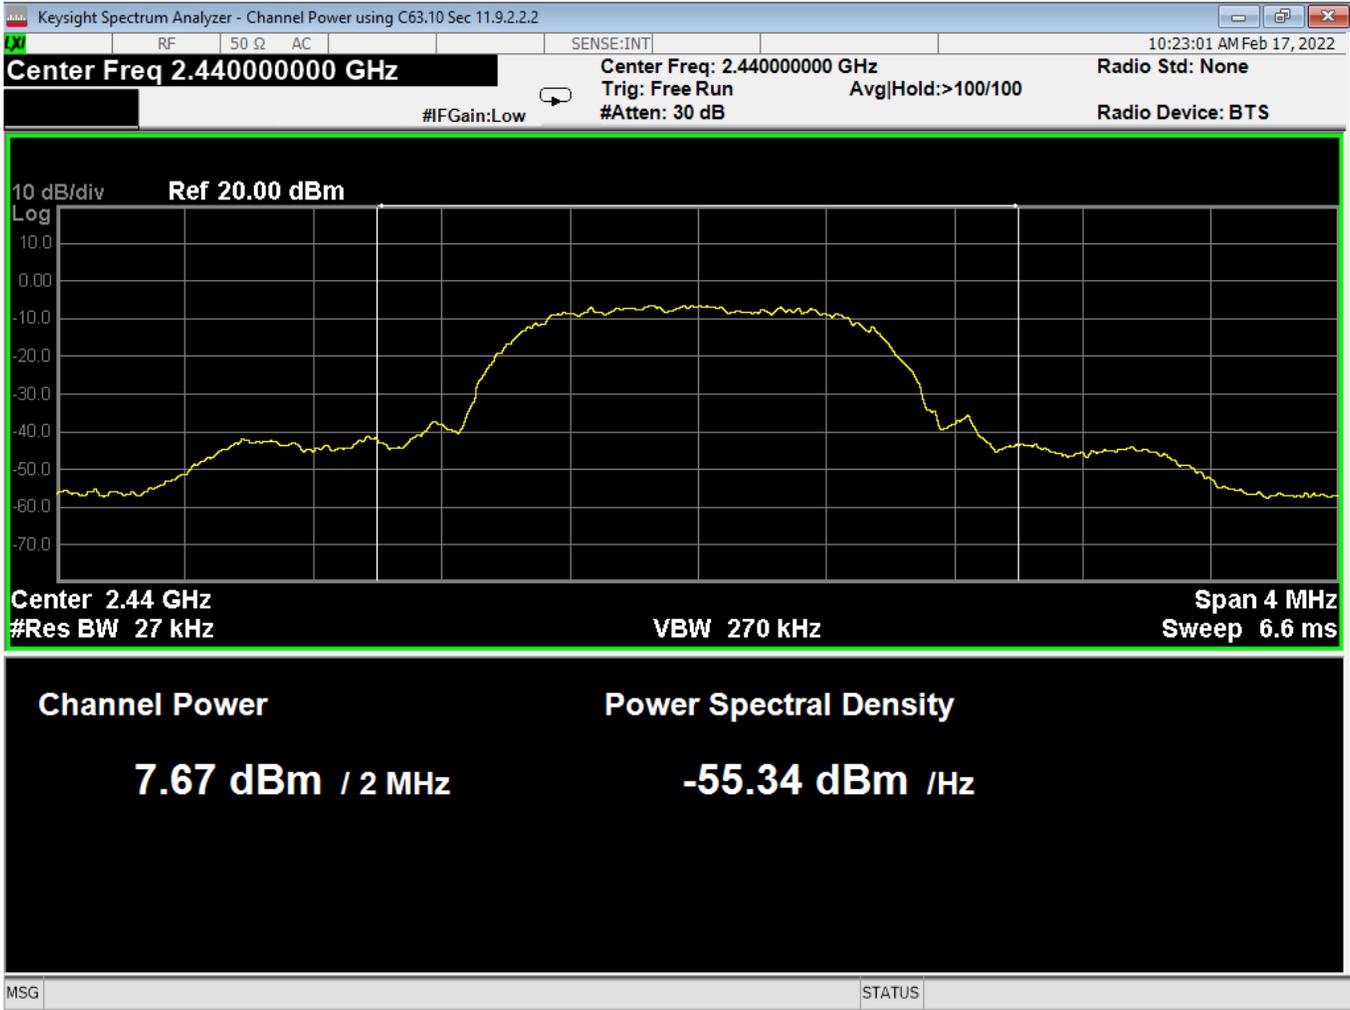

15 Average Power, Mid Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

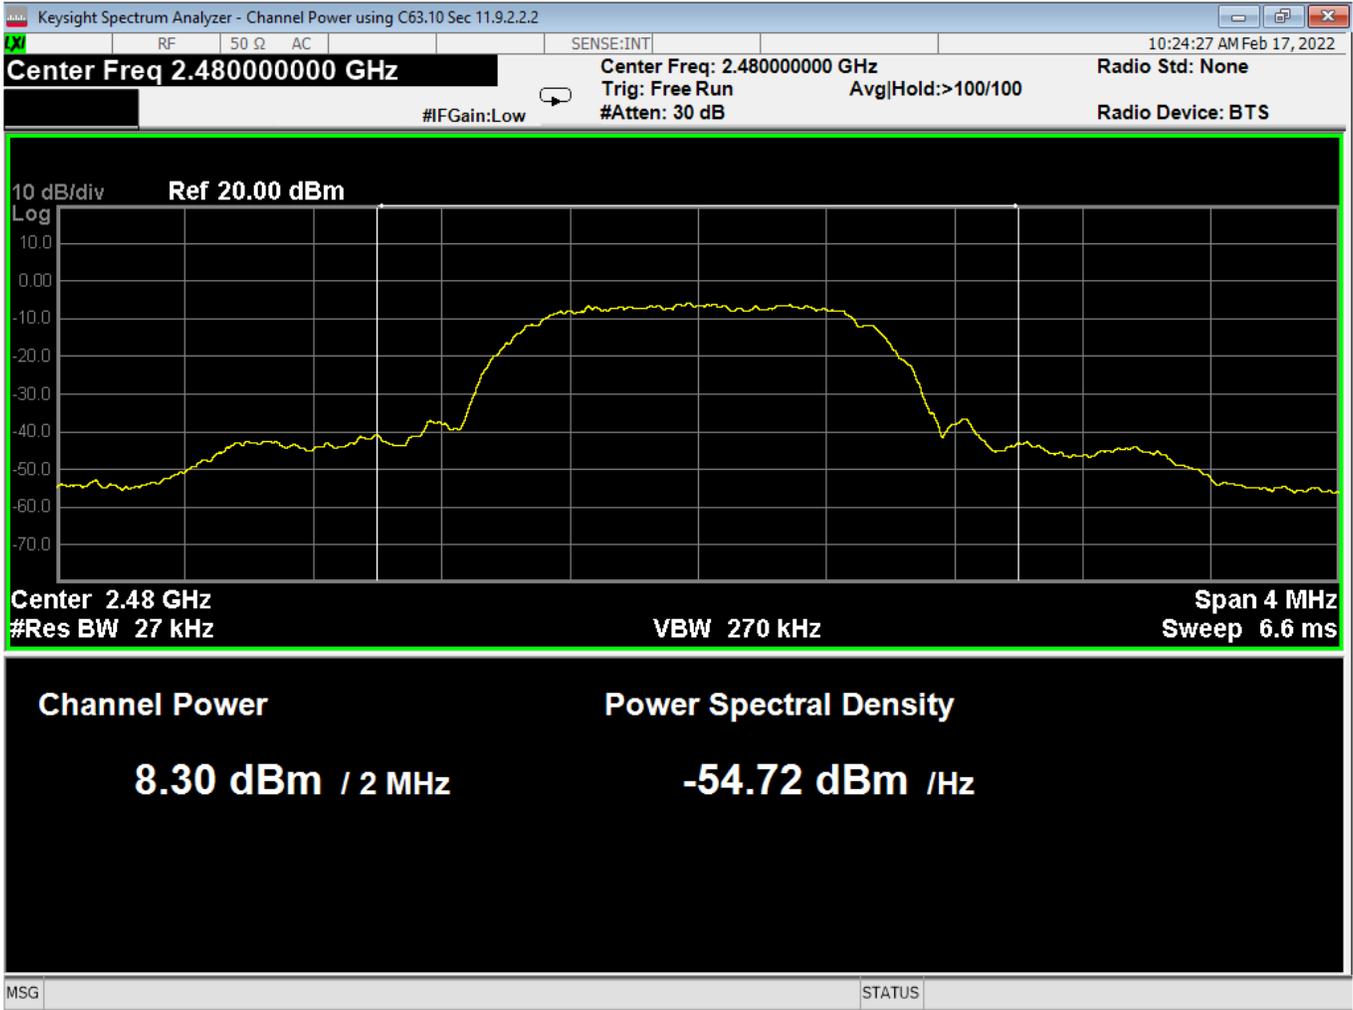

16 Average Power, High Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

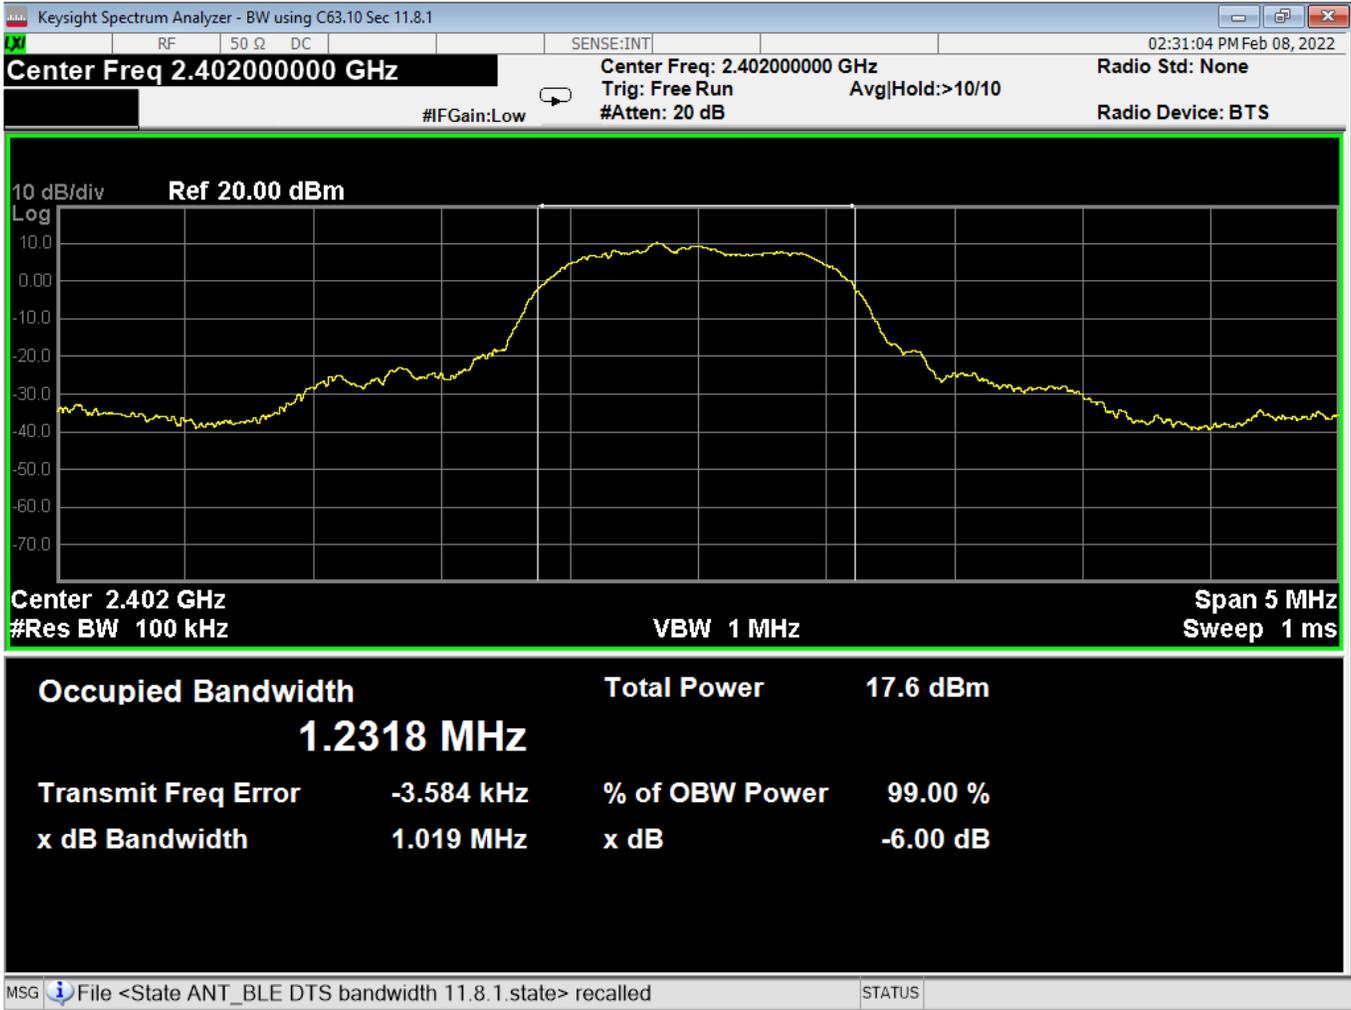

17 Bandwidth, Low Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

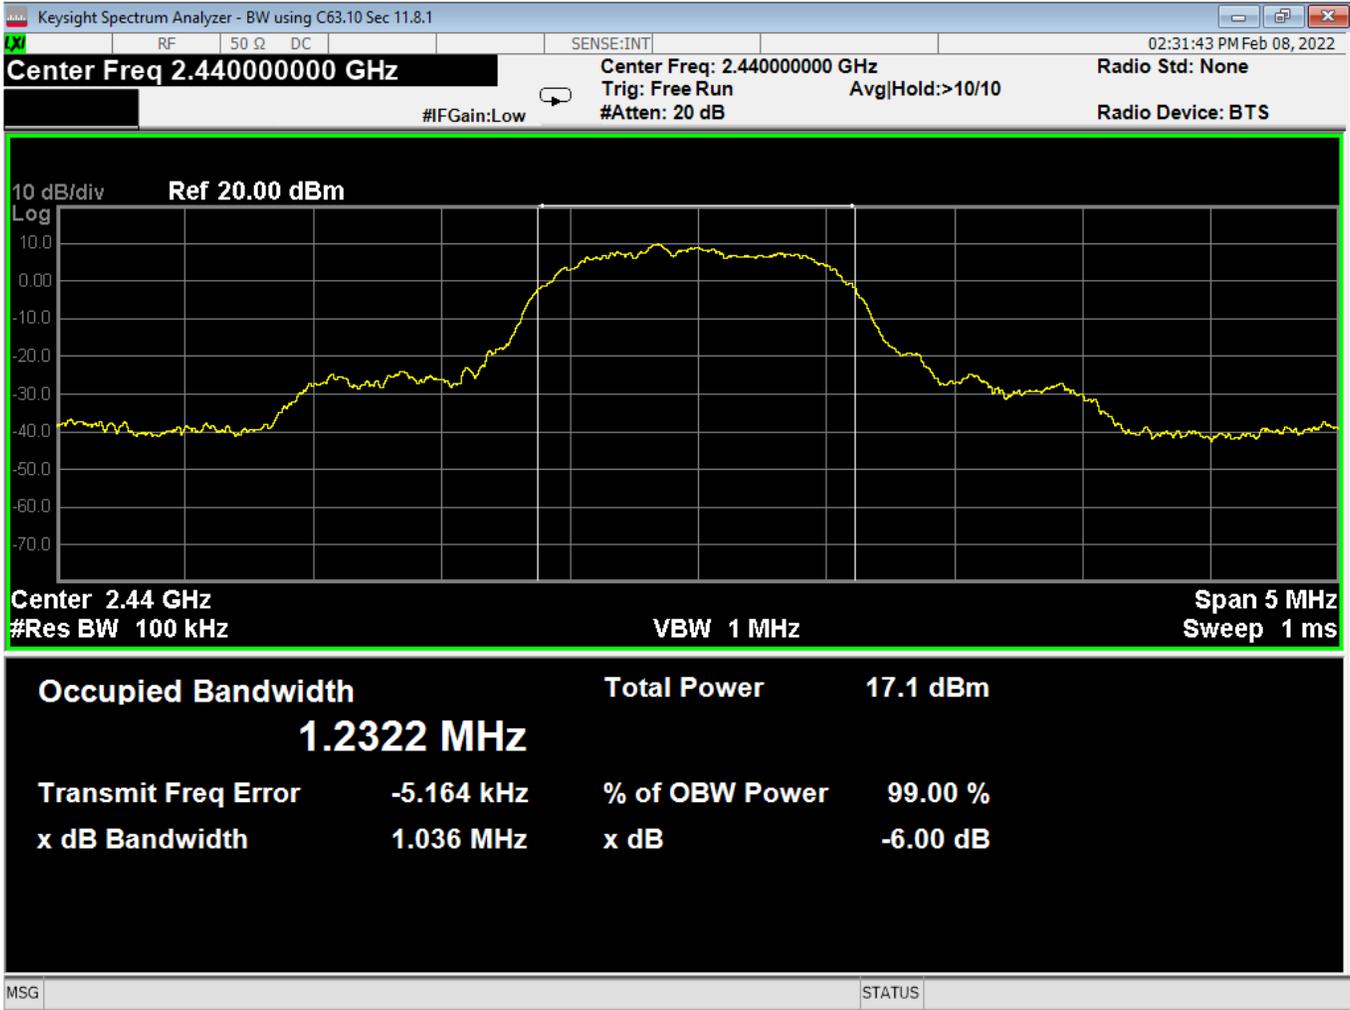

18 Bandwidth, Mid Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

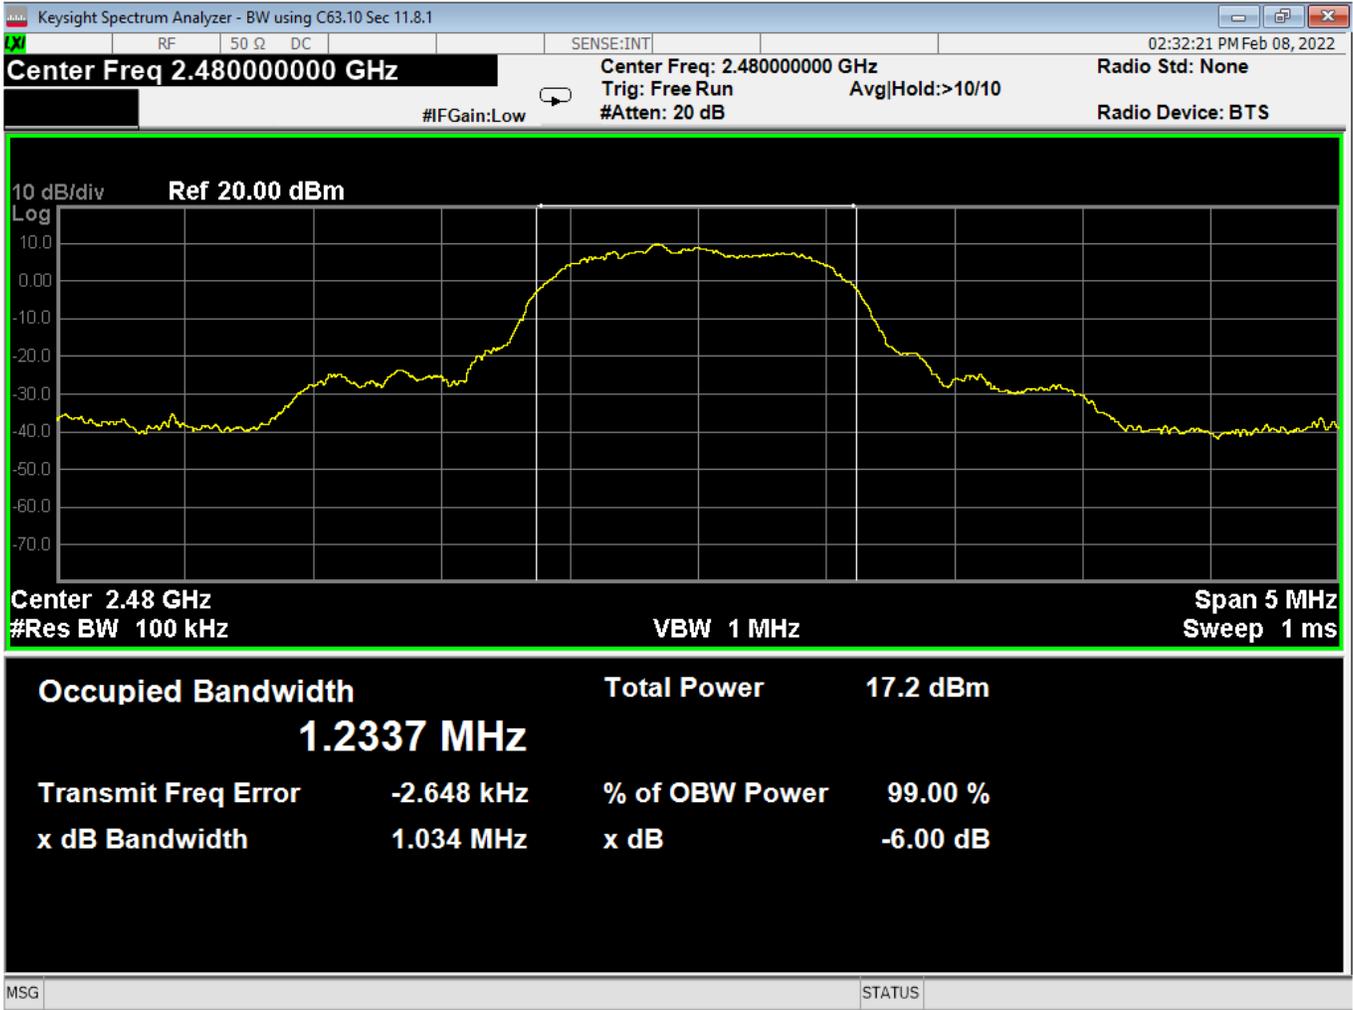

19 Bandwidth, High Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

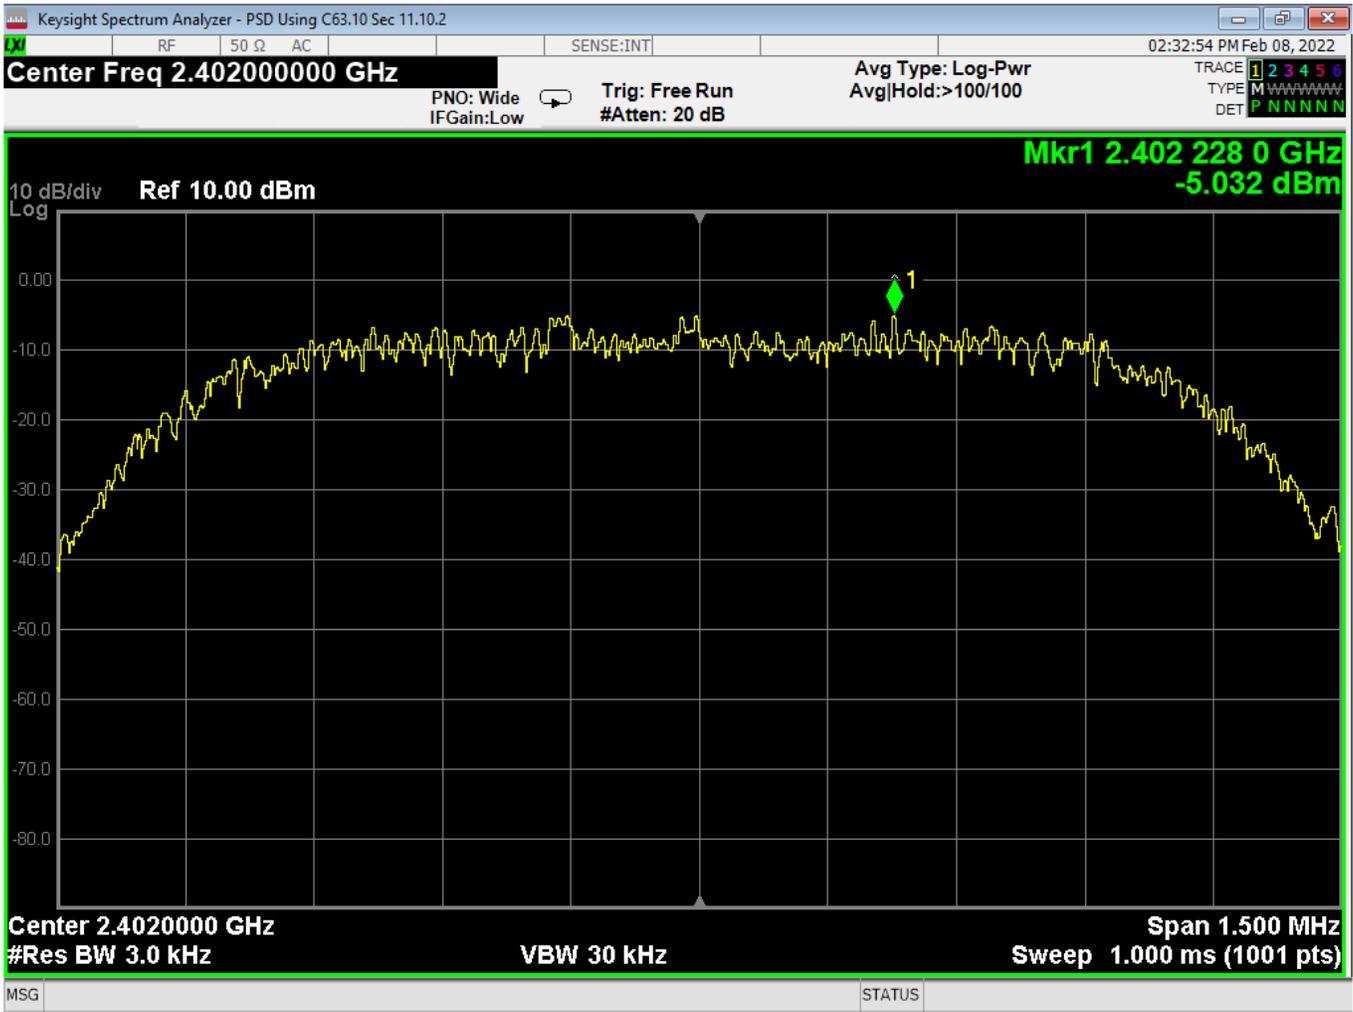

20 PSD, Low Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

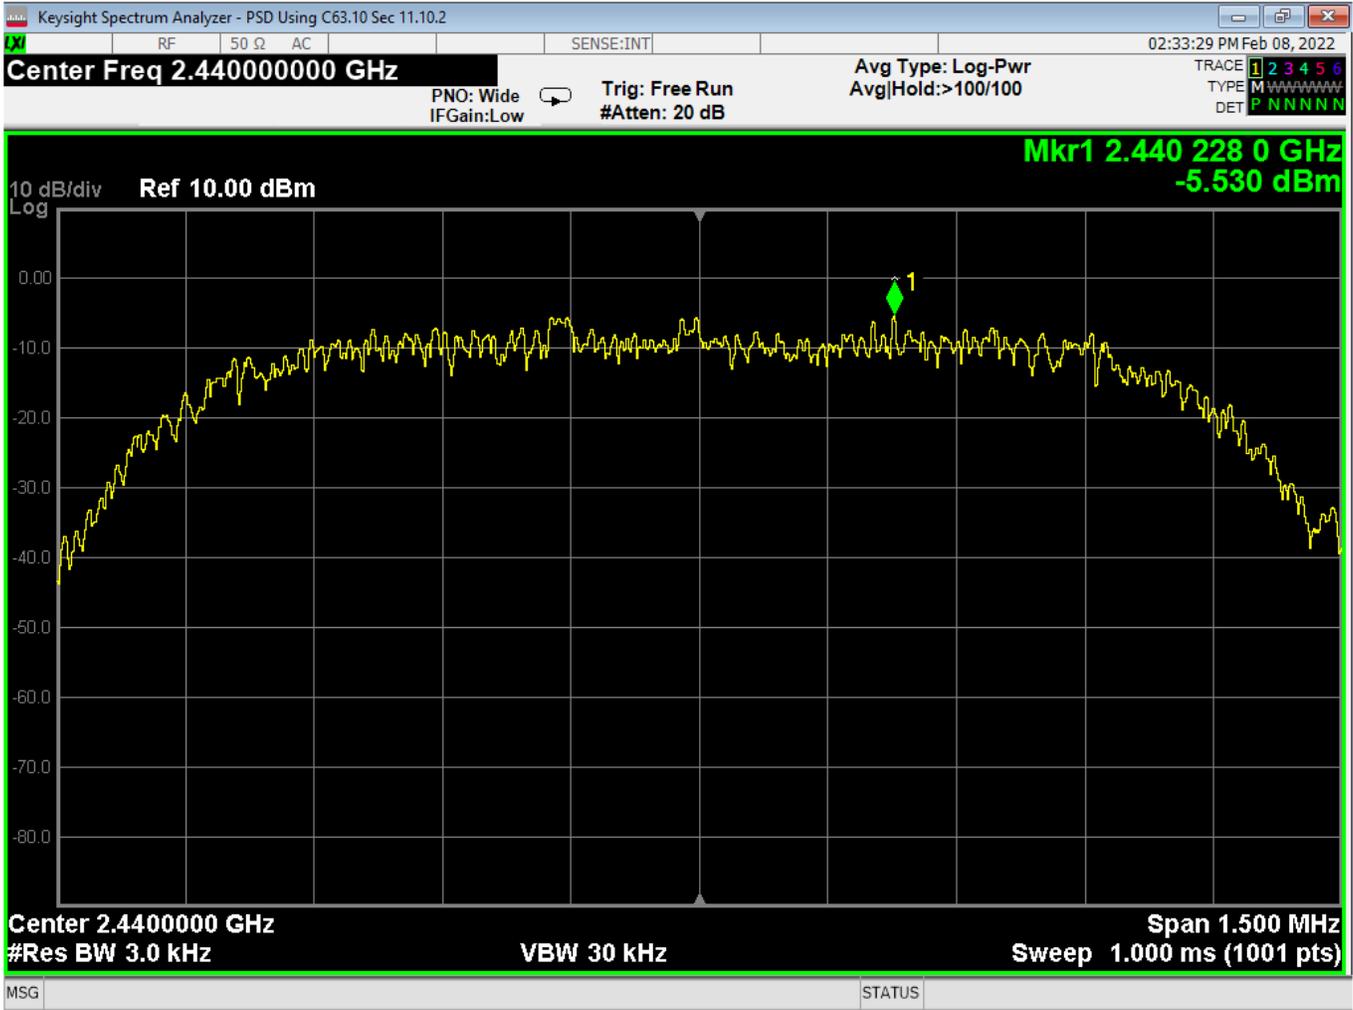

21 PSD, Mid Channel, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

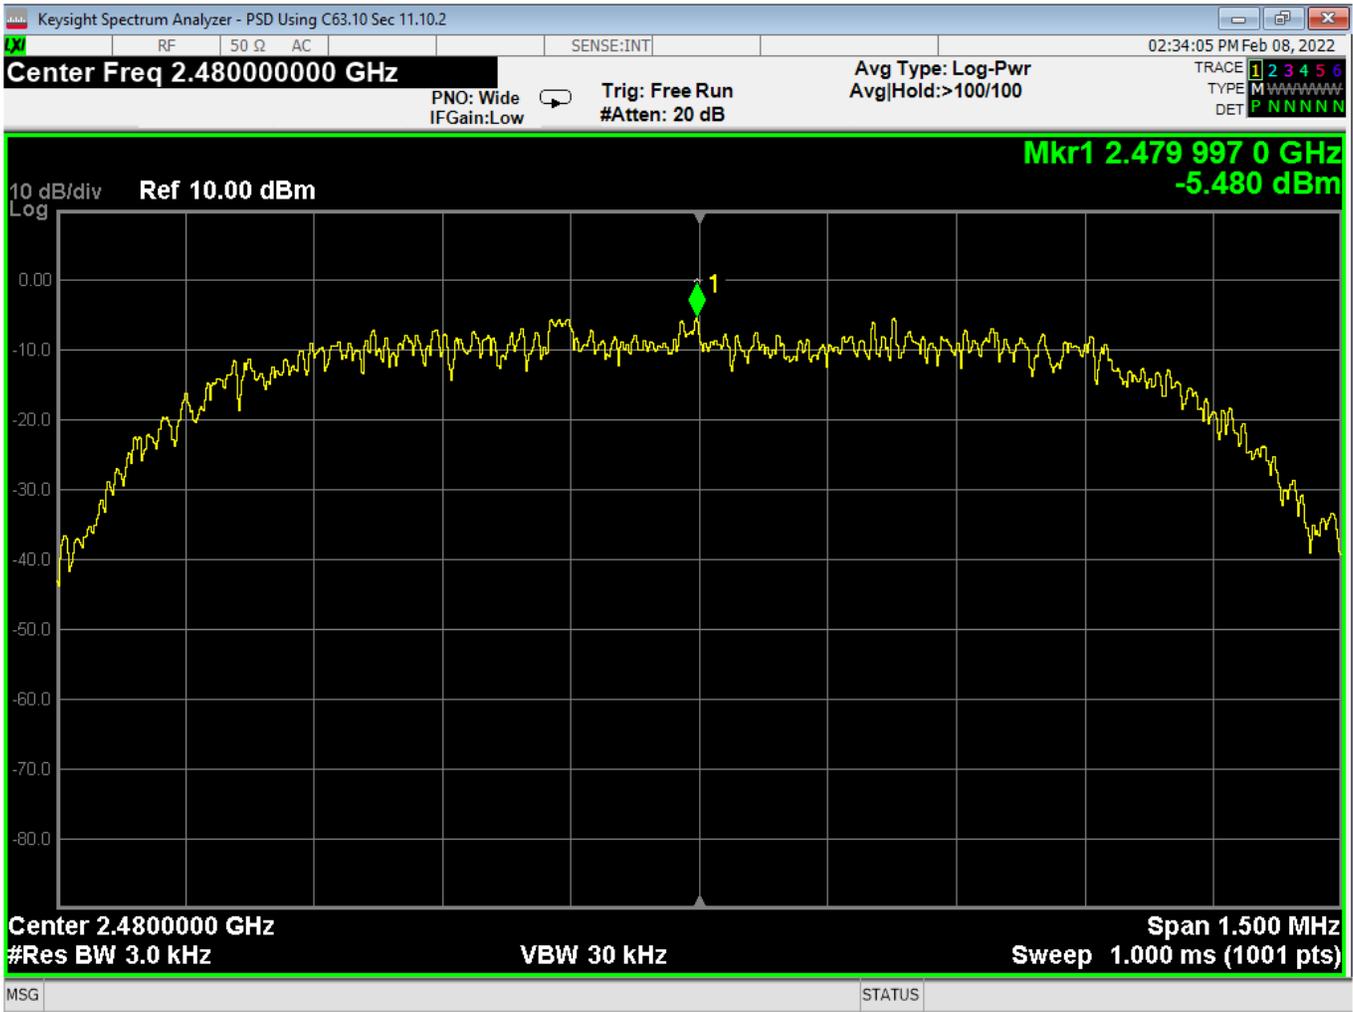

22 PSD, High Channel, 3EDR



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

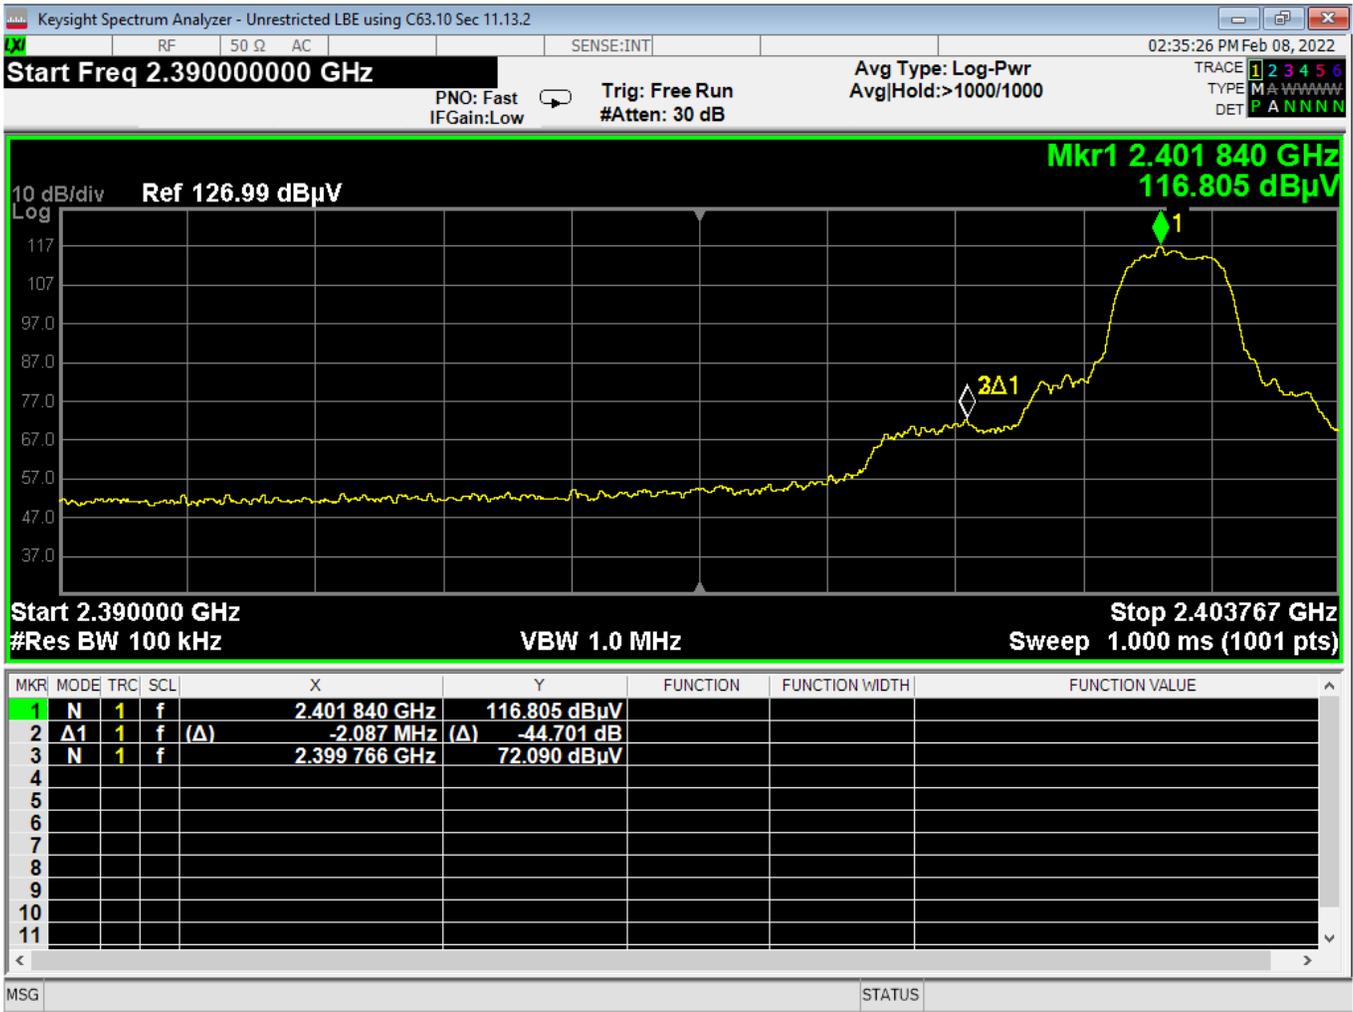

23 Lower Bandedge, Unrestricted, 3EDR




Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		



24 Higher Bandedge, Unrestricted, 3EDR



Report Number:	R20211005-21-E8A	Rev	A
Prepared for:	Garmin International, Inc.		

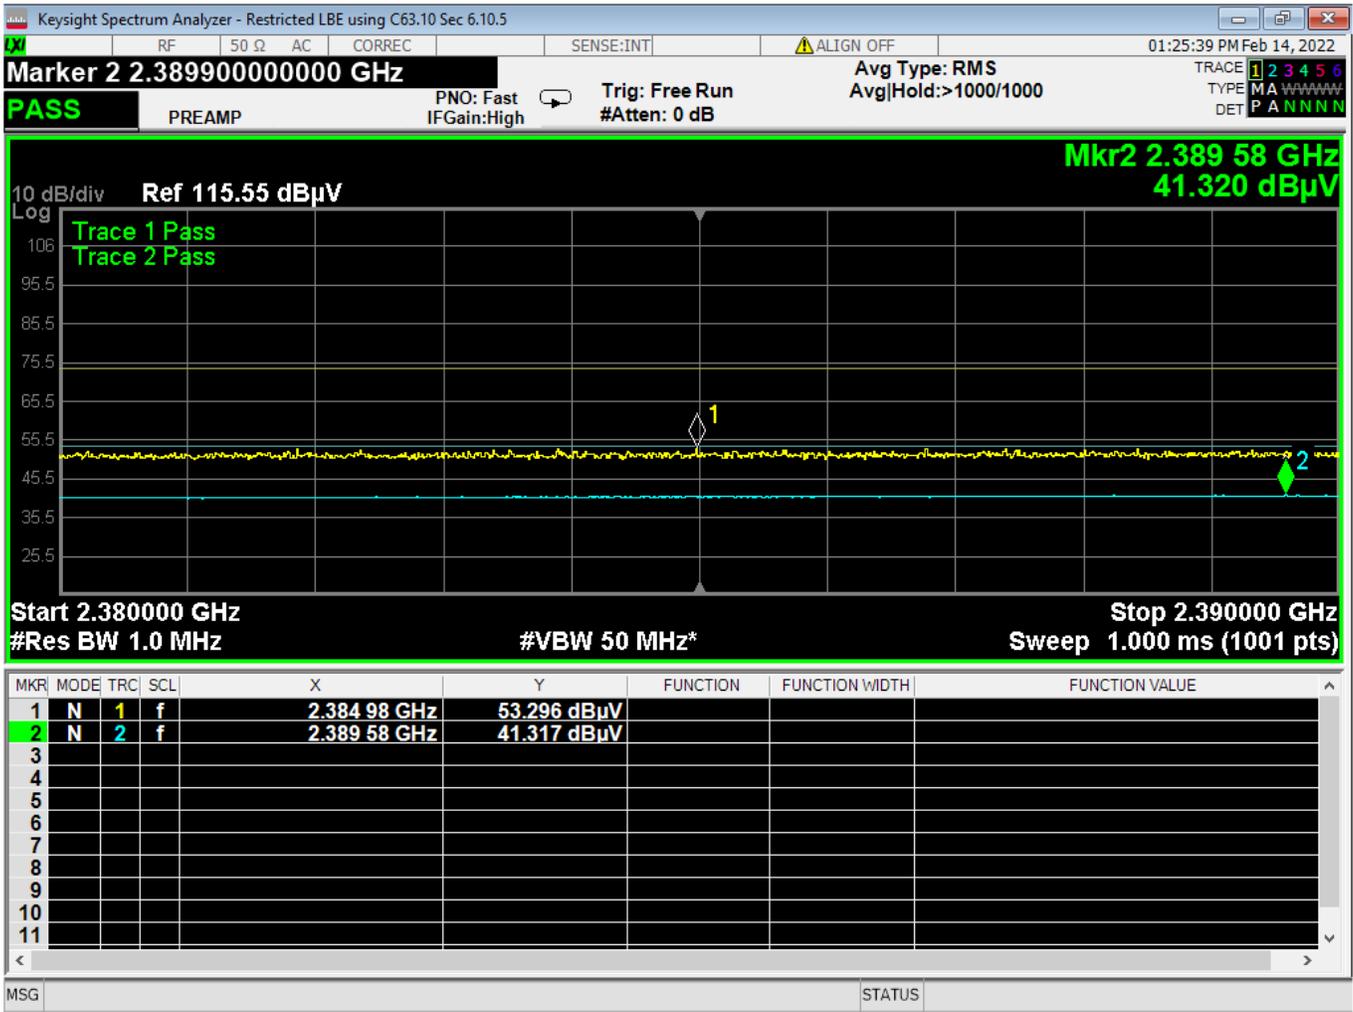

25 Lower Bandedge, Restricted, 3EDR

*Measurement is corrected for losses, but not corrected for DCCF, see section 4.3 for more information on DCCF. See section 4.0 for fully corrected values.

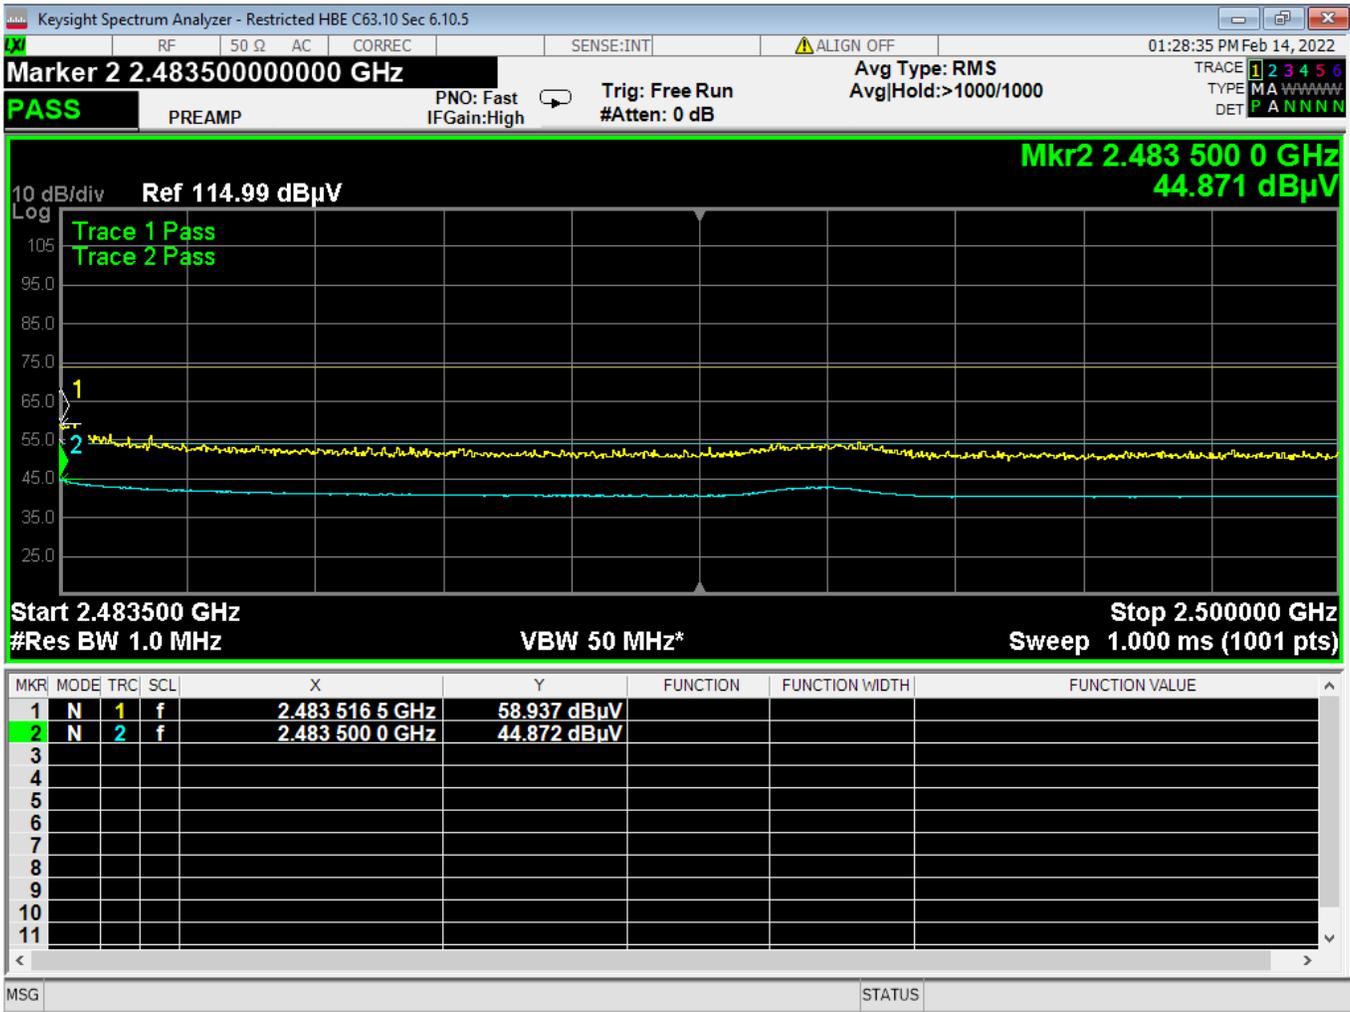


Report Number: R20211005-21-E8A

Rev

A

Prepared for: Garmin International, Inc.



26 Higher Bandedge, Restricted, 3EDR

*Measurement is corrected for losses, but not corrected for DCCF, see section 4.3 for more information on DCCF. See section 4.0 for fully corrected values.



Report Number:

R20211005-21-E8A

Rev

A

Prepared for:

Garmin International, Inc.

REPORT END

FCC/ISED Test Report


Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: AA4308

Test Report No: R20211005-21-E9A

Approved by:



Fox Lane
EMC Test Engineer

DATE: May 13, 2022

Total Pages: 118

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above-named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	5 March 2022	Original – KVepuri Prepared by FLane and SProbst
A	13 May 2022	PSD plots and tabular data updated Delta from spurious emissions changed



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page	2
1.0 Summary of test results	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description	6
3.2 Test personnel	6
3.3 Test equipment	7
3.4 General Test Procedure and Setup for Radio Measuremnts	8
4.0 Results	9
4.1 Output Power	13
4.2 Bandwidth	14
4.3 Duty Cycle	15
4.4 Radiated emissions	16
4.5 Conducted Spurious Emissions	23
4.5 Band edges	29
4.6 Power Spectral Density	31
4.7 Conducted AC Mains Emissions	32
Appendix A: Sample Calculation	37
Appendix B – Measurement Uncertainty	39
Appendix C – Graphs and Tables	40
REPORT END	118



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	AA4308
EUT Received	6 December 2021
EUT Tested	8 December 2021- 2 March 2022
Serial No.	3392435192 (Radiated Measurements) 3392435208(Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input checked="" type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

For Bluetooth Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440/2441 MHz
High	2480 MHz

For 802.11x Transmissions:

Channel	Frequency
Low	2412 MHz
Mid	2437 MHz
High	2462 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

Power Settings used:

Modulation	Low	Mid	High
802.11b	33	34	26
802.11g	18	29	20
802.11n	18	29	19

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of 35 ± 4%
 Temperature of 22 ± 3° Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing and Report
2	Karthik Vepuri	Test Engineer	Review/Editing and Report
3	Blake Winter	Test Engineer	Testing
4	Grace Larsen	Test Technician	Testing and Report
5	Samuel Probst	Test Technician	Testing and Report
6	Matthew Emory	Test Technician	Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 21, 2021	July 21, 2023
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	May 5, 2020	May 5, 2022
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A091418	July 27, 2021	July 27, 2022
EMCO Horn Antenna	3115	6415	March 16, 2020	March 16, 2022
EMCO Horn Antenna	3116	2576	March 9, 2020	March 9, 2022
Com-Power LISN 50µH / 250µH - 50Ω	LI-220C	20070017	September 22, 2020	September 22, 2022
8447F POT H64 Preamplifier*	8447F POT H64	3113AD4667	February 1, 2021	February 1, 2023
Rohde & Schwarz Preamplifier*	TS-PR18	3545700803	April 14, 2020	April 14, 2022
Trilithic High Pass Filter*	6HC330	23042	April 14, 2020	April 14, 2022
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	October 25, 2019	October 25, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preamplifier to antenna)*	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)**	PE9128	NCEE BH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)**	PE9128	NCEE BH2	September 24, 2021	September 24, 2023

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.



Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

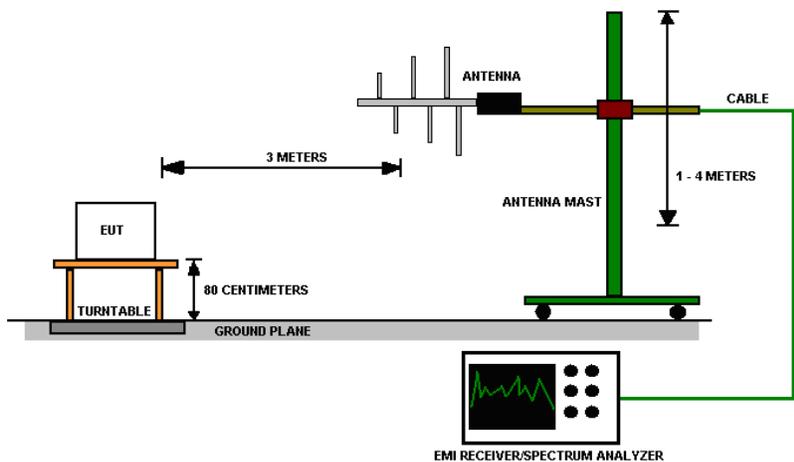


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

DTS Radio Measurements Low Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	15.16	10.06	16.340	43.053	-6.416	PASS
Mid	802.11 b	15.08	9.57	16.720	46.989	3.709	PASS
High	802.11 b	15.00	10.05	13.610	22.961	0.673	PASS
Low	802.11 g	16.61	16.55	8.070	6.412	-11.635	PASS
Mid	802.11 g	16.59	16.57	13.730	23.605	-10.699	PASS
High	802.11 g	16.55	16.55	7.350	5.433	-16.299	PASS
Low	802.11 n	17.544	17.63	8.56	7.178	-12.614	PASS
Mid	802.11 n	17.58	17.66	13.08	20.324	-10.858	PASS
High	802.11 n	17.565	17.60	7.86	6.109	-17.729	PASS

Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz Output Power Limit = 30 dBm; PSD Limit = 8 dBm

Unrestricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2400.00	81.08	114.46	33.38	30.00	PASS
Low	802.11 g	2400.00	67.55	101.73	34.18	30.00	PASS
Low	802.11 n	2400.00	66.99	102.49	35.50	30.00	PASS
High	802.11 b	2483.50	55.08	111.11	56.02	30.00	PASS
High	802.11 g	2483.50	56.34	103.62	47.28	30.00	PASS
High	802.11 n	2483.50	55.91	102.69	46.78	30.00	PASS

Radiated Peak Restricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	60.10	Peak	73.98	13.88	PASS
Low	802.11 g	2390.00	62.22	Peak	73.98	11.77	PASS
Low	802.11 n	2390.00	64.03	Peak	73.98	9.95	PASS
High	802.11 b	2483.50	56.50	Peak	73.98	17.48	PASS
High	802.11 g	2483.50	59.65	Peak	73.98	14.33	PASS
High	802.11 n	2483.50	57.04	Peak	73.98	16.94	PASS

*Limit shown is the peak limit taken from FCC Part 15.209

Radiated Average Restricted Band-Edge Low Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	49.20	Average	53.98	4.78	PASS
Low	802.11 g	2390.00	48.84	Average	53.98	5.14	PASS
Low	802.11 n	2390.00	49.57	Average	53.98	4.41	PASS
High	802.11 b	2483.50	45.31	Average	53.98	8.67	PASS
High	802.11 g	2483.50	46.28	Average	53.98	7.70	PASS
High	802.11 n	2483.50	44.84	Average	53.98	9.14	PASS

*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

DTS Radio Measurements High Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	14.77	9.15	16.650	46.238	-6.221	PASS
Mid	802.11 b	14.78	9.51	17.670	58.479	-5.54	PASS
High	802.11 b	14.77	9.50	13.550	22.646	-8.378	PASS
Low	802.11 g	16.44	16.54	7.900	6.166	-11.969	PASS
Mid	802.11 g	16.44	16.55	13.590	22.856	-9.839	PASS
High	802.11 g	16.43	16.53	9.090	8.110	-14.714	PASS
Low	802.11 n	17.50	17.68	8.100	8.531	-12.944	PASS
Mid	802.11 n	17.54	17.72	11.360	13.68	-13.733	PASS
High	802.11 n	17.53	17.70	9.310	8.53	-16.878	PASS

Occupied Bandwidth = N/A; 6 dB Bandwidth Limit =500 kHz Output Power Limit = 30 dBm; PSD Limit = 8 dBm

Unrestricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamenta l (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2390.00	79.99	114.59	34.60	20.00	PASS
Low	802.11 g	2390.00	67.46	104.20	36.74	20.00	PASS
Low	802.11 n	2390.00	67.68	104.24	36.56	20.00	PASS
High	802.11 b	2483.50	56.21	111.22	55.00	20.00	PASS
High	802.11 g	2483.50	57.63	104.14	46.50	20.00	PASS
High	802.11 n	2483.50	58.40	104.21	45.81	20.00	PASS

Radiated Peak Restricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measuremen t Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	59.42	Peak	73.98	14.56	PASS
Low	802.11 g	2390.00	64.28	Peak	73.98	9.70	PASS
Low	802.11 n	2390.00	65.20	Peak	73.98	8.79	PASS
High	802.11 b	2483.50	55.78	Peak	73.98	18.20	PASS
High	802.11 g	2483.50	61.83	Peak	73.98	12.16	PASS
High	802.11 n	2483.50	61.50	Peak	73.98	12.48	PASS

*Limit shown is the peak limit taken from FCC Part 15.209



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Radiated Average Restricted Band-Edge High Data Rate

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	48.39	Average	53.98	5.59	PASS
Low	802.11 g	2390.00	49.29	Average	53.98	4.69	PASS
Low	802.11 n	2390.00	50.35	Average	53.98	3.63	PASS
High	802.11 b	2483.50	44.76	Average	53.98	9.22	PASS
High	802.11 g	2483.50	46.31	Average	53.98	7.67	PASS
High	802.11 n	2483.50	45.53	Average	53.98	8.45	PASS

*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method: Power measurements were performed using ANSI C63.10, Section 11.9.2.2.2.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.3 DUTY CYCLE

Test Method:

All Modulations/Transmitters in this report had a duty cycle of >98%

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH (μV/m)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 * log * Emission level (μV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Test procedures:

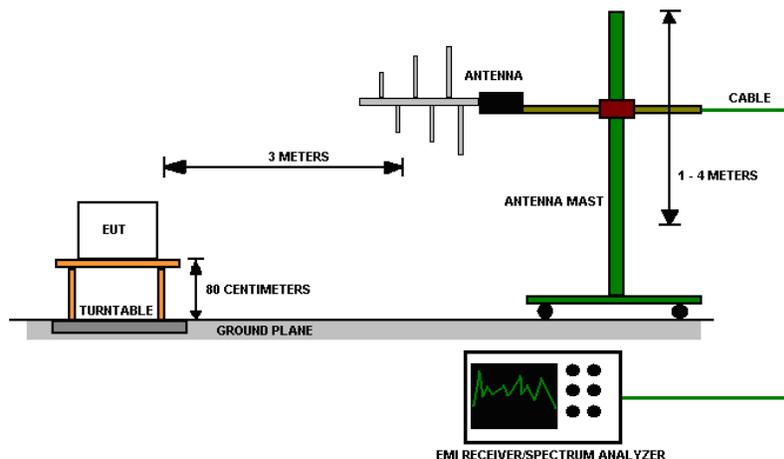- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

Figure 3 - Radiated Emissions Test Setup
NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

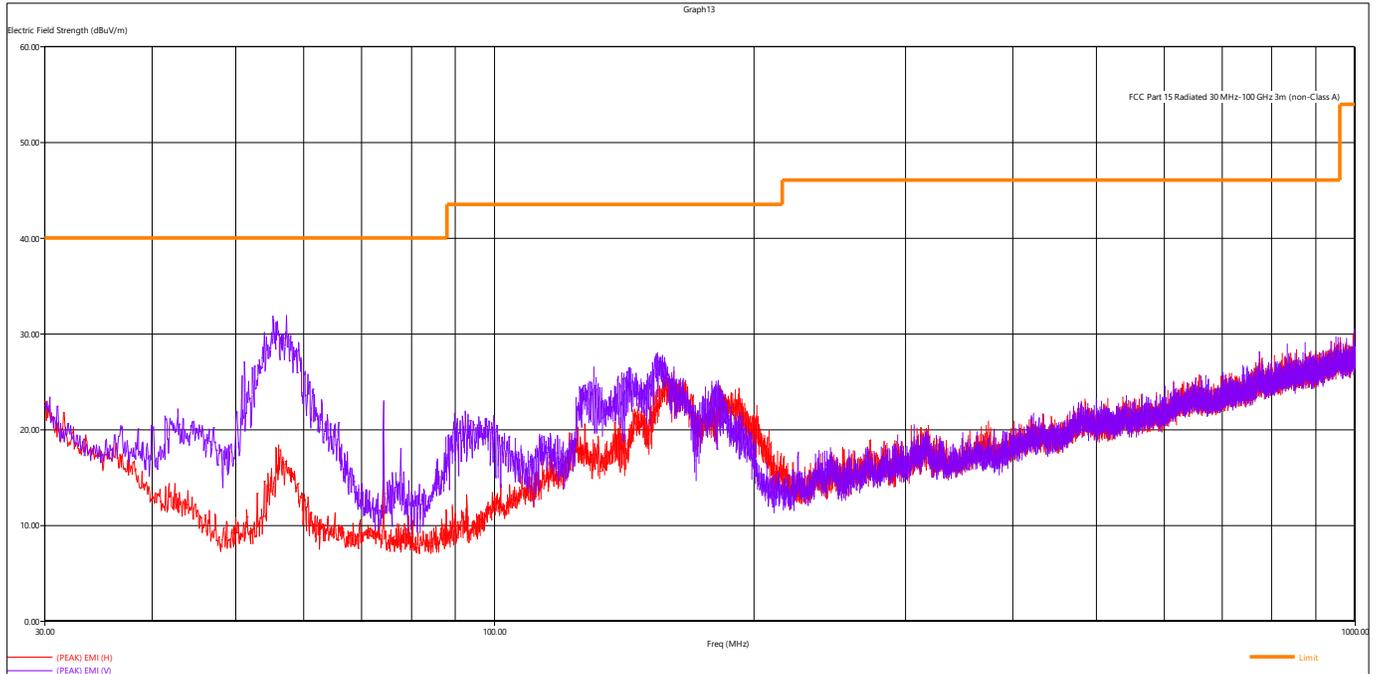


Figure 4 - Radiated Emissions Plot, Receive

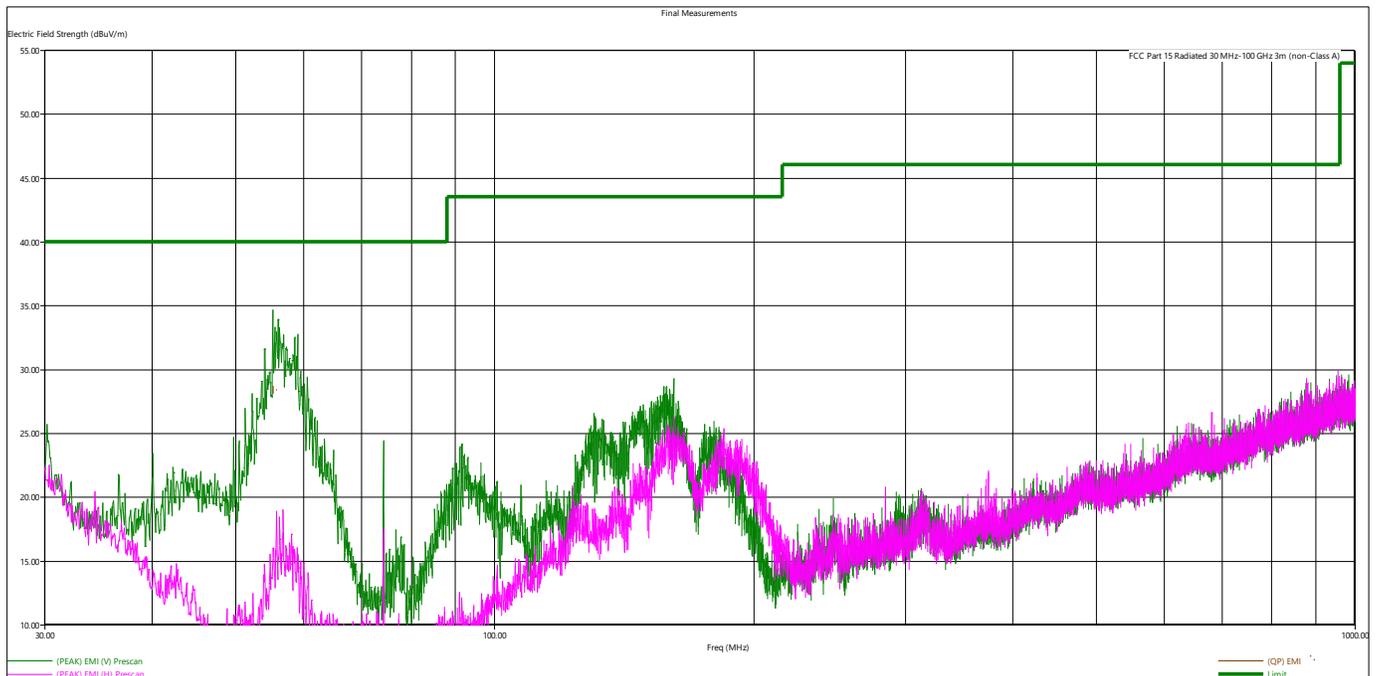


Figure 5 - Radiated Emissions Plot, 802.11b

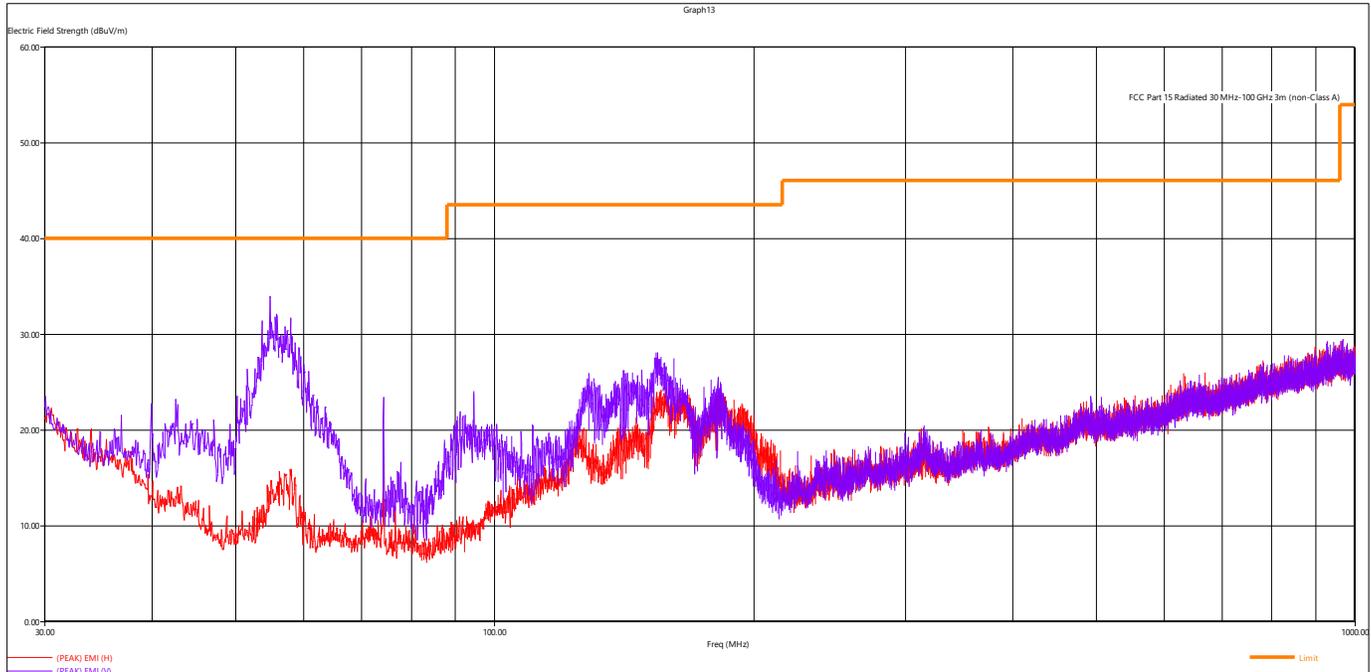


Figure 6 - Radiated Emissions Plot, 802.11g

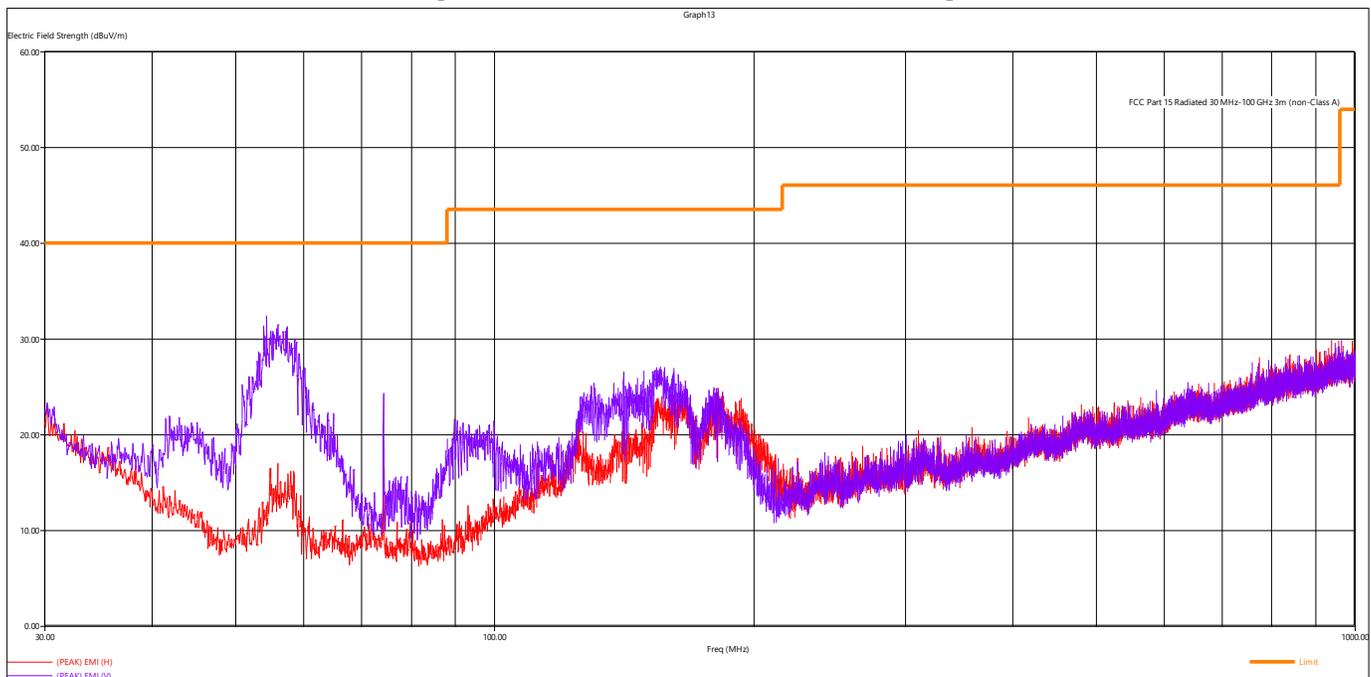


Figure 7 - Radiated Emissions Plot, 802.11n

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Quasi-Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
55.204800	28.38	40.00	11.62	107.00	347.00	V	Low	802.11b

All other measurements were found to be at least 6 dB below the limit. Worst case emissions are reported.

Peak Measurements, 802.11x, Low Data Rate									
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation	Data Rate
MHz	dBµV/m	dBµV/m	dB	cm.	deg.				
2411.138000	105.44	NA	NA	384.00	104.00	H	Low	802.11b	1MHz
2436.078000	105.68	NA	NA	375.00	107.00	H	Mid	802.11b	1MHz
2461.012000	102.96	NA	NA	365.00	108.00	H	High	802.11b	1MHz
2412.102000	110.01	NA	NA	380.00	98.00	H	Low	802.11b	11MHz
2438.142000	109.96	NA	NA	373.00	95.00	H	Mid	802.11b	11MHz
2462.206000	106.32	NA	NA	364.00	104.00	H	High	802.11b	11MHz
2411.020000	103.24	NA	NA	393.00	105.00	H	Low	802.11g	6MHz
2439.412000	105.68	NA	NA	371.00	105.00	H	Mid	802.11g	6MHz
2459.444000	100.28	NA	NA	362.00	115.00	H	High	802.11g	6MHz
2409.232000	105.77	NA	NA	387.00	101.00	H	Low	802.11g	54MHz
2438.960000	106.20	NA	NA	382.00	107.00	H	Mid	802.11g	54MHz
2463.992000	102.70	NA	NA	233.00	105.00	H	High	802.11g	54MHz
2414.178000	103.13	NA	NA	213.00	238.00	H	Low	802.11n	MCS0
2436.126000	105.15	NA	NA	397.00	106.00	H	Mid	802.11n	MCS0
2463.710000	98.81	NA	NA	509.00	112.00	H	High	802.11n	MCS0
2414.692000	101.95	NA	NA	410.00	108.00	H	Low	802.11n	MCS7
2434.938000	102.49	NA	NA	176.00	106.00	H	Mid	802.11n	MCS7
2457.902000	99.51	NA	NA	510.00	106.00	H	High	802.11n	MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.
 All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Average Measurements, 802.11x									
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation	Data Rate
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.				
2411.138000	102.68	NA	NA	384.00	104.00	H	Low	802.11b	1MHz
2436.078000	102.82	NA	NA	375.00	107.00	H	Mid	802.11b	1MHz
2461.012000	99.95	NA	NA	365.00	108.00	H	High	802.11b	1MHz
2412.102000	102.38	NA	NA	380.00	98.00	H	Low	802.11b	11MHz
2438.142000	101.81	NA	NA	373.00	95.00	H	Mid	802.11b	11MHz
2462.206000	98.78	NA	NA	364.00	104.00	H	High	802.11b	11MHz
2411.020000	94.44	NA	NA	393.00	105.00	H	Low	802.11g	6MHz
2439.412000	96.87	NA	NA	371.00	105.00	H	Mid	802.11g	6MHz
2459.444000	91.36	NA	NA	362.00	115.00	H	High	802.11g	6MHz
2409.232000	95.72	NA	NA	387.00	101.00	H	Low	802.11g	54MHz
2438.960000	96.00	NA	NA	382.00	107.00	H	Mid	802.11g	54MHz
2463.992000	91.99	NA	NA	233.00	105.00	H	High	802.11g	54MHz
2414.178000	93.14	NA	NA	213.00	238.00	H	Low	802.11n	MCS0
2436.126000	95.18	NA	NA	397.00	106.00	H	Mid	802.11n	MCS0
2463.710000	89.38	NA	NA	509.00	112.00	H	High	802.11n	MCS0
2414.692000	91.96	NA	NA	410.00	108.00	H	Low	802.11n	MCS7
2434.938000	92.43	NA	NA	176.00	106.00	H	Mid	802.11n	MCS7
2457.902000	89.06	NA	NA	510.00	106.00	H	High	802.11n	MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.
All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

From FCC Part 15.247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report. The line shown in the plots is a reference line placed at -20dBm.

Deviations from test standard:

Test performed at 120kHz RBW

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Data rates and channels were investigated and worst case was reported, no emissions exceeded the limits.

There was no distinguishable difference between low and high data rate.

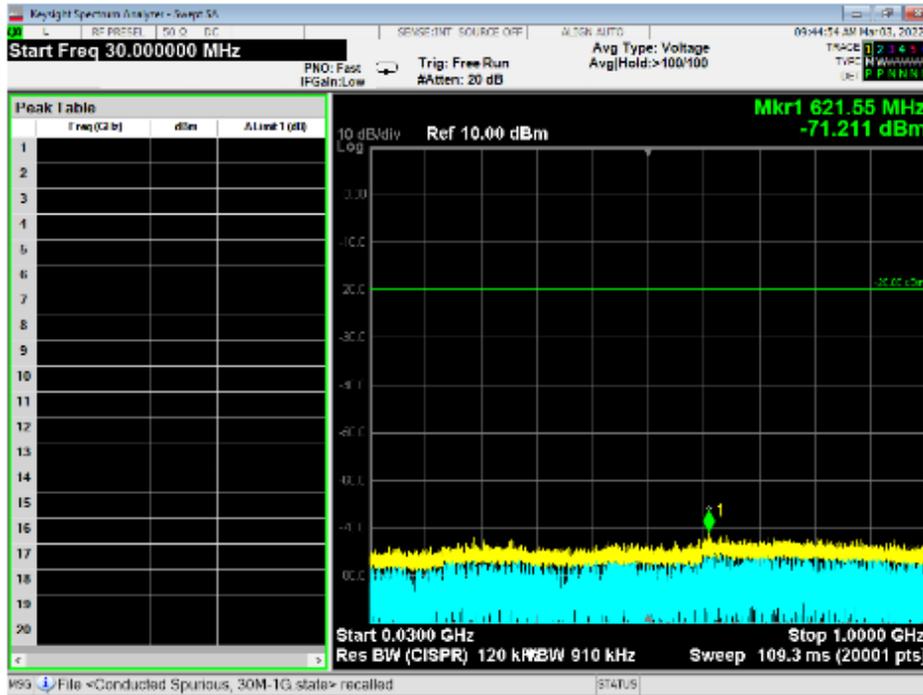


Figure 8 - Radiated Emissions Plot, WIFI 802.11b, 30M – 1G, Low

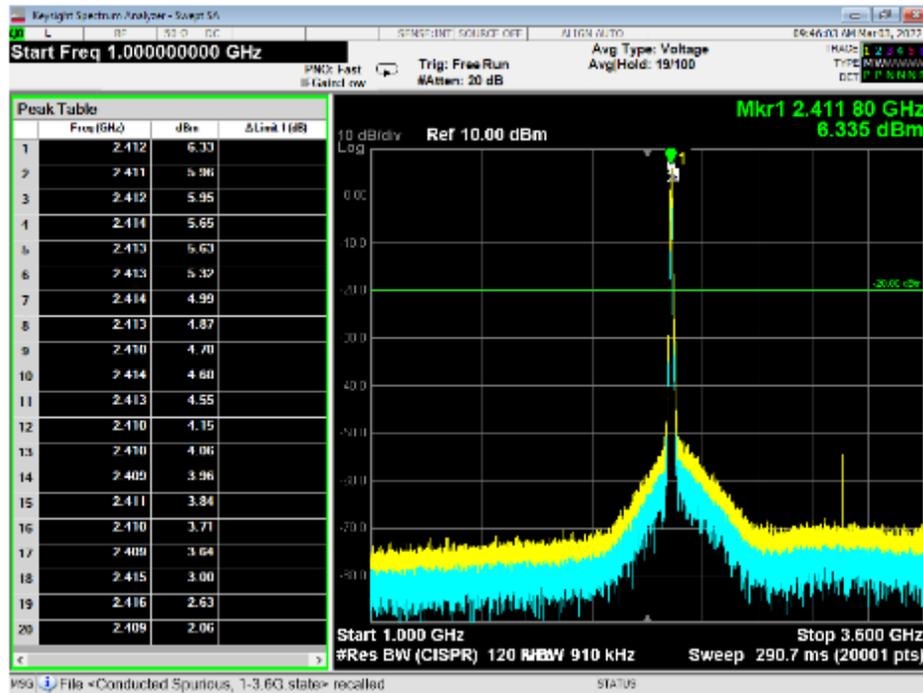


Figure 9 - Radiated Emissions Plot, WIFI 802.11b, 1G – 3.6G, Low

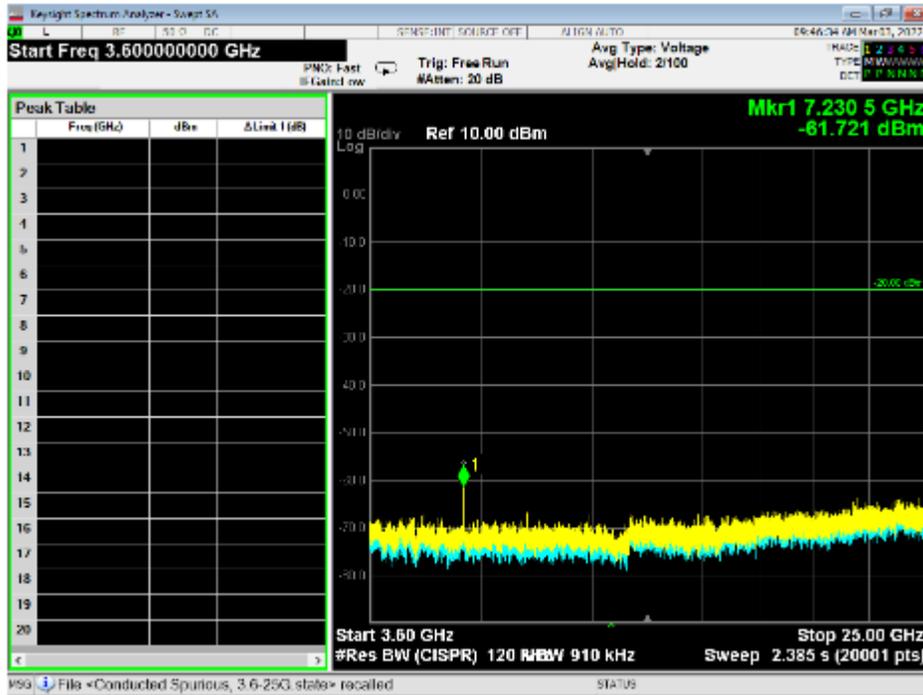


Figure 10 - Radiated Emissions Plot, WIFI 802.11b, 3.6G – 25G, Low

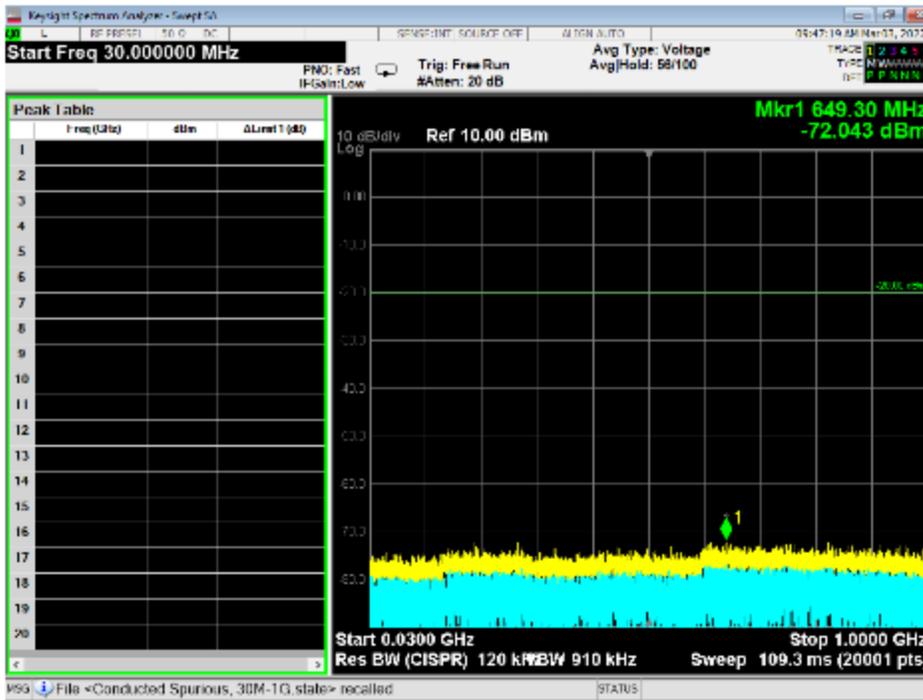


Figure 11 - Radiated Emissions Plot, WIFI 802.11g, 30M – 1G, Low

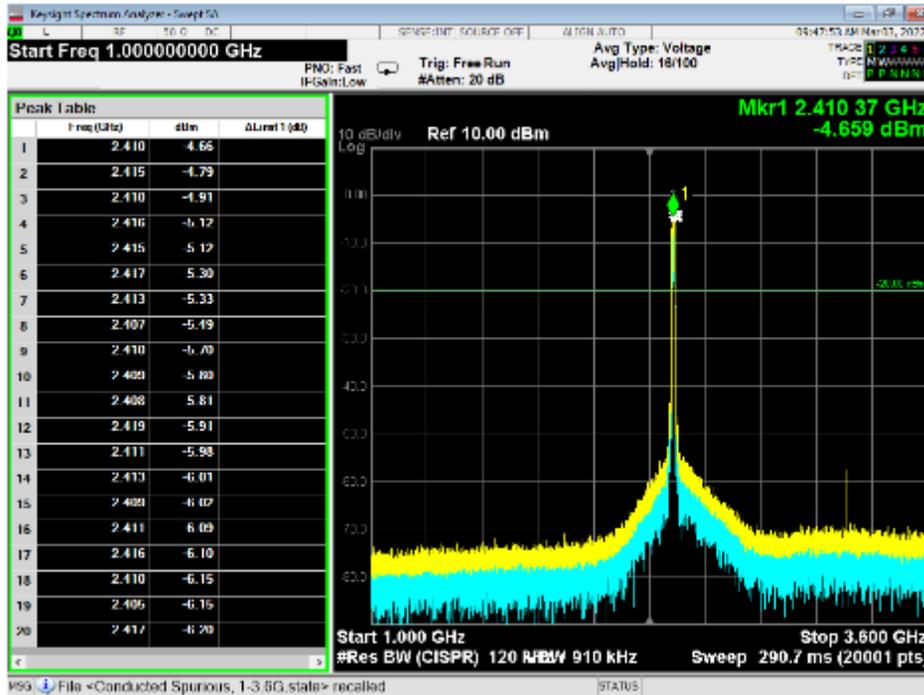


Figure 12 - Radiated Emissions Plot, WIFI 802.11g, 1G – 3.6G, Low

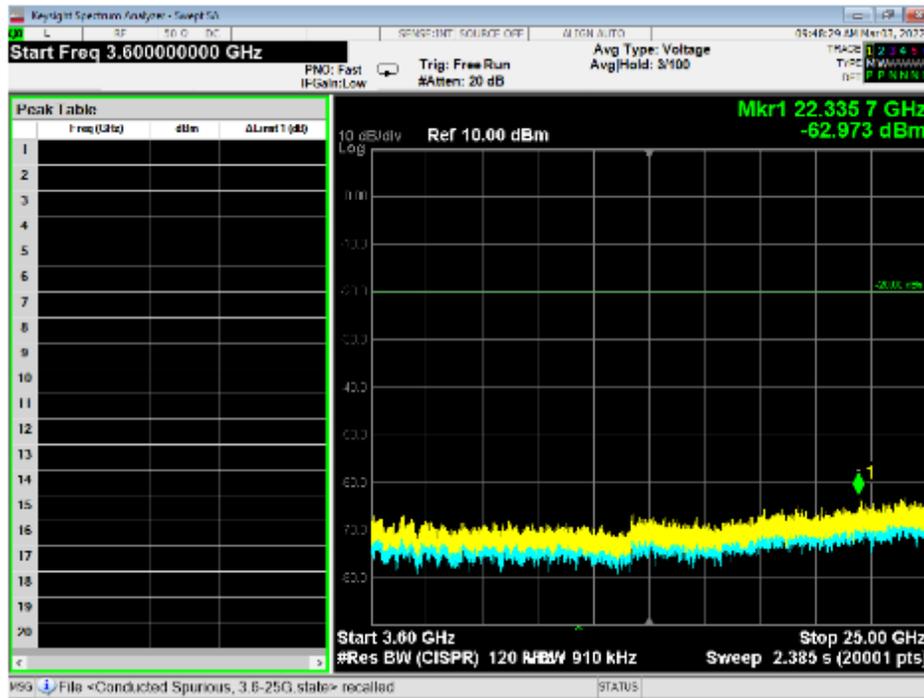


Figure 13 - Radiated Emissions Plot, WIFI 802.11g, 3.6G – 25G, Low

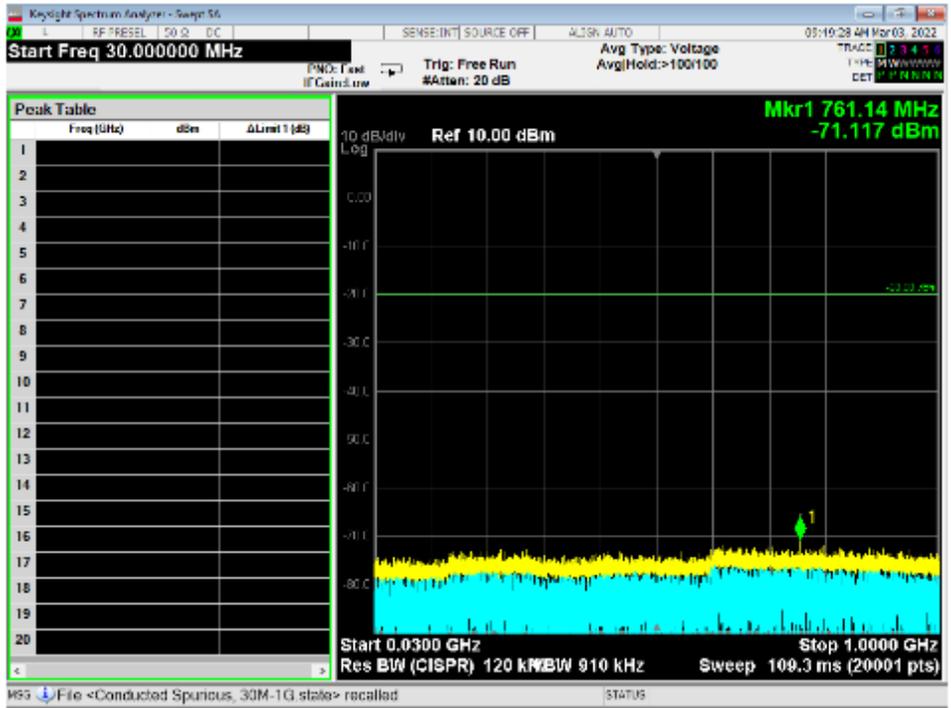


Figure 14 - Radiated Emissions Plot, WIFI 802.11n, 30M – 1G, Low

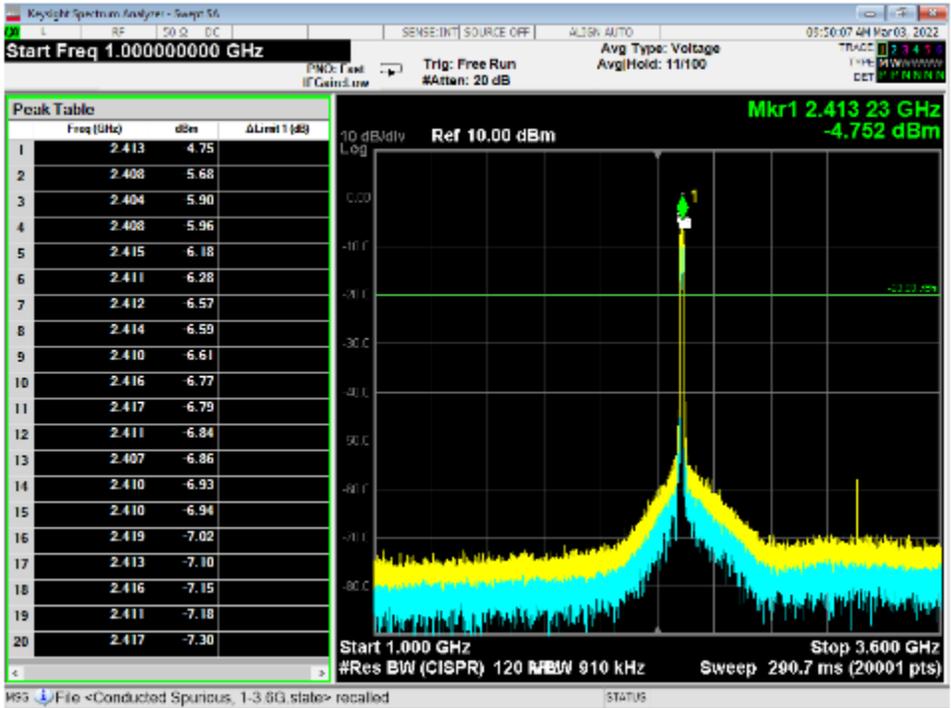


Figure 15 - Radiated Emissions Plot, WIFI 802.11n, 1G – 3.6G, Low

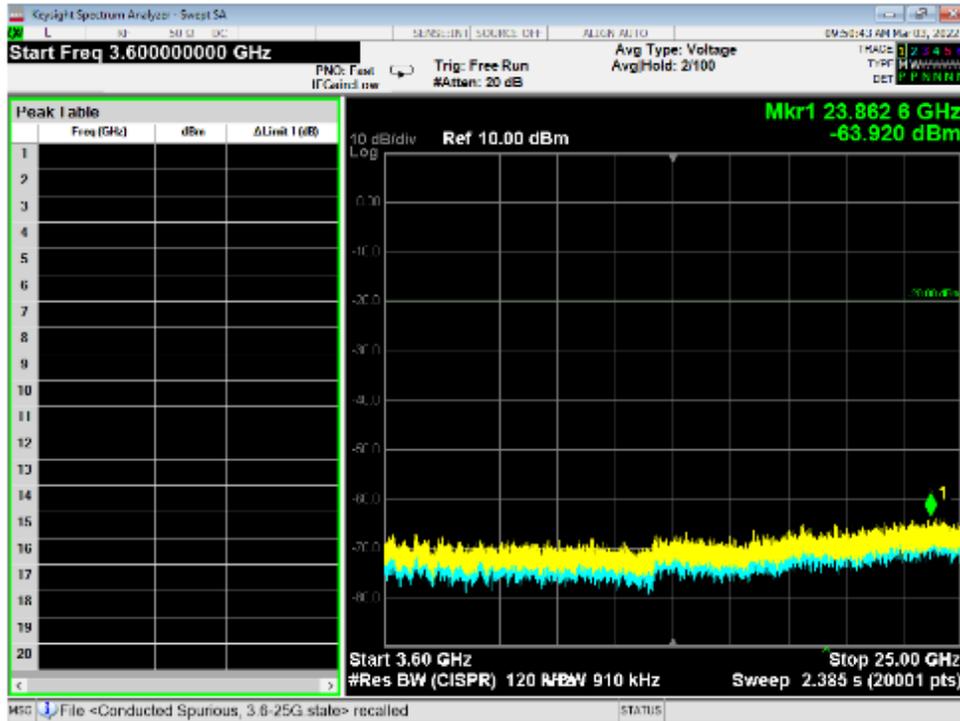


Figure 16 - Radiated Emissions Plot, WIFI 802.11n, 3.6G – 25G, Low



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.6 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are reported on the graph.
4. The measurements are listed in the tables in section 4.0.

Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.7 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

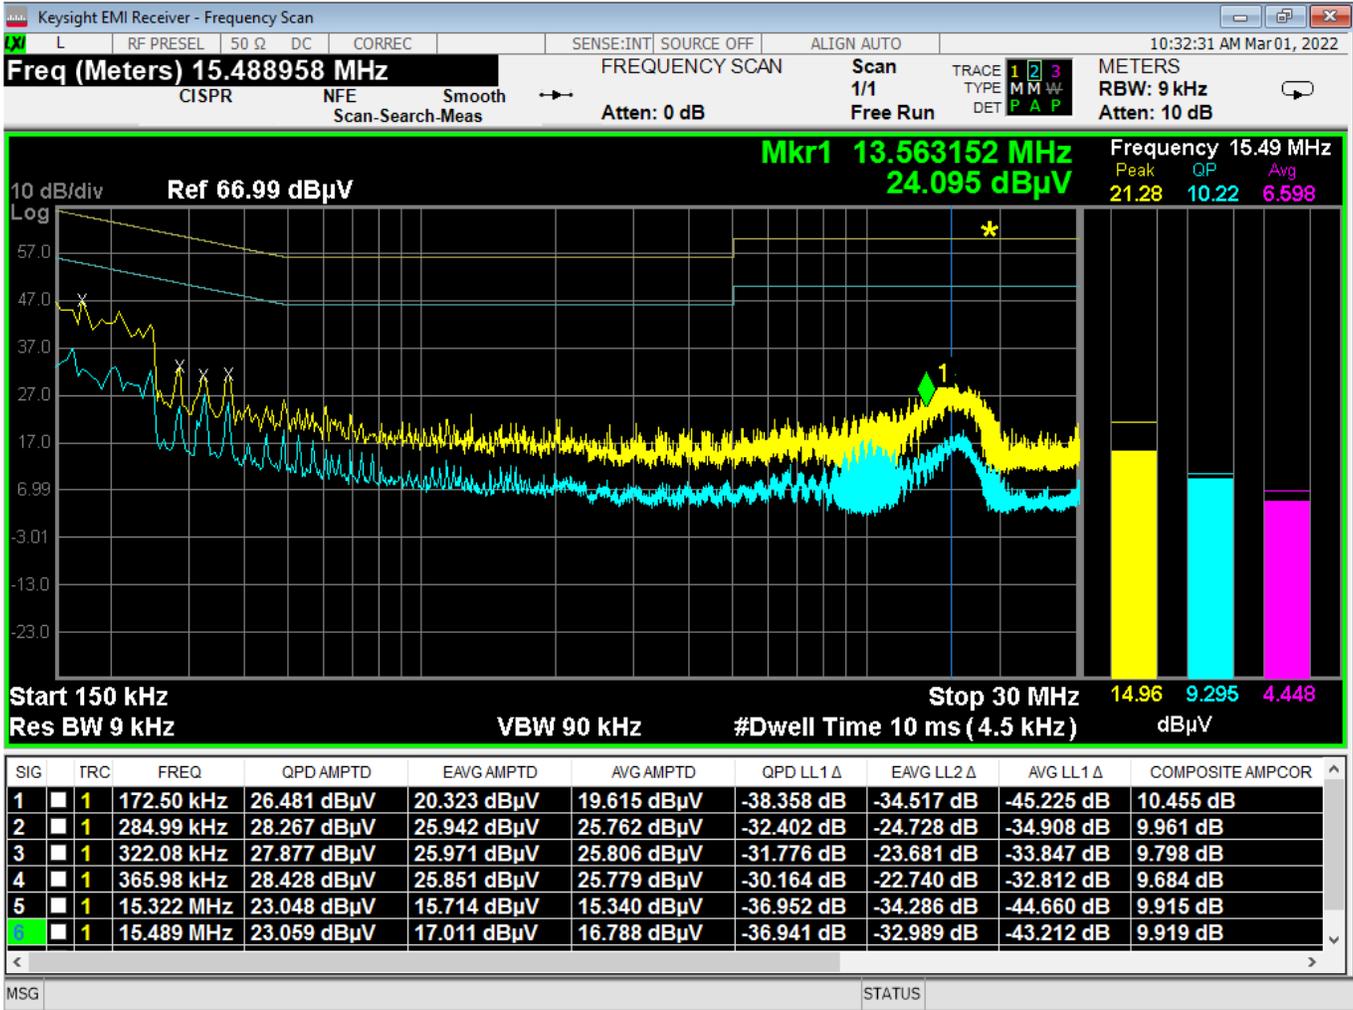


Figure 17 - Conducted Emissions Plot, Line, TX

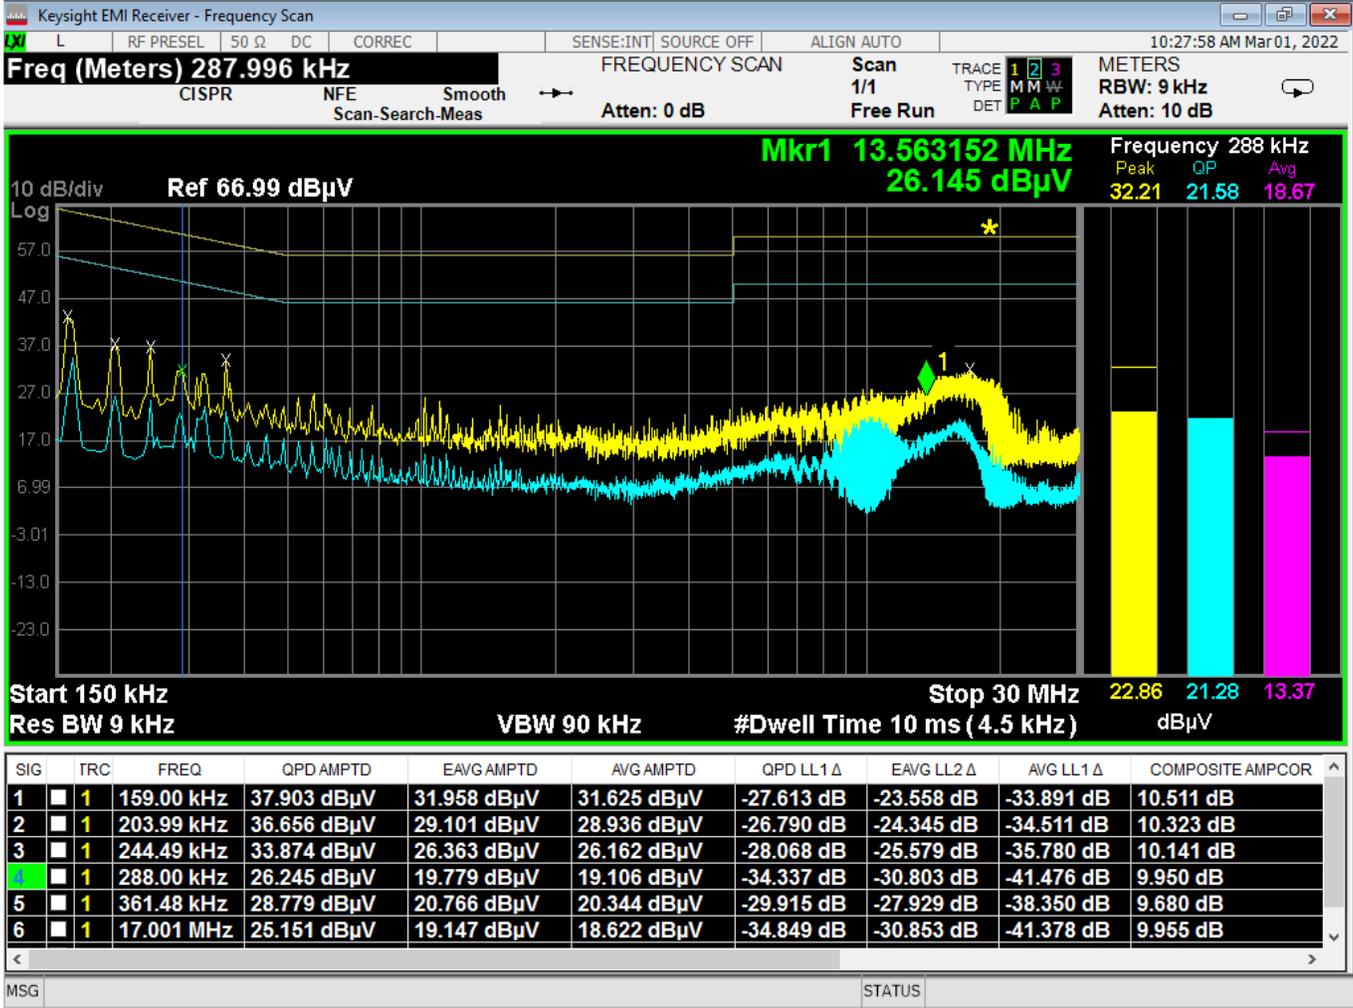


Figure 18 - Conducted Emissions Plot, Neutral, TX

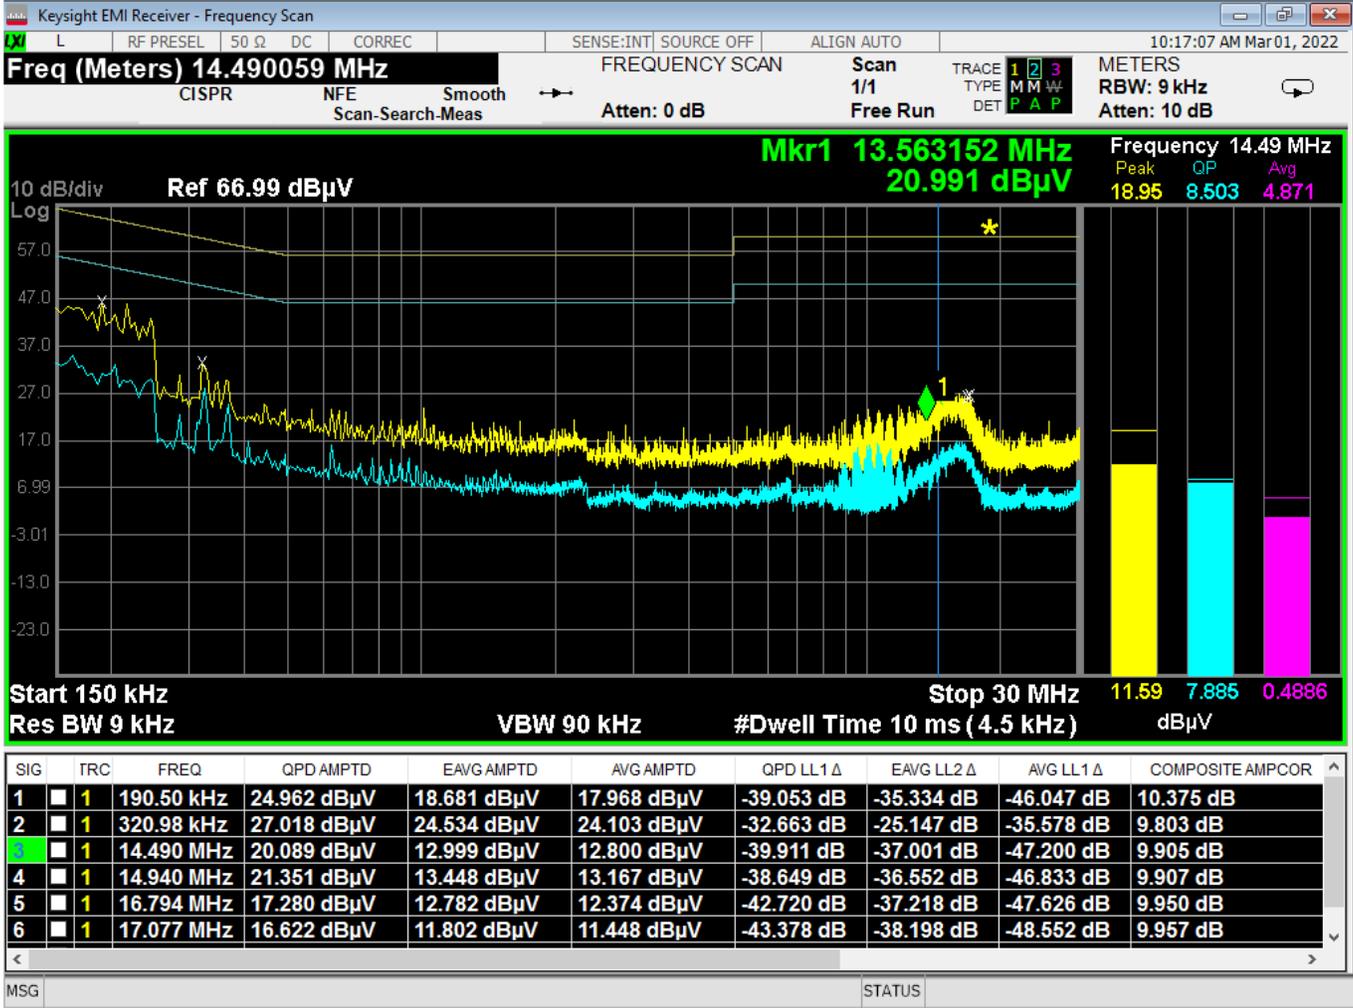


Figure 19 - Conducted Emissions Plot, Line, IDLE

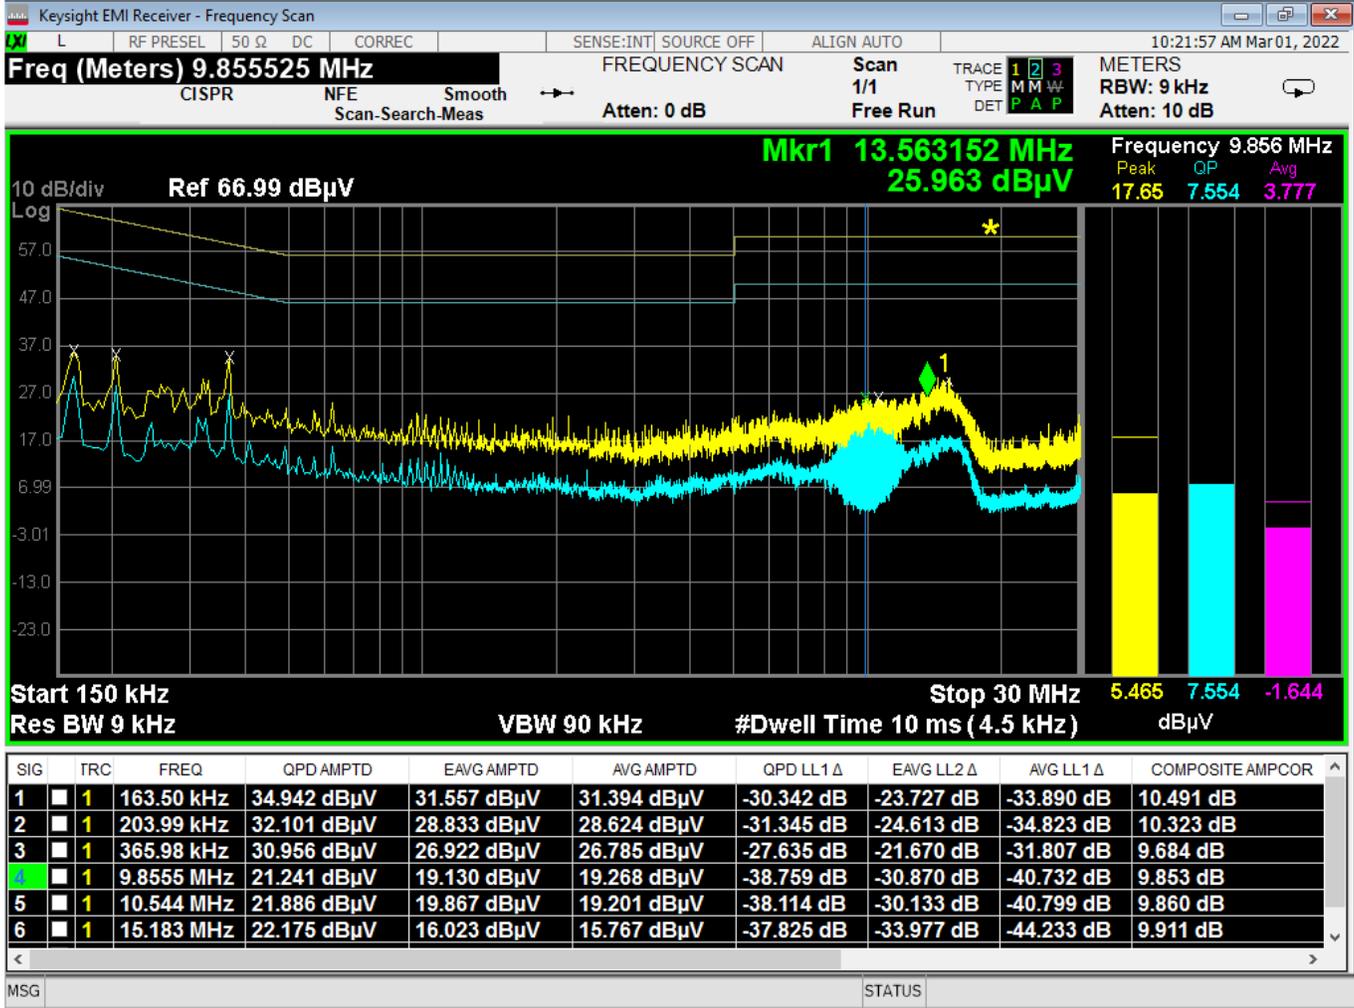


Figure 20 - Conducted Emissions Plot, Neutral, IDLE



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

	Report Number:	R20211005-21-E9A	Rev	A
	Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [Field \text{ Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$Power \text{ (watts)} = 10^{[Power \text{ (dBm)}/10]} / 1000$$

$$Voltage \text{ (dB}\mu\text{V)} = Power \text{ (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field \text{ Strength (V/m)} = 10^{[Field \text{ Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

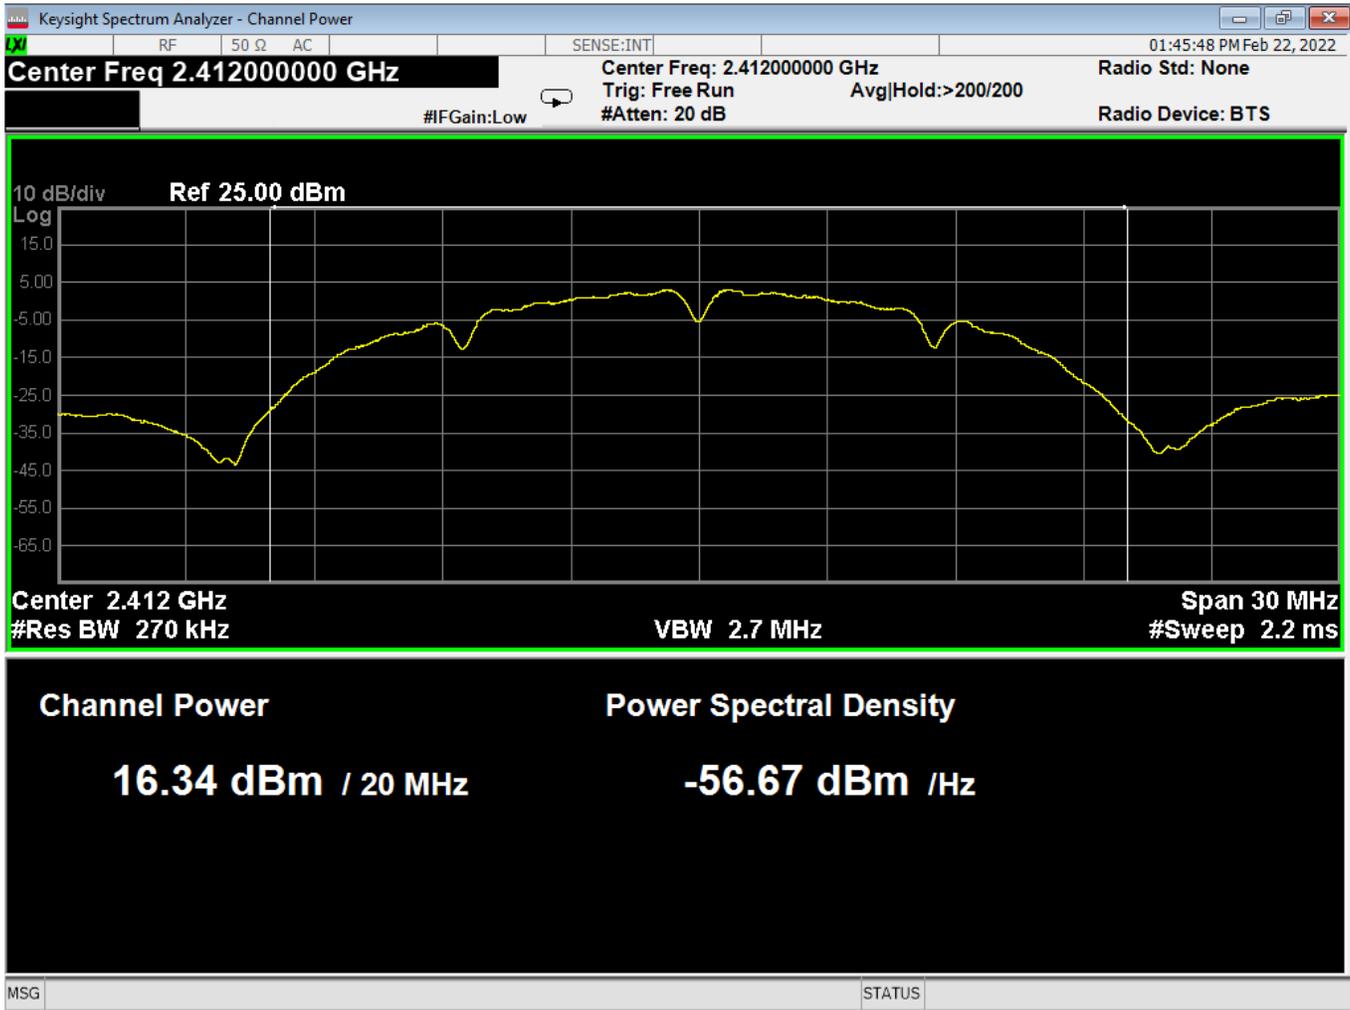
APPENDIX C – GRAPHS AND TABLES



01 Average Power, Low, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

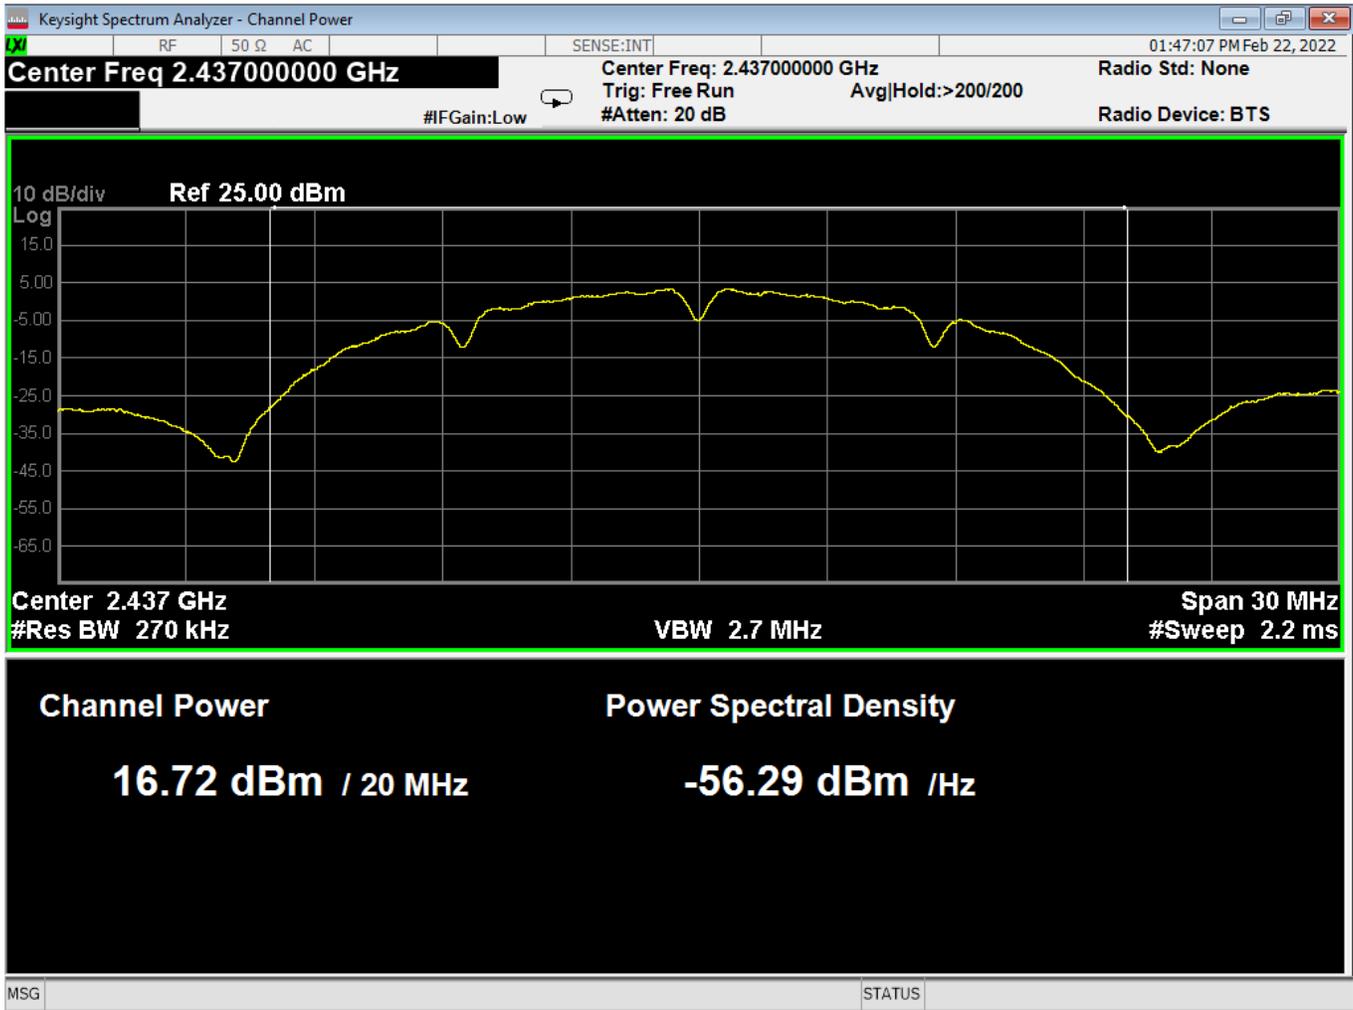

02 Average Power, Mid, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

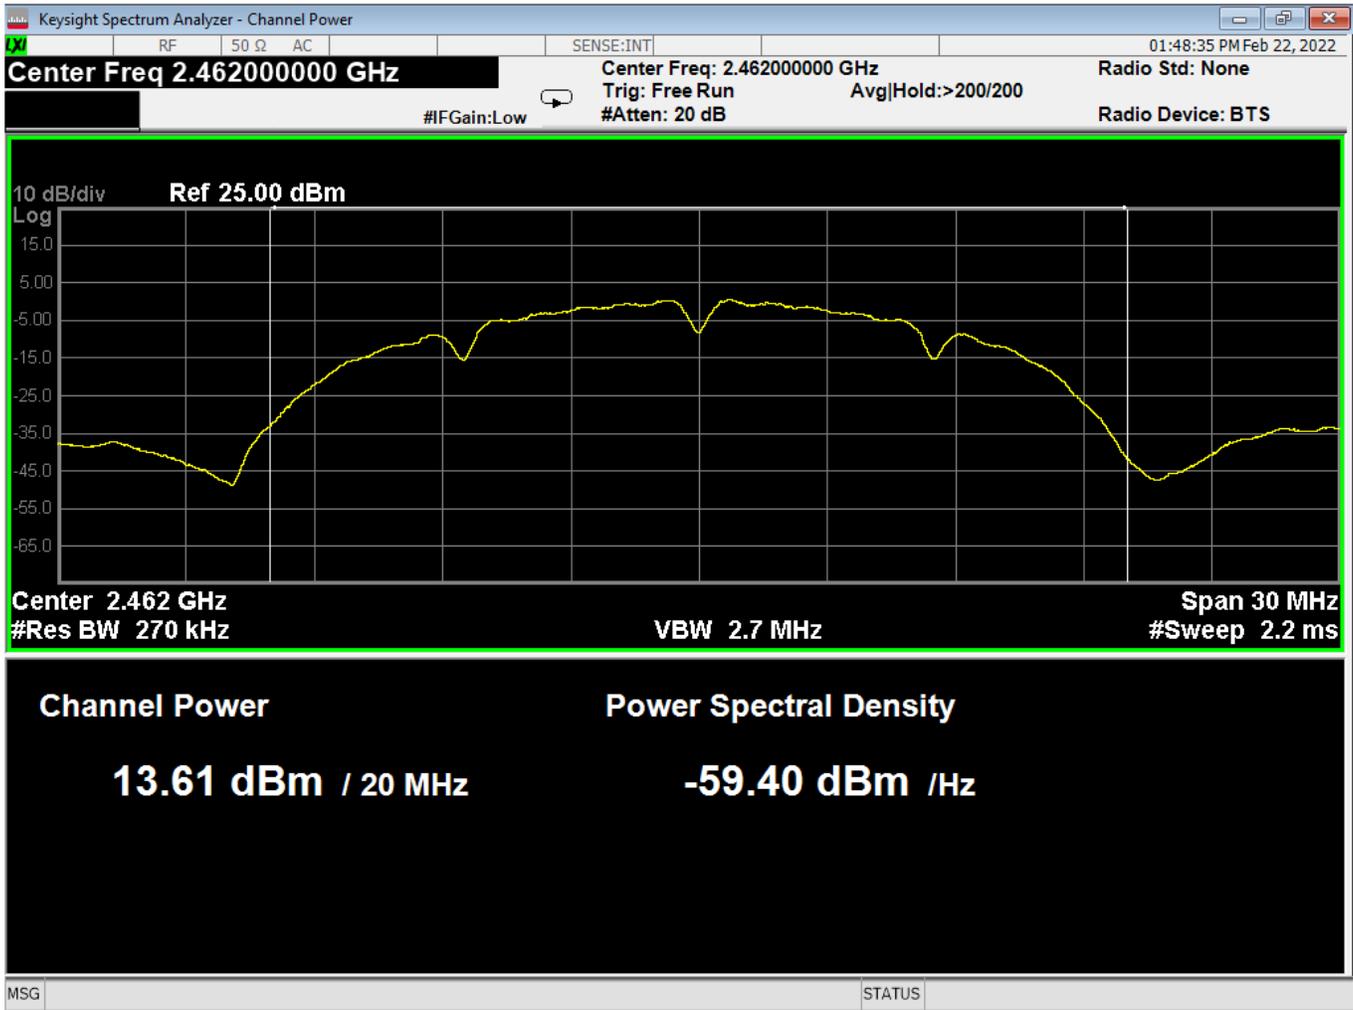

03 Average Power, High, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

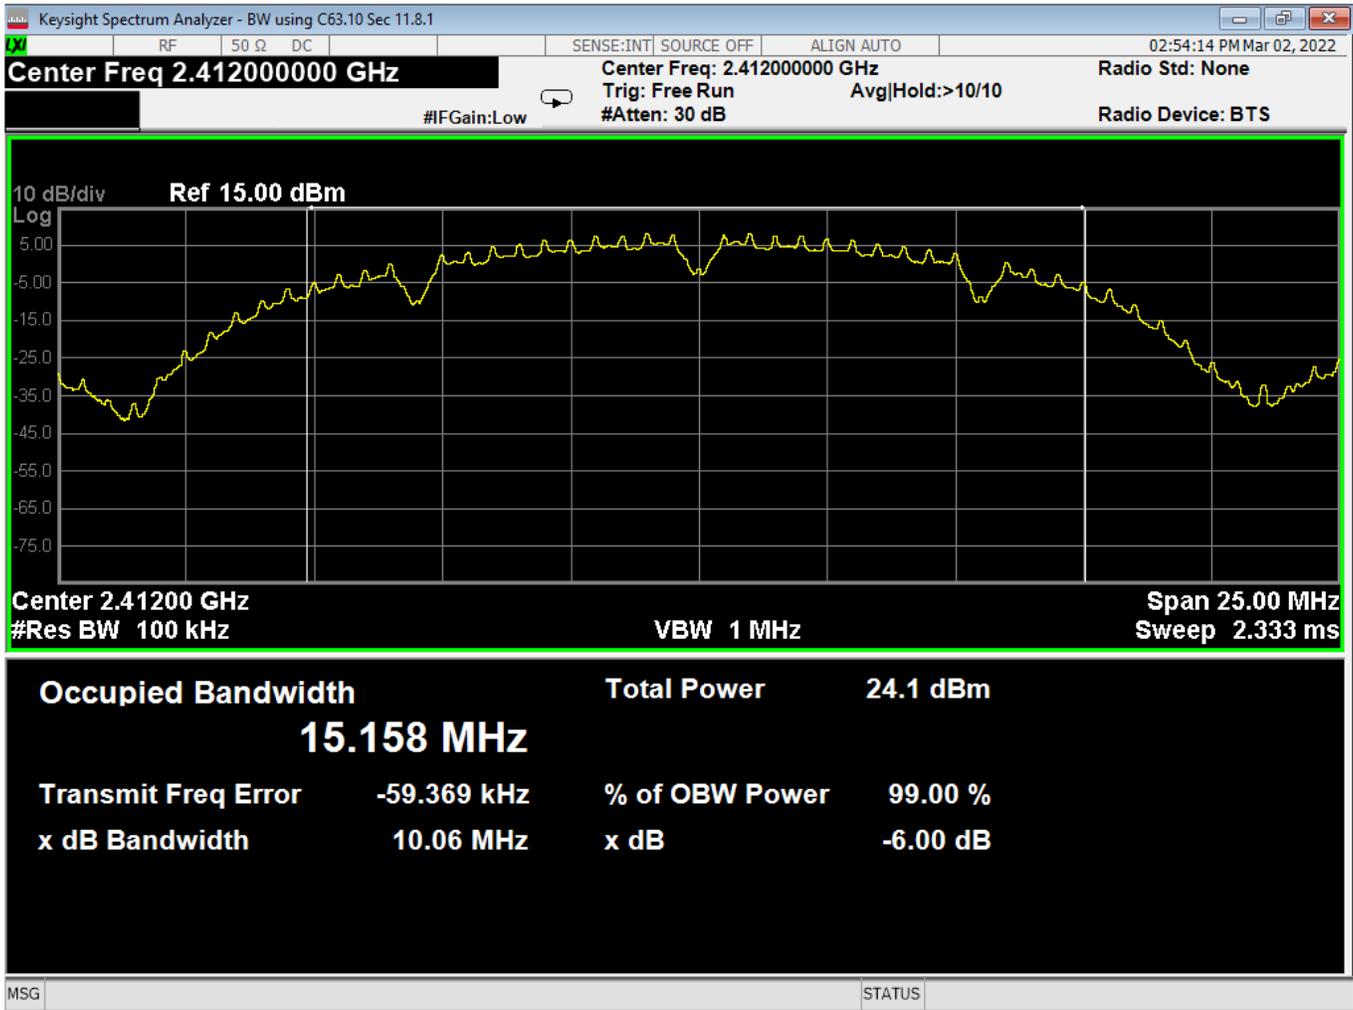

04 OBW-6dB, Low, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

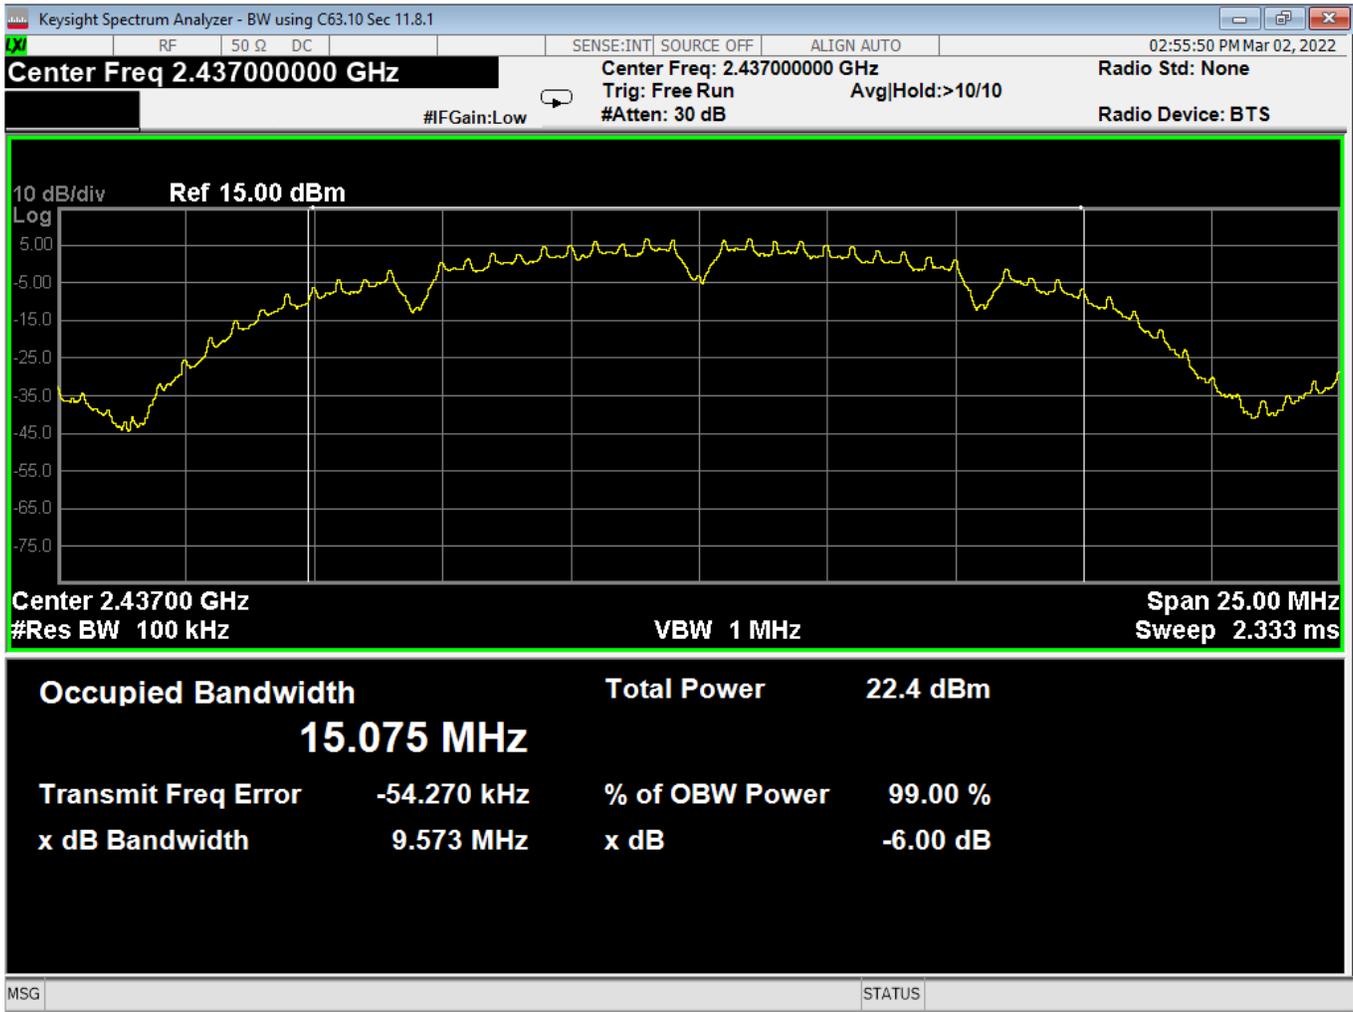

05 OBW-6dB, Mid, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

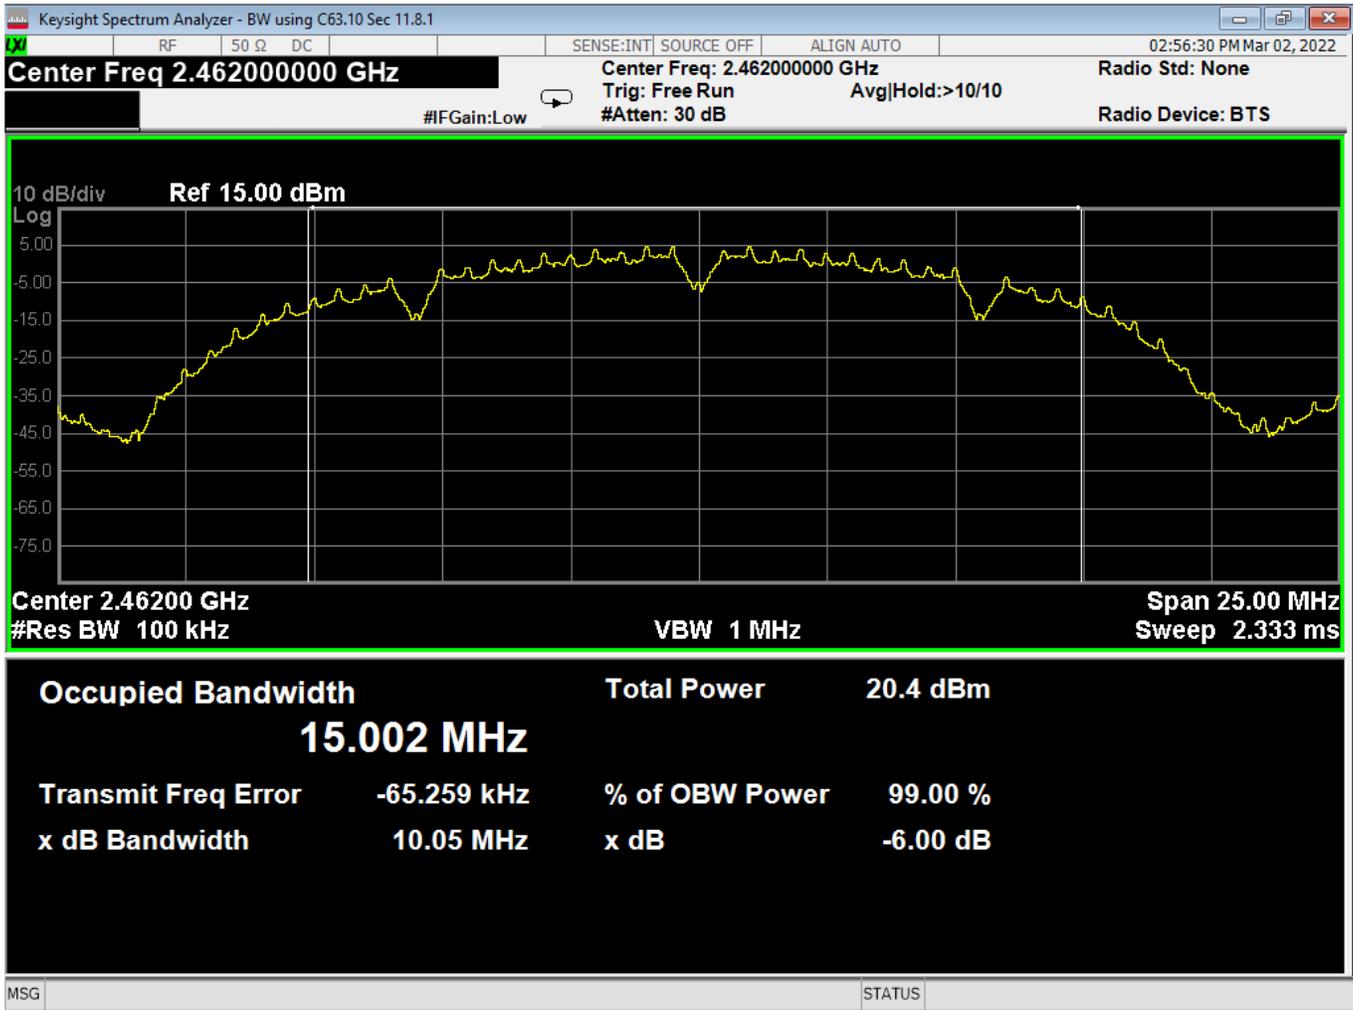

06 OBW-6dB, High, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

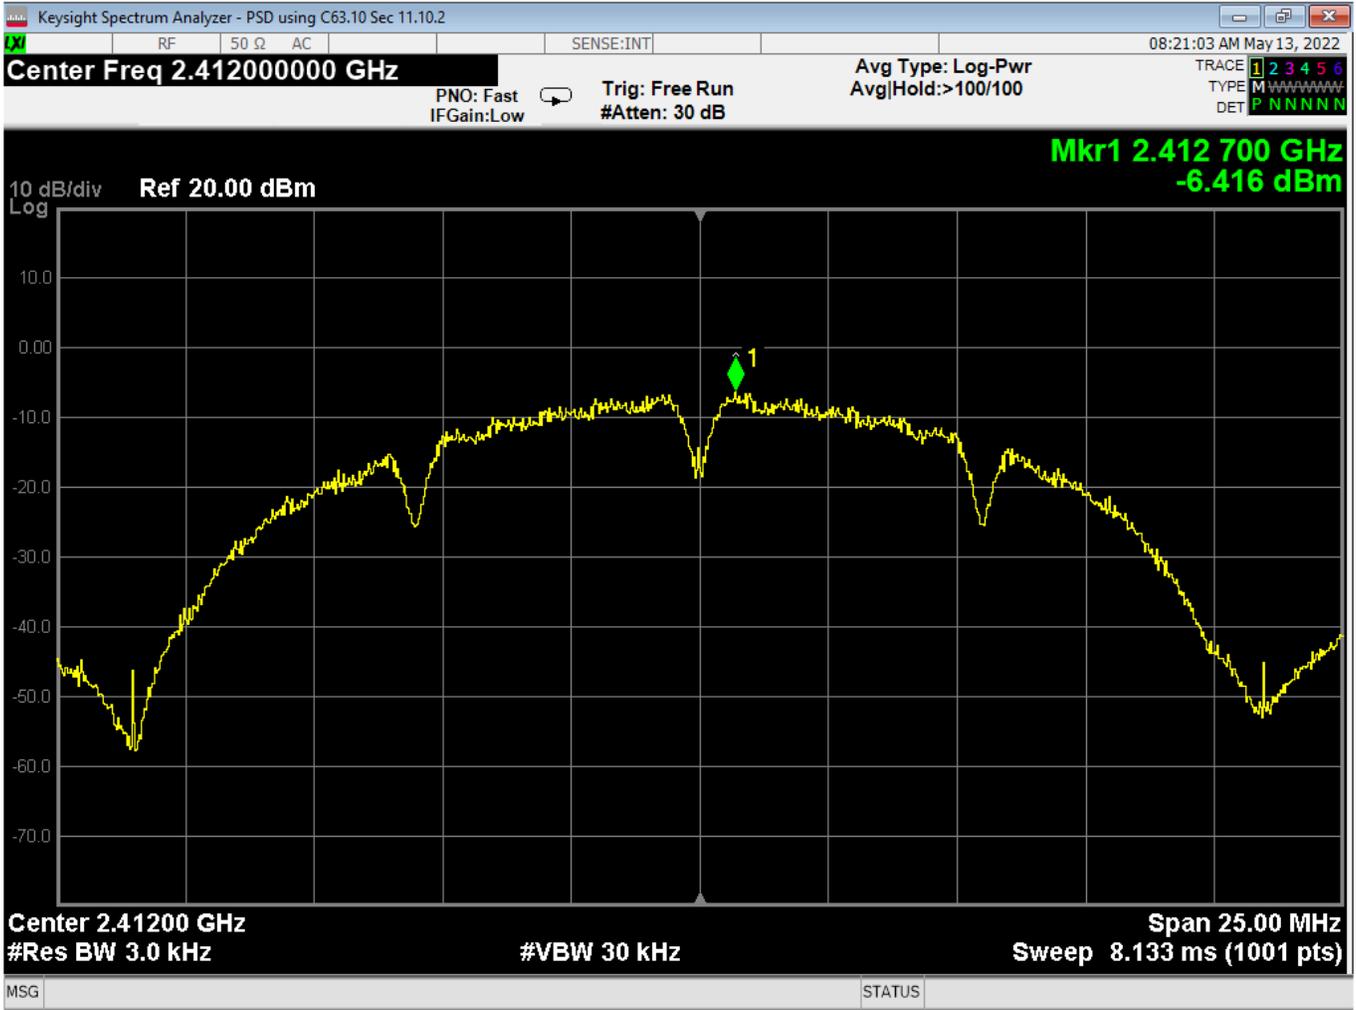

07 PSD, Low, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

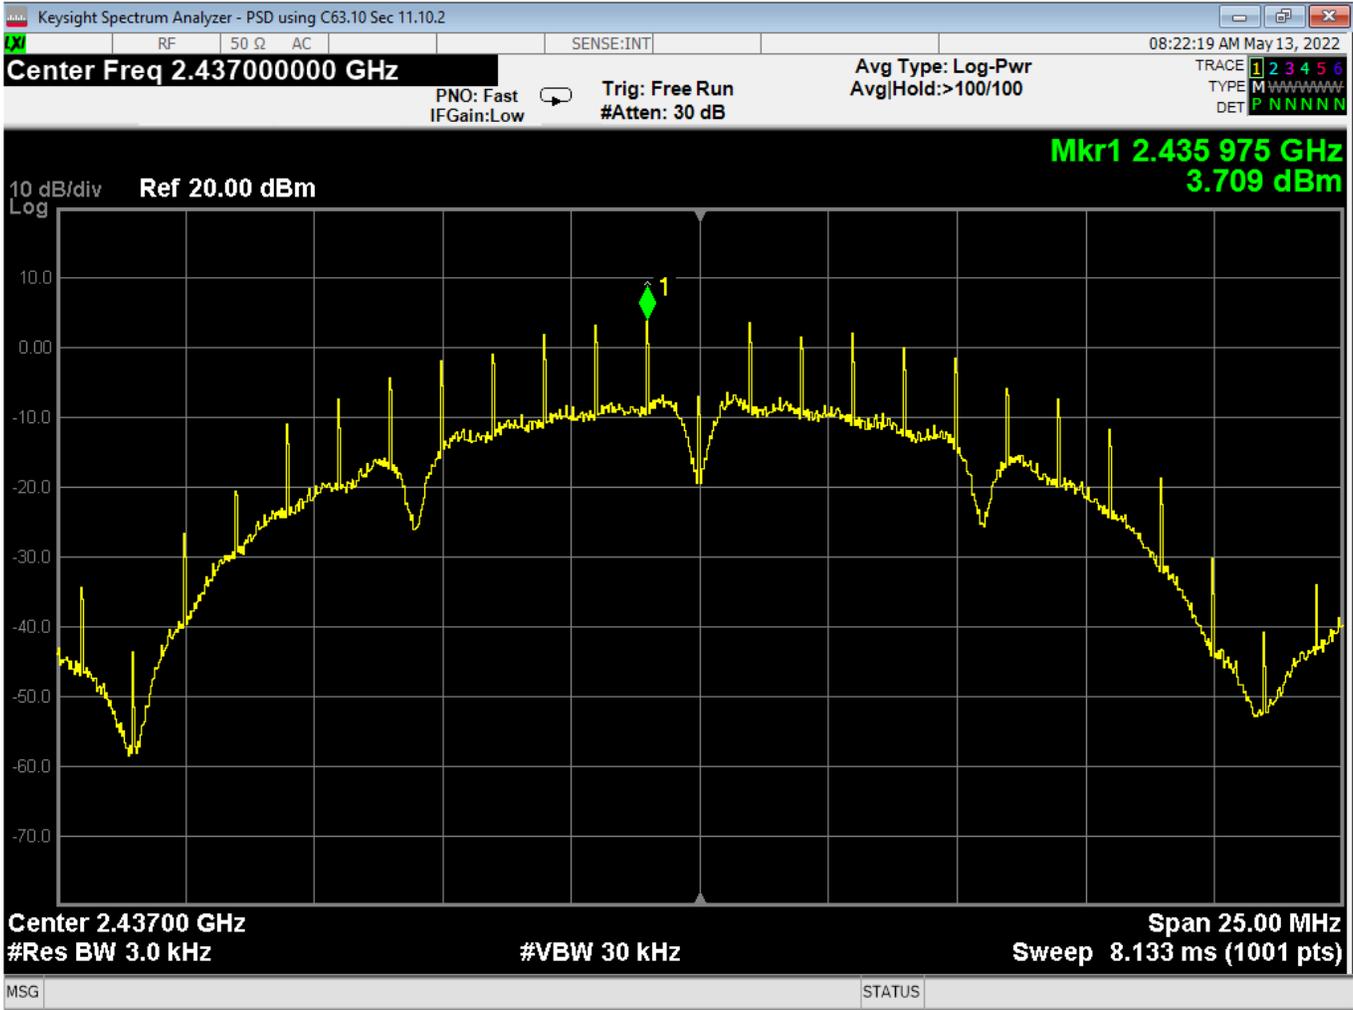

08 PSD, Mid, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

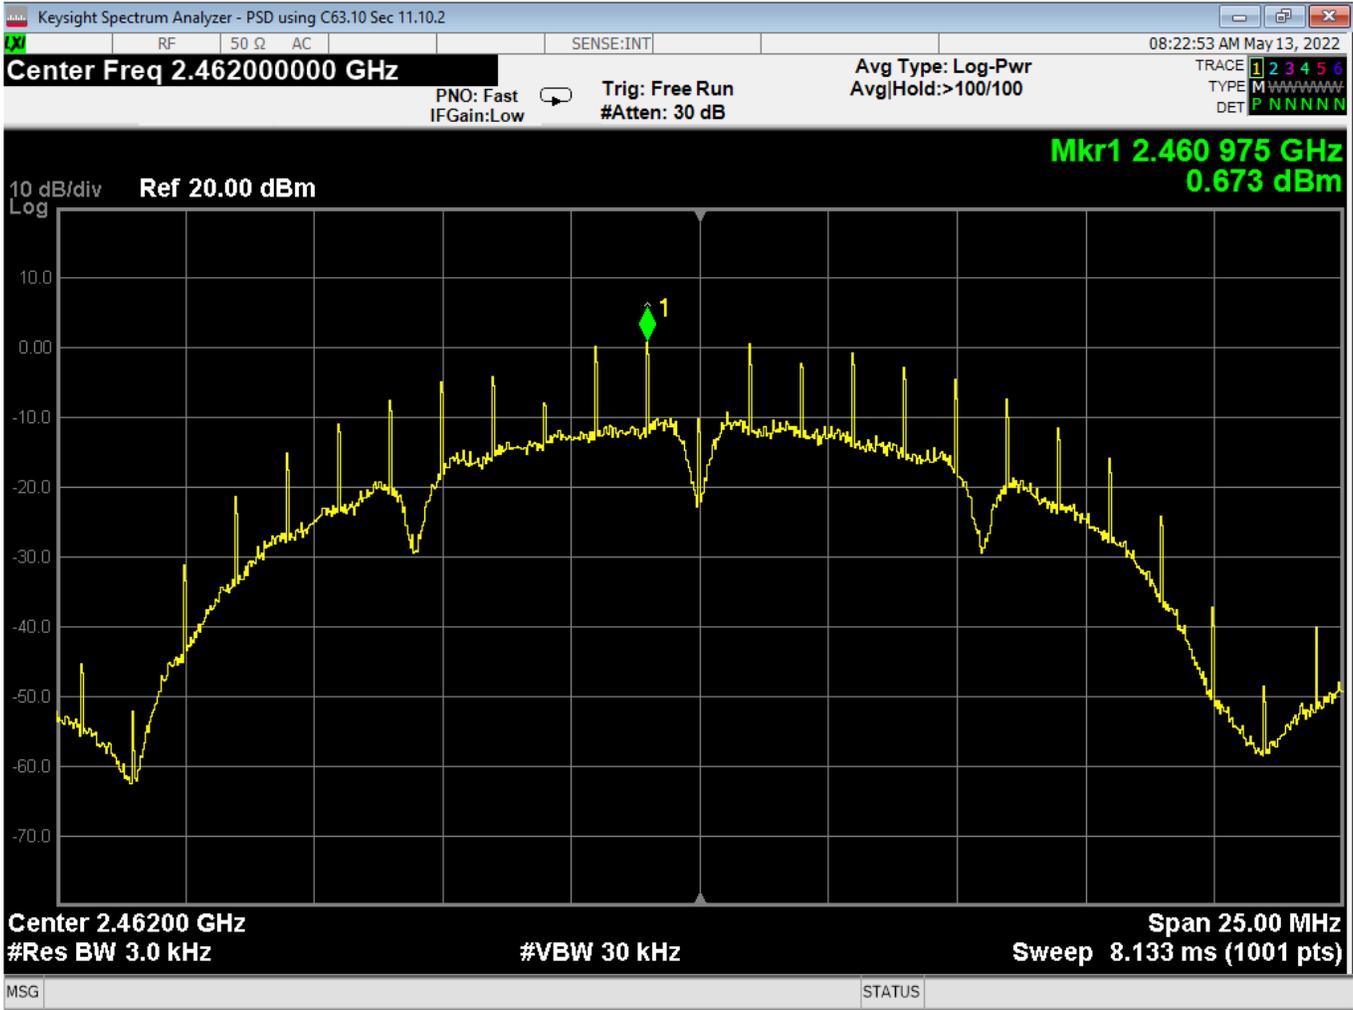

09 PSD, High, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

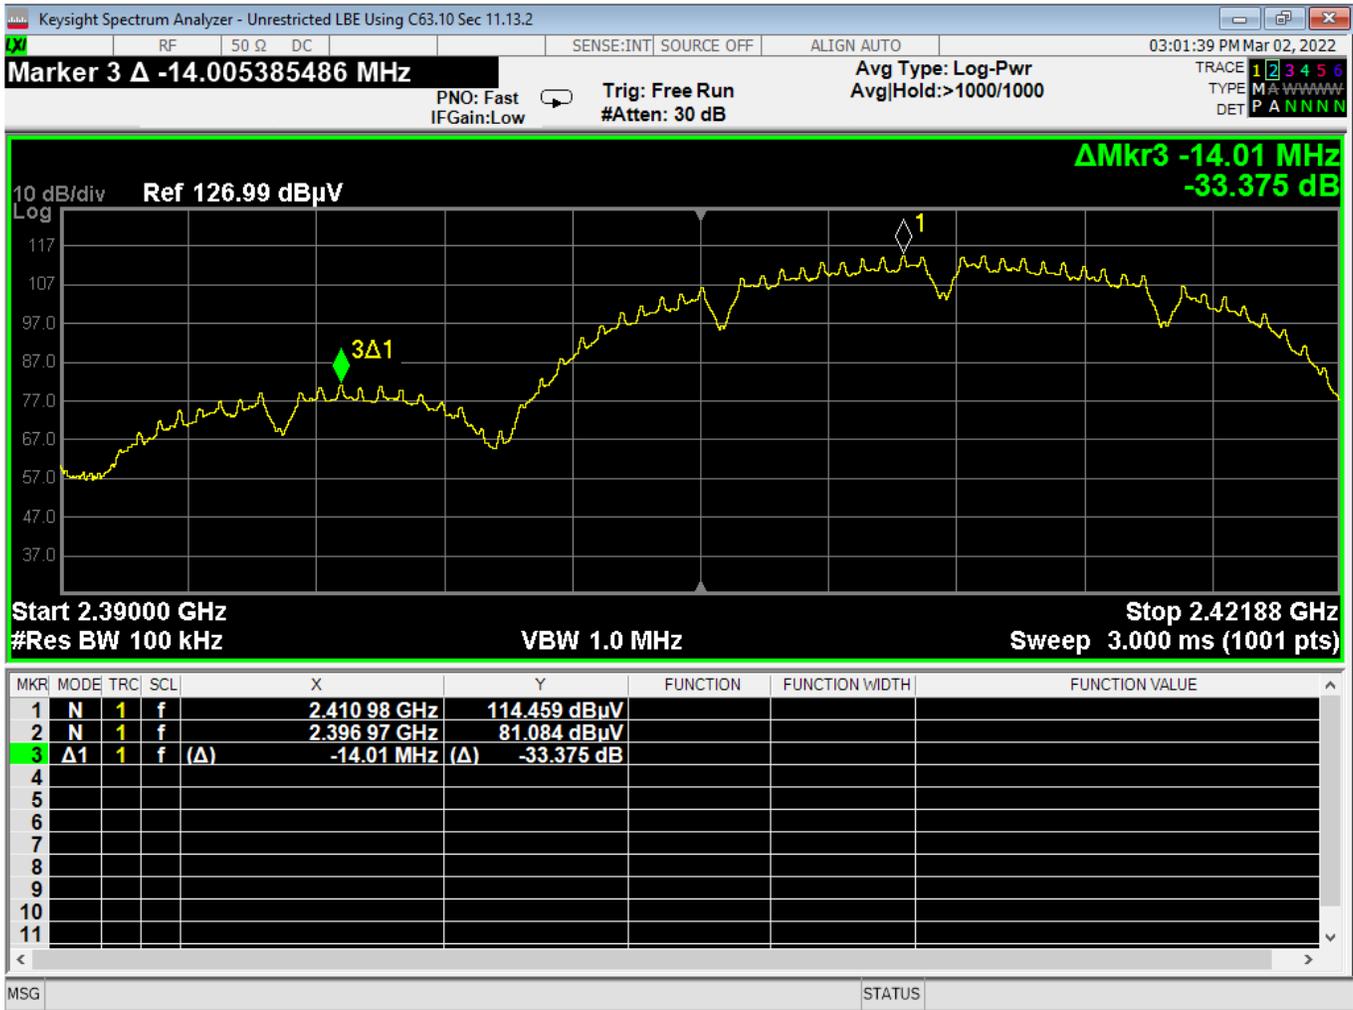

10 Lower Bandedge, Unrestricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

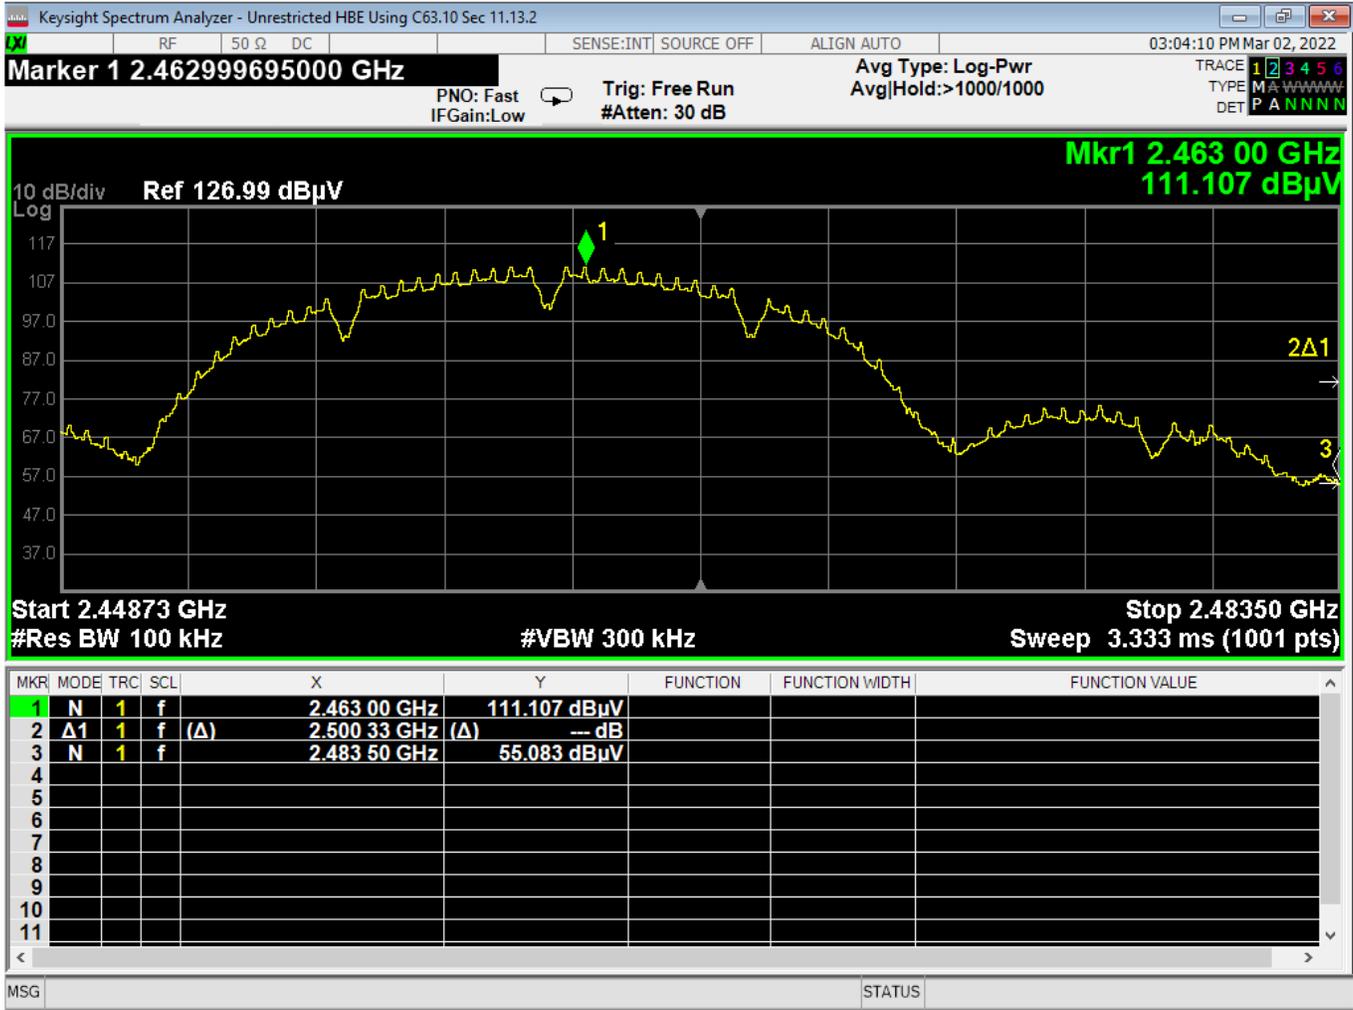

11 Higher Bandedge, Unrestricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

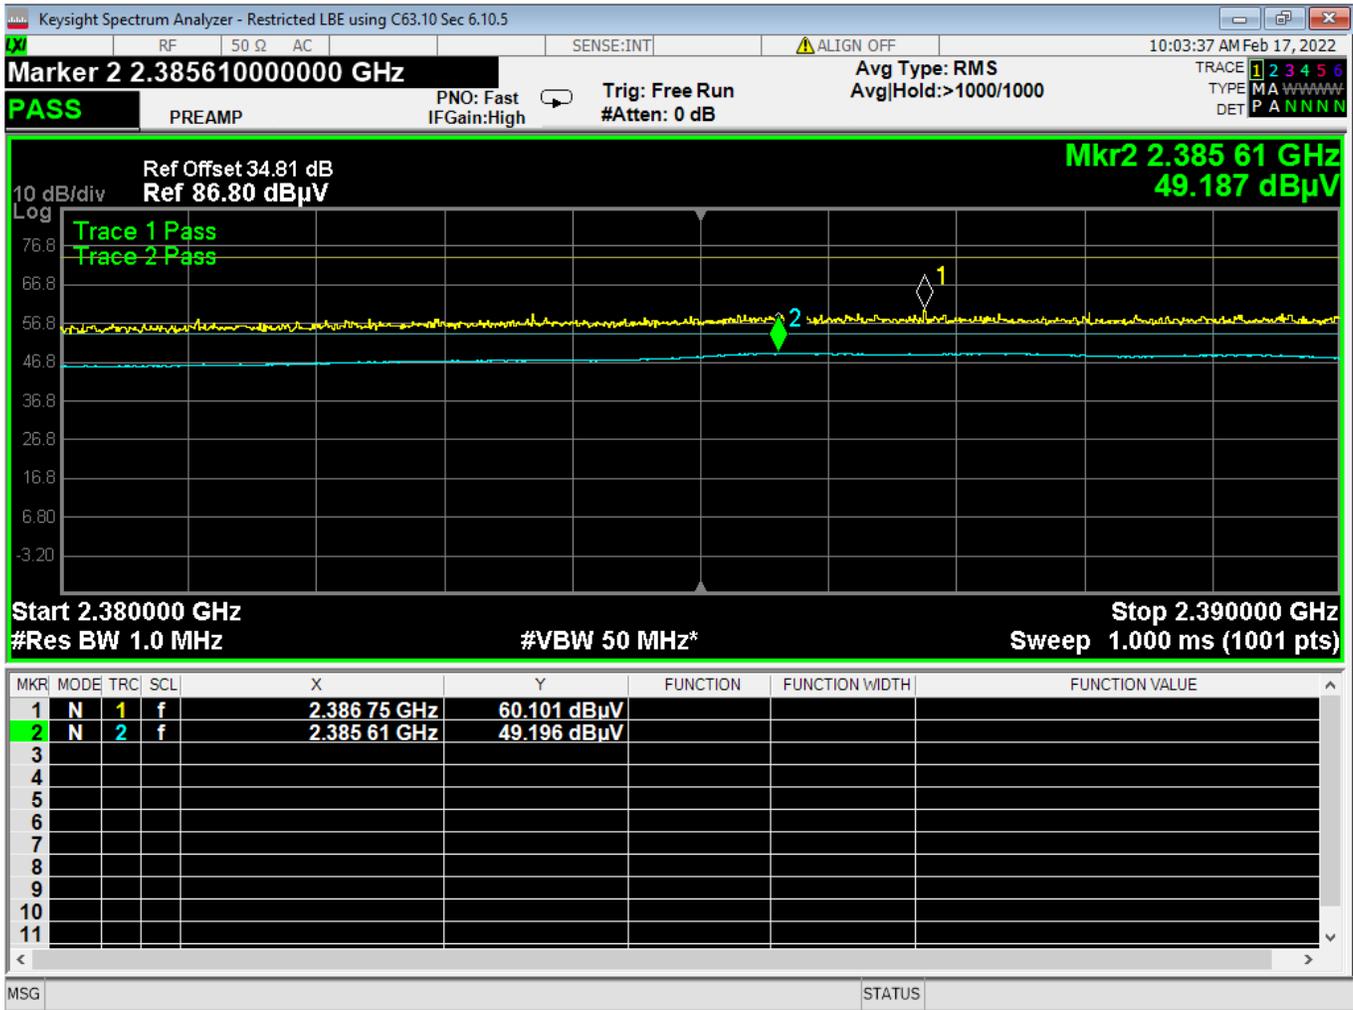

12 Lower Bandedge, Restricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

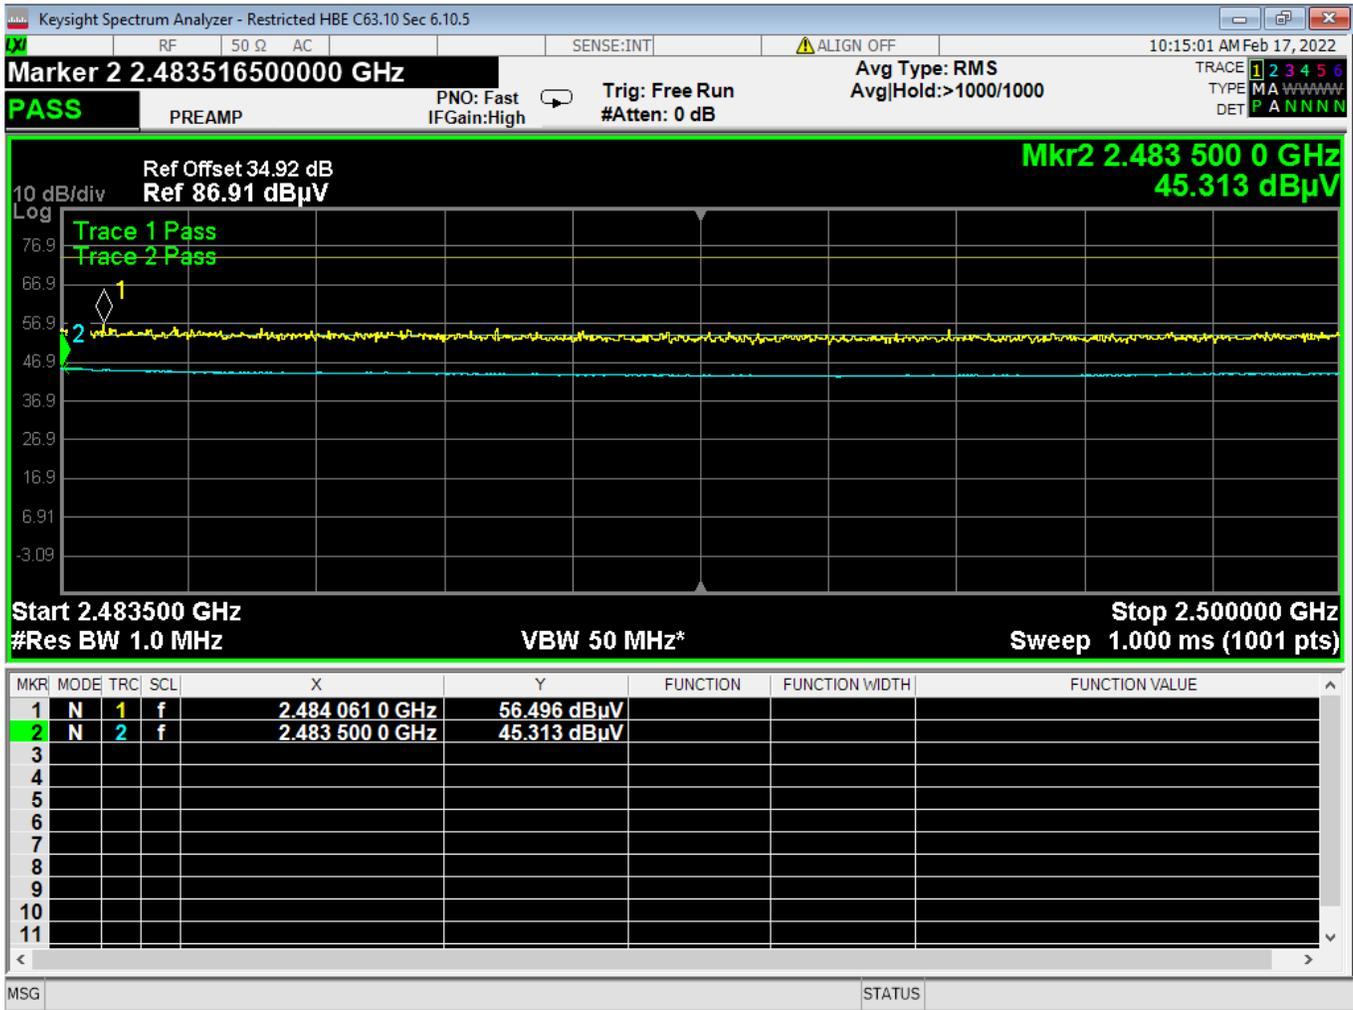

13 Higher Bandedge, Restricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

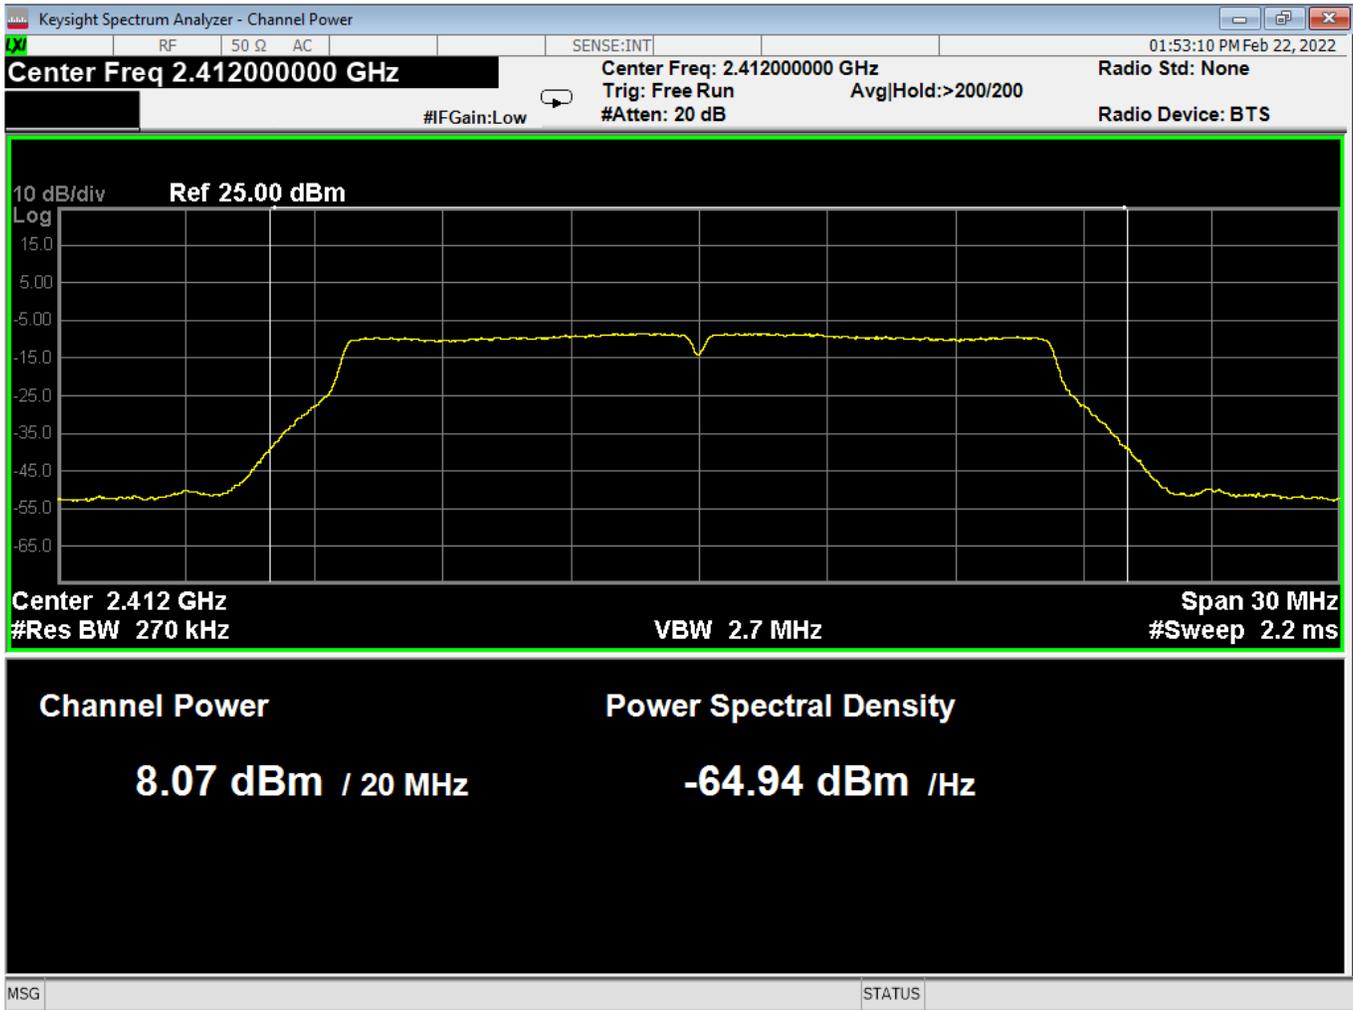

14 Average Power, Low, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

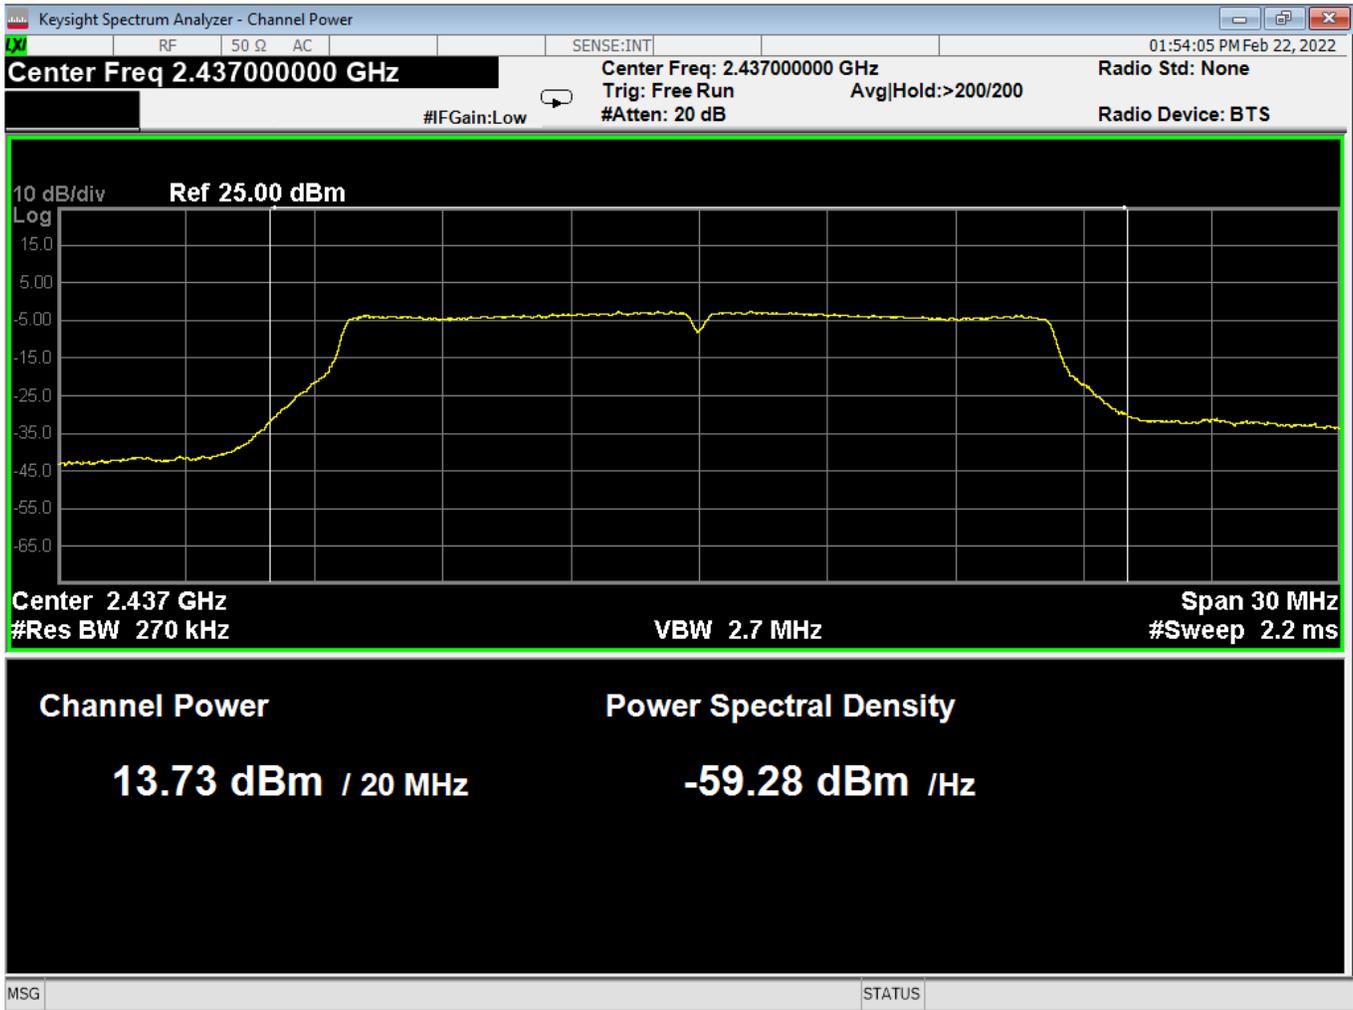

15 Average Power, Mid, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

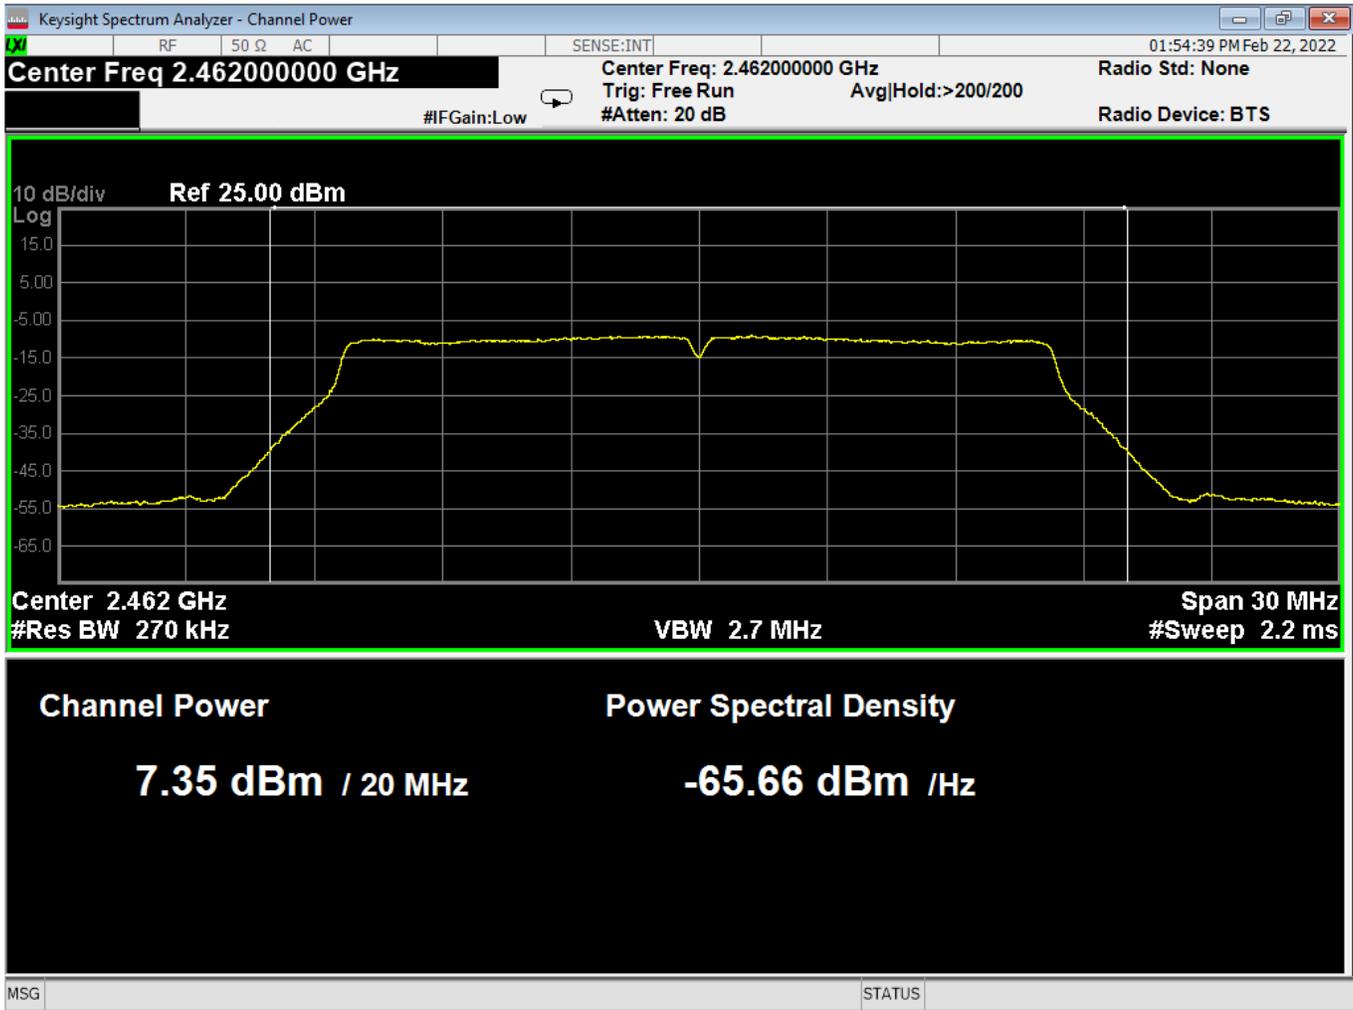

16 Average Power, High, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

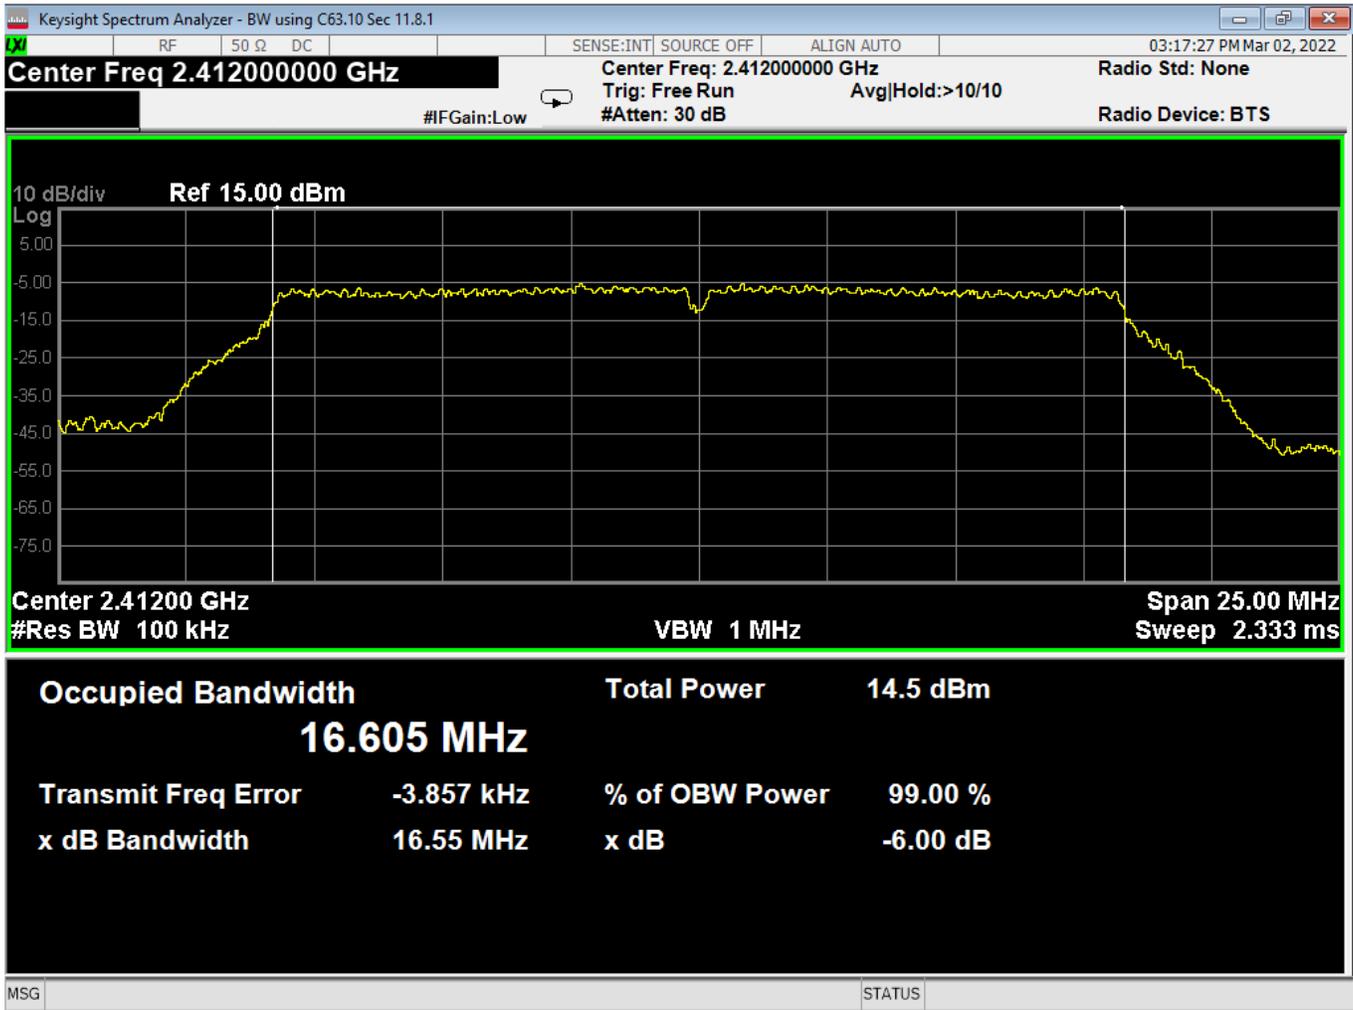

17 OBW-6dB, Low, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

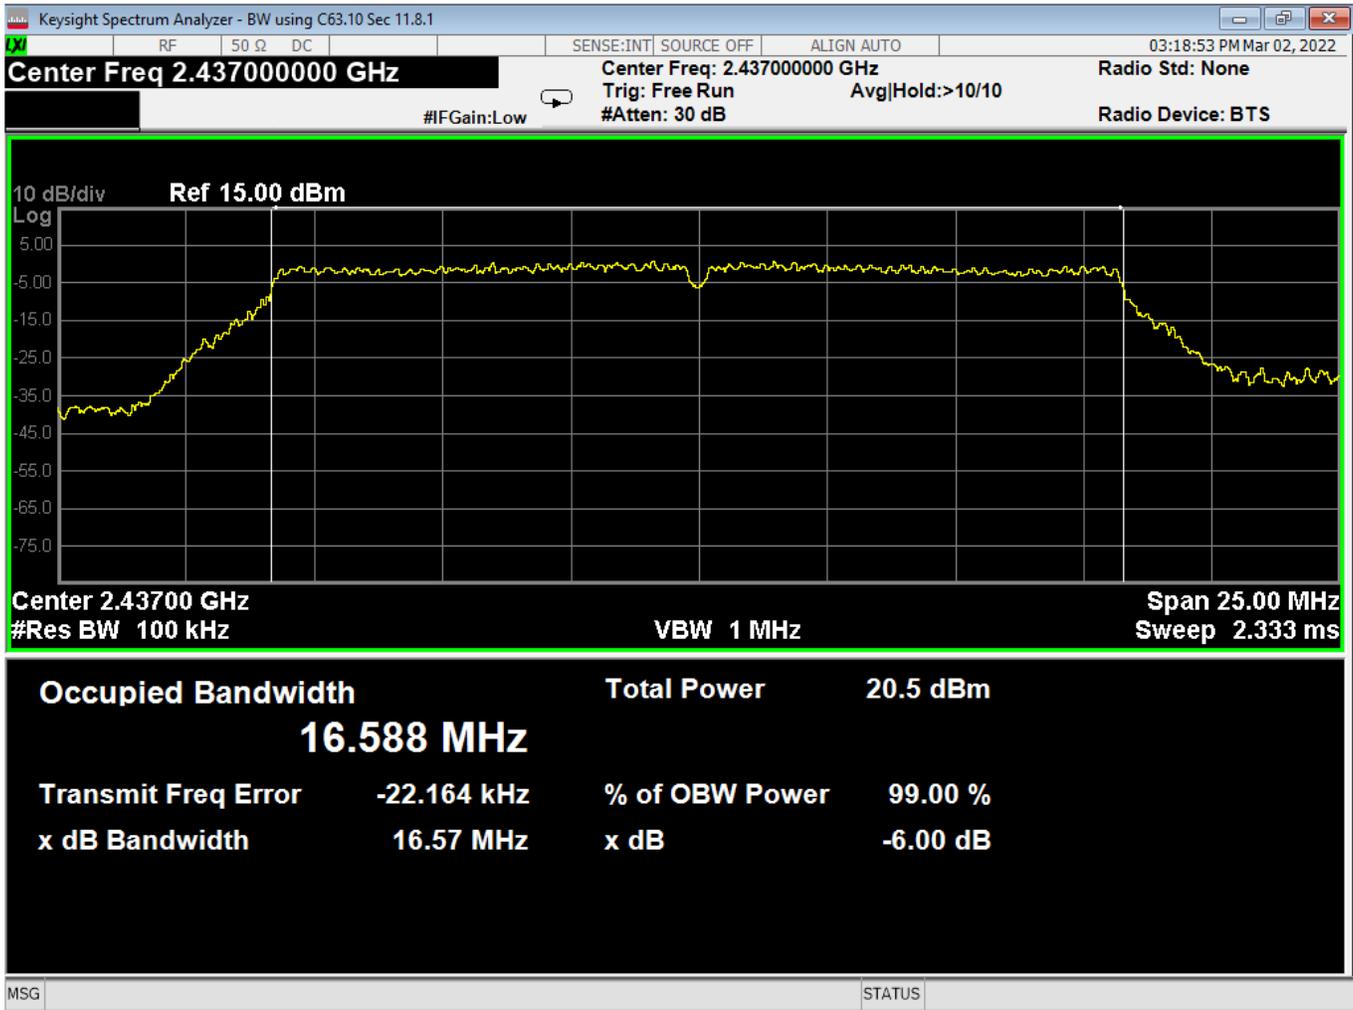

18 OBW-6dB, Mid, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

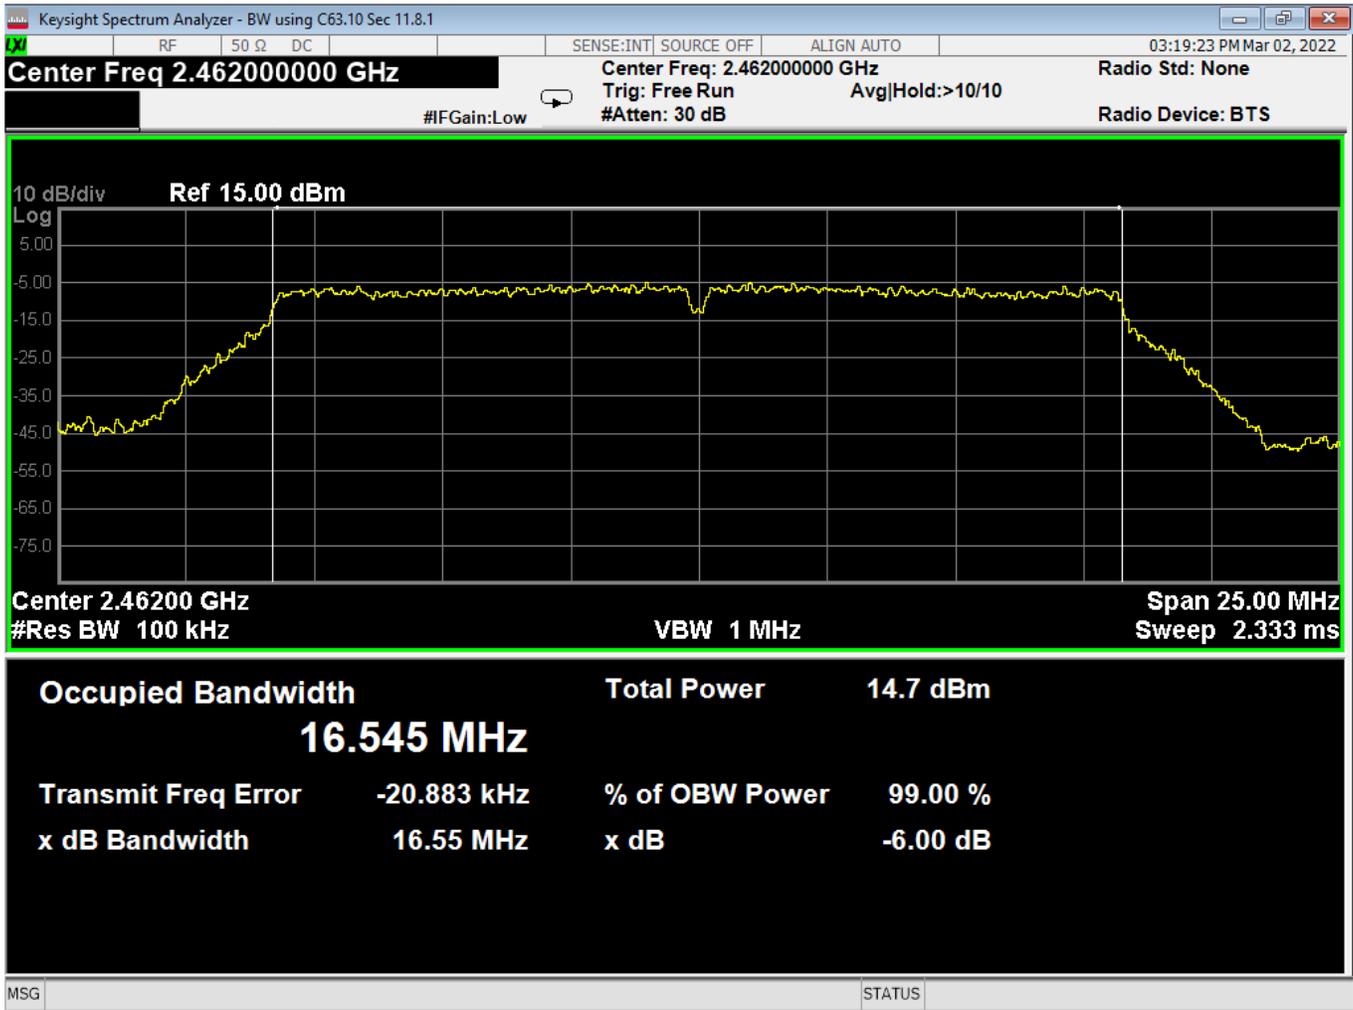

19 OBW-6dB, High, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

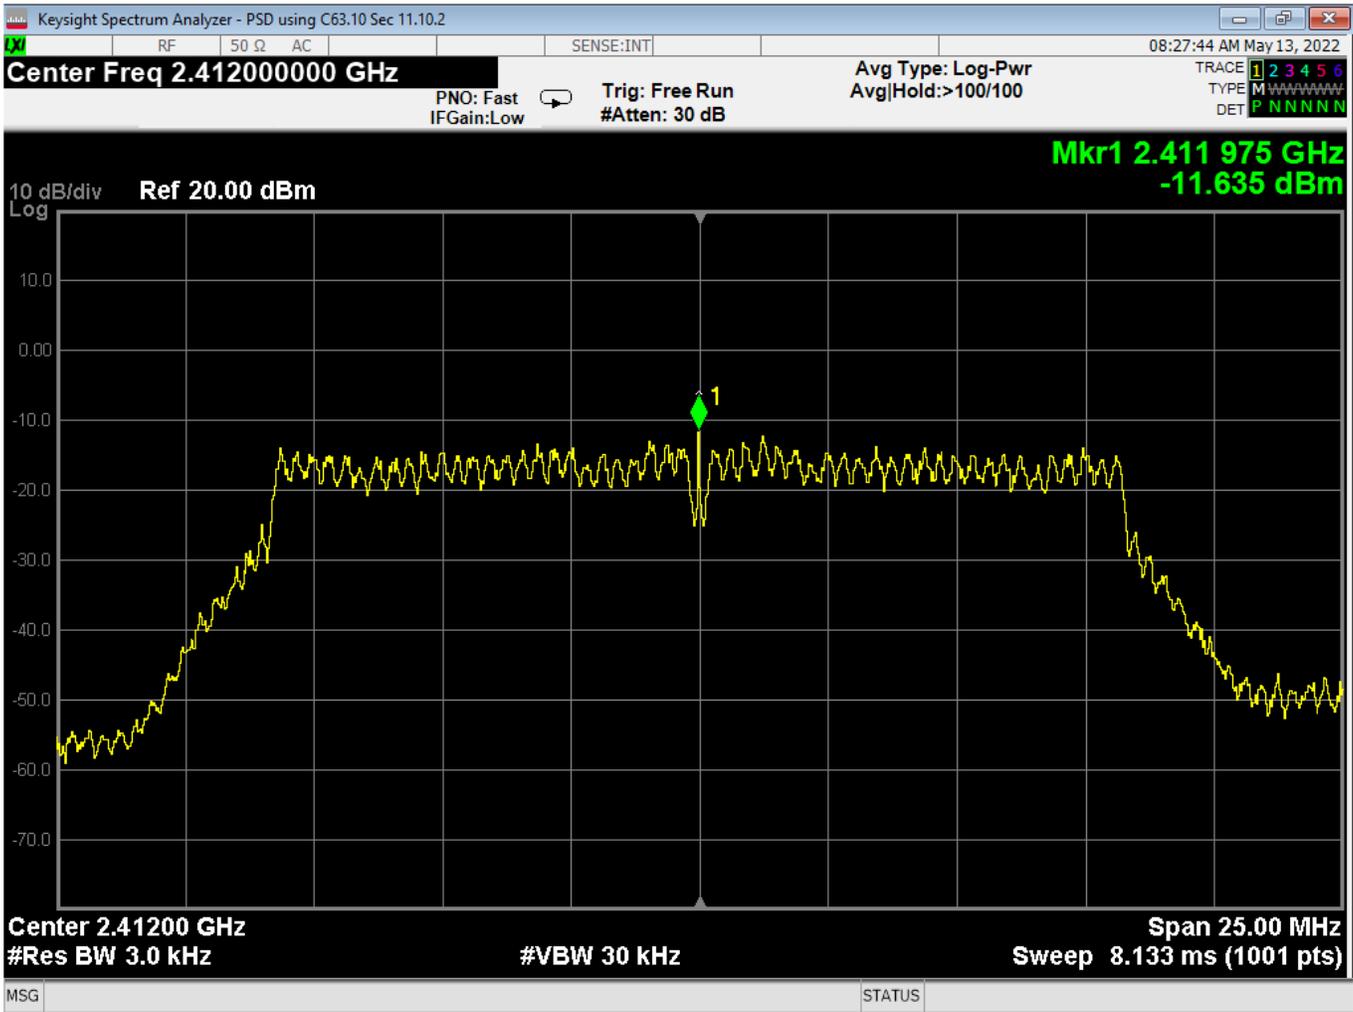

20 PSD, Low, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

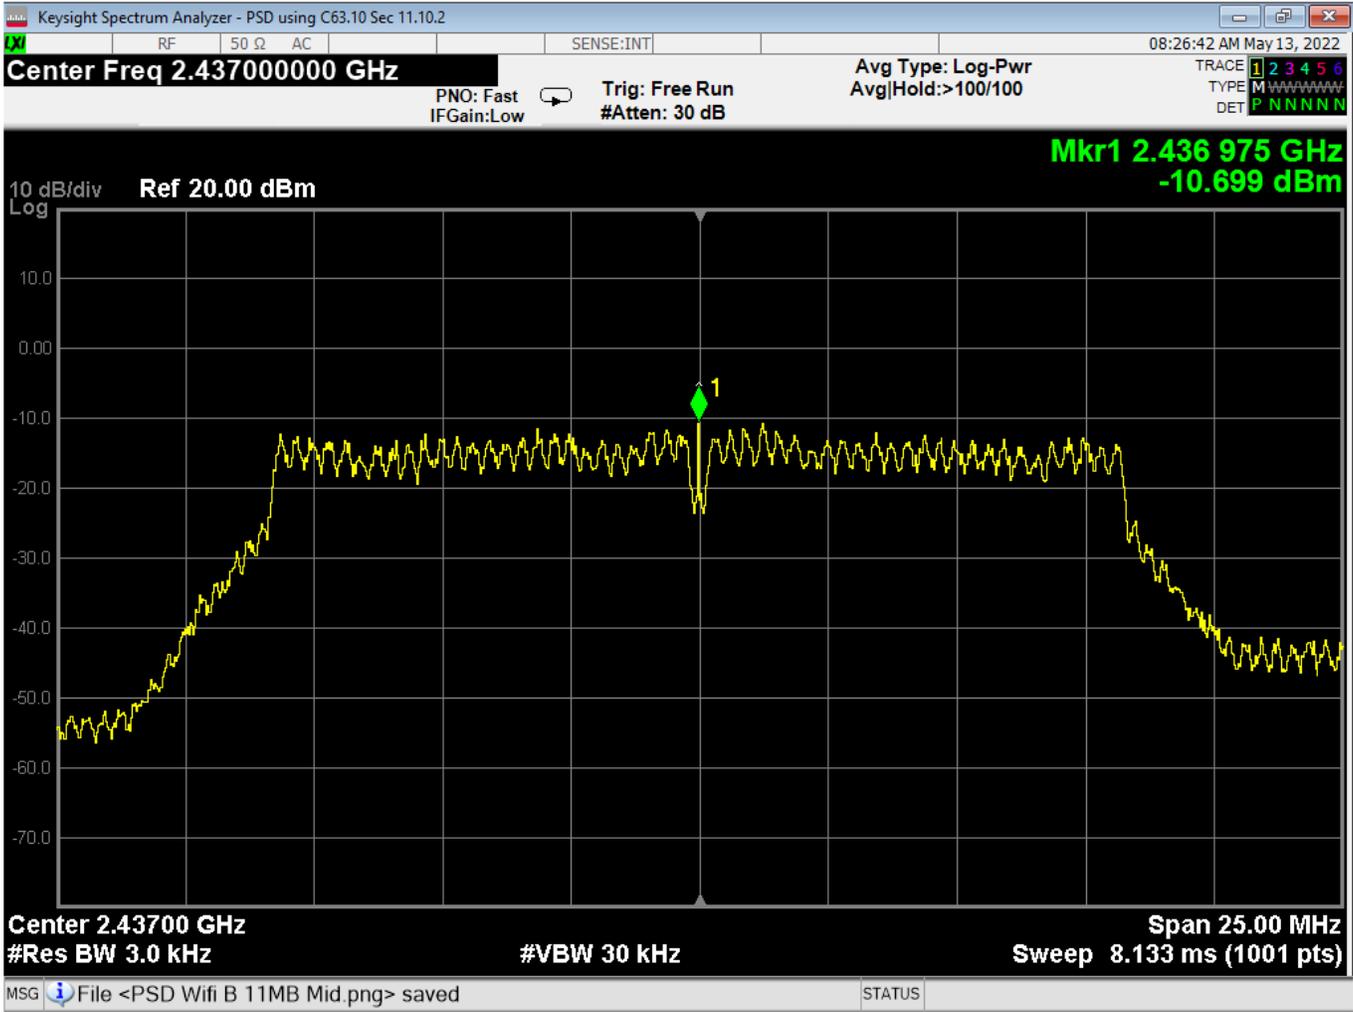

21 PSD, Mid, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

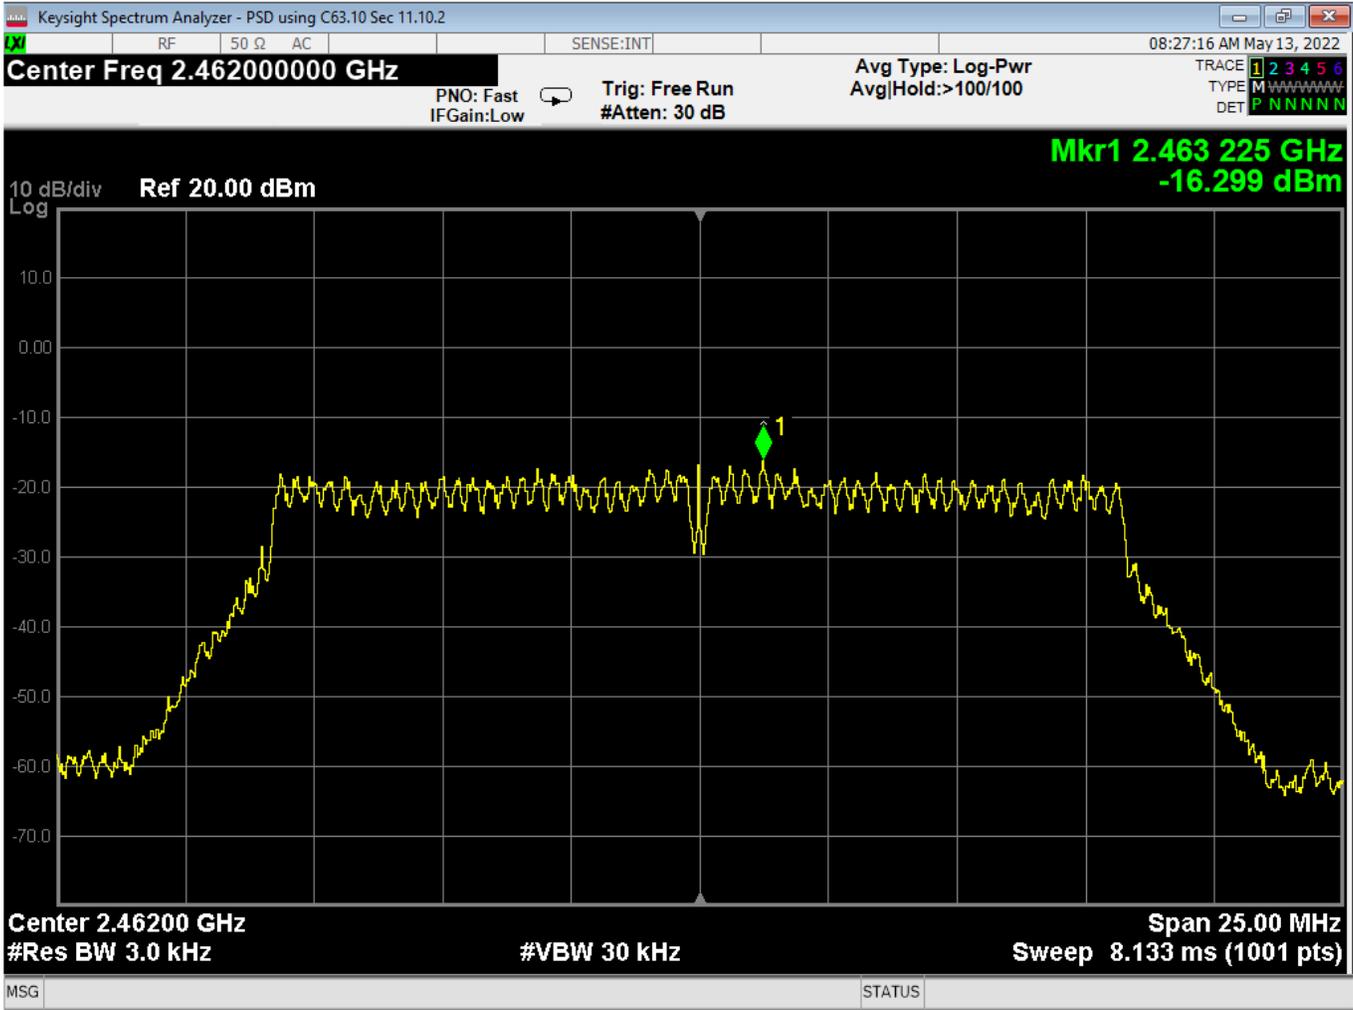

22 PSD, High, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

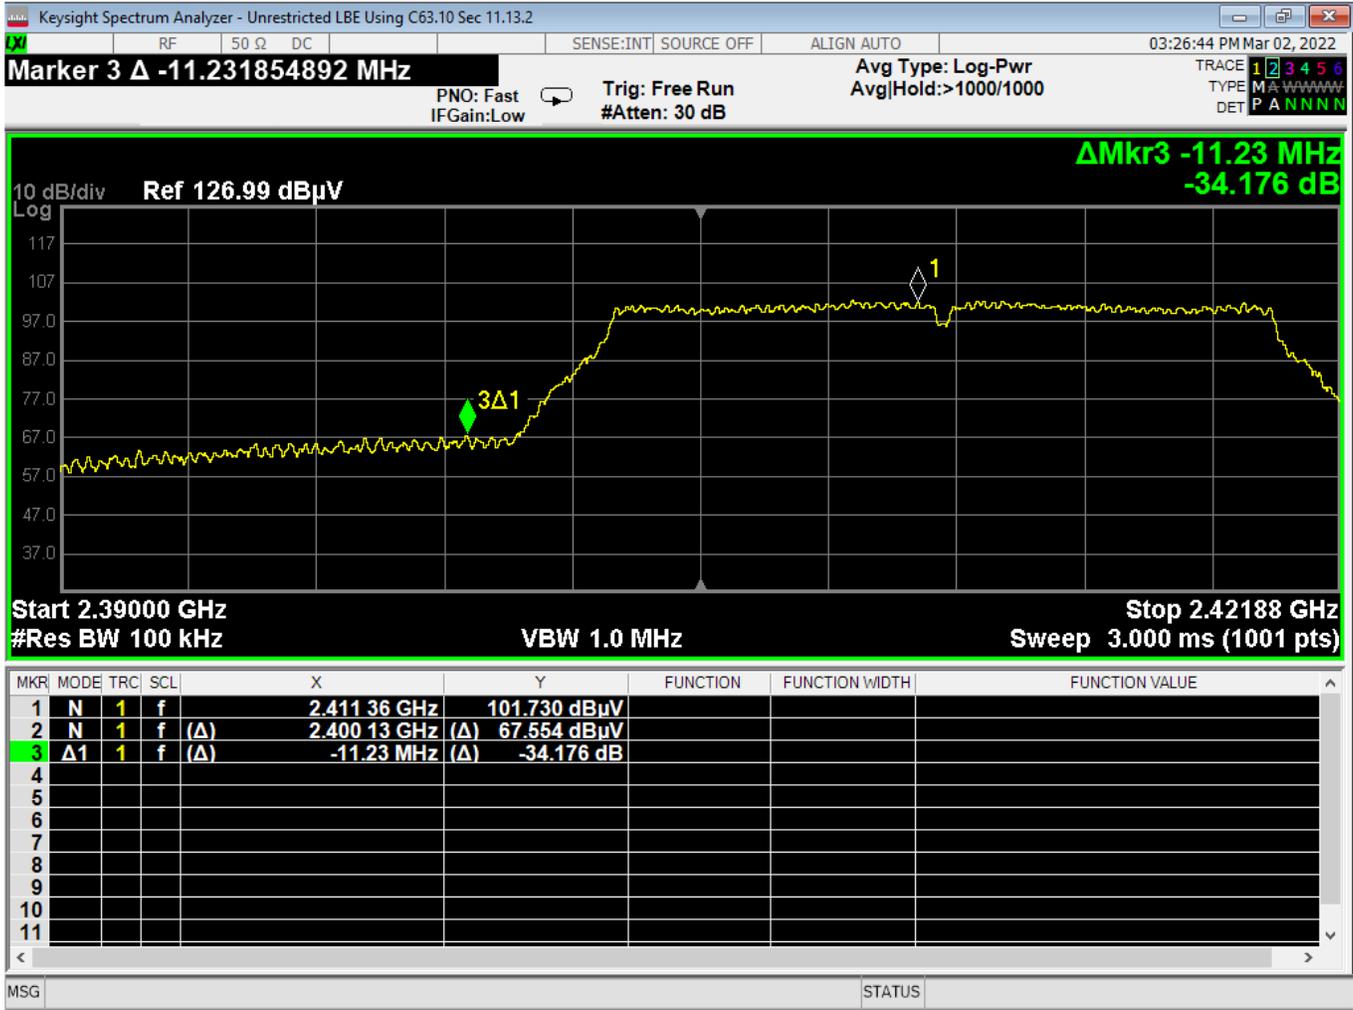

23 Lower Bandedge, Unrestricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

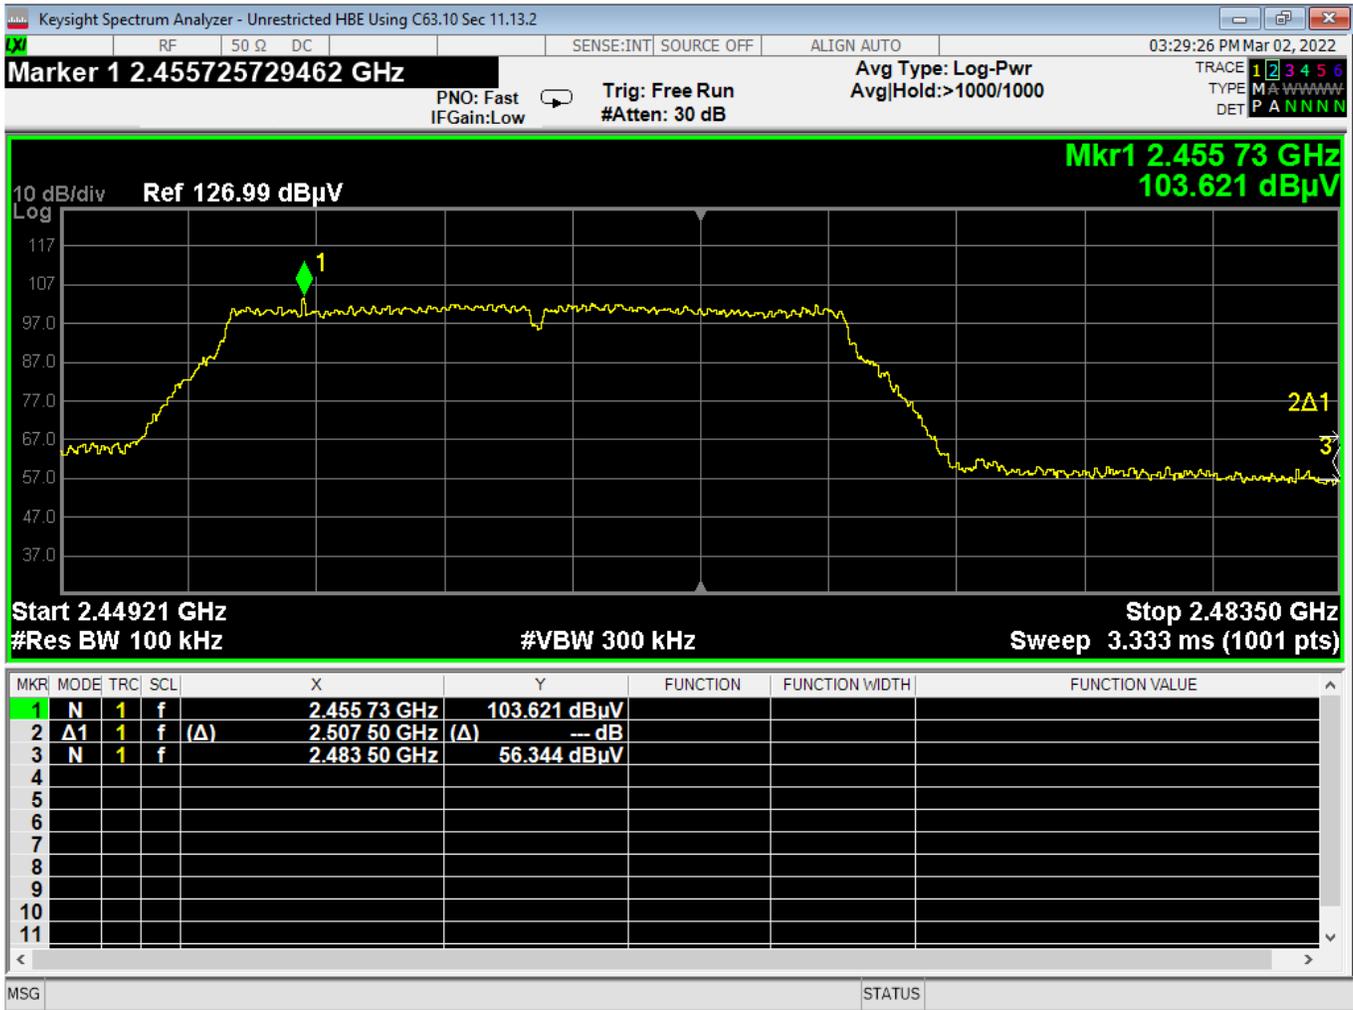

24 Higher Bandedge, Unrestricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

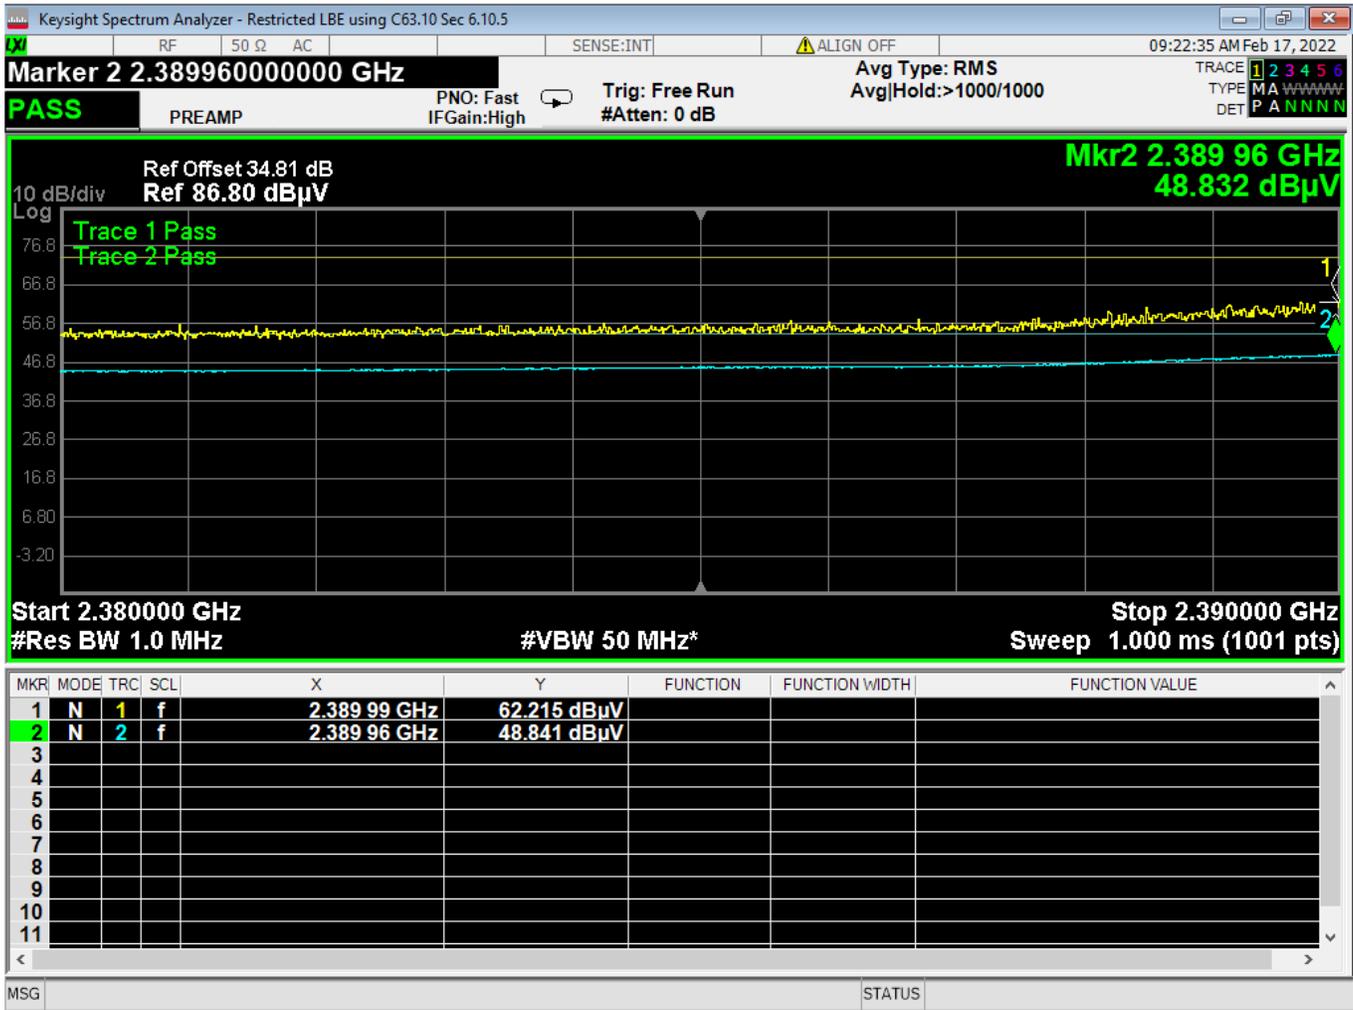

25 Lower Bandedge, Restricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

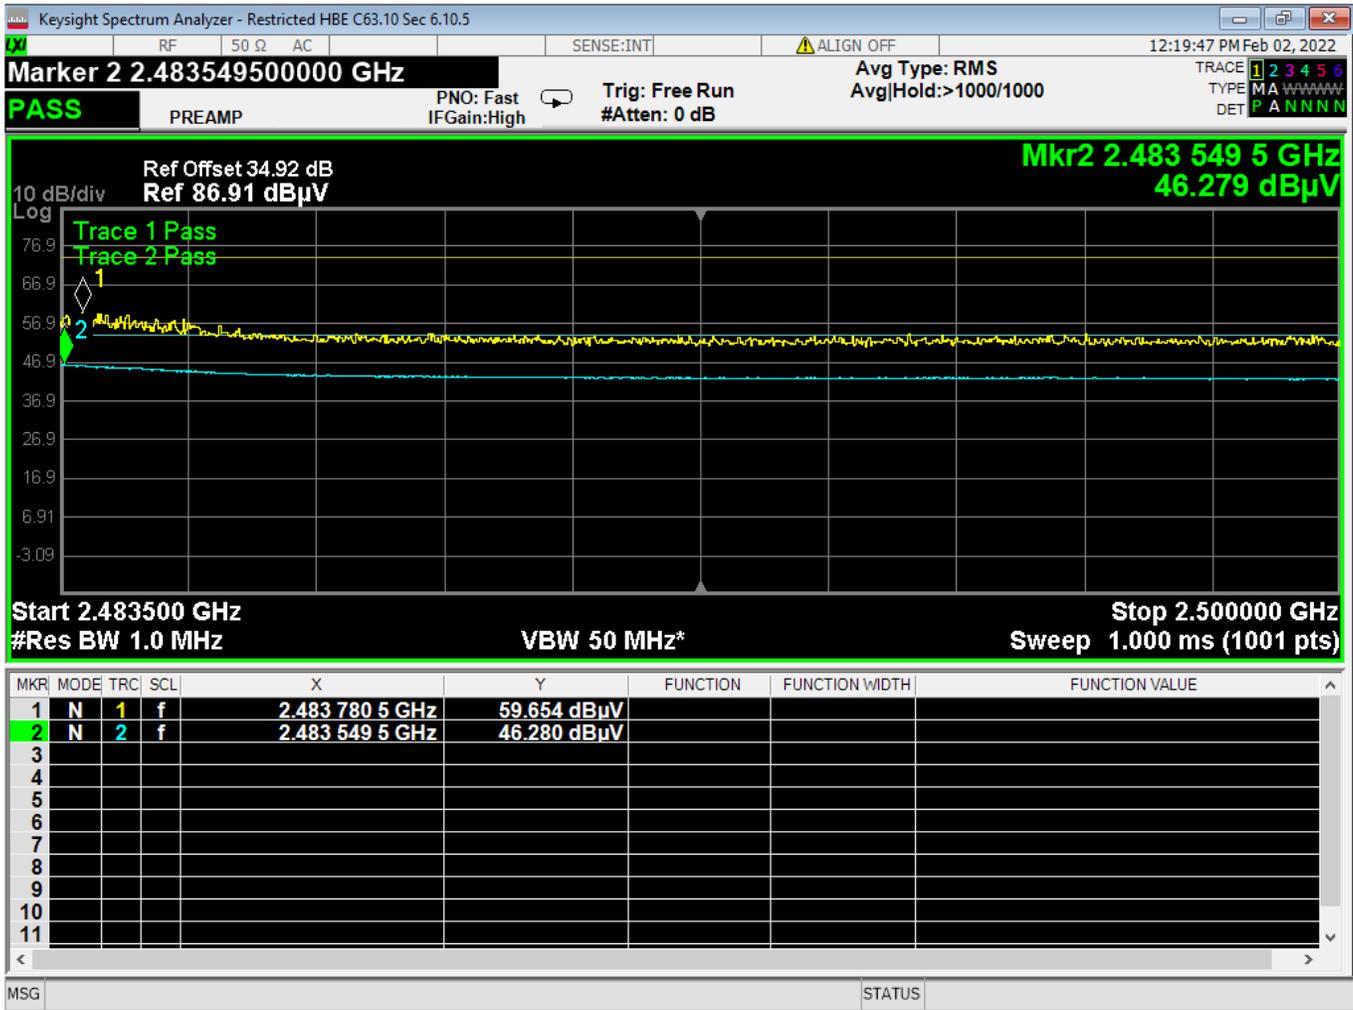

26 Higher Bandedge, Restricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

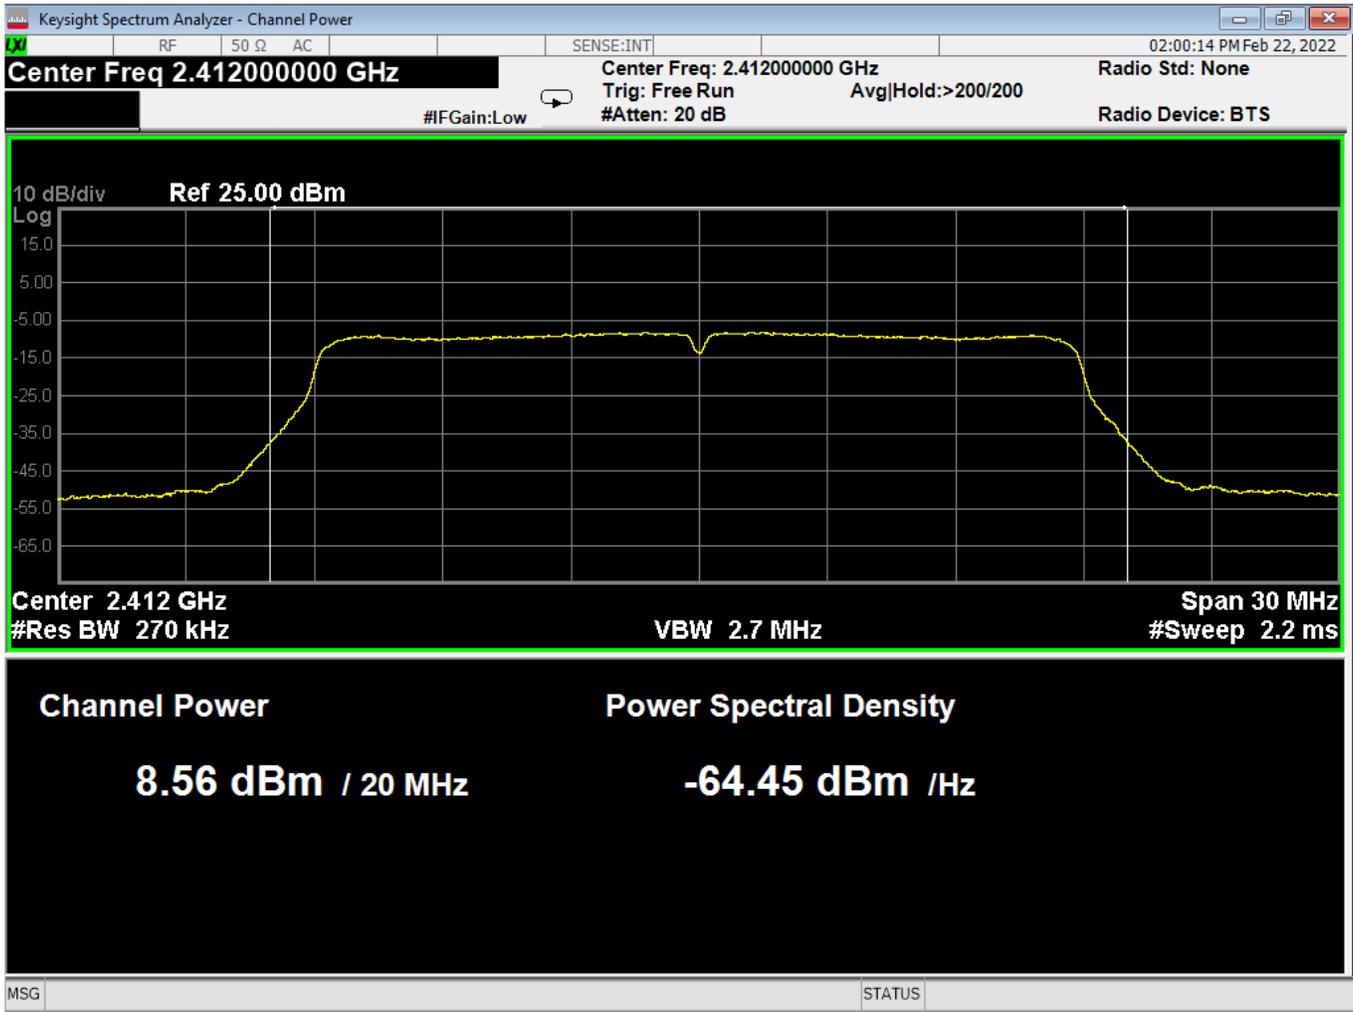

27 Average Power, Low, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

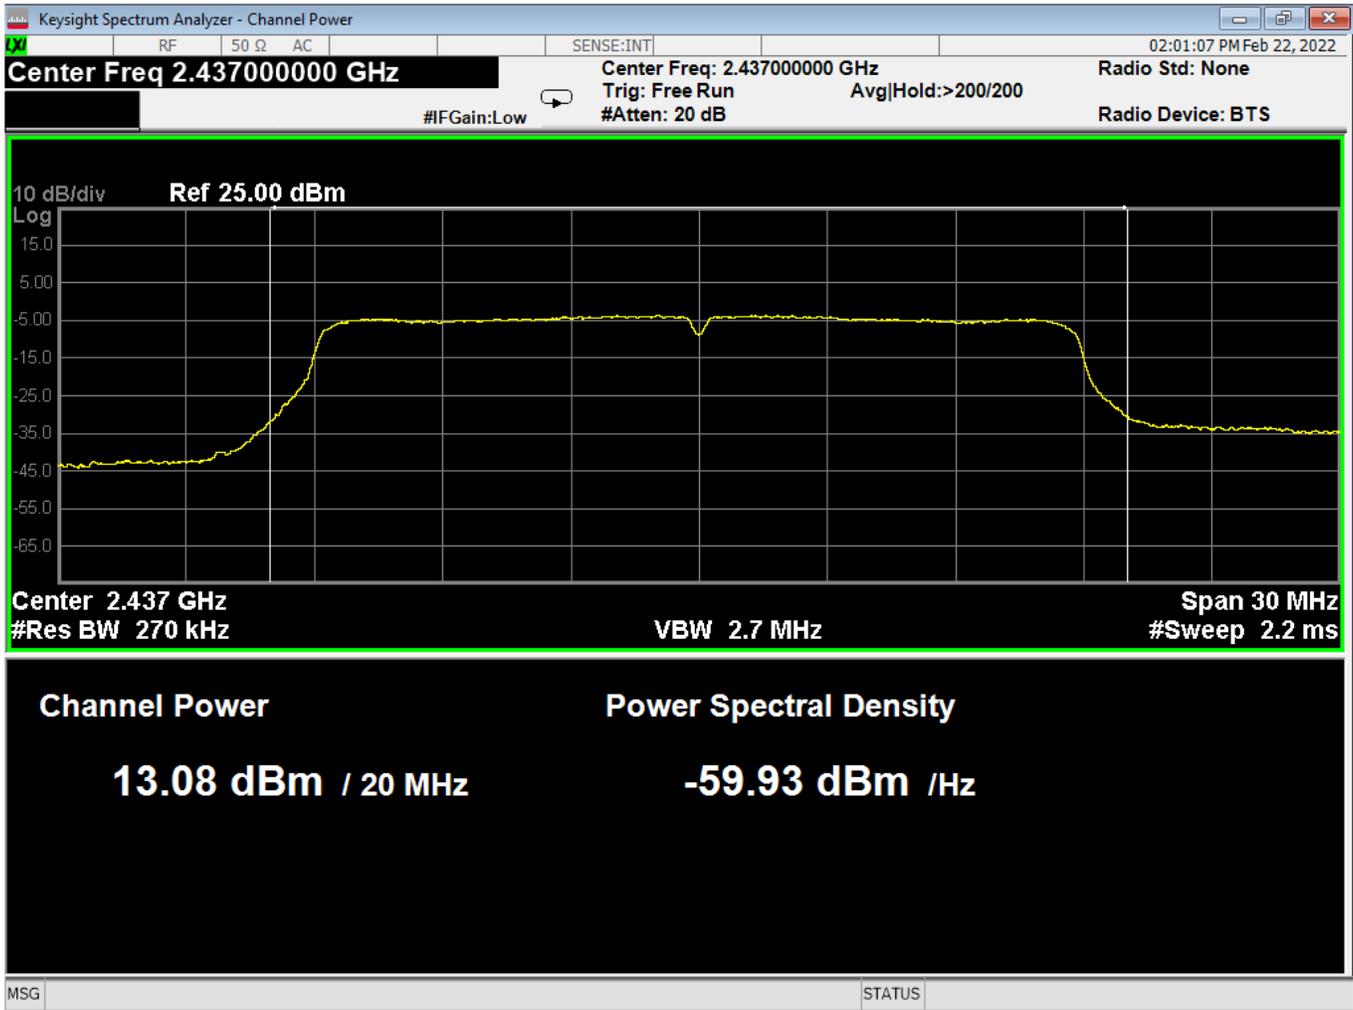

28 Average Power, Mid, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

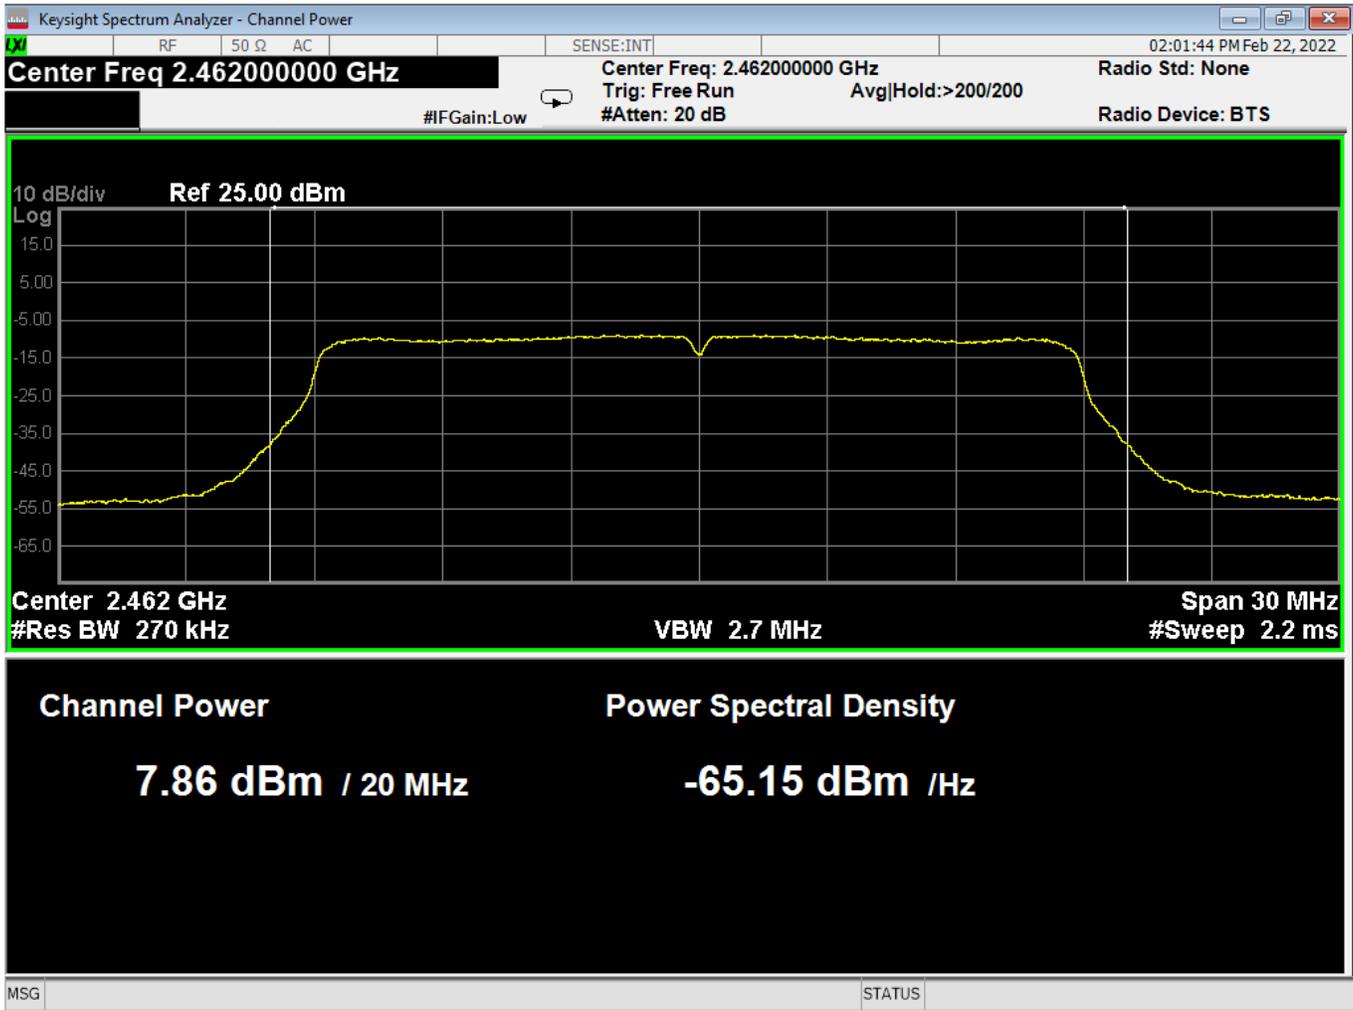

29 Average Power, High, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

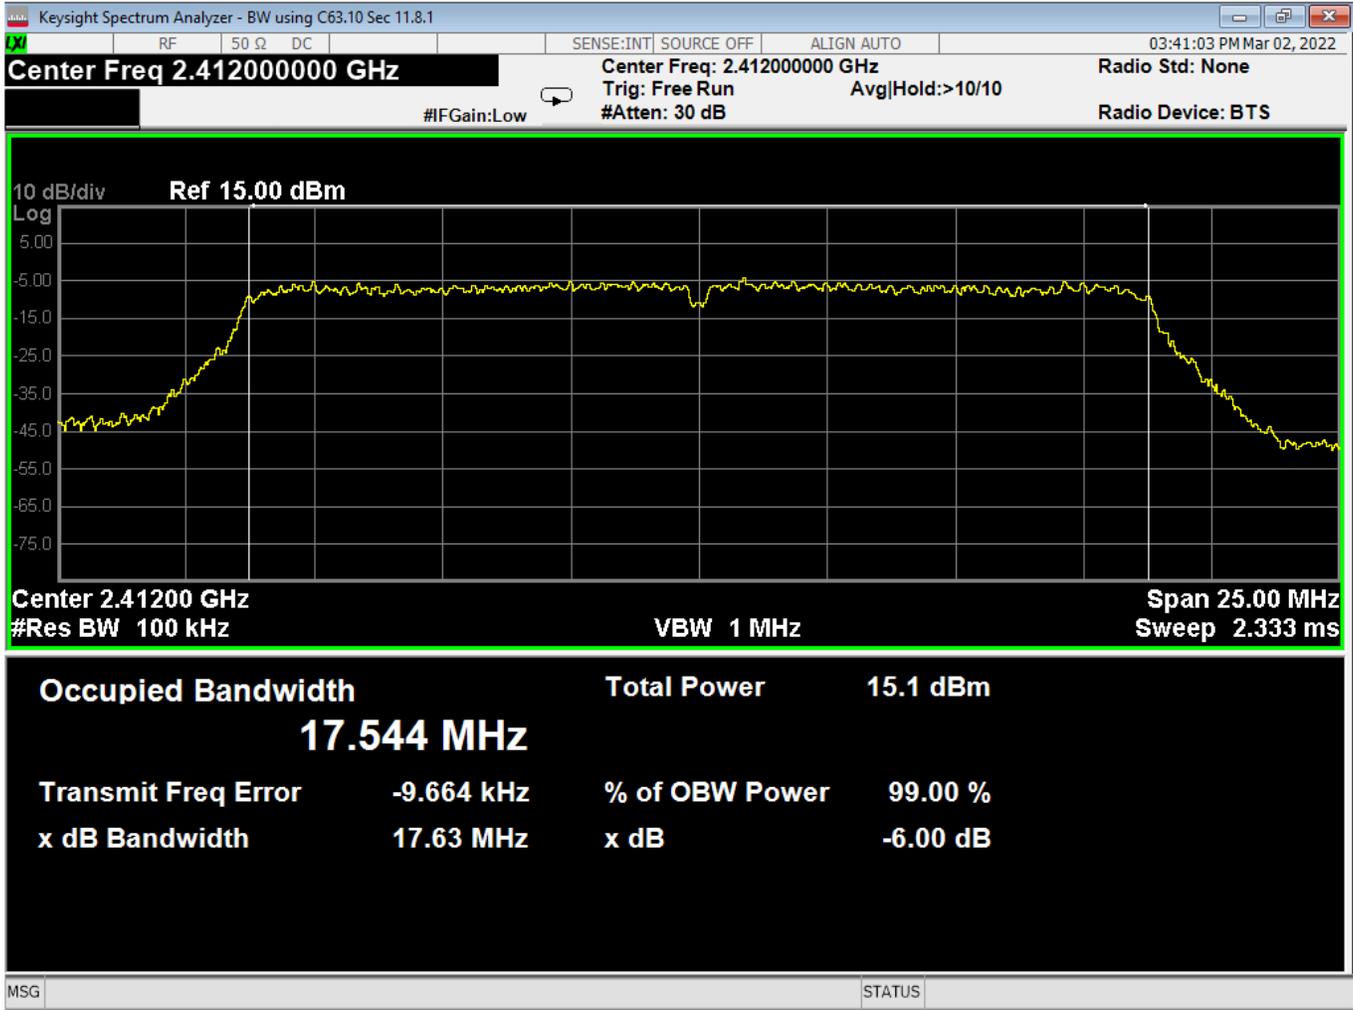

30 OBW-6dB, Low, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

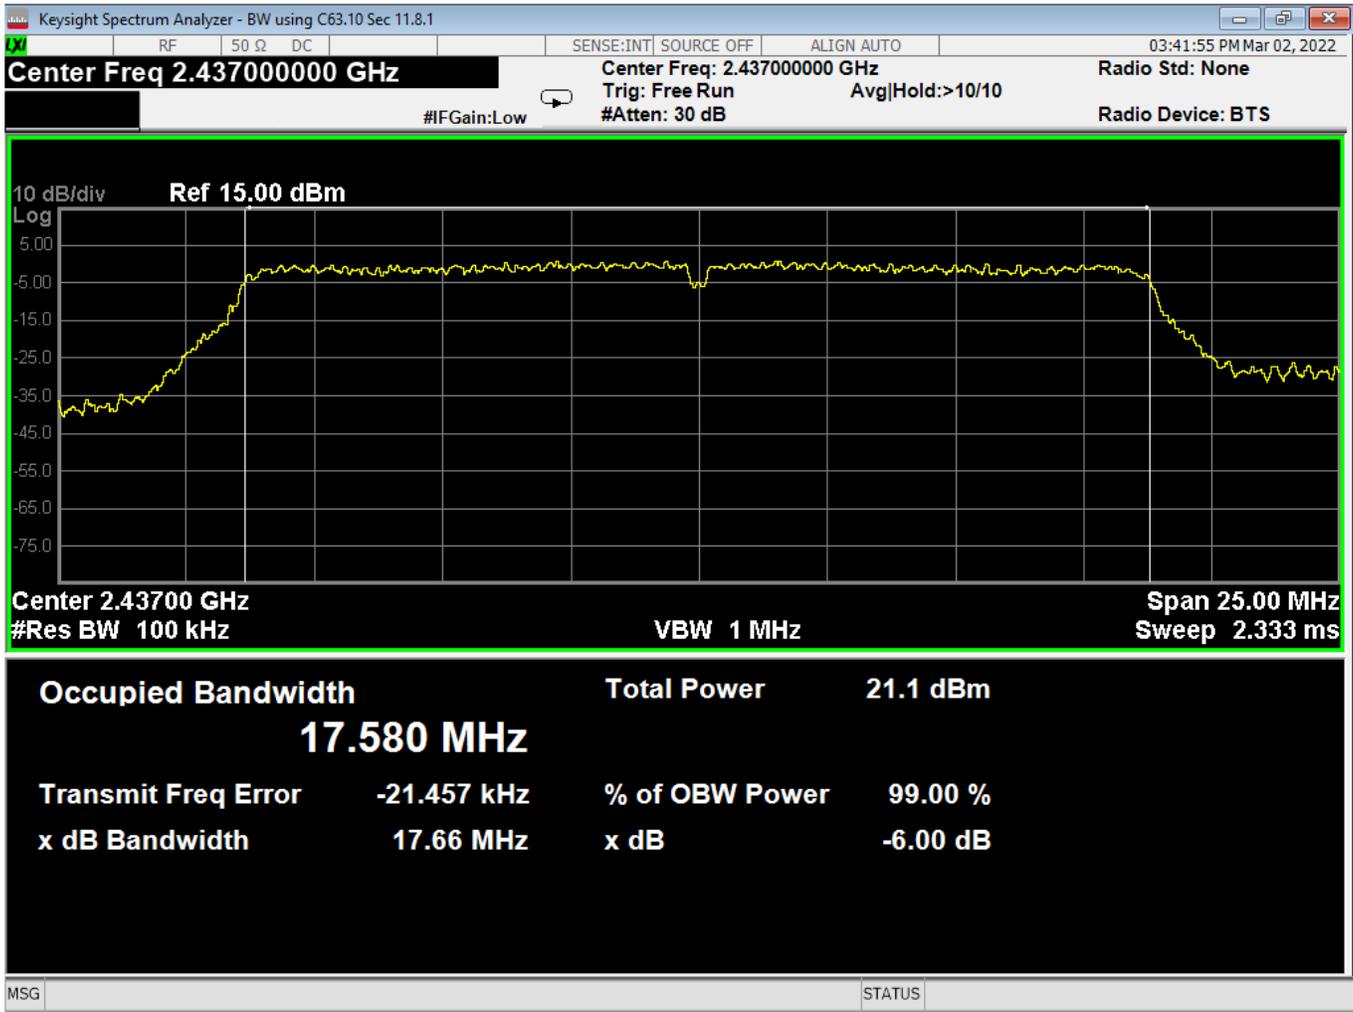

31 OBW-6dB, Mid, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

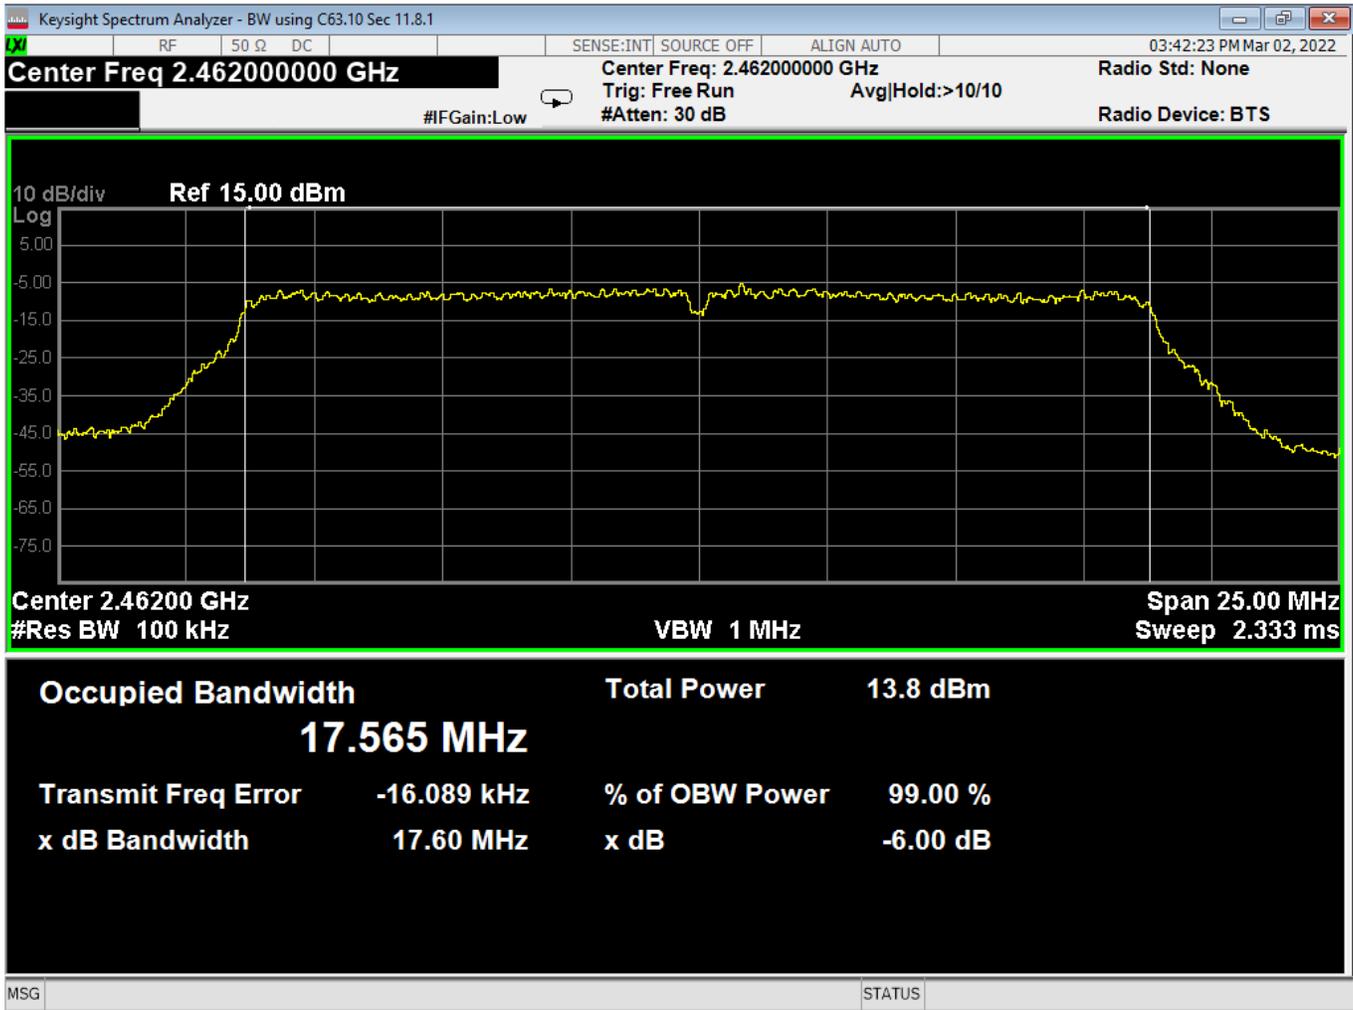

32 OBW-6dB, High, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

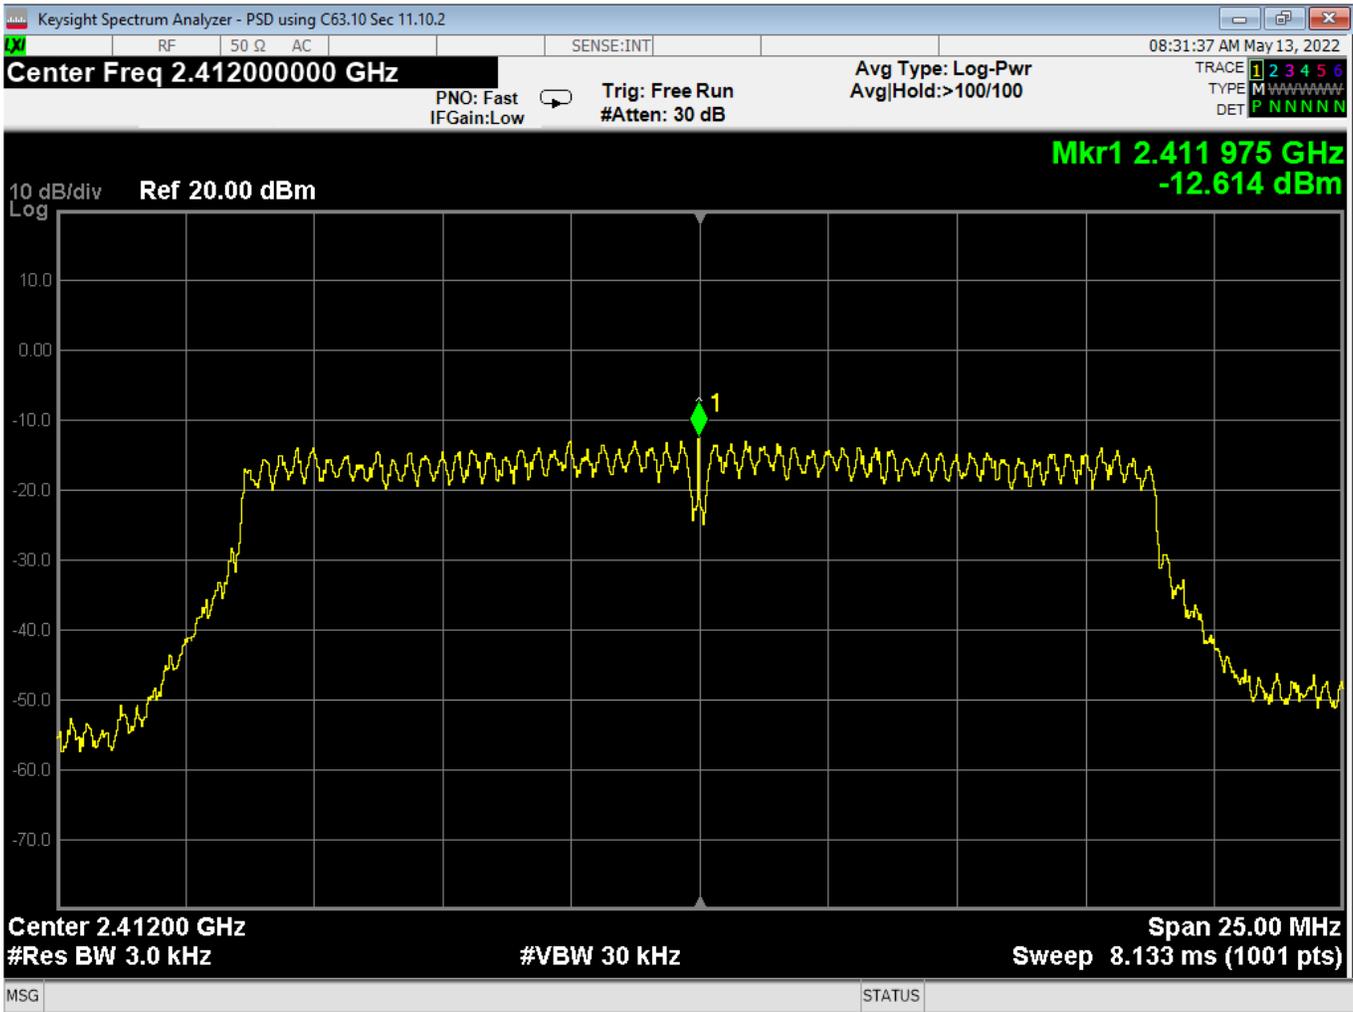

33 PSD, Low, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

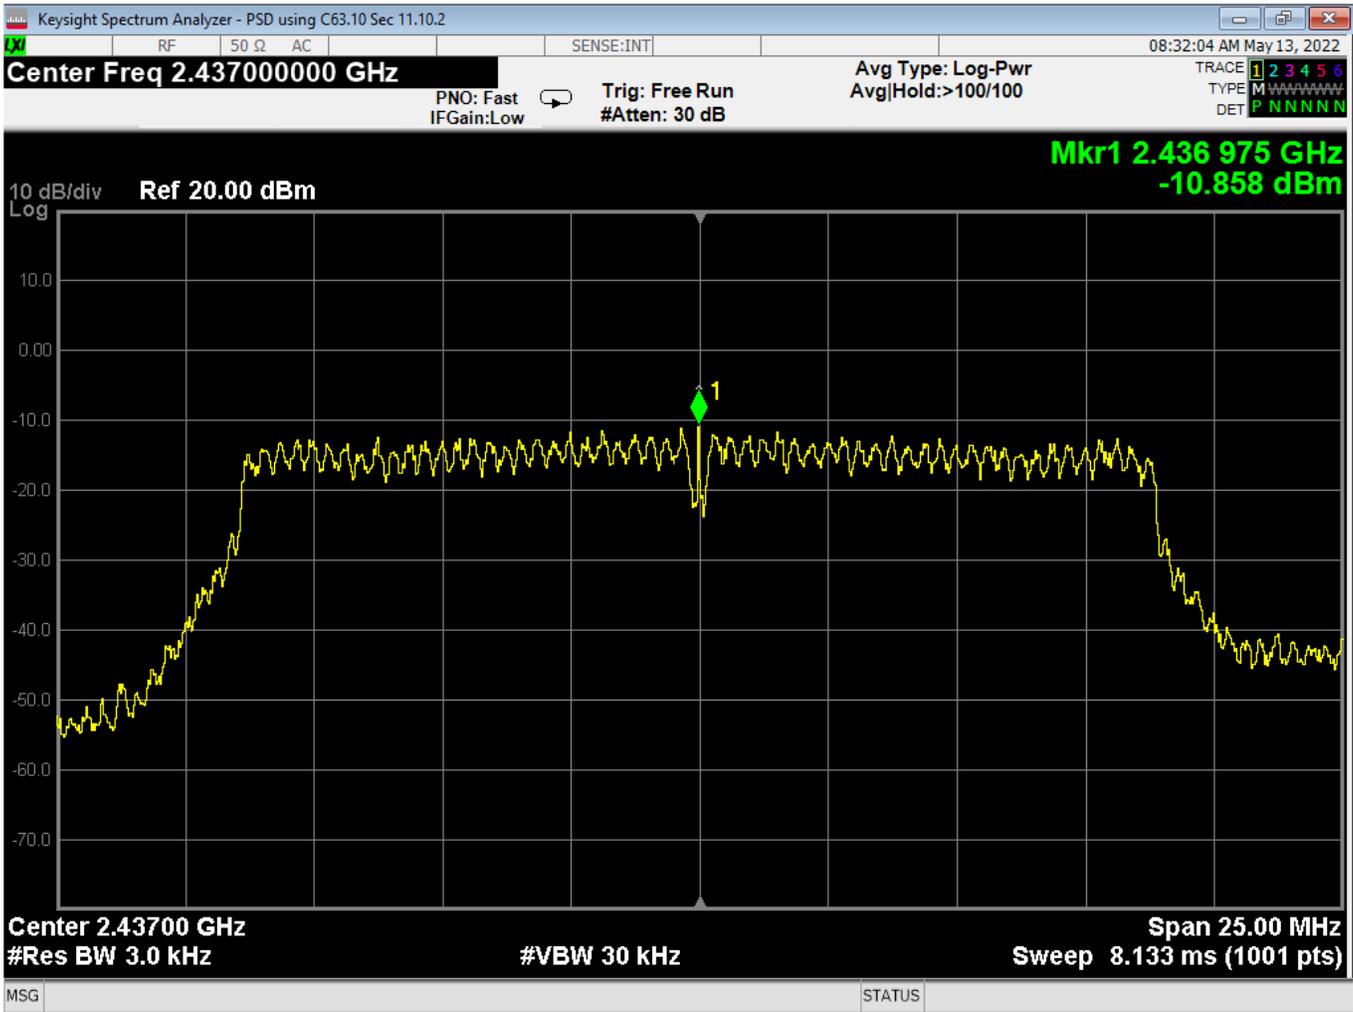

34 PSD, Mid, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

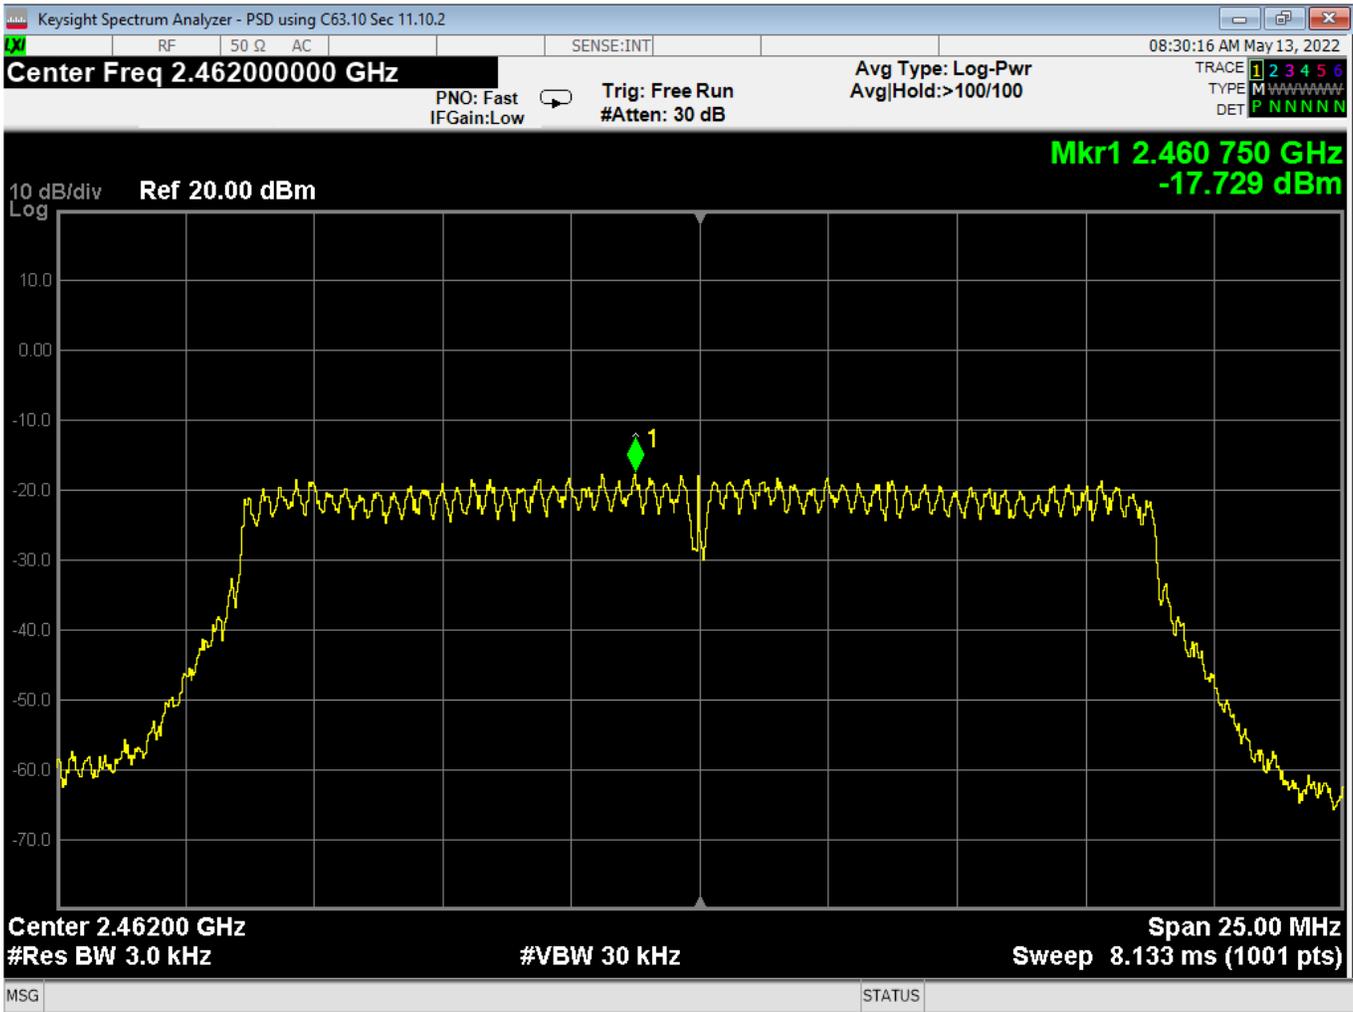

35 PSD, High, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

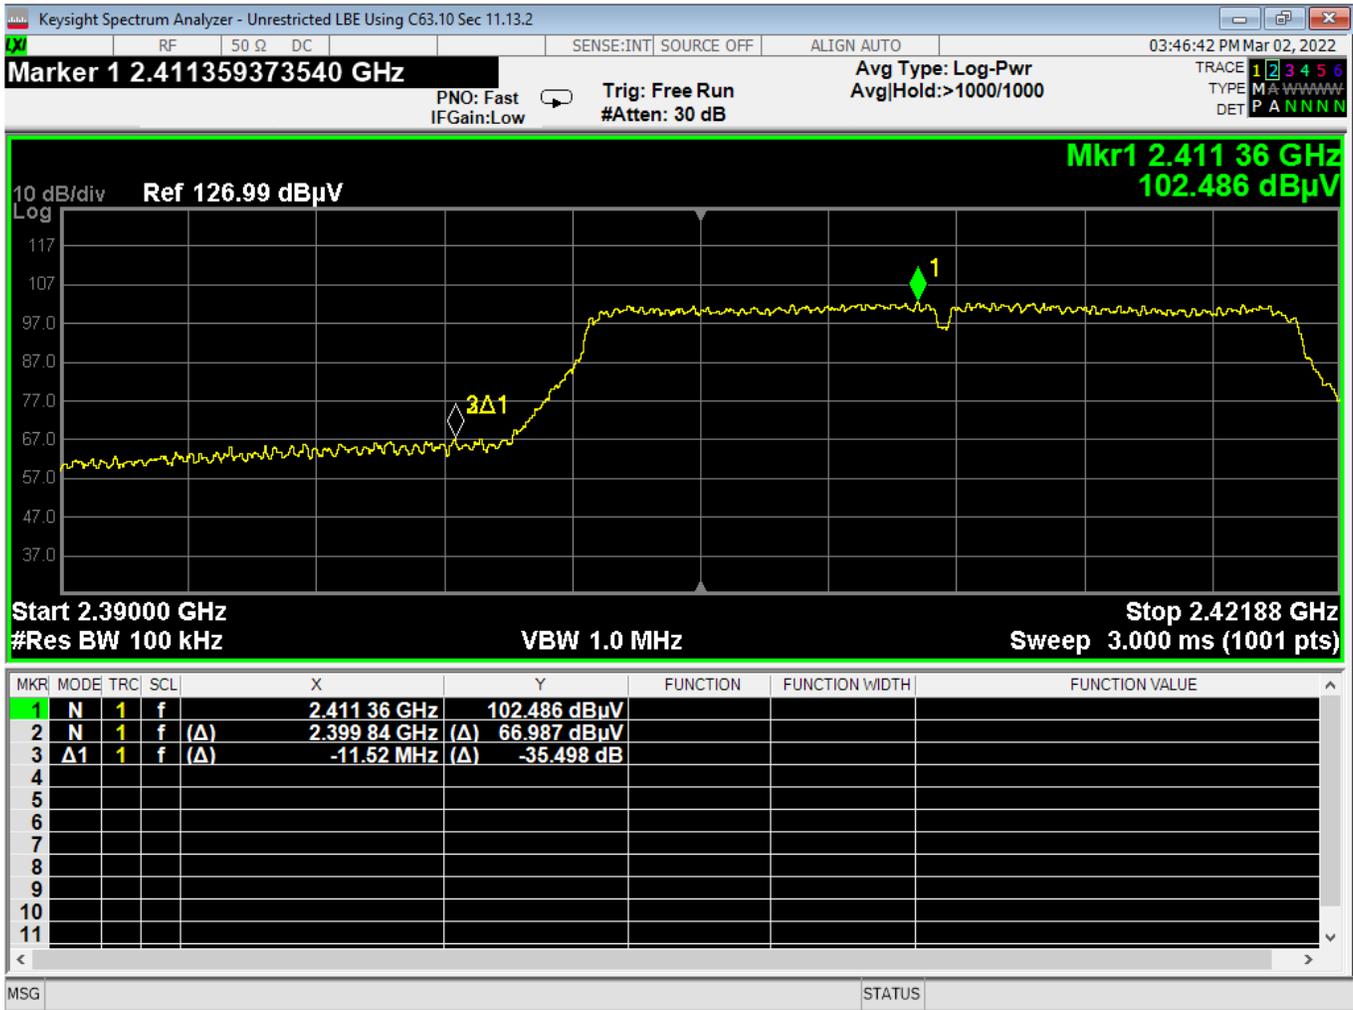

36 Lower Bandedge, Unrestricted, Wifi N, Low Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

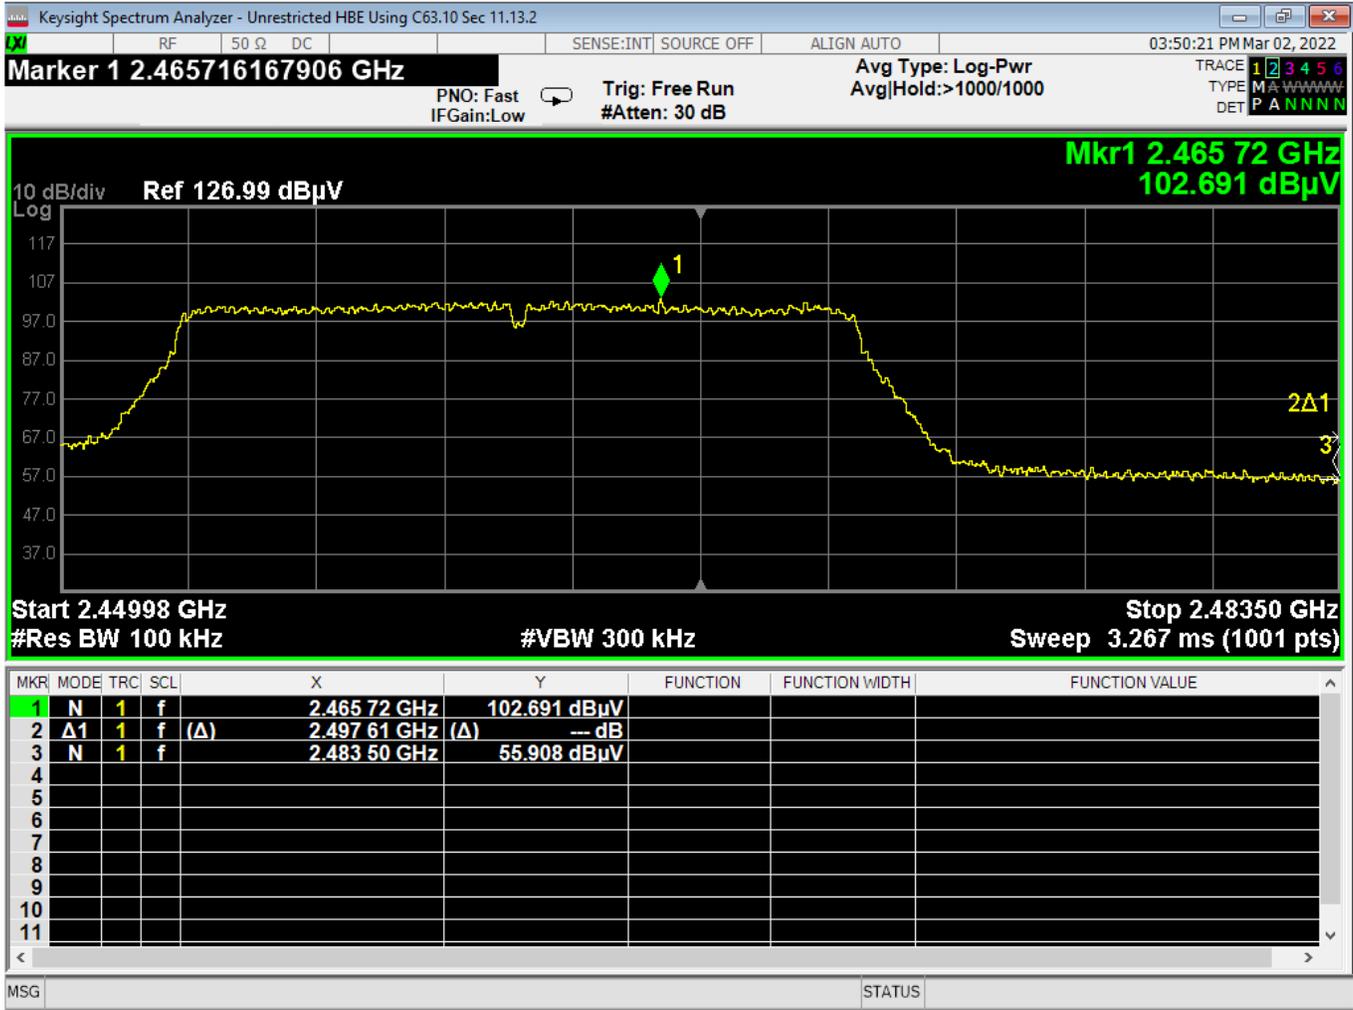

37 Higher Bandedge, Unrestricted, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		



38 Lower Bandedge, Restricted, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

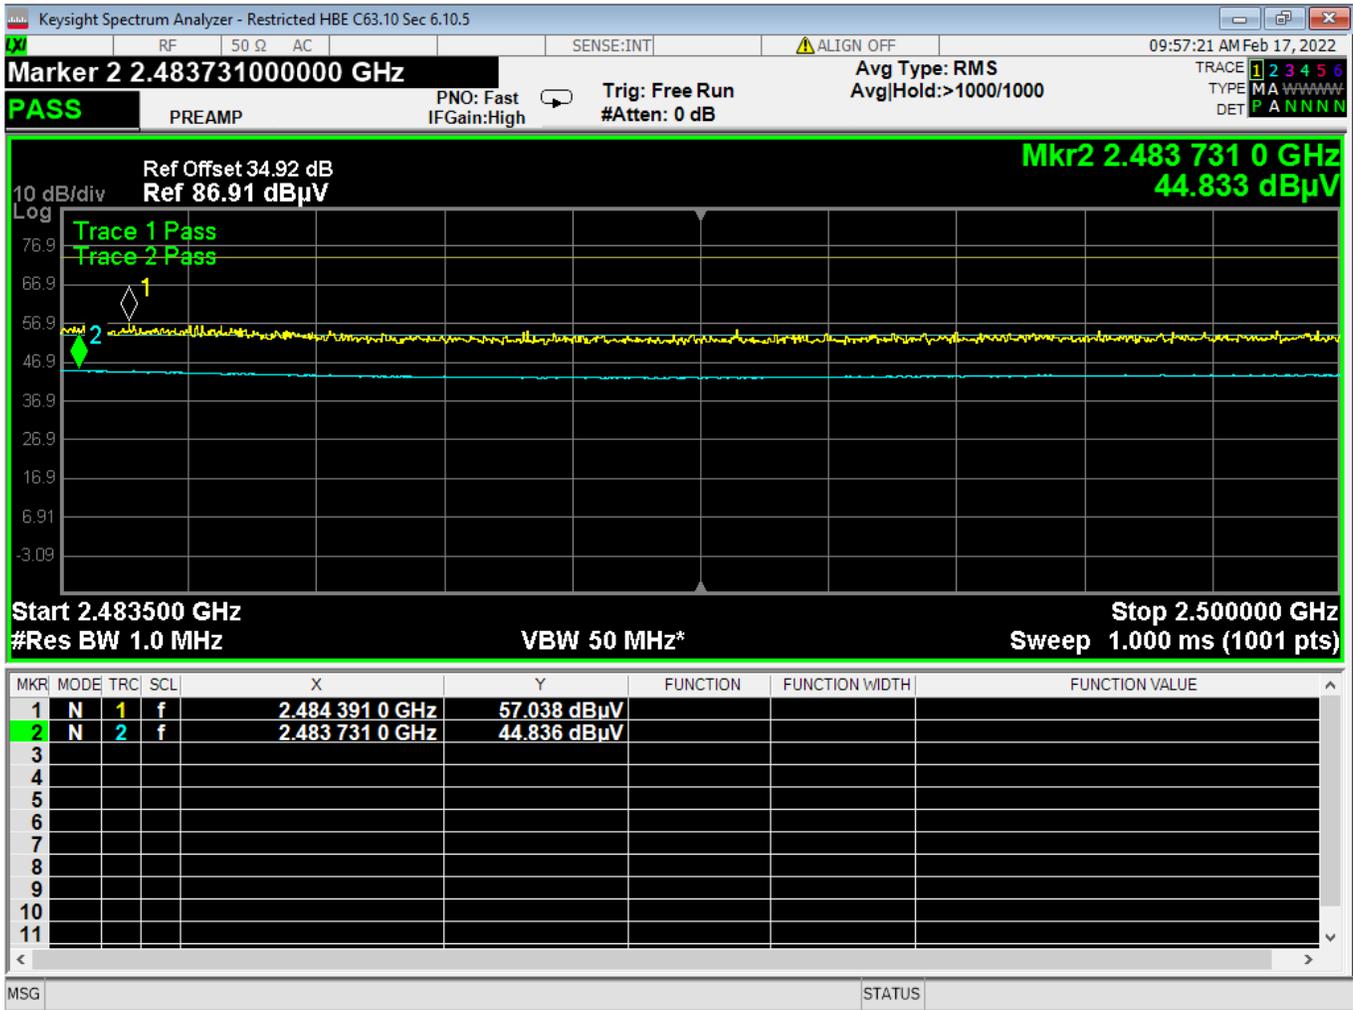

39 Higher Bandedge, Restricted, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

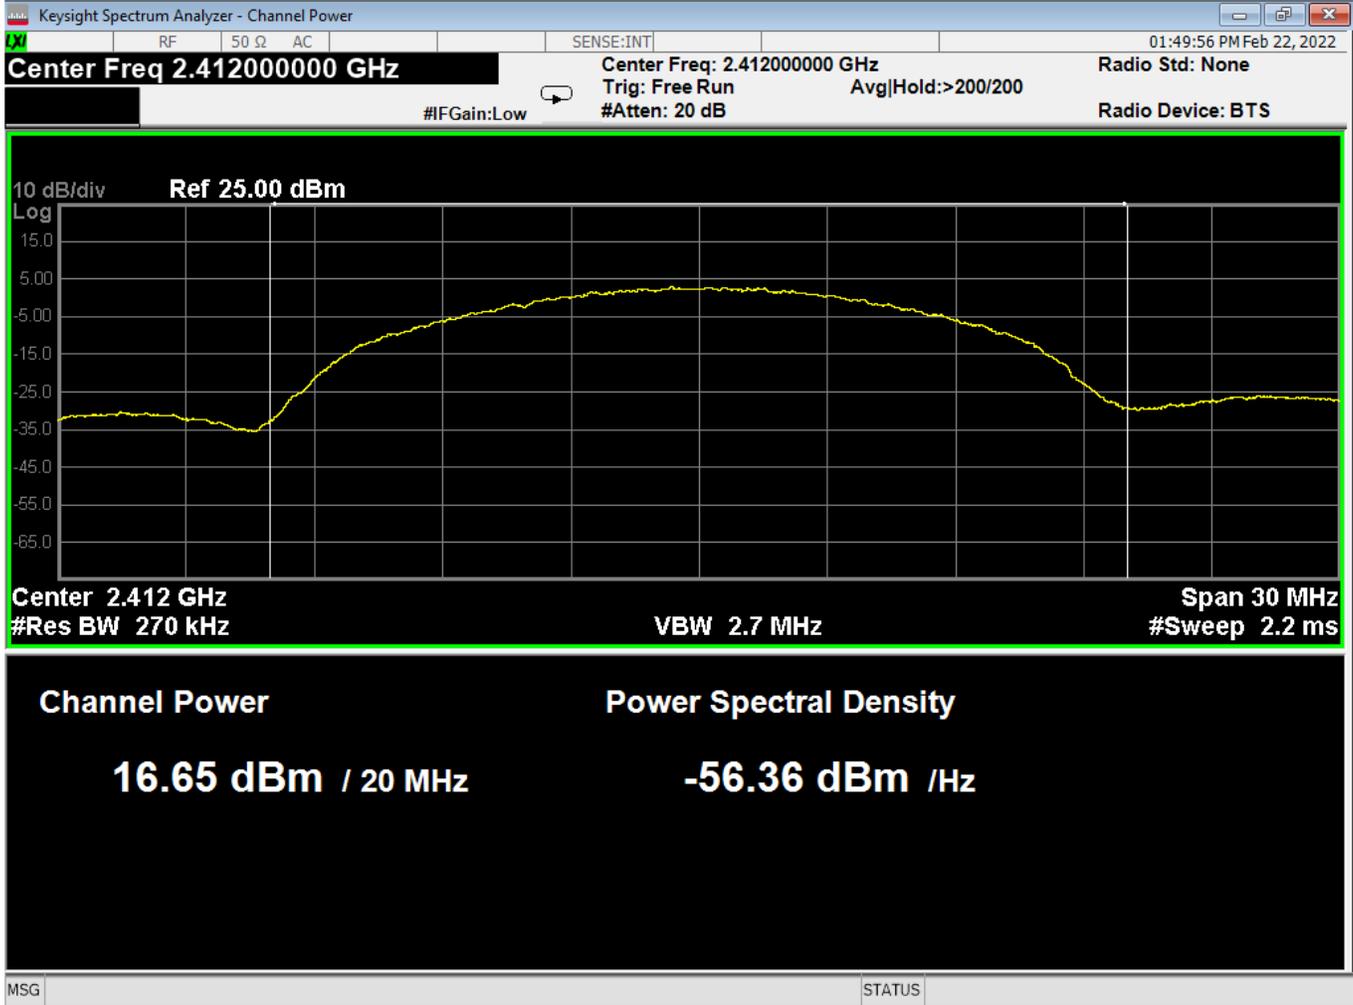

40 Average Power, Low, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

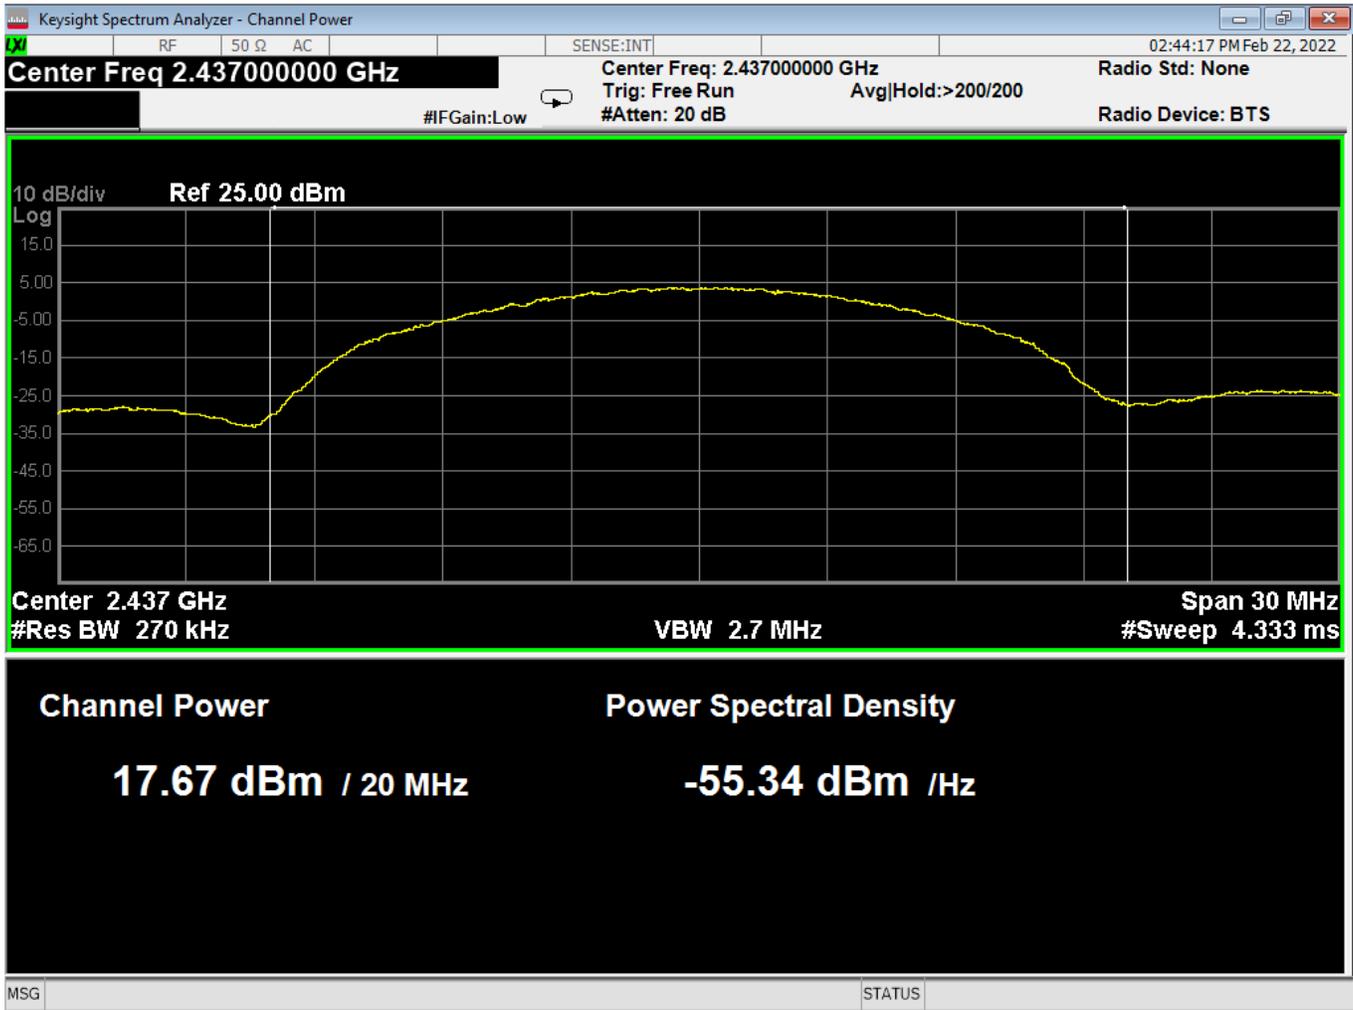

41 Average Power, Mid, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

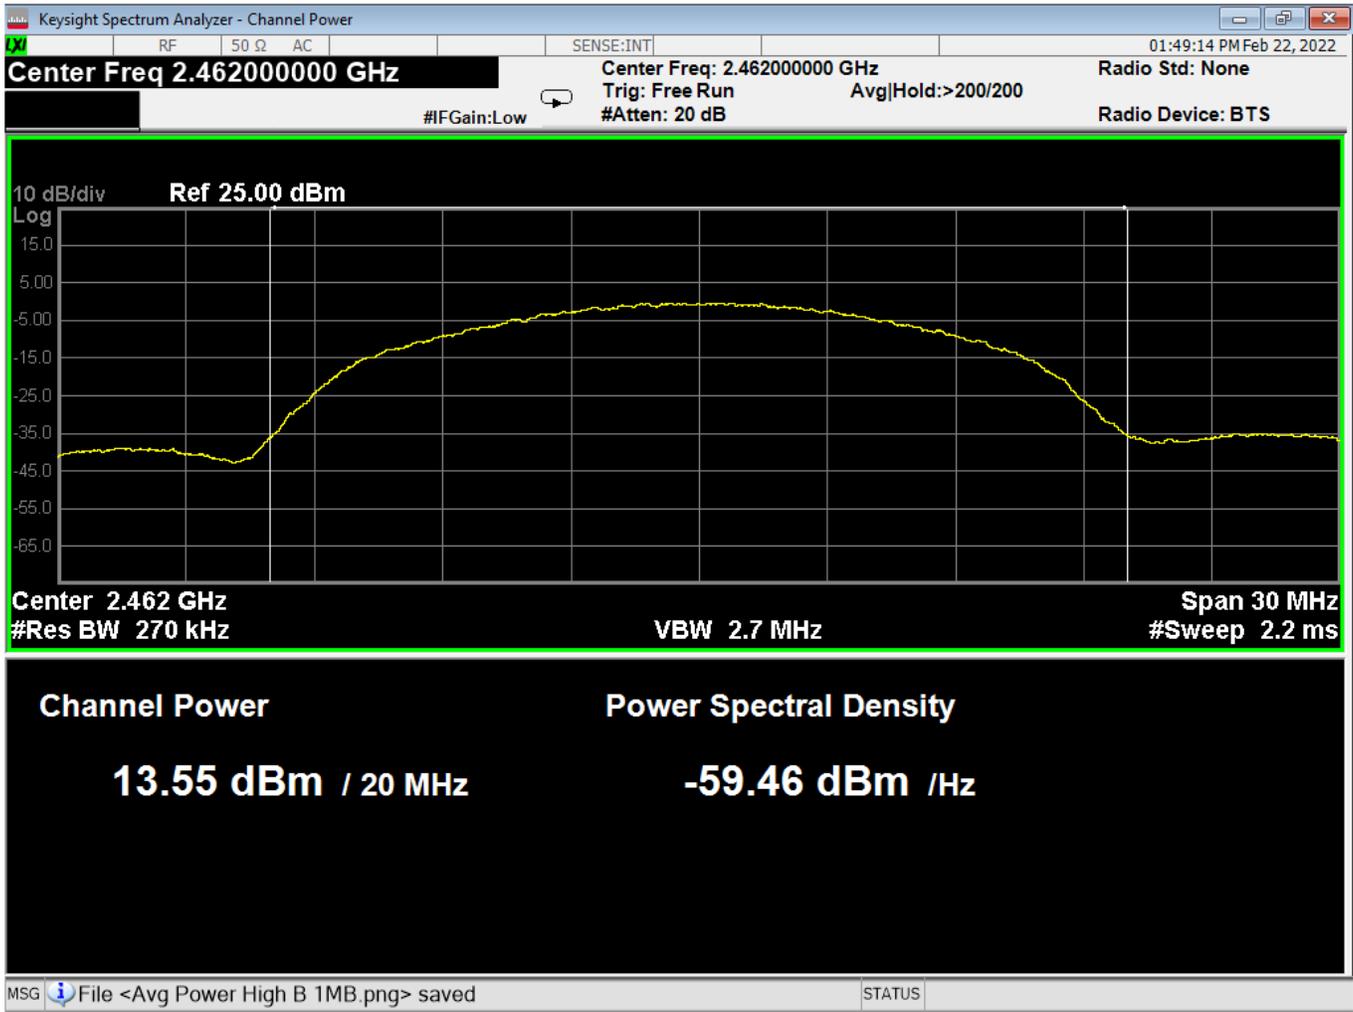

42 Average Power, High, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

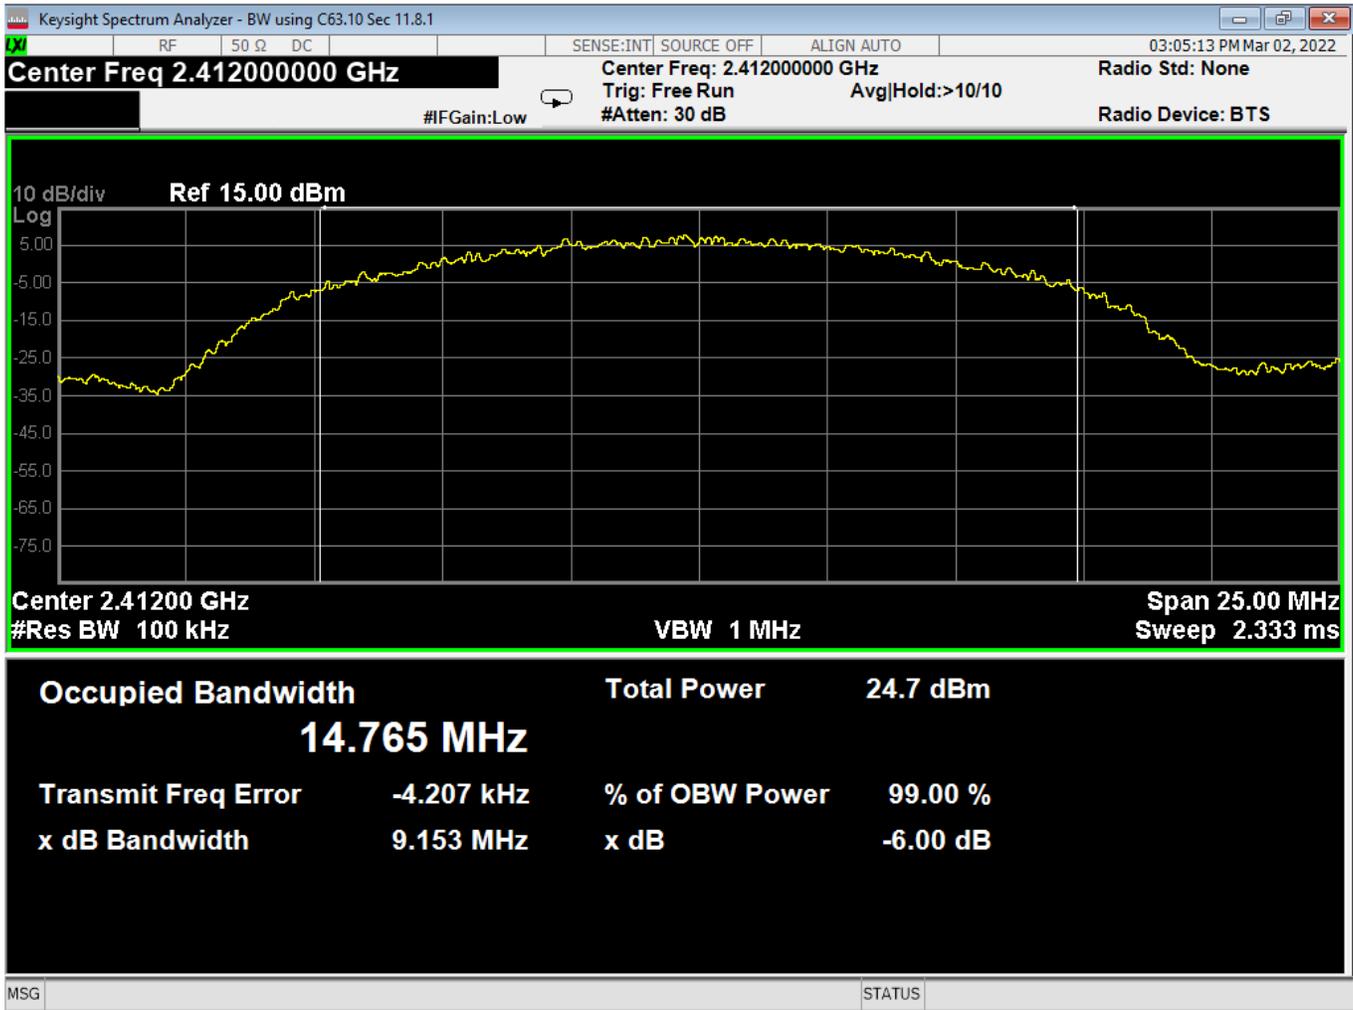

43 OBW-6dB, Low, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

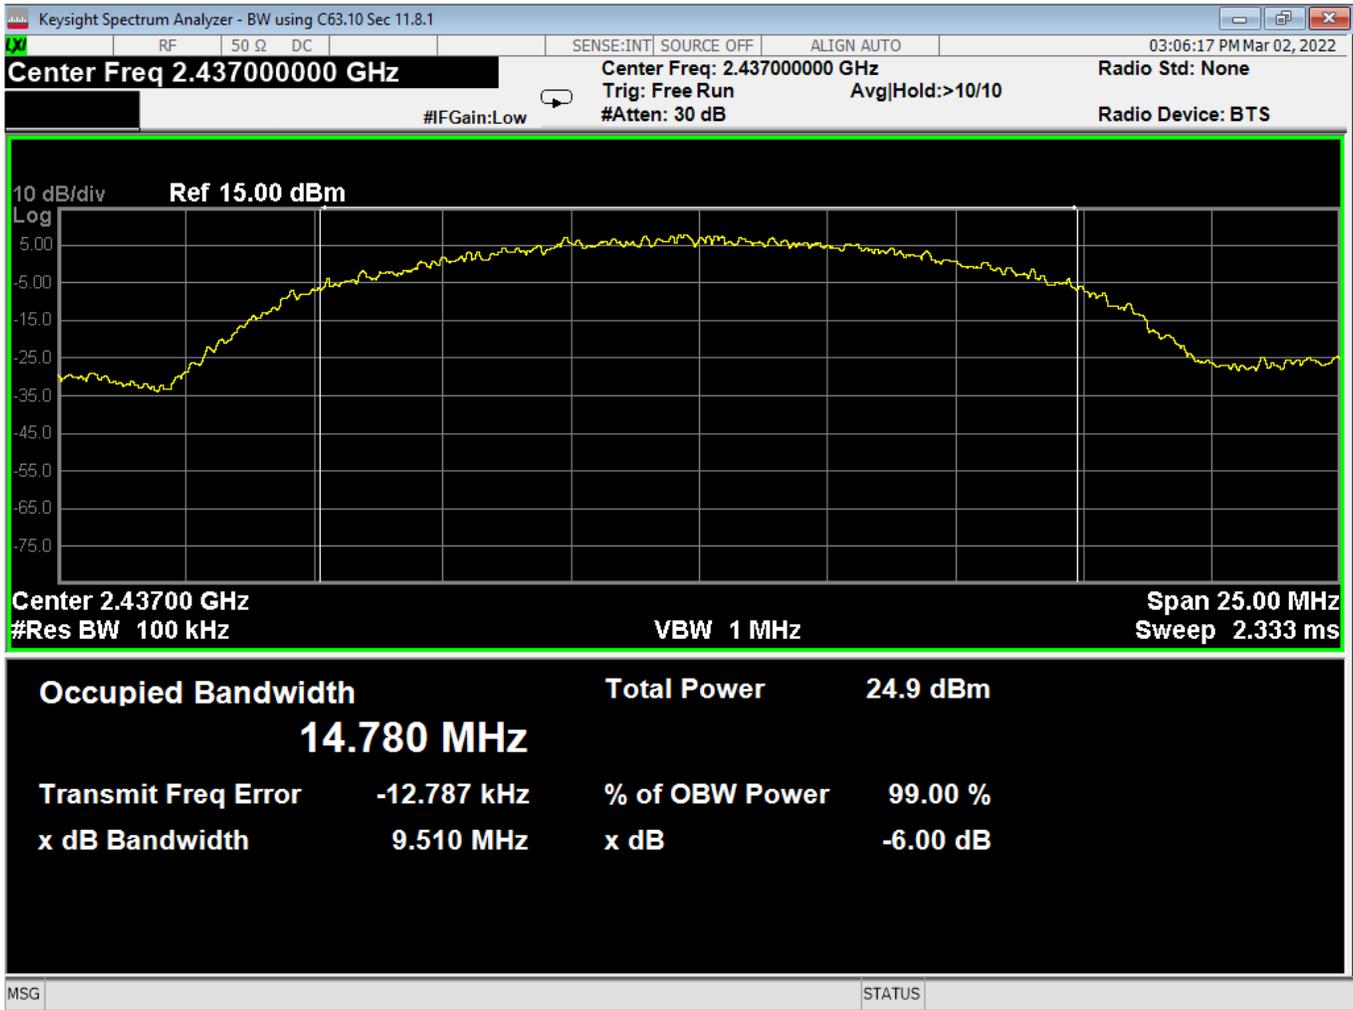

44 OBW-6dB, Mid, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

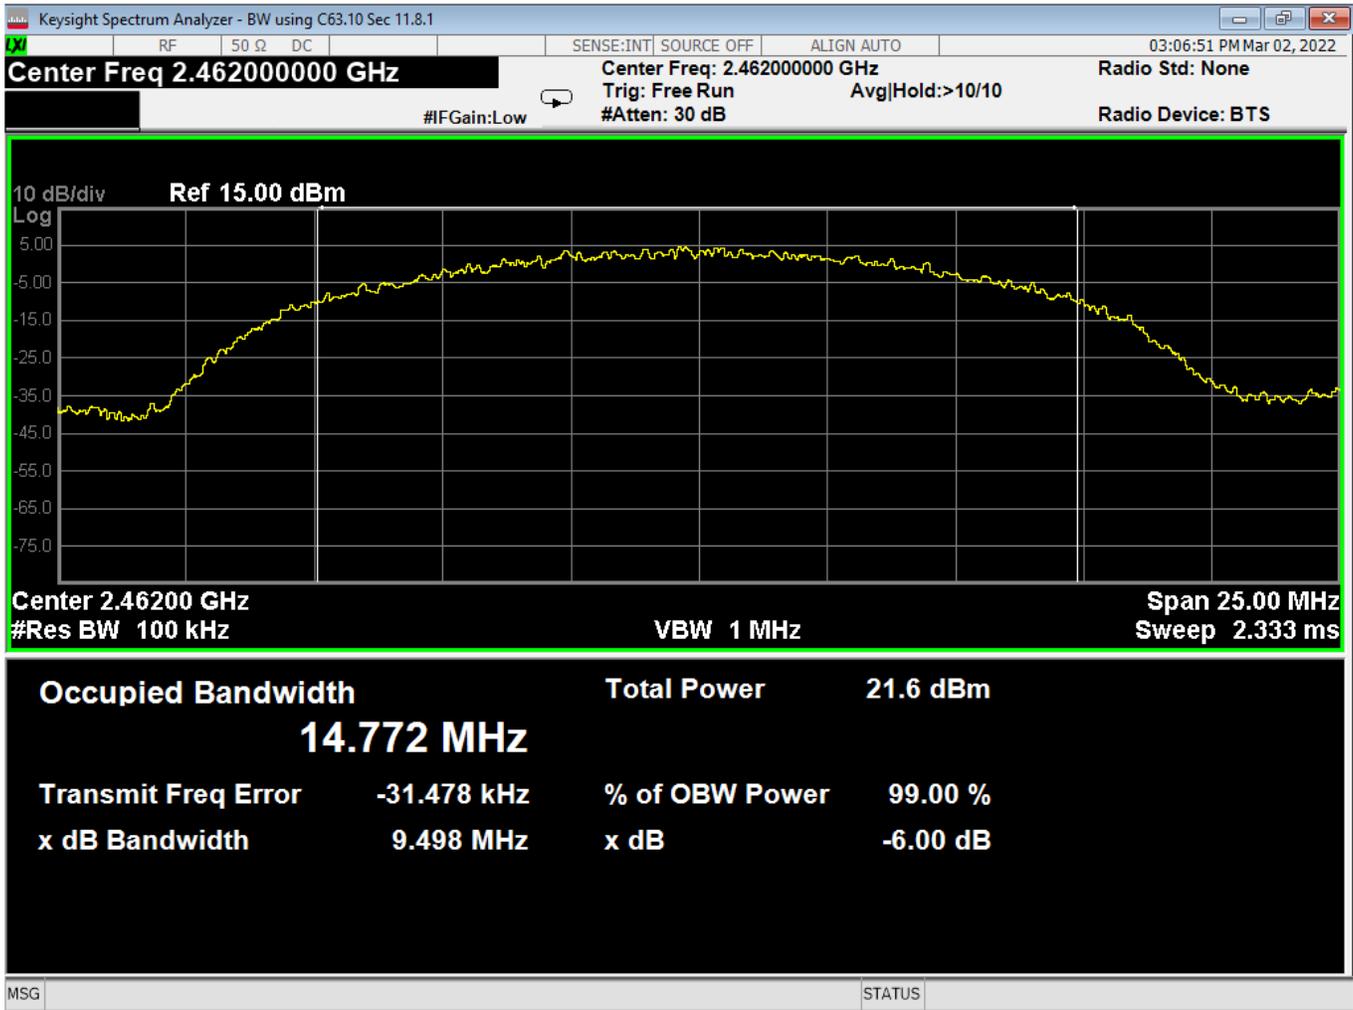

45 OBW-6dB, High, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

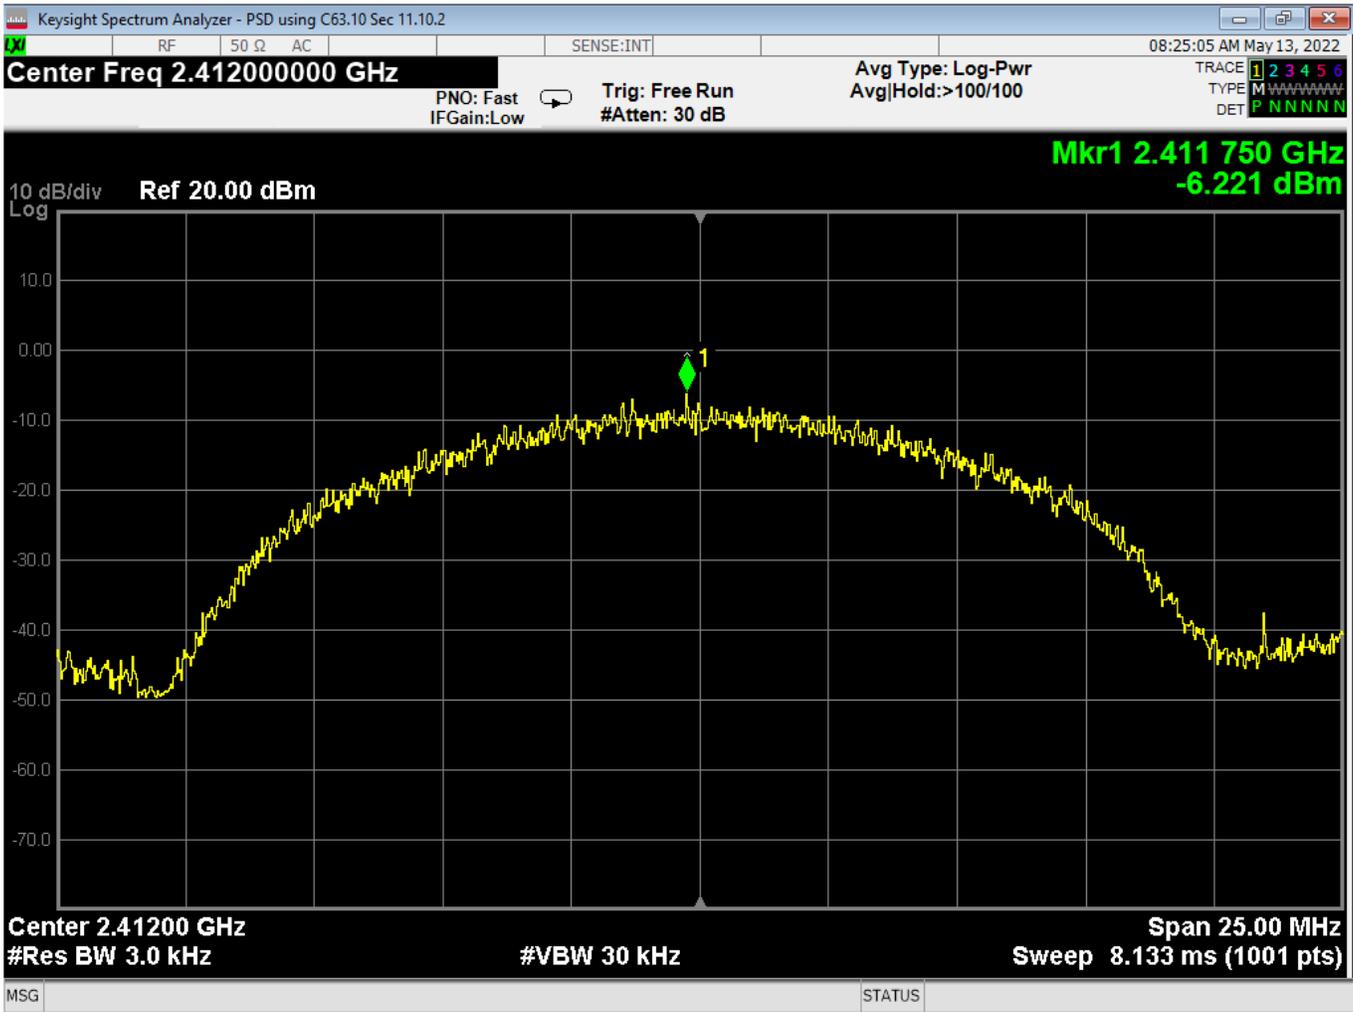

46 PSD, Low, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

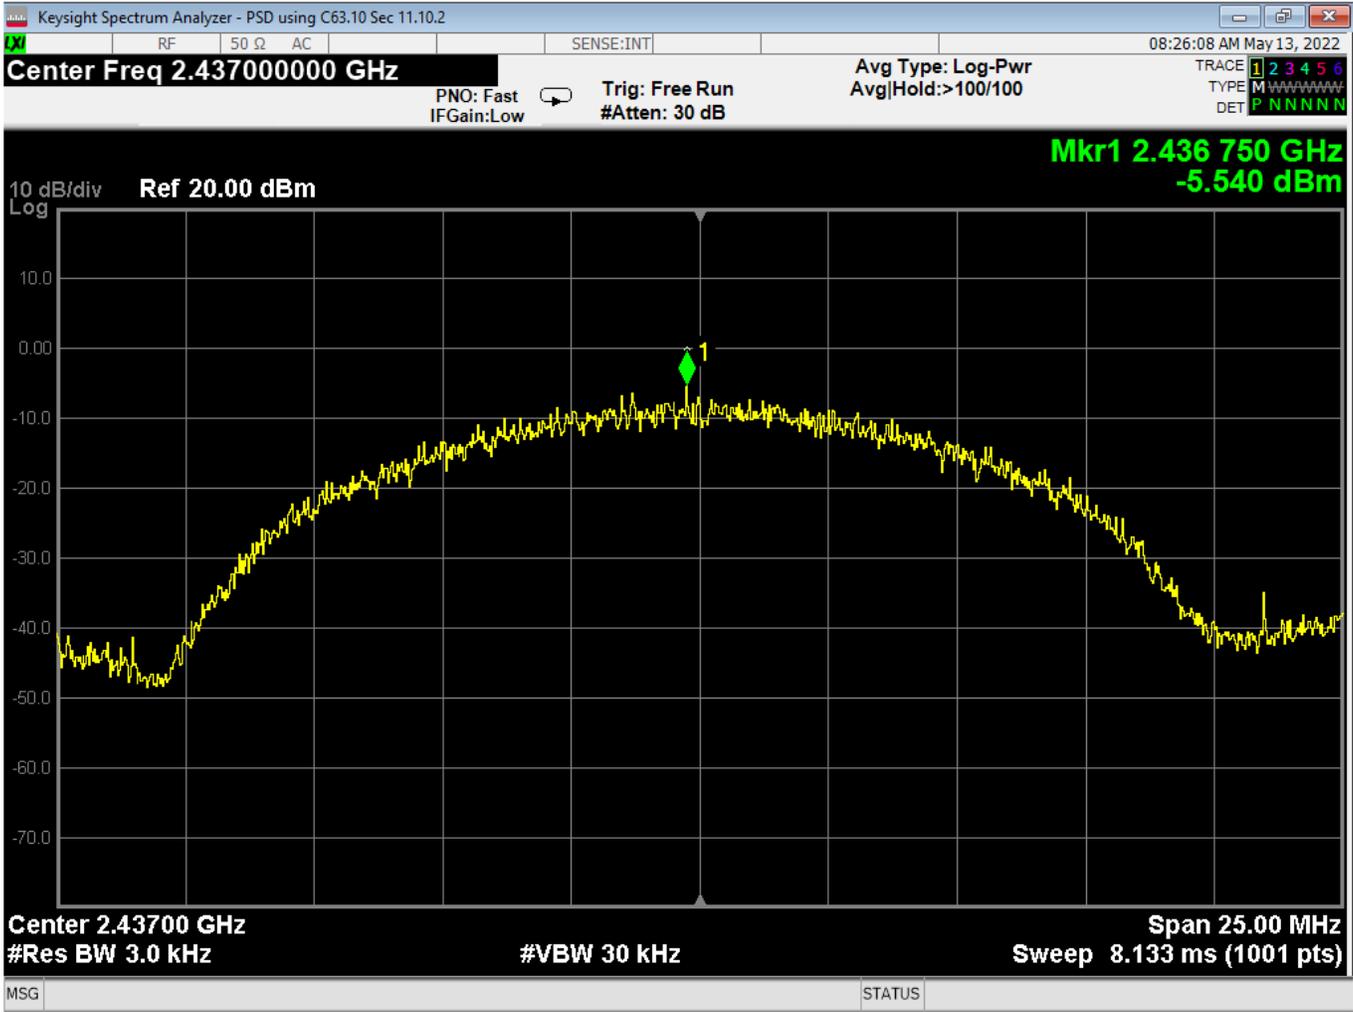

47 PSD, Mid, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

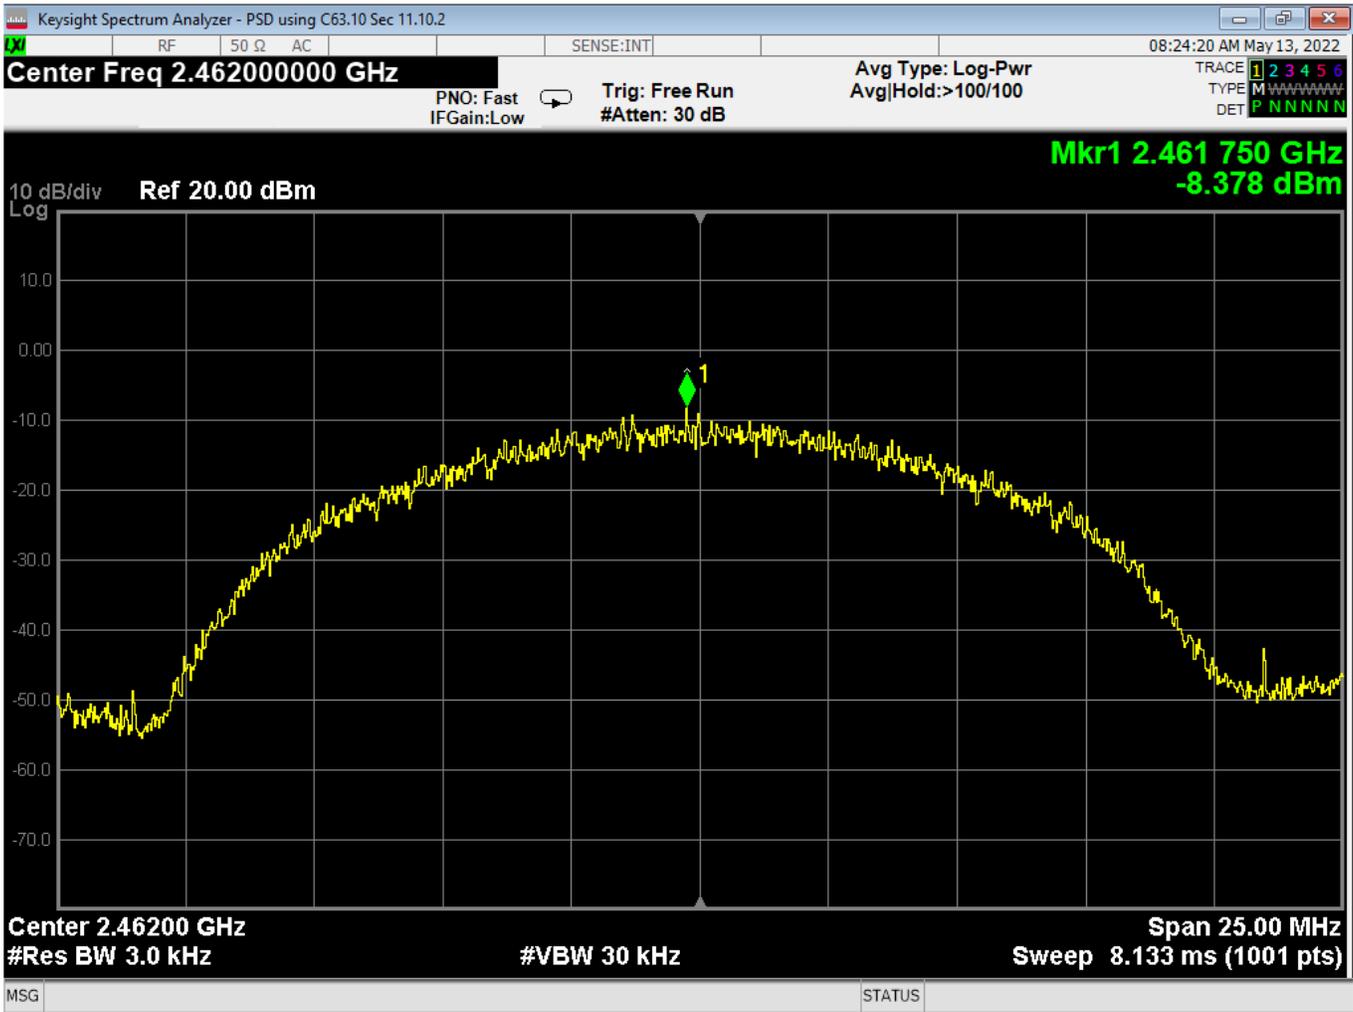

48 PSD, High, Wifi B, High Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

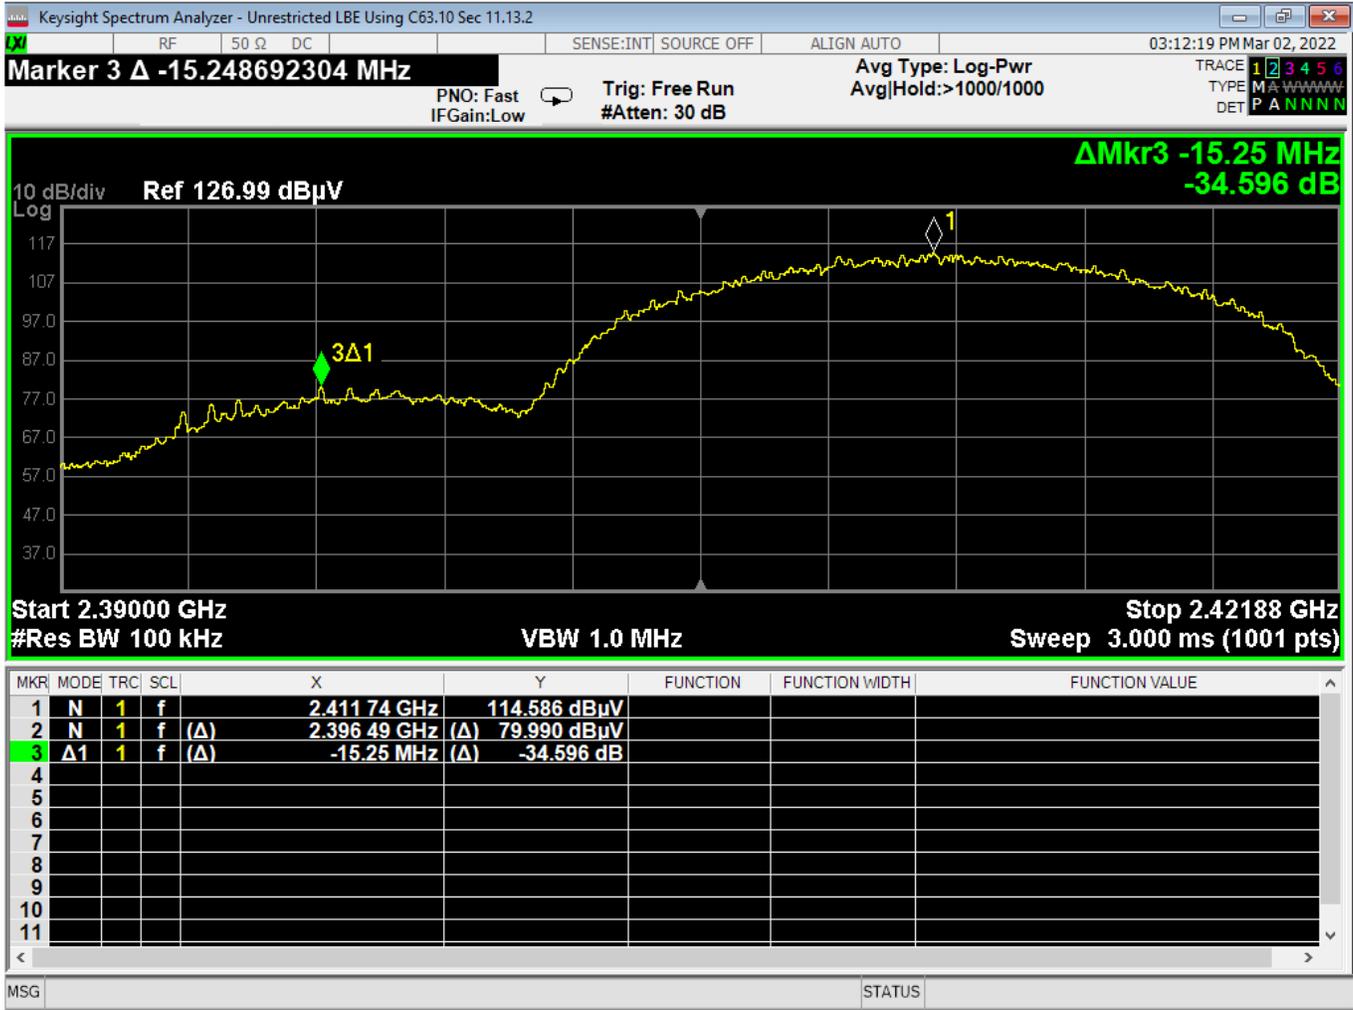

49 Lower Bandedge, Unrestricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		



50 Higher Bandedge, Unrestricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

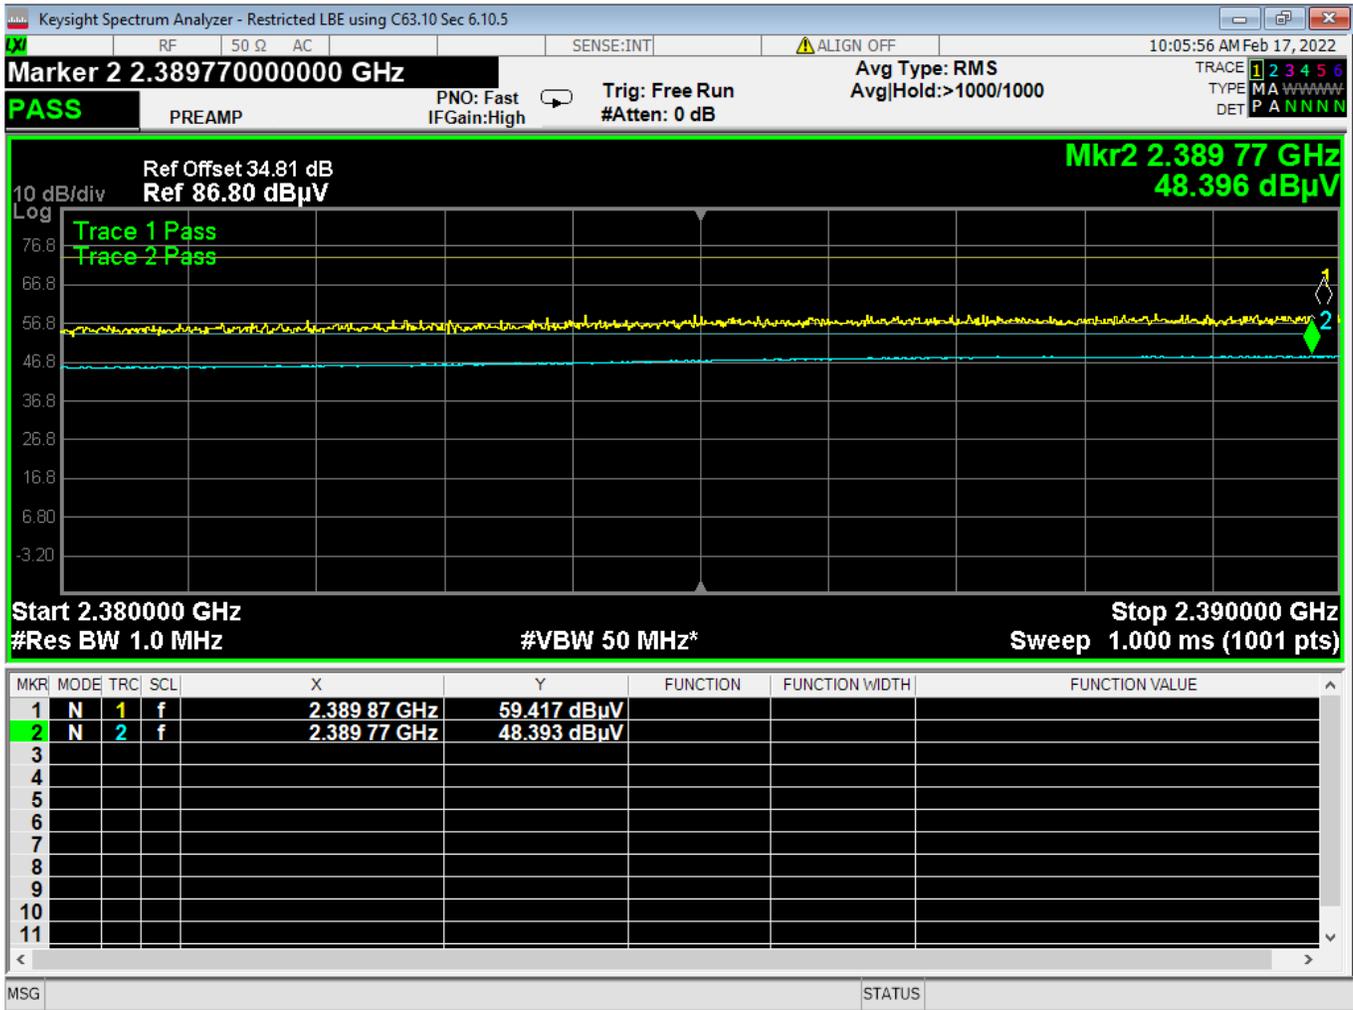

51 Lower Bandedge, Restricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

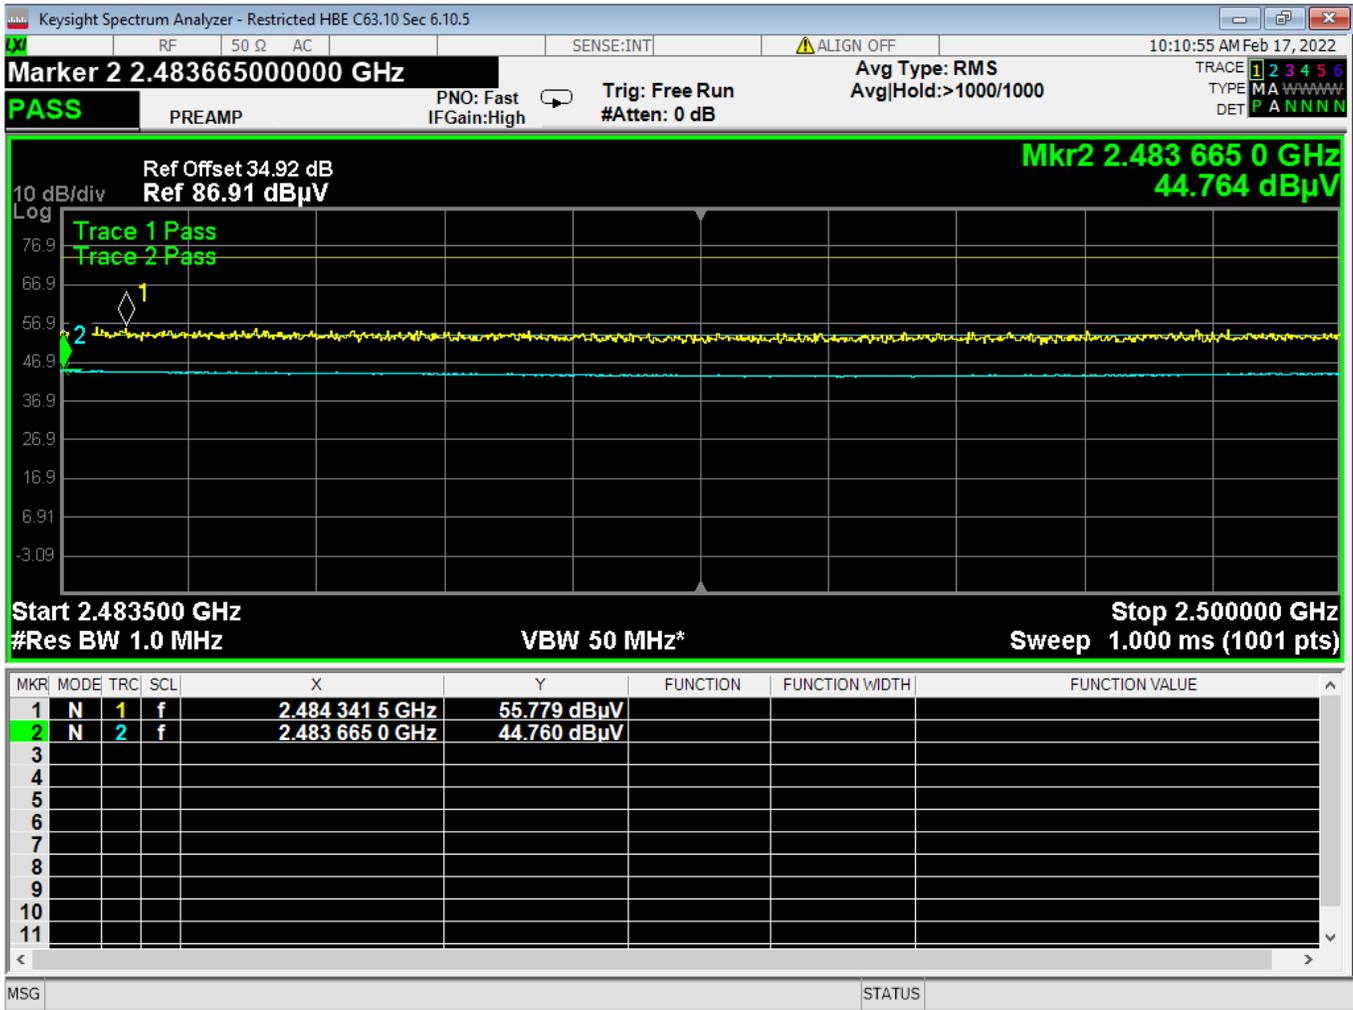

52 Higher Bandedge, Restricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

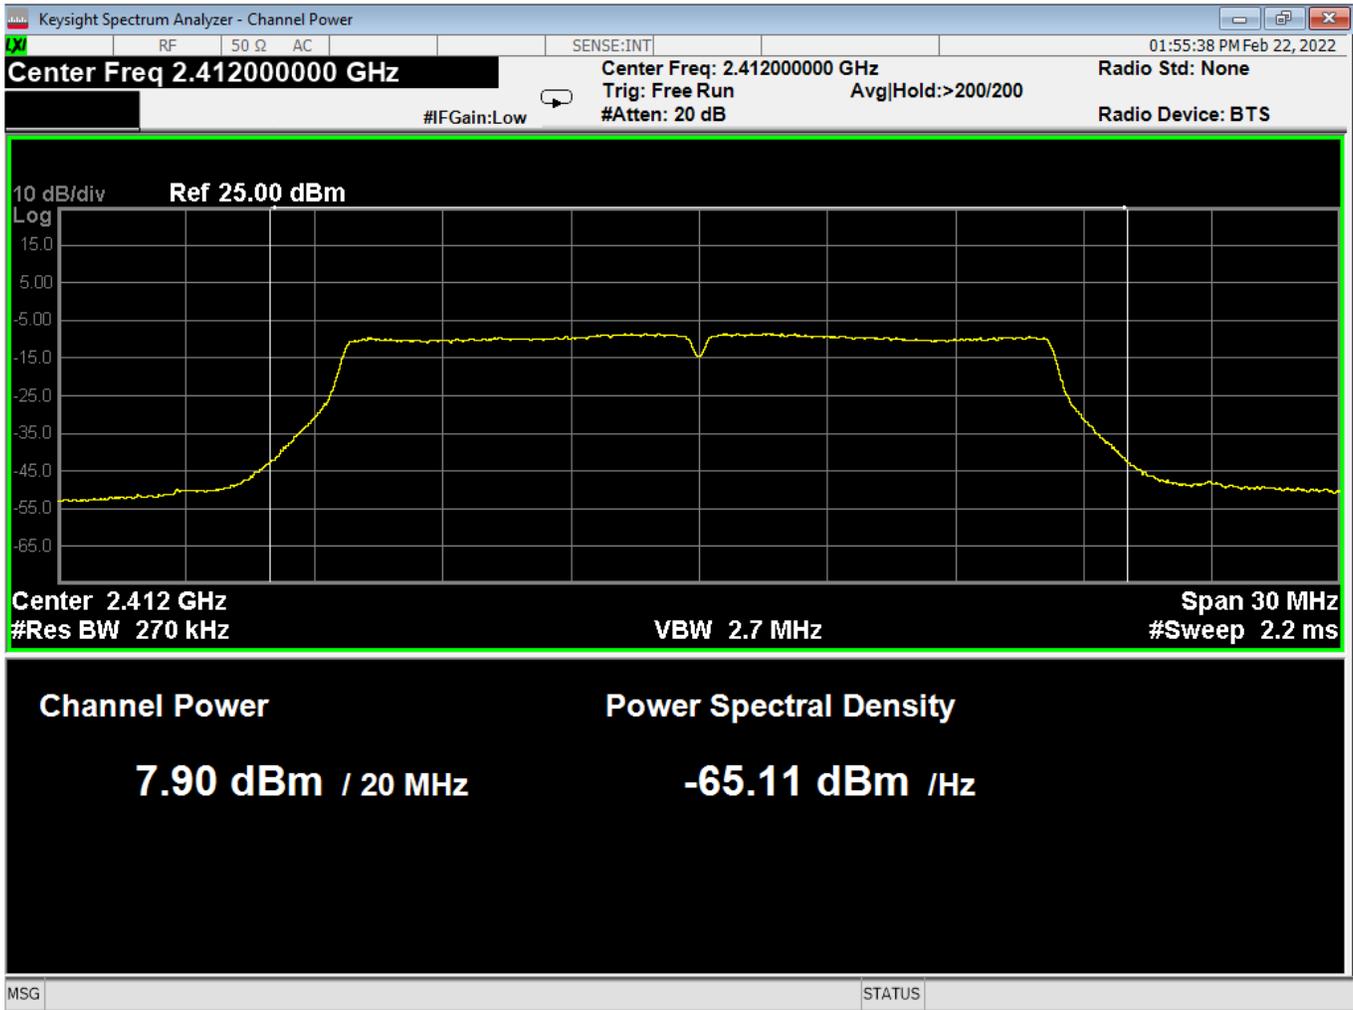

53 Average Power, Low, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

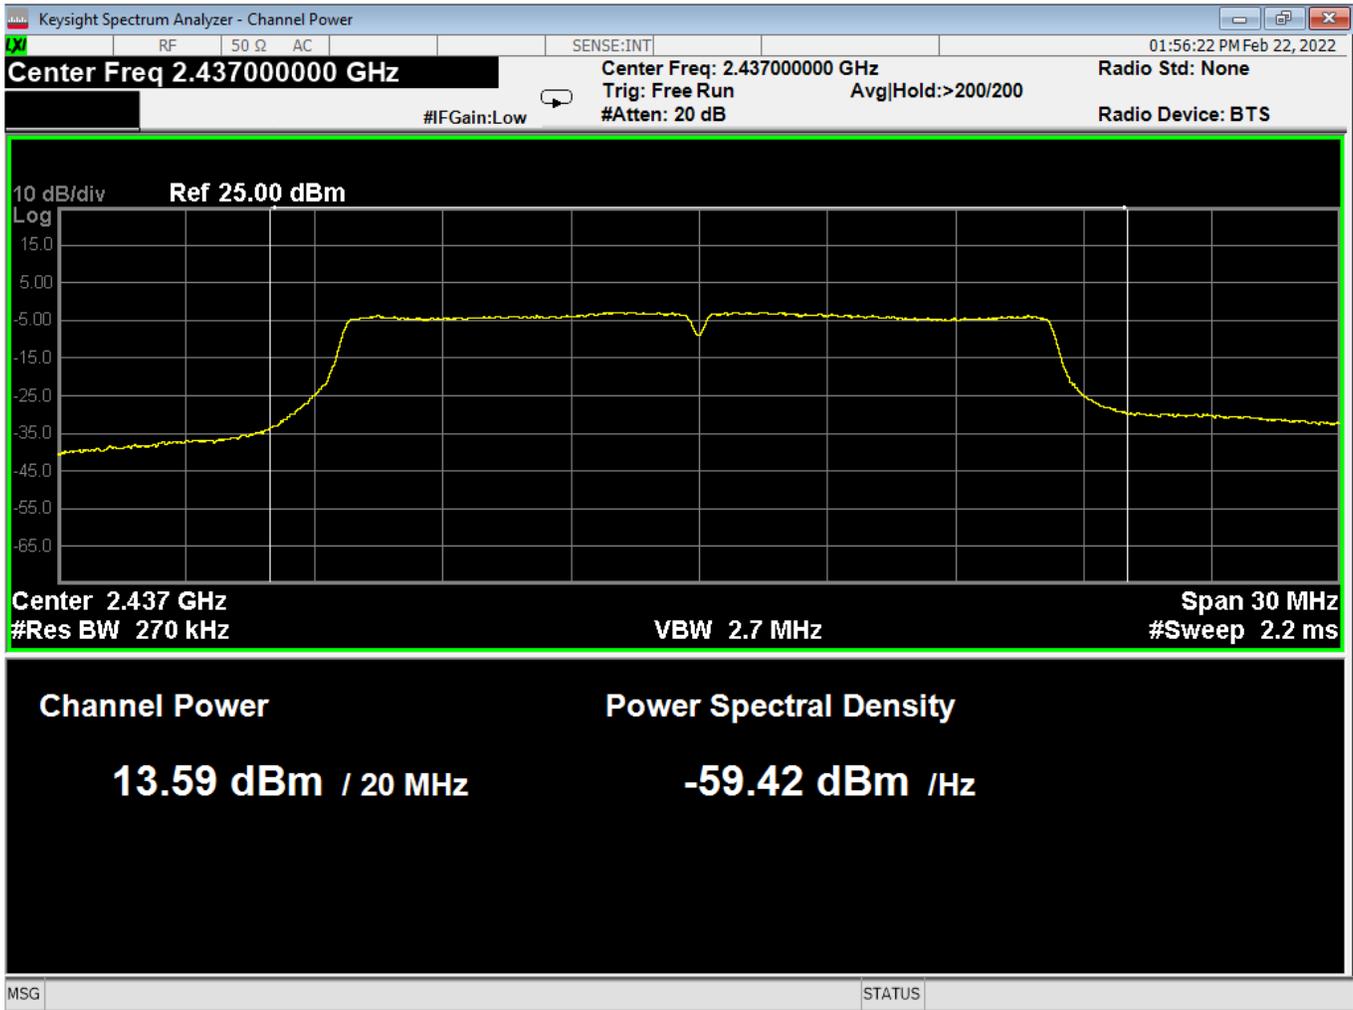

54 Average Power, Mid, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

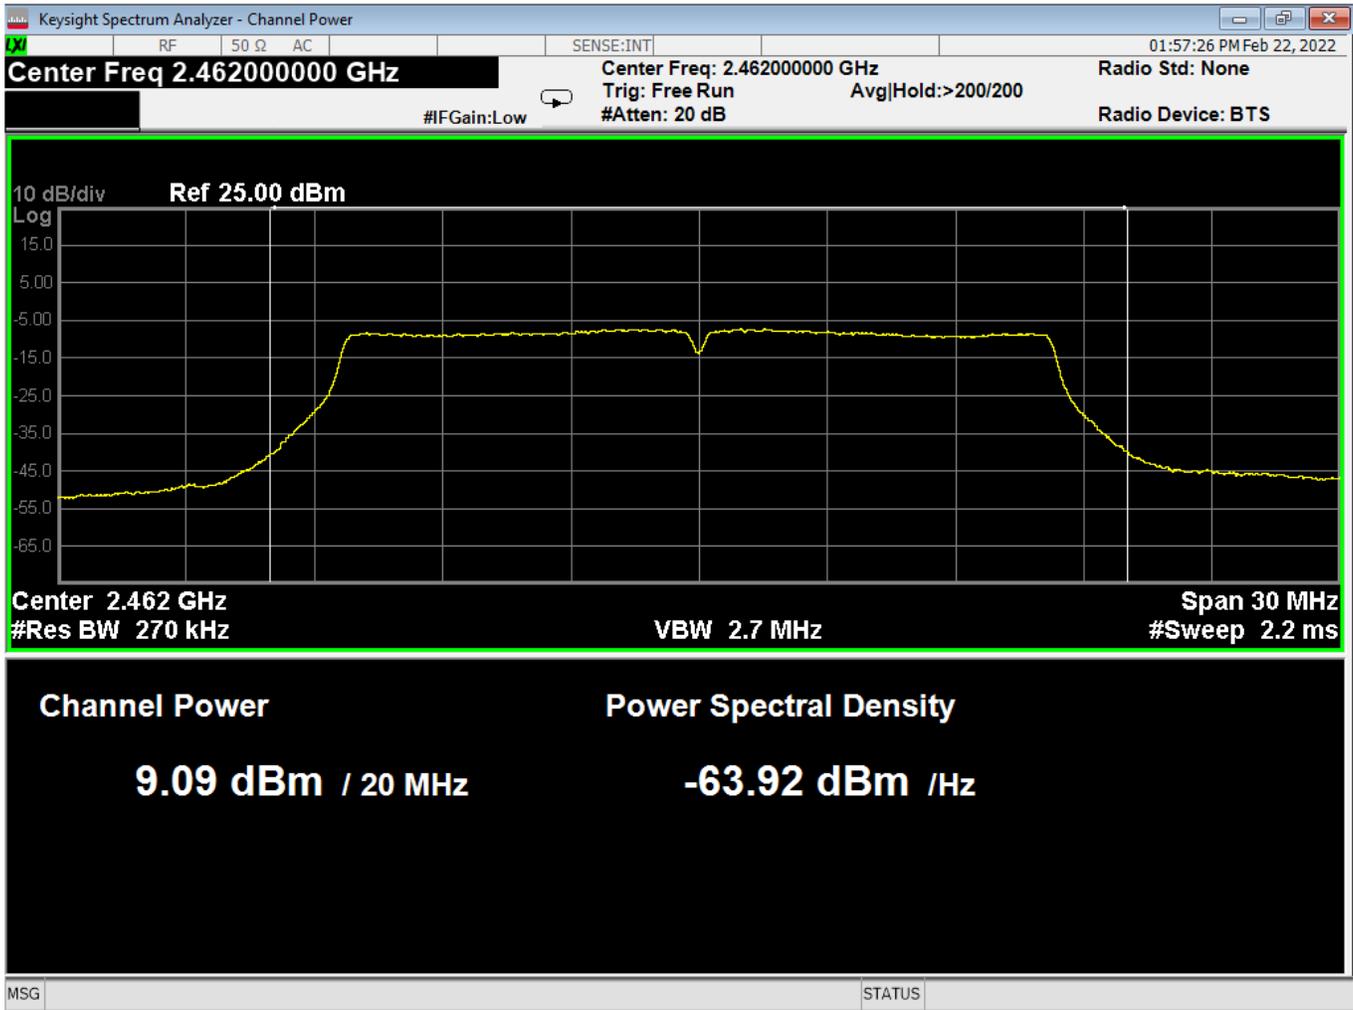

55 Average Power, High, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

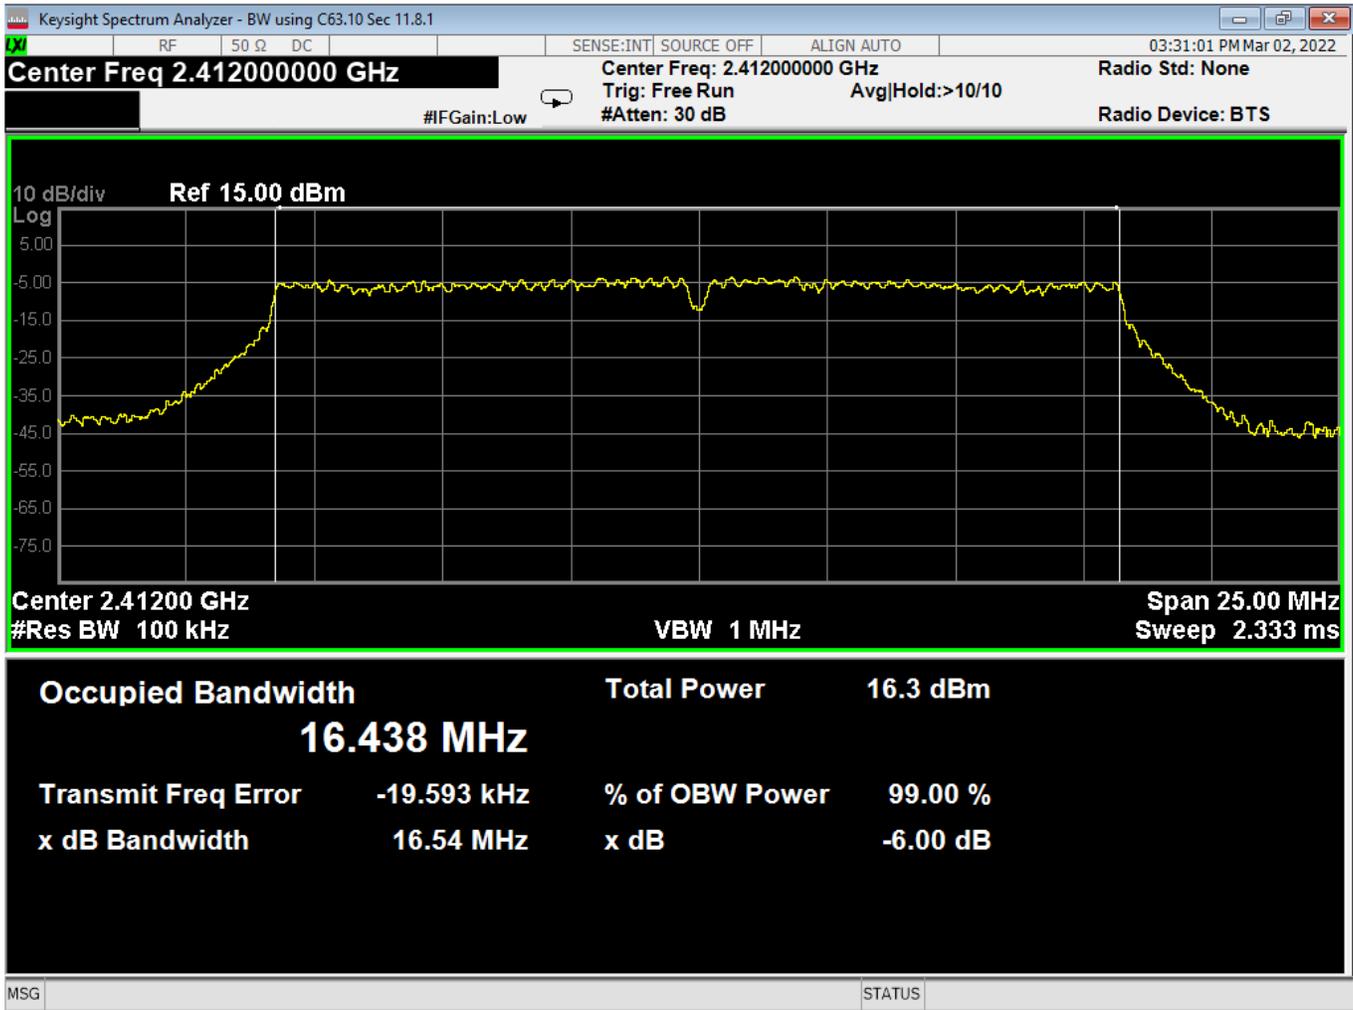

56 OBW-6dB, Low, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

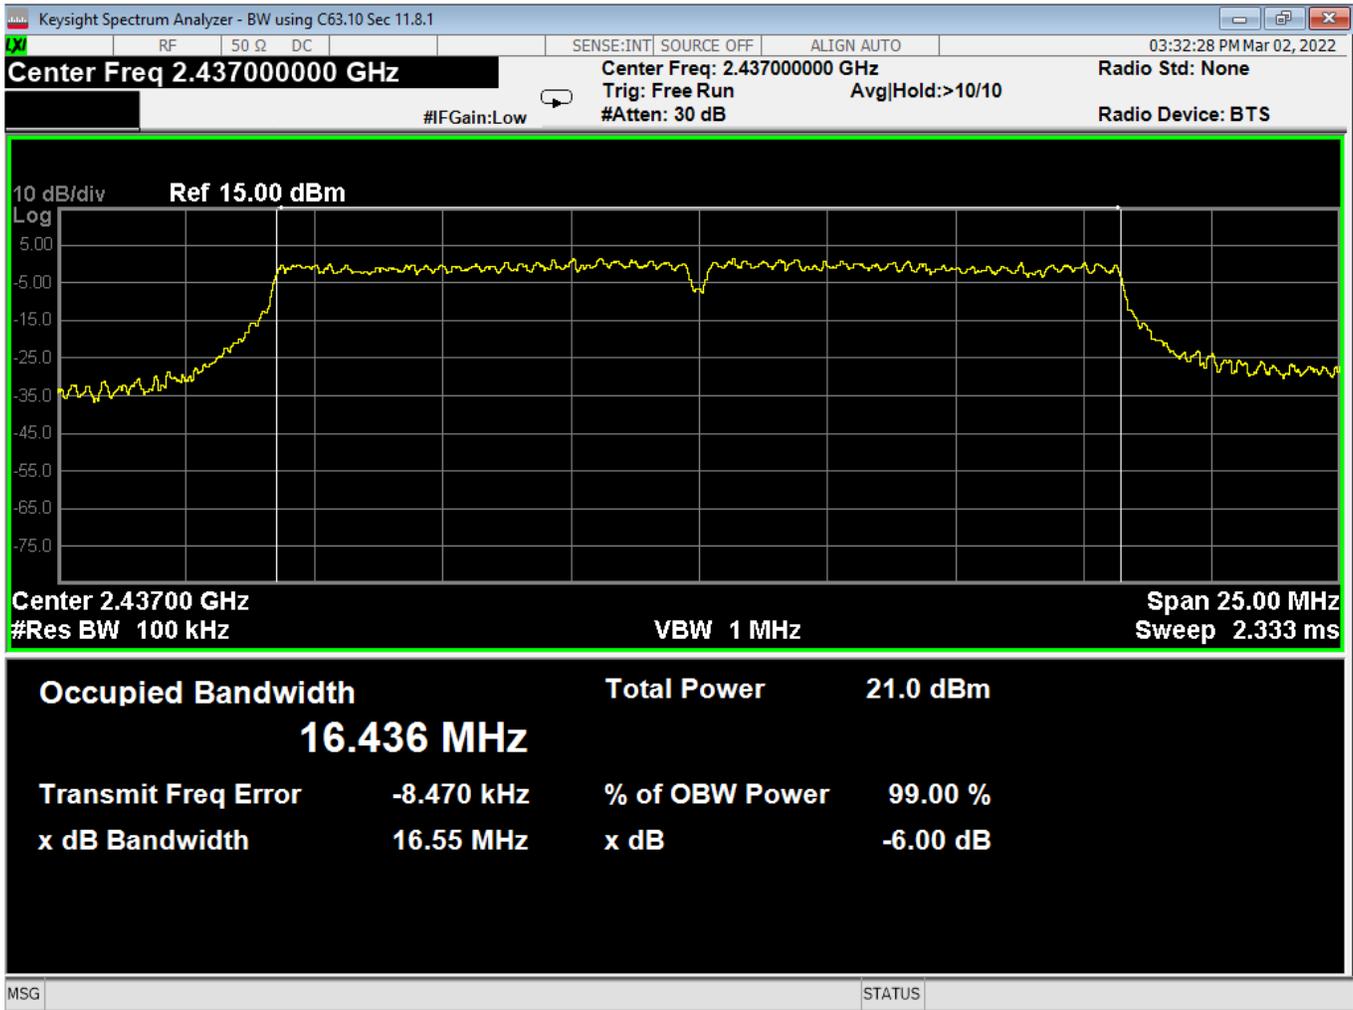

57 OBW-6dB, Mid, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

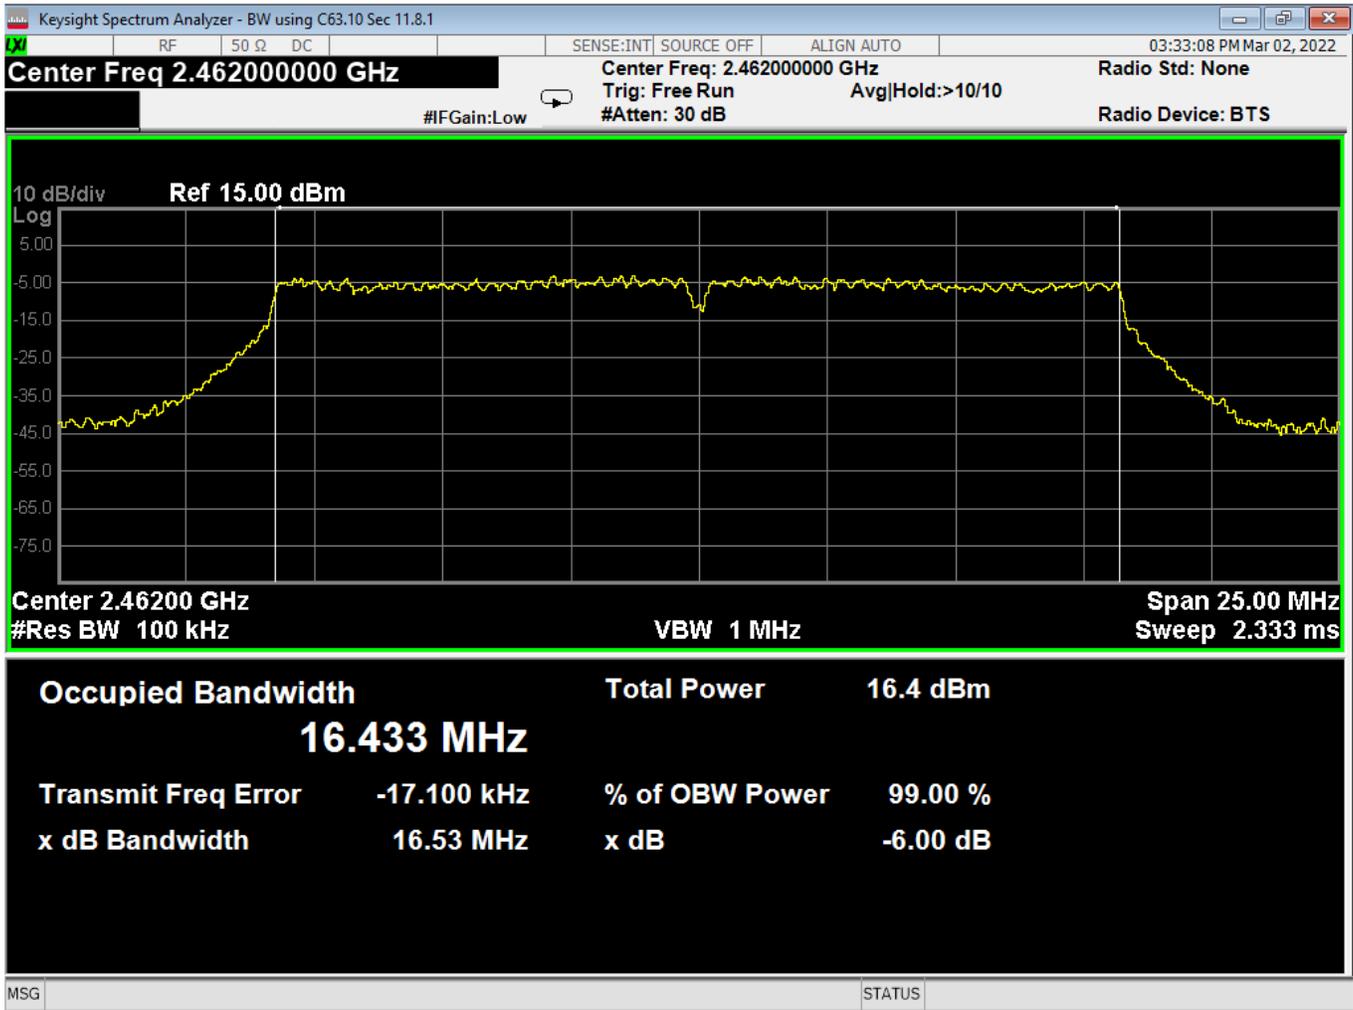

58 OBW-6dB, High, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

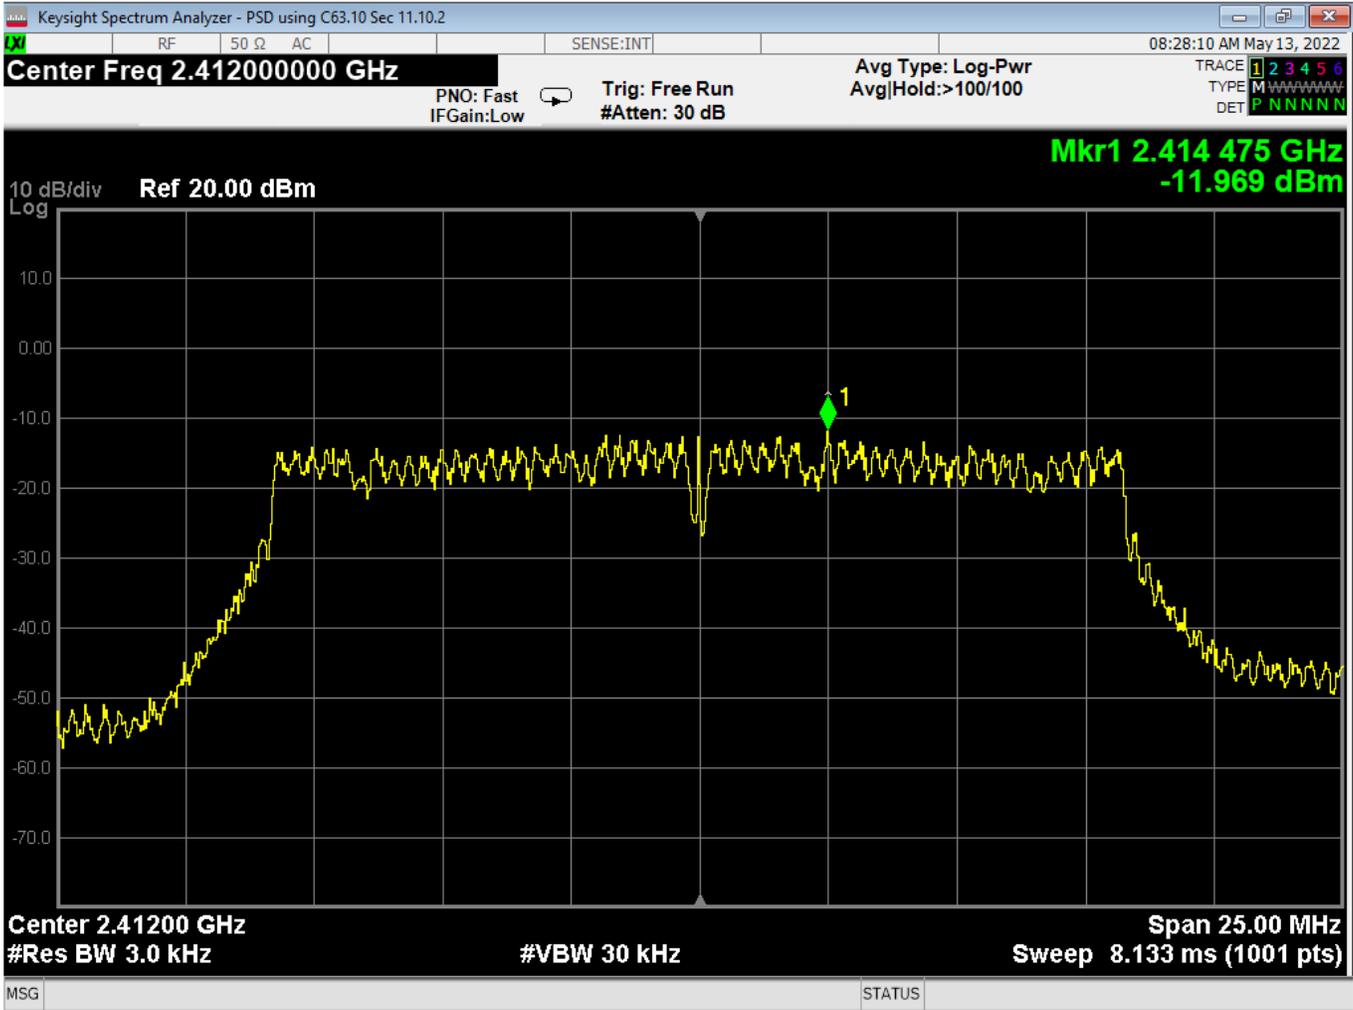

59 PSD, Low, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

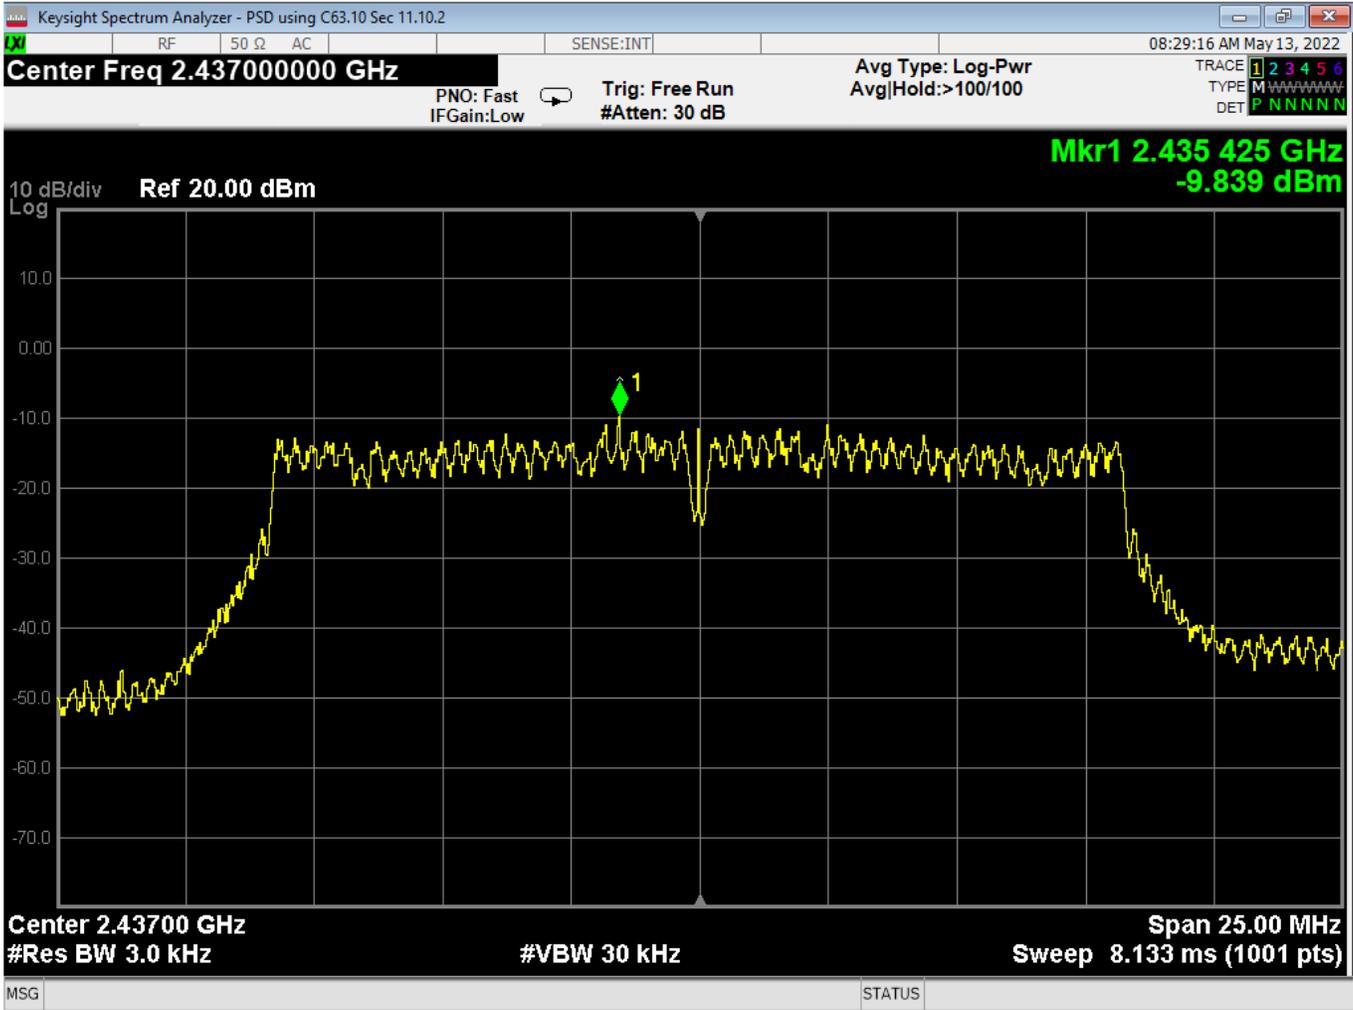

60 PSD, Mid, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

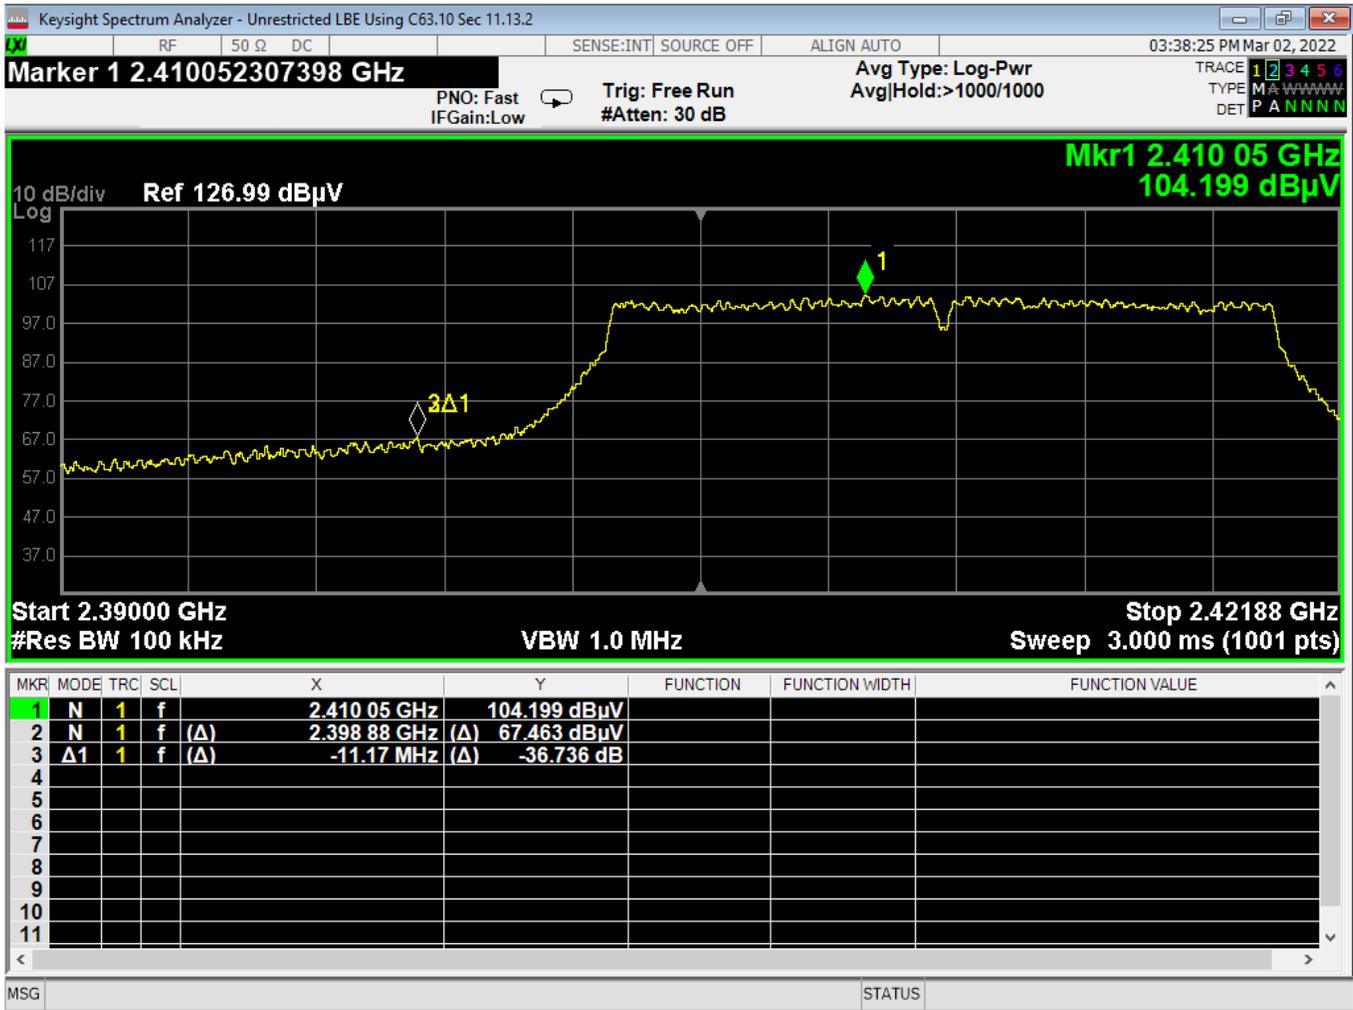

62 Lower Bandedge, Unrestricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

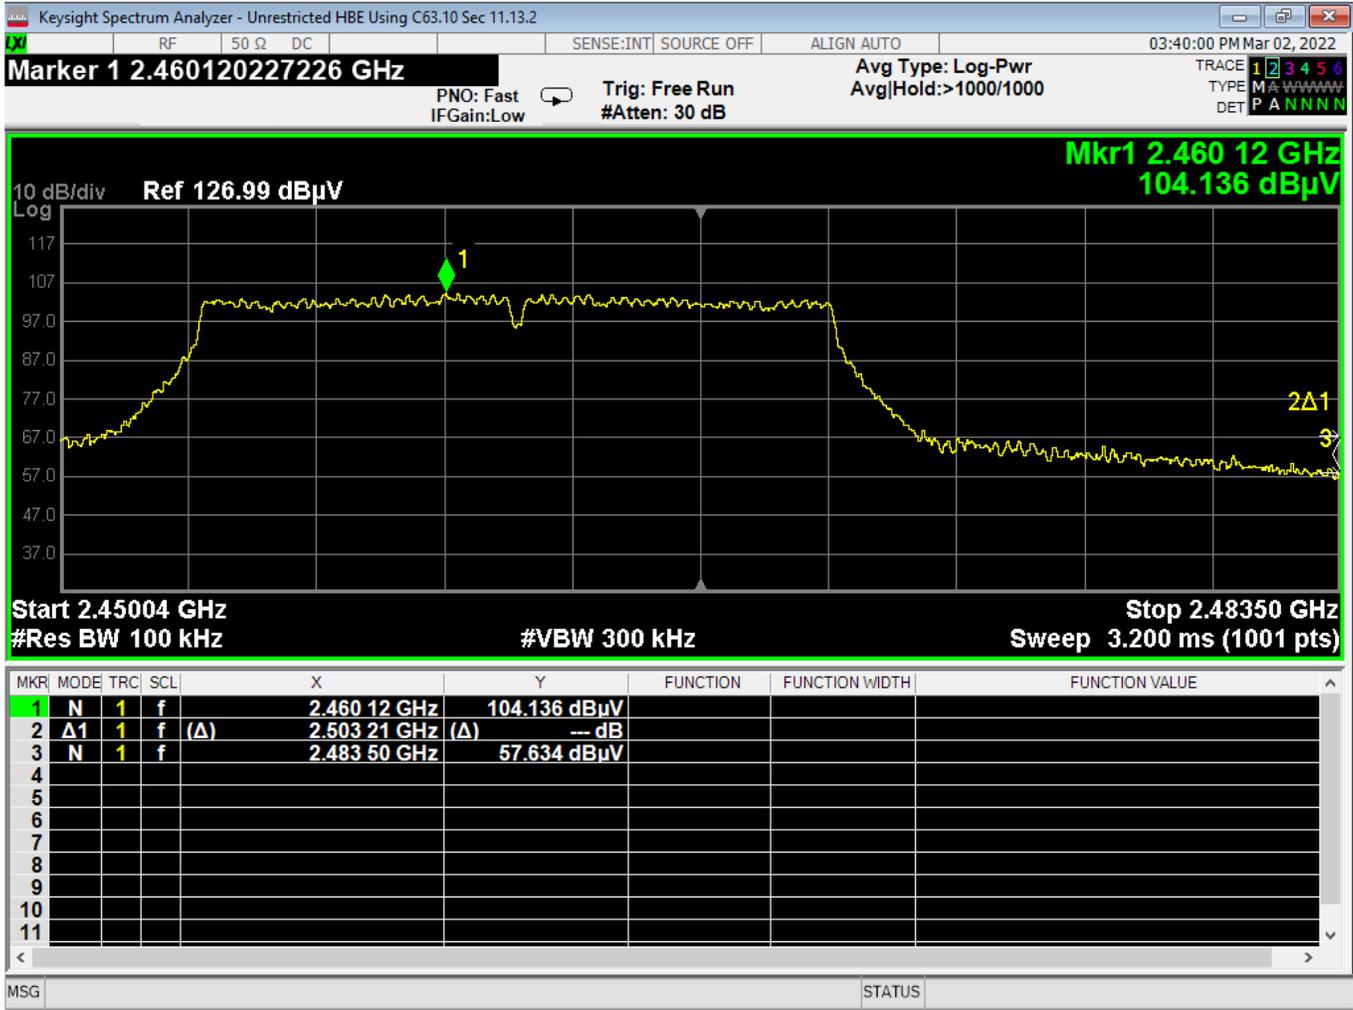

63 Higher Bandedge, Unrestricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

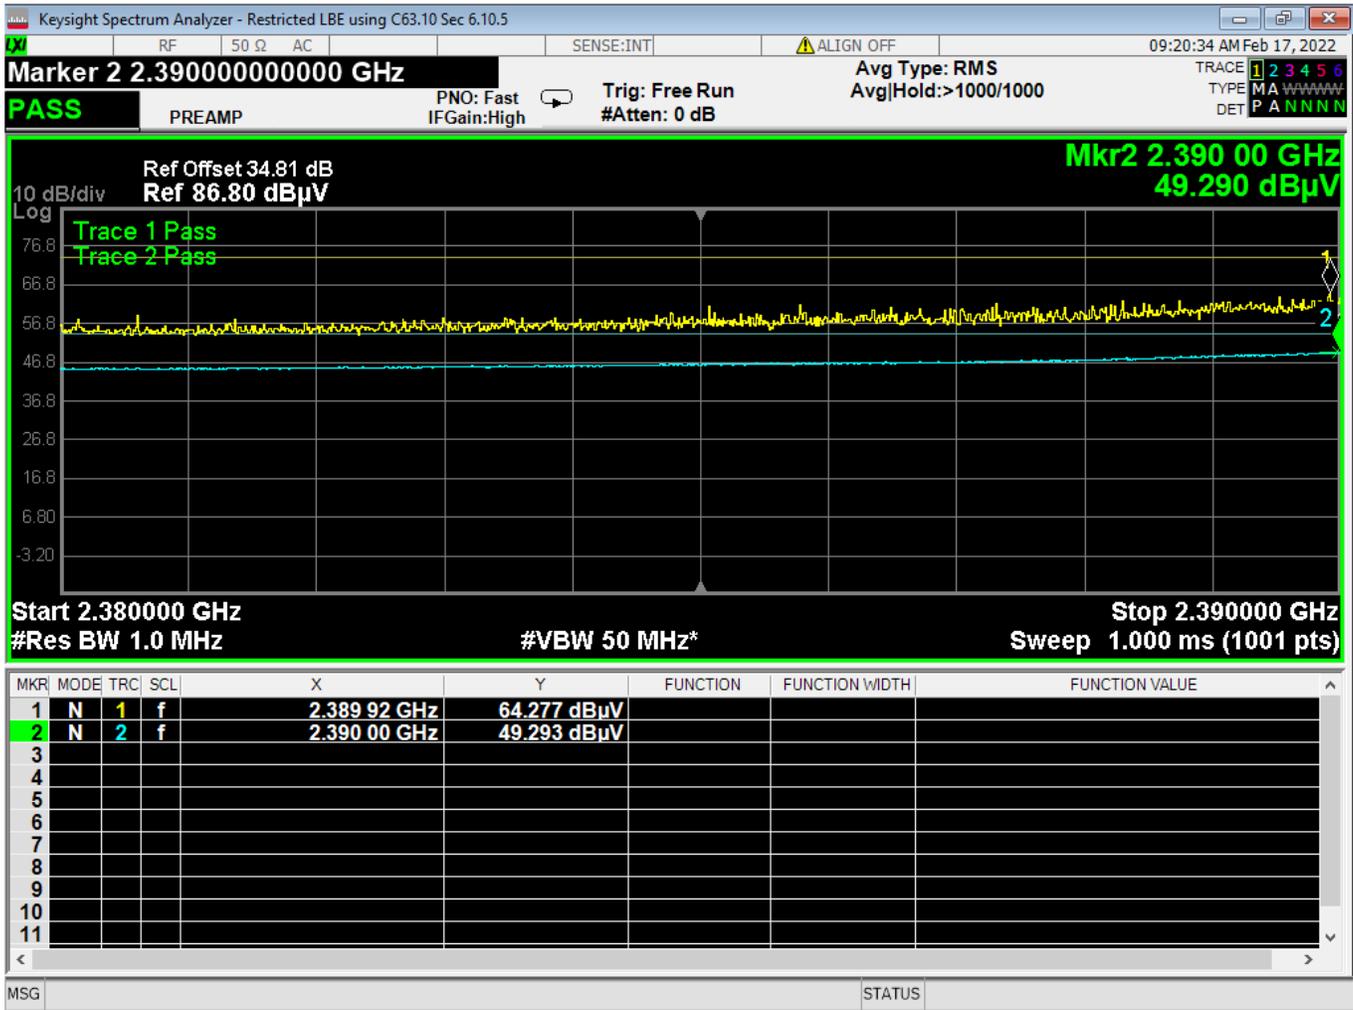

64 Lower Bandedge, Restricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

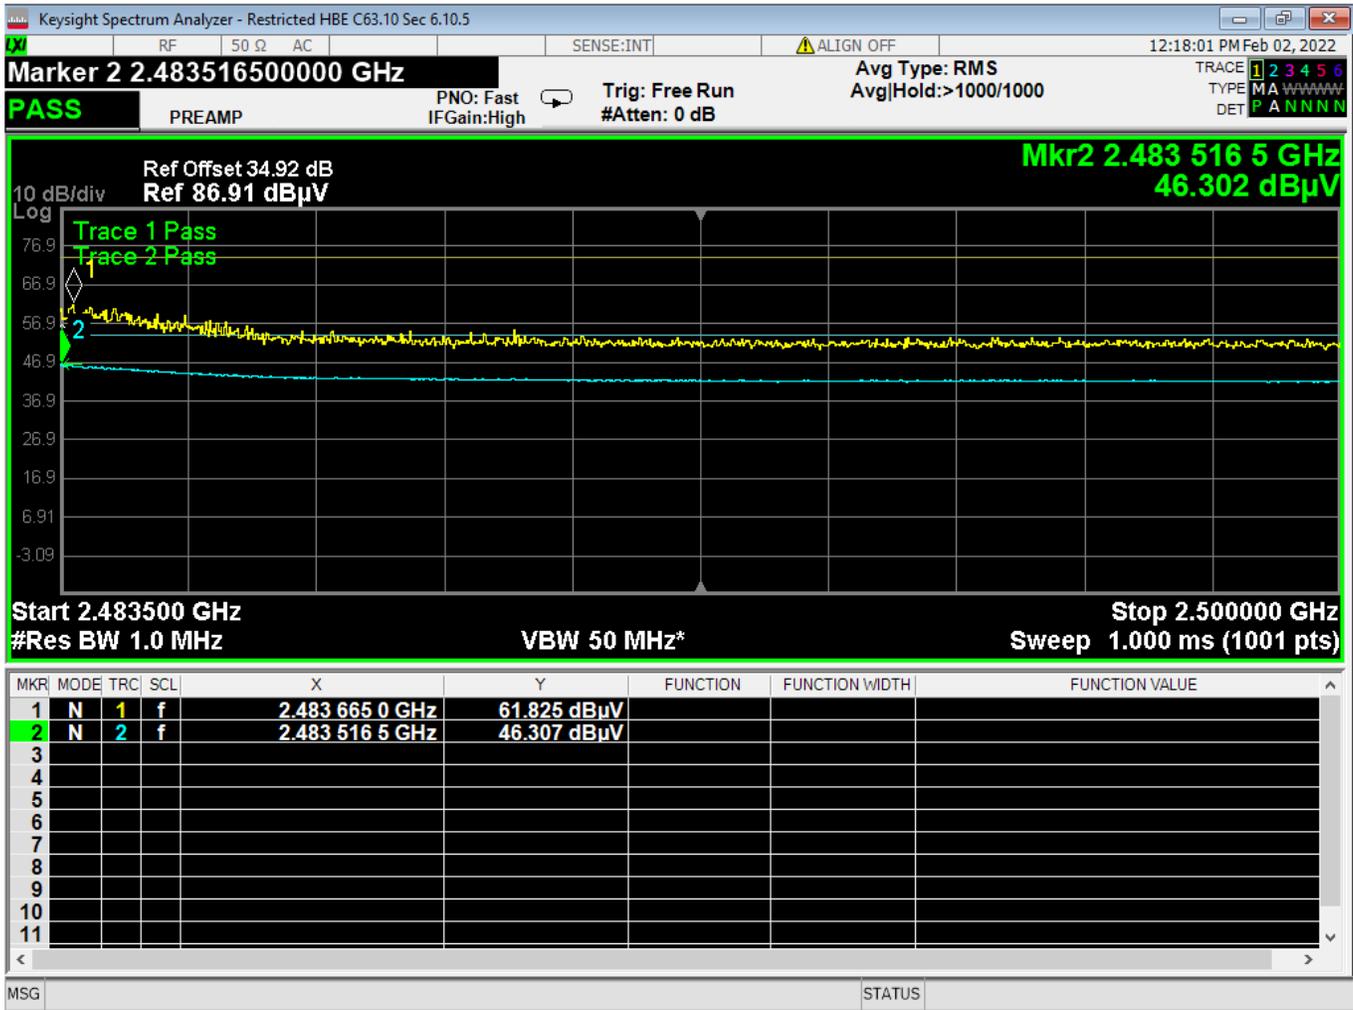

65 Higher Bandedge, Restricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

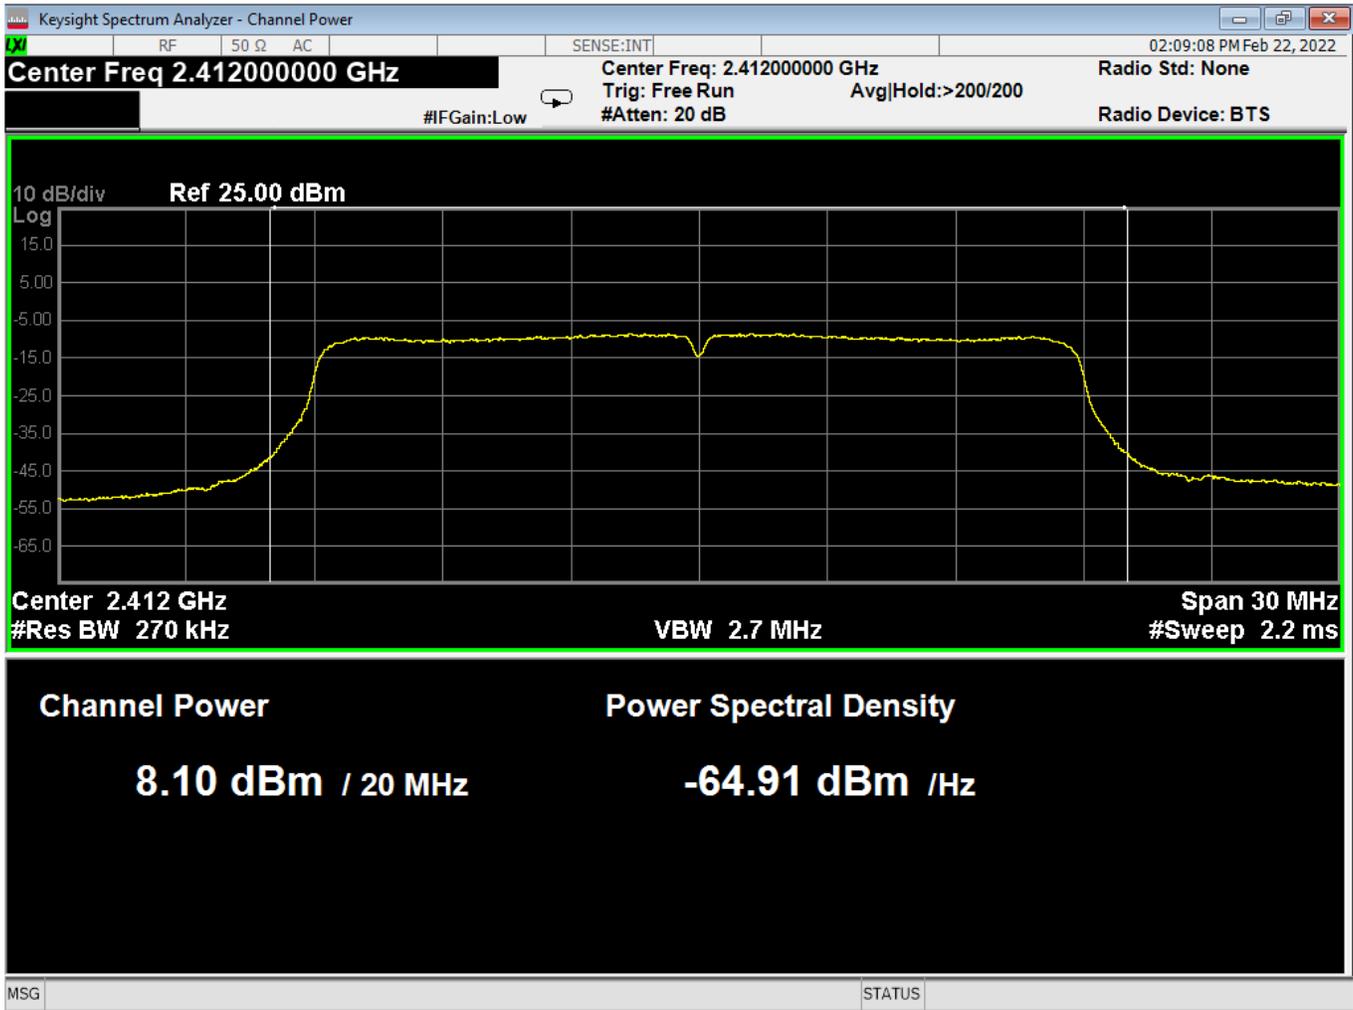

66 Average Power, Low, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

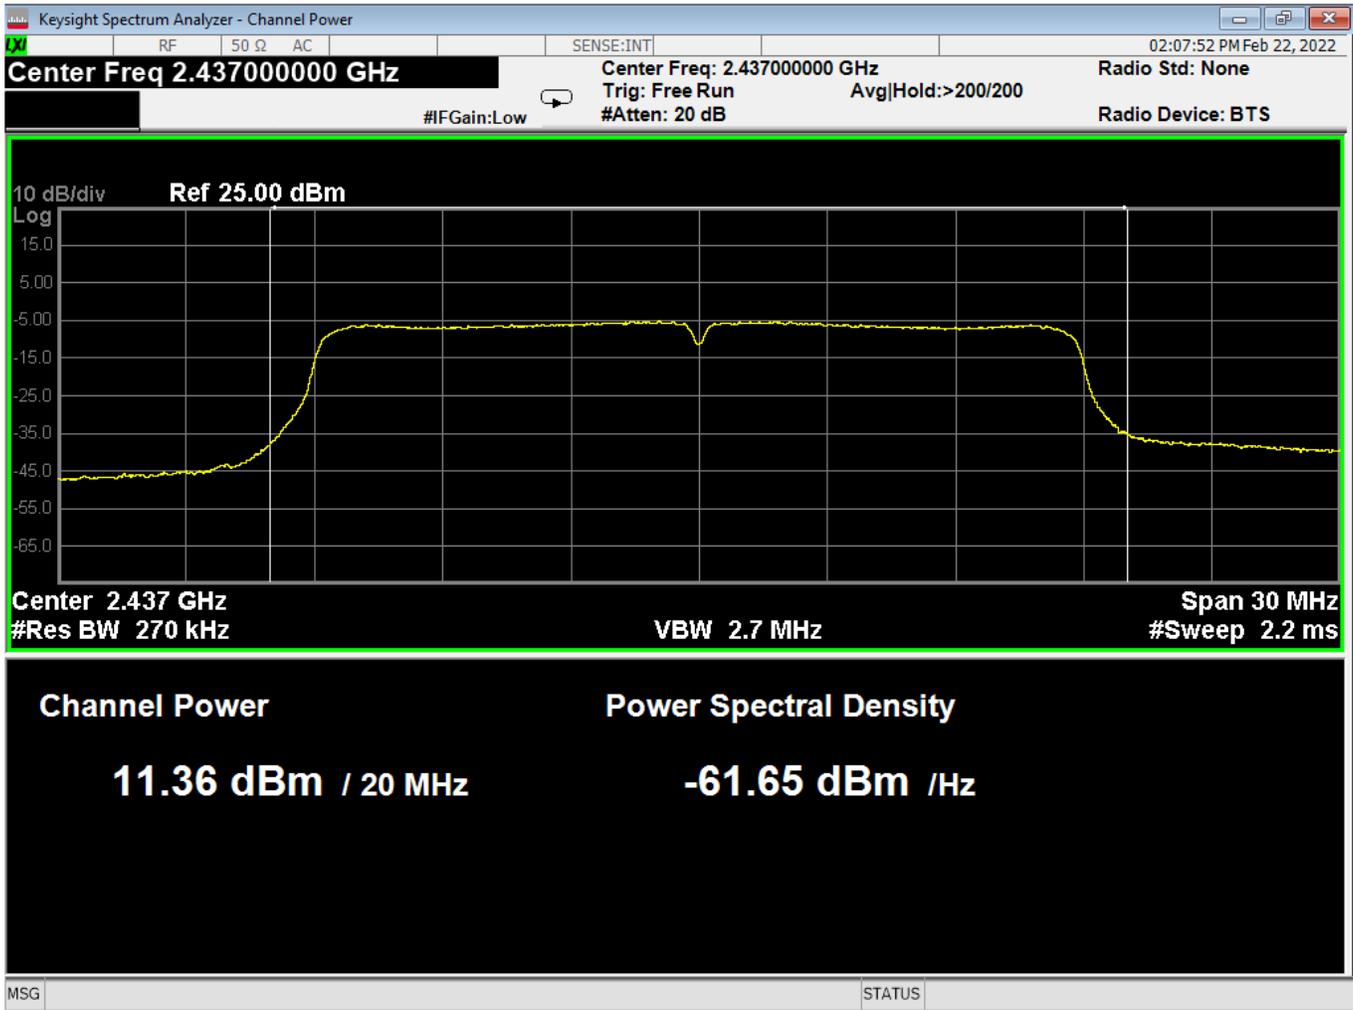

67 Average Power, Mid, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

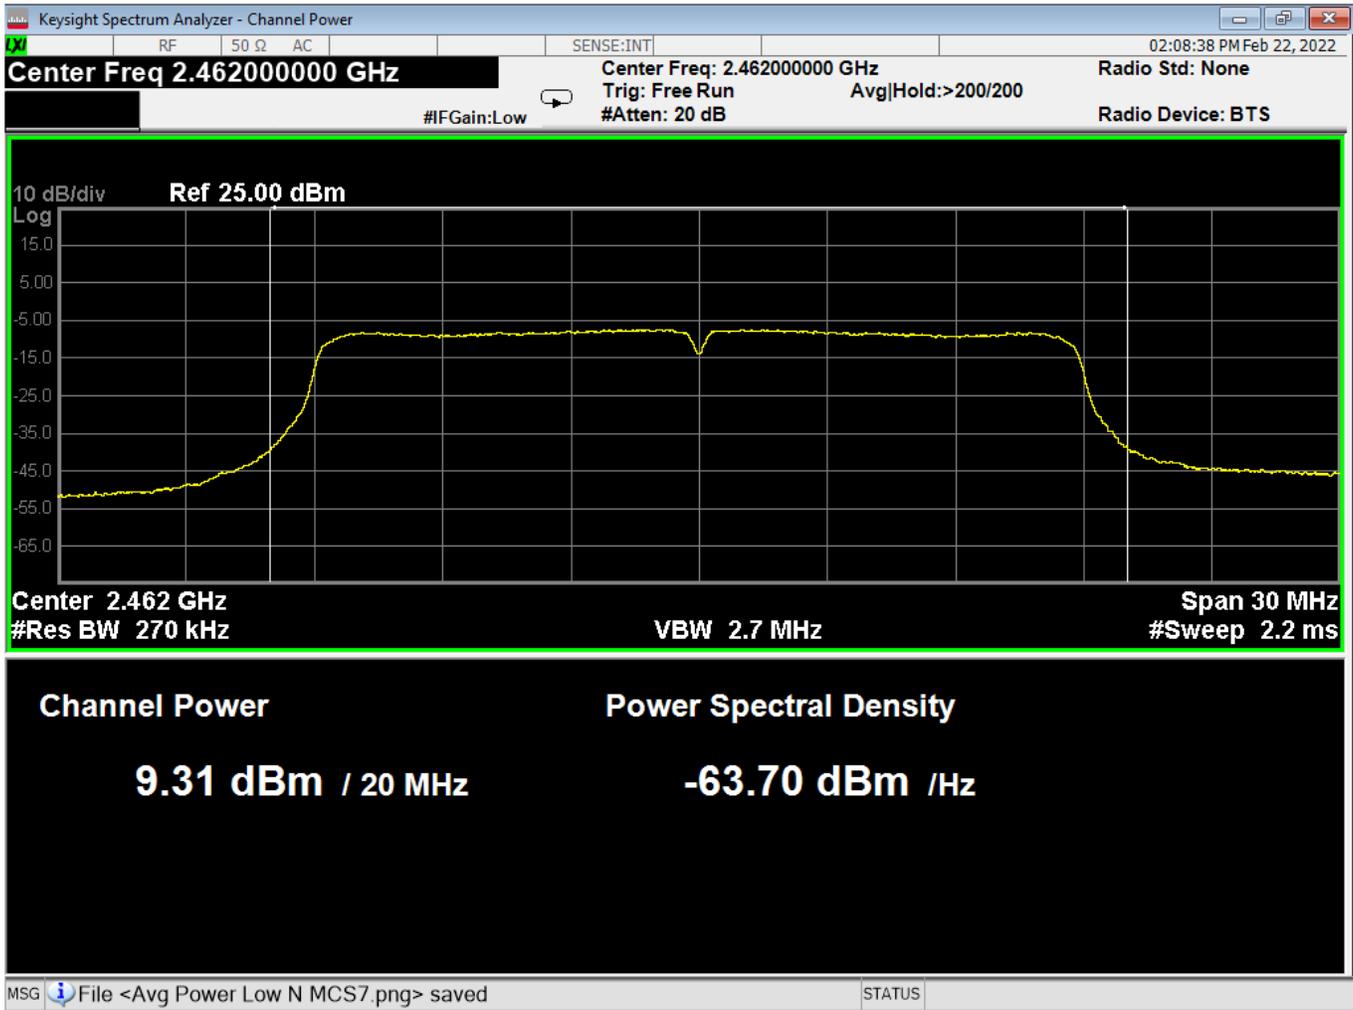

68 Average Power, High, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

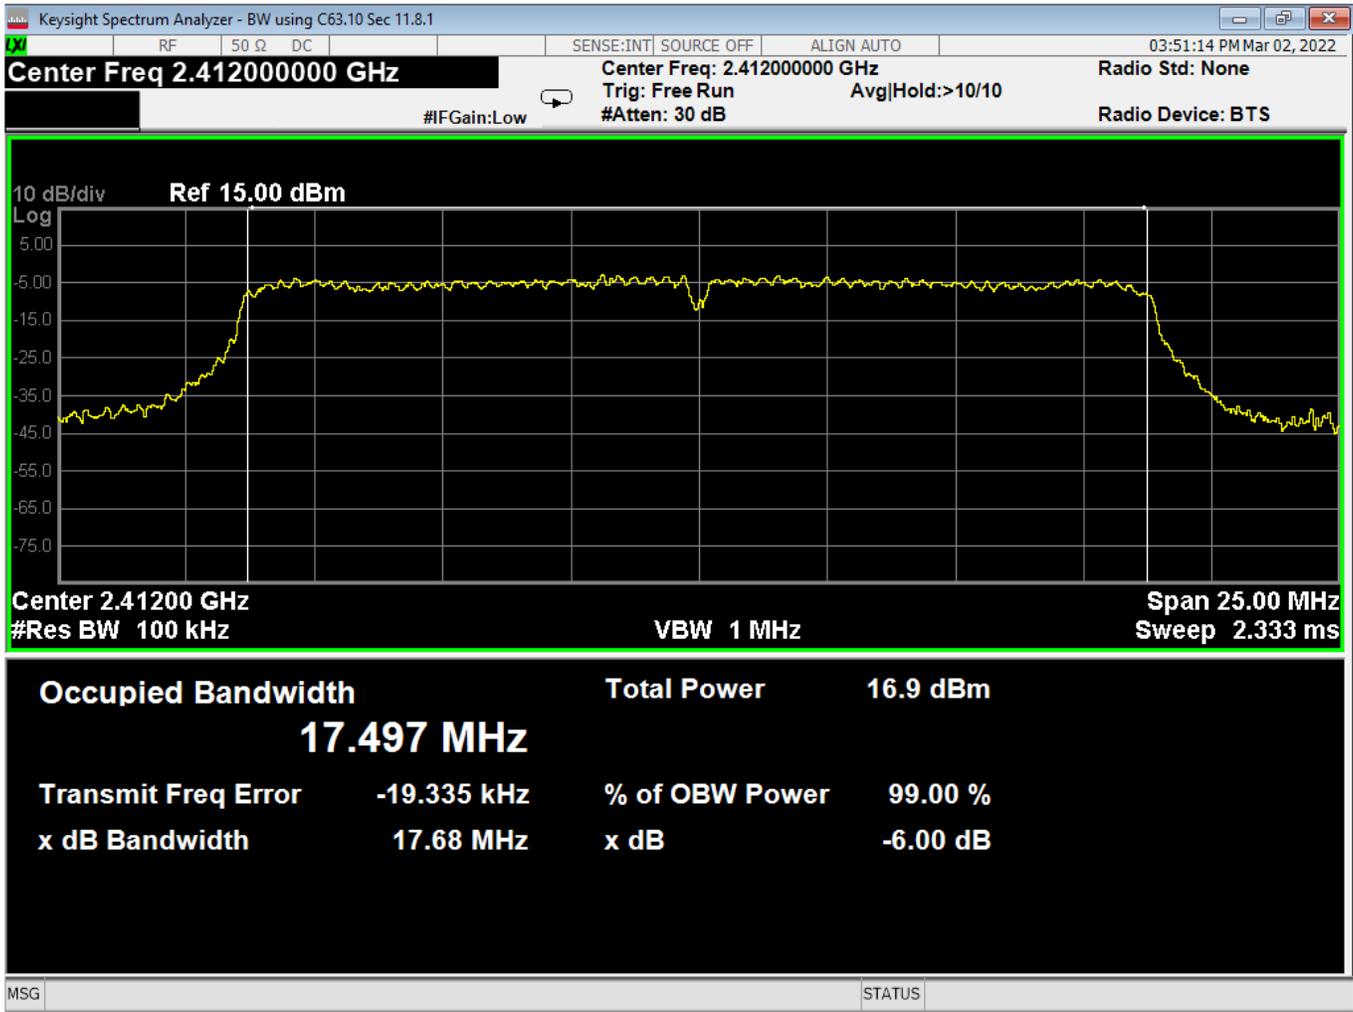

69 OBW-6dB, Low, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

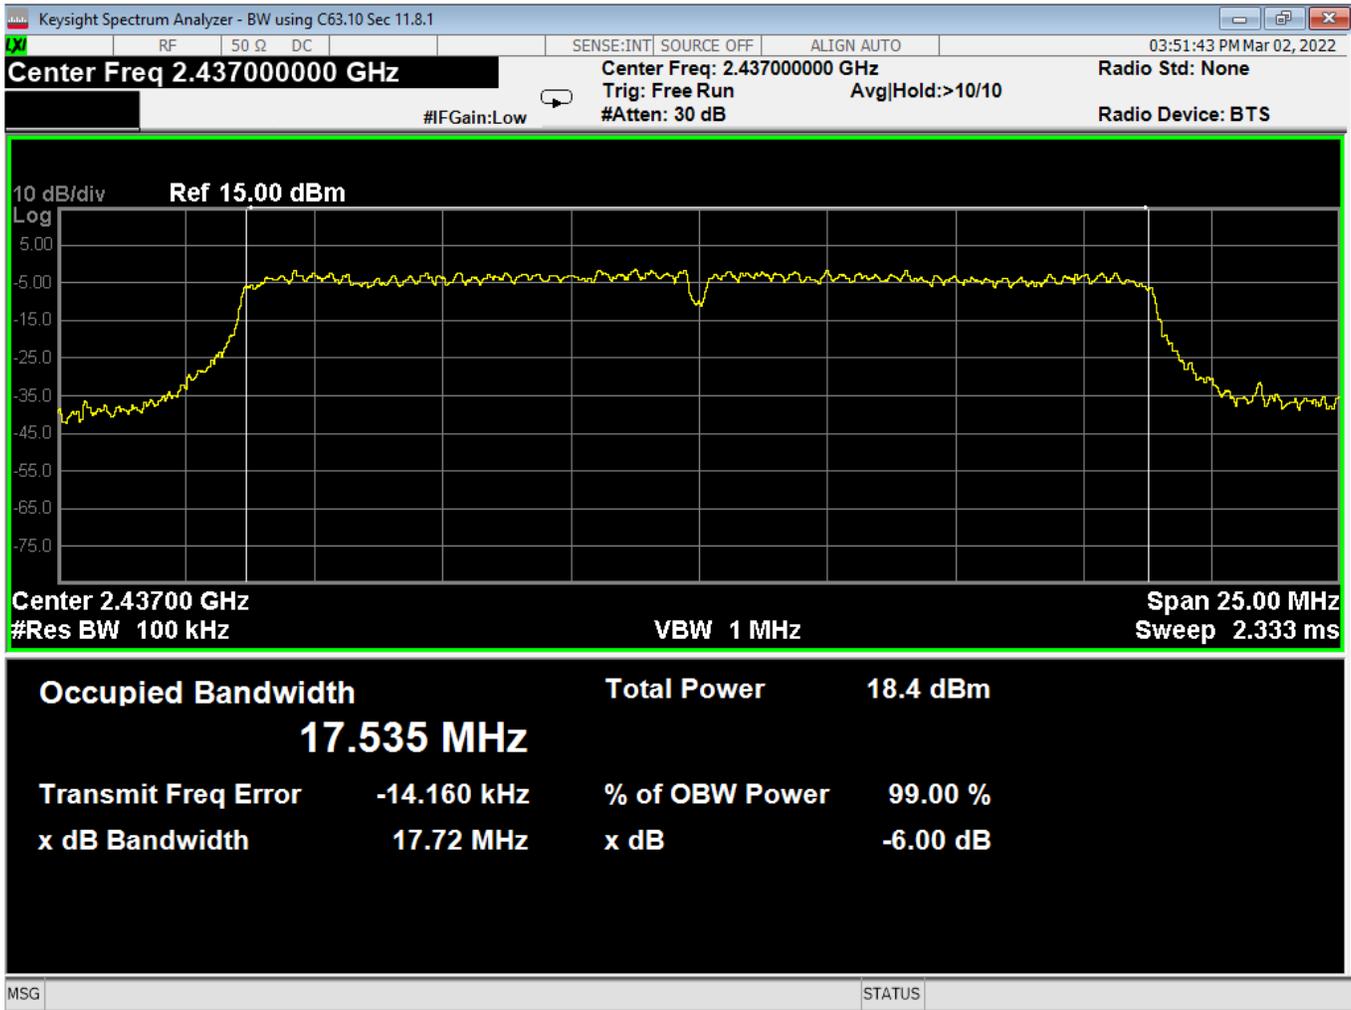

70 OBW-6dB, Mid, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

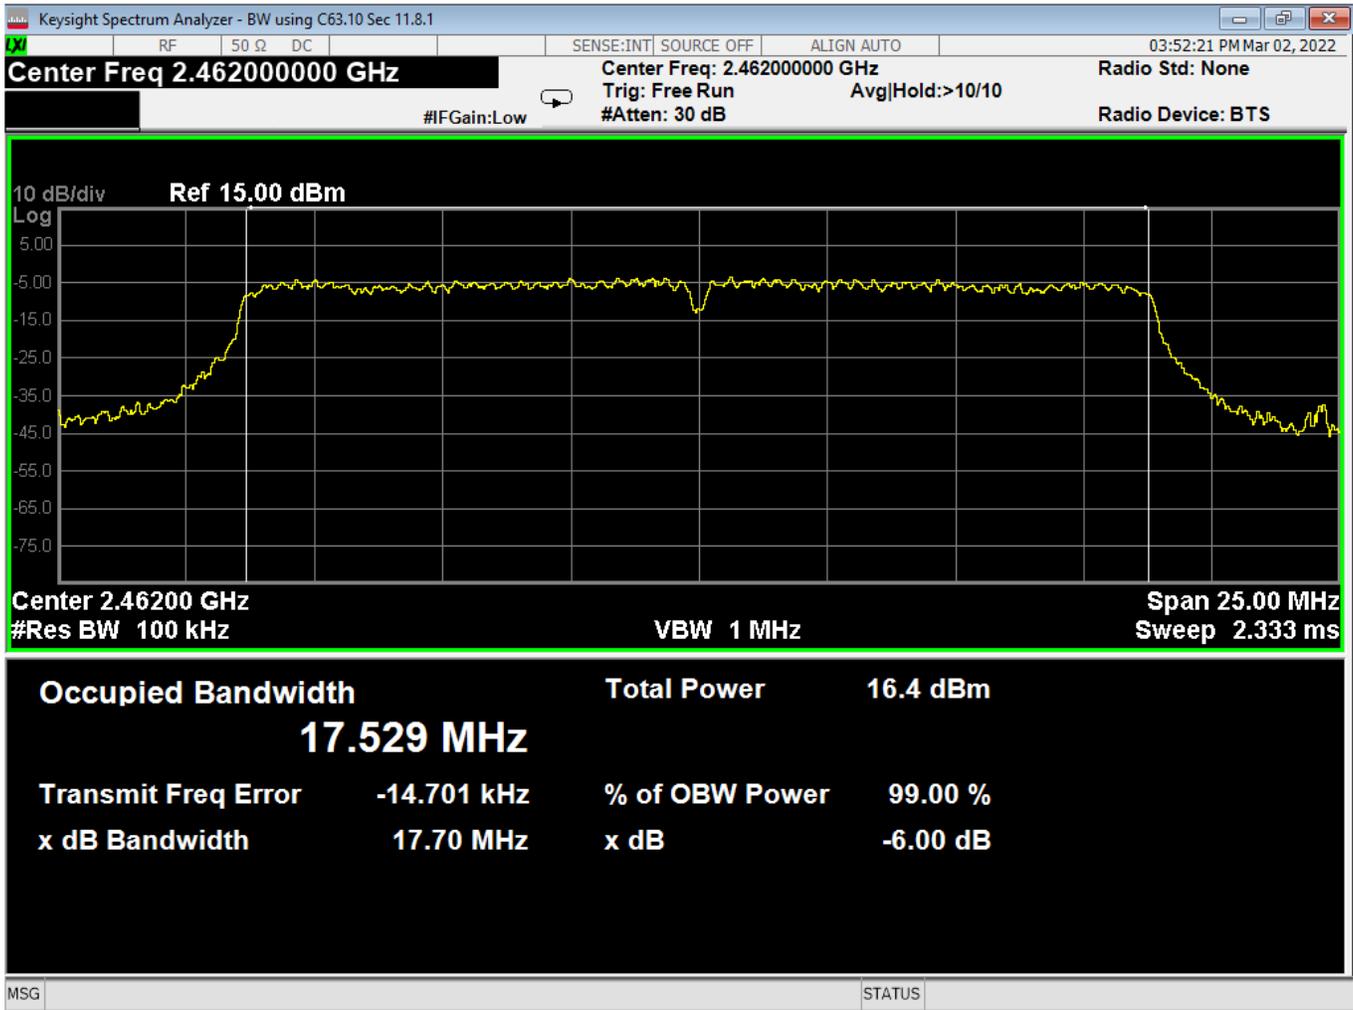

71 OBW-6dB, High, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

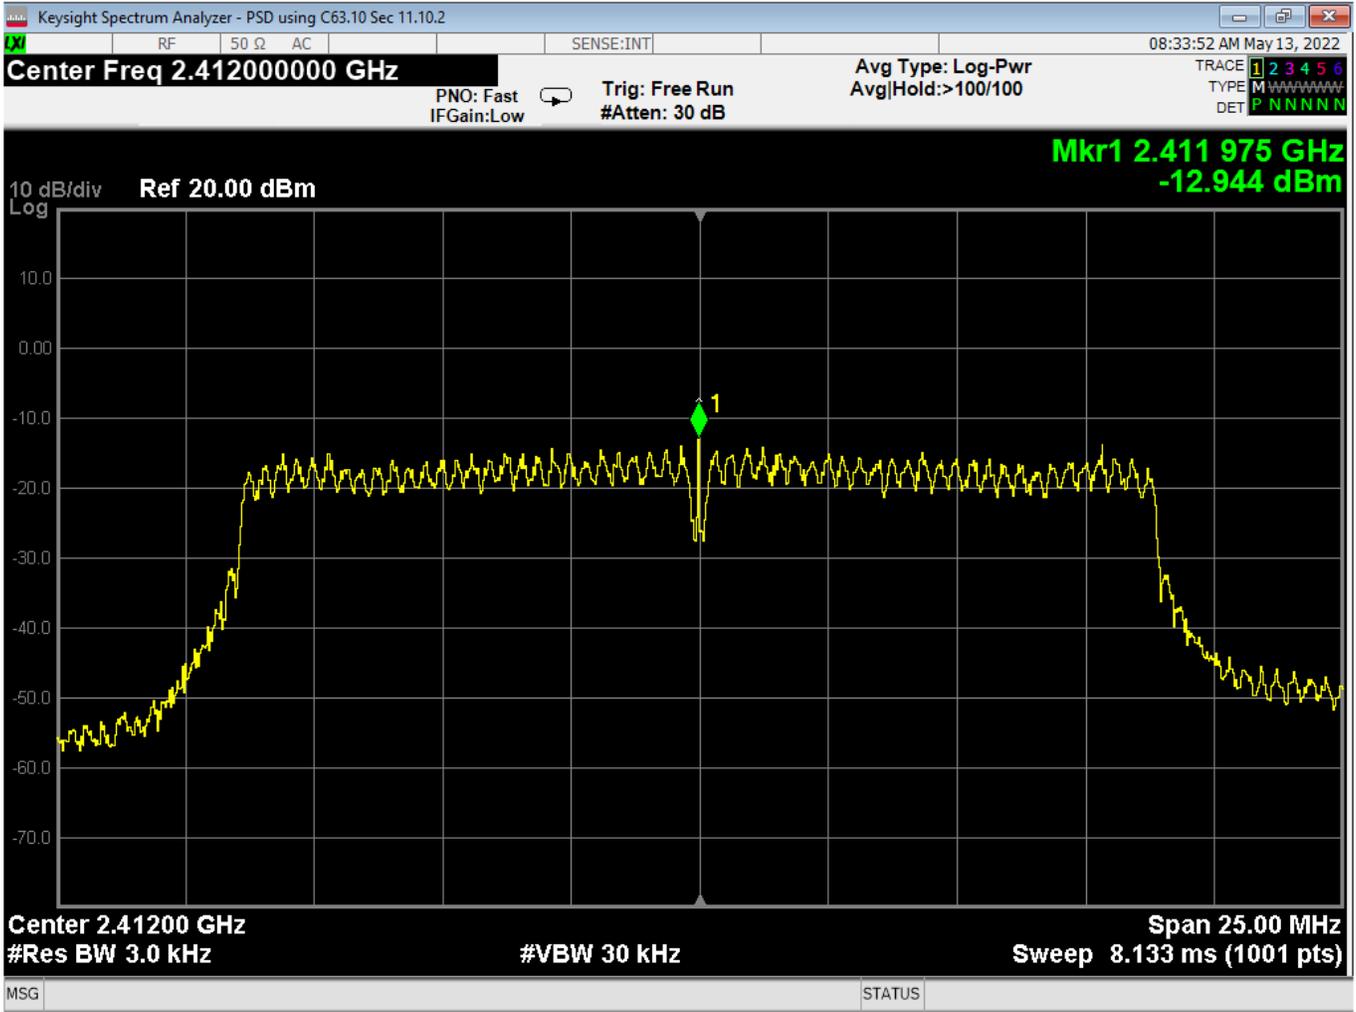

72 PSD, Low, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

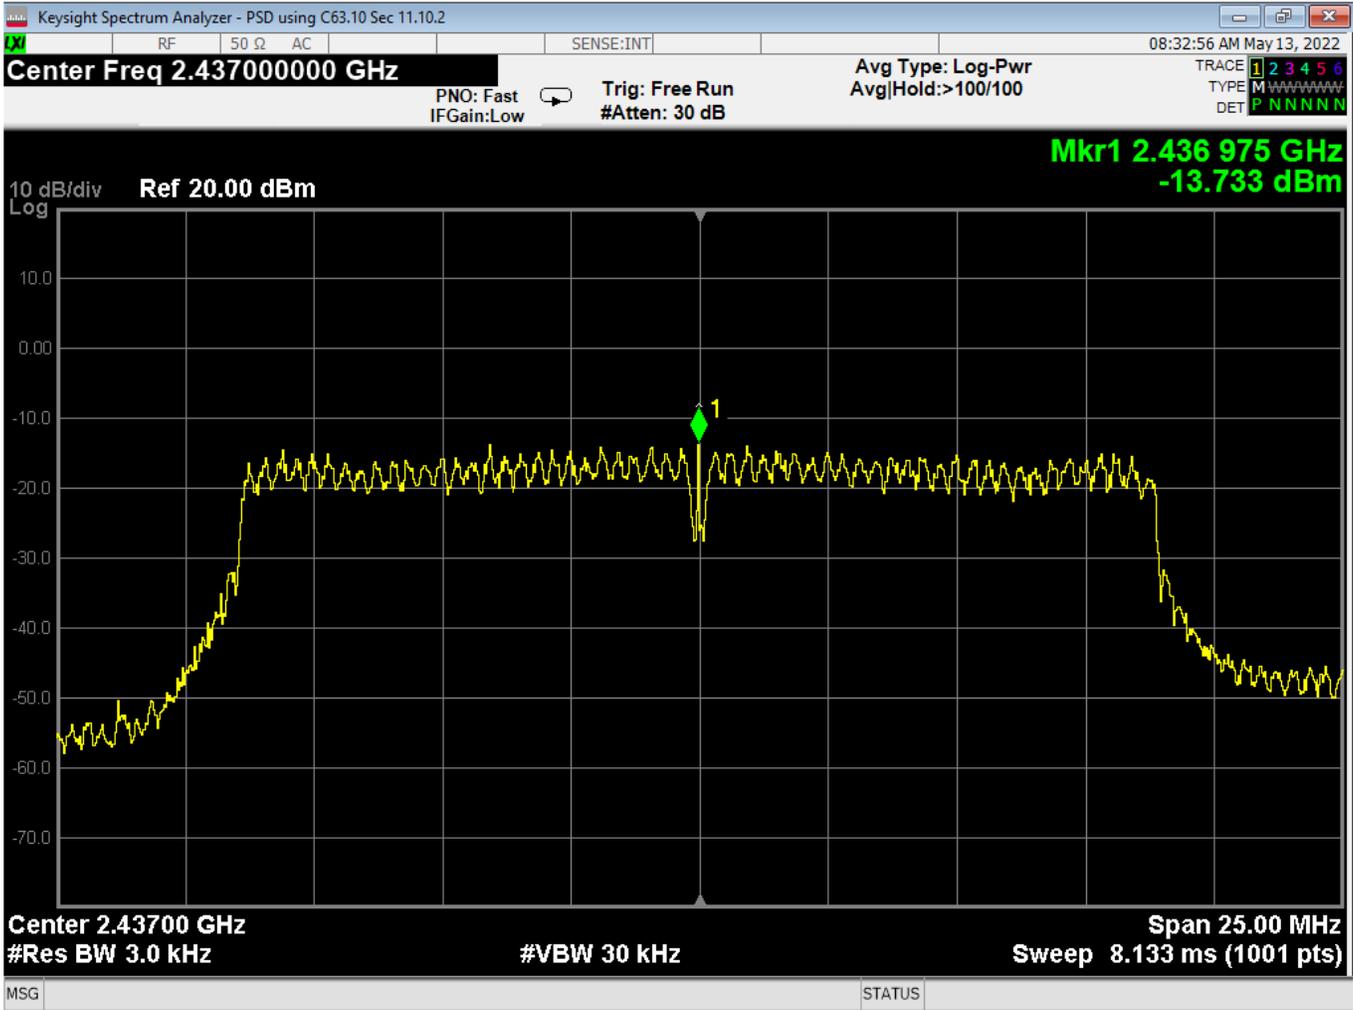

73 PSD, Mid, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

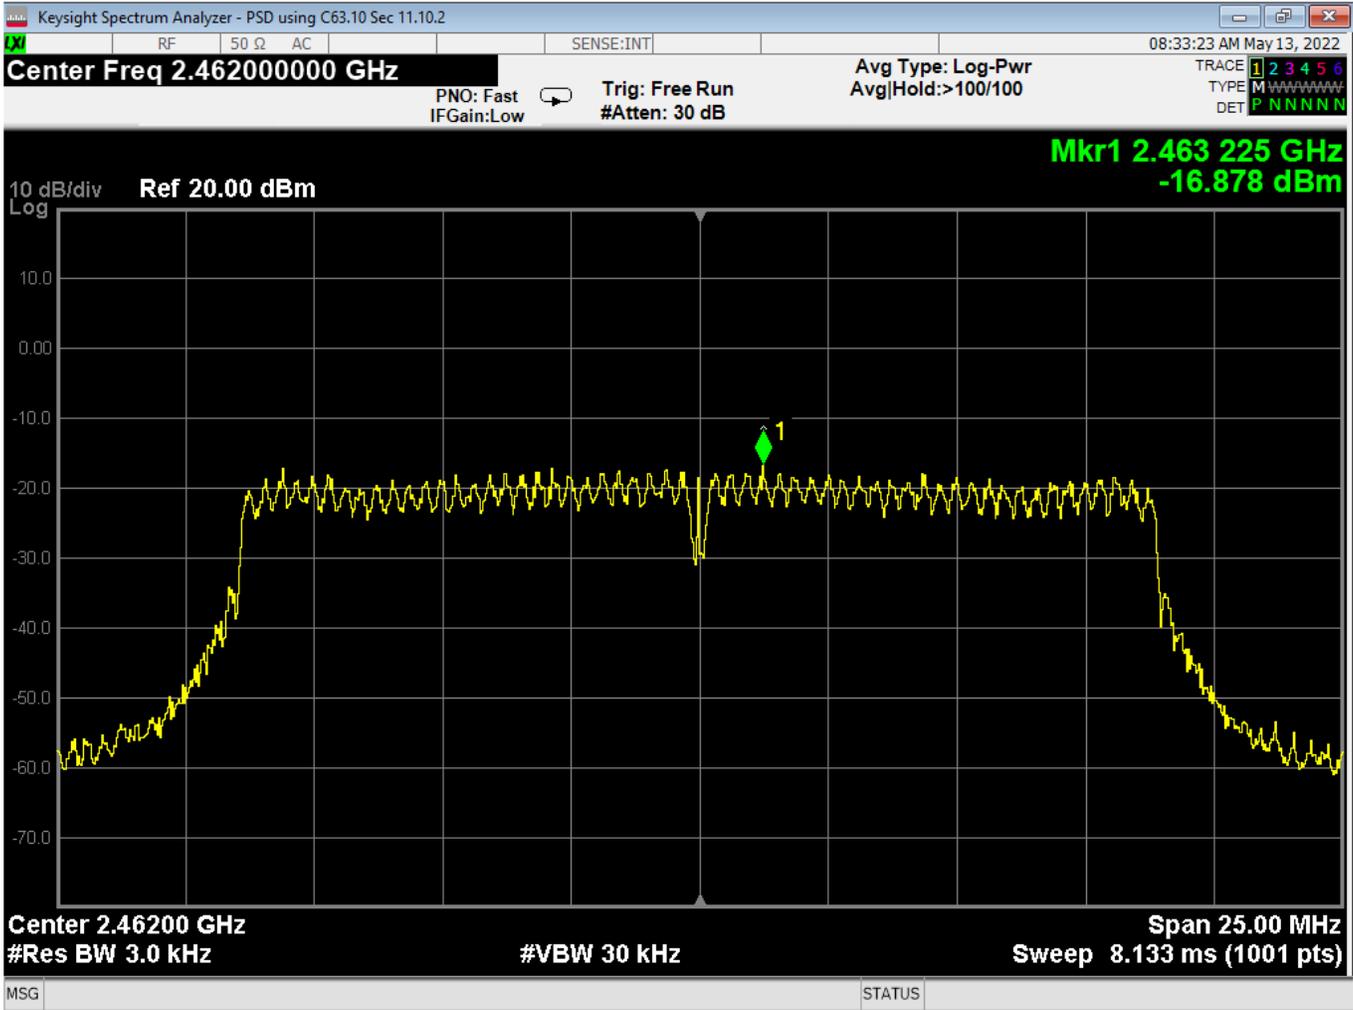

74 PSD, High, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

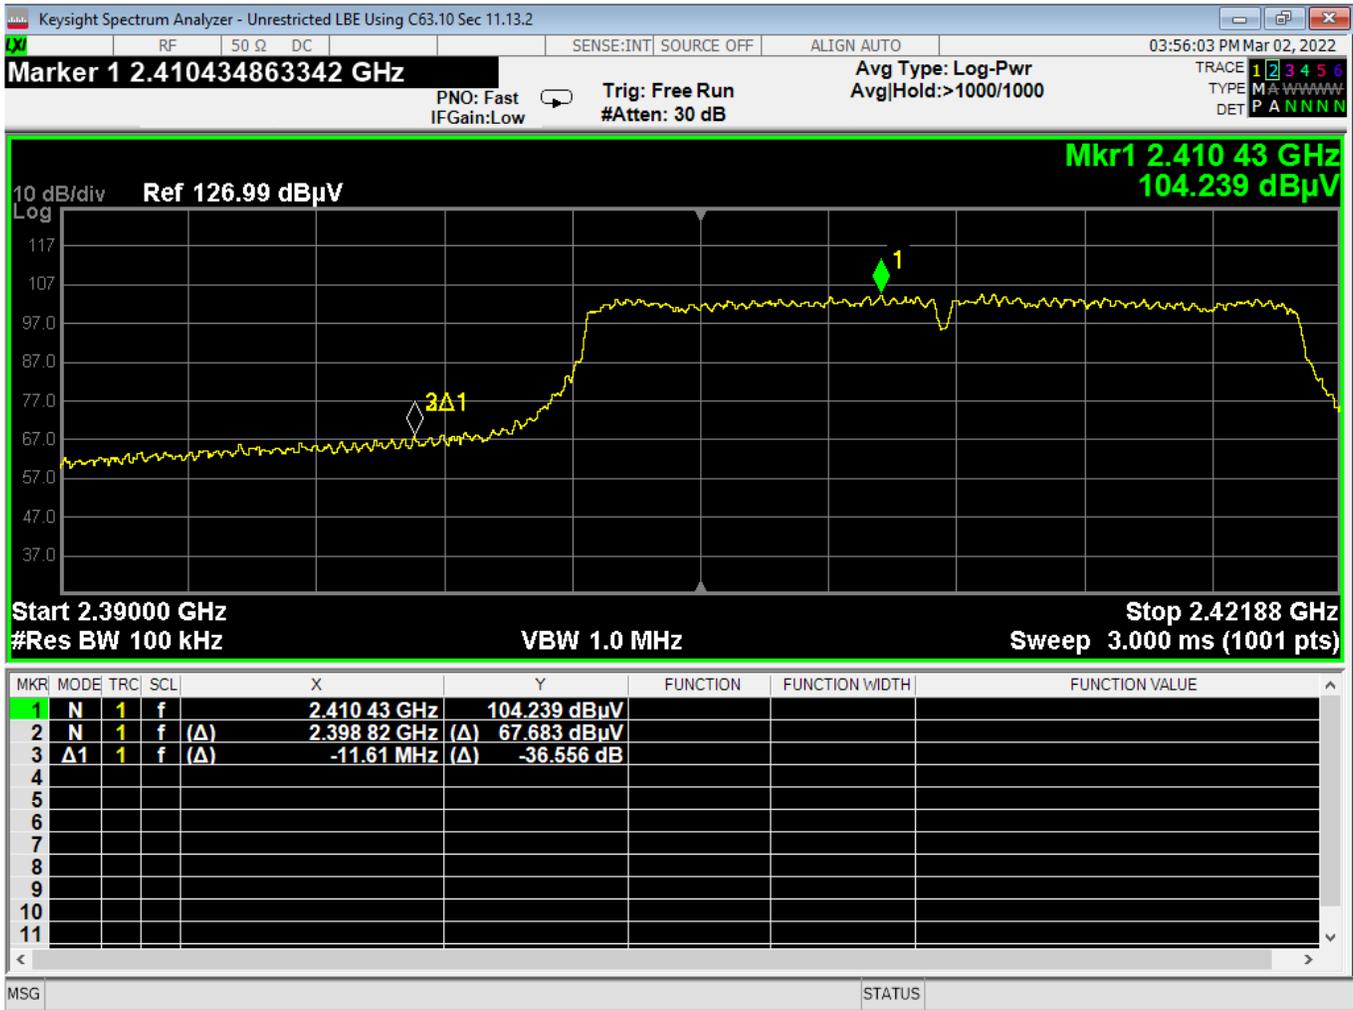

75 Lower Bandedge, Unrestricted, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

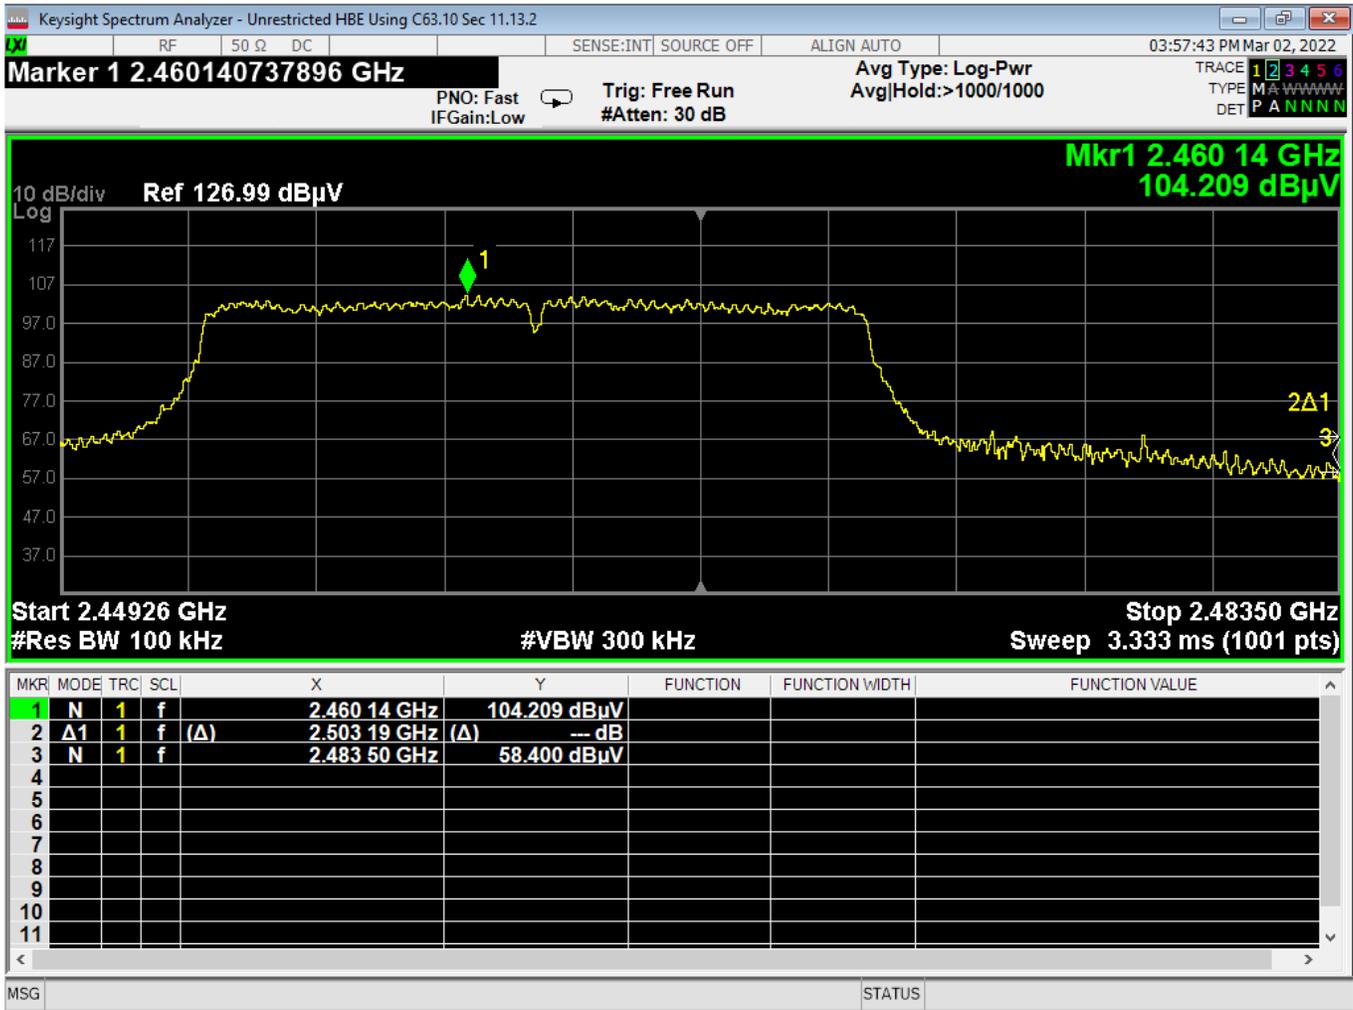

76 Higher Bandedge, Unrestricted, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

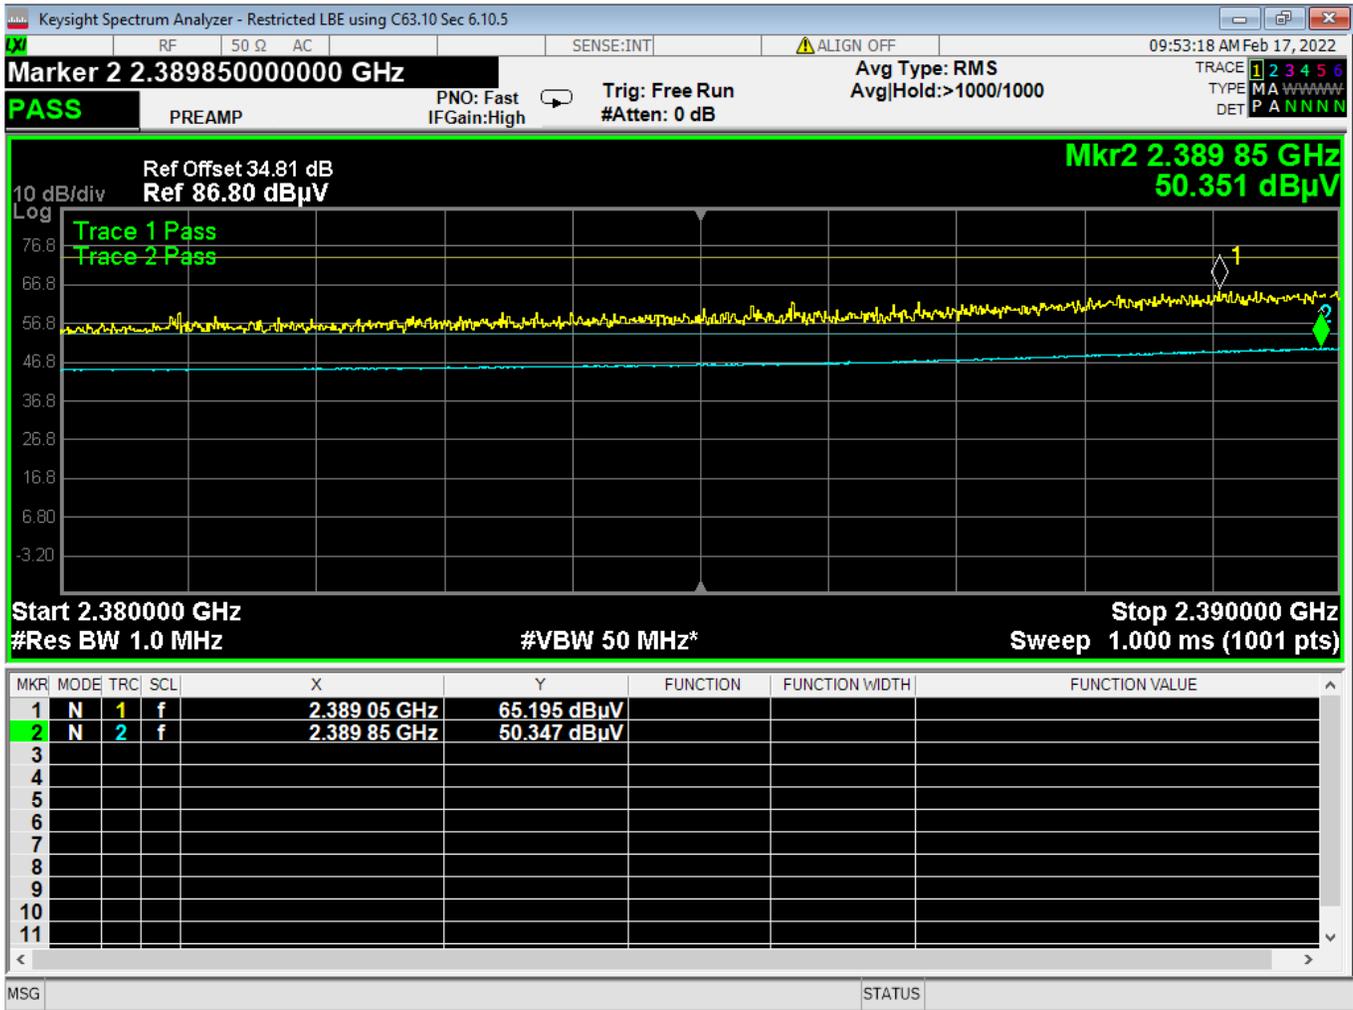

77 Lower Bandedge, Restricted, Wifi N, High Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

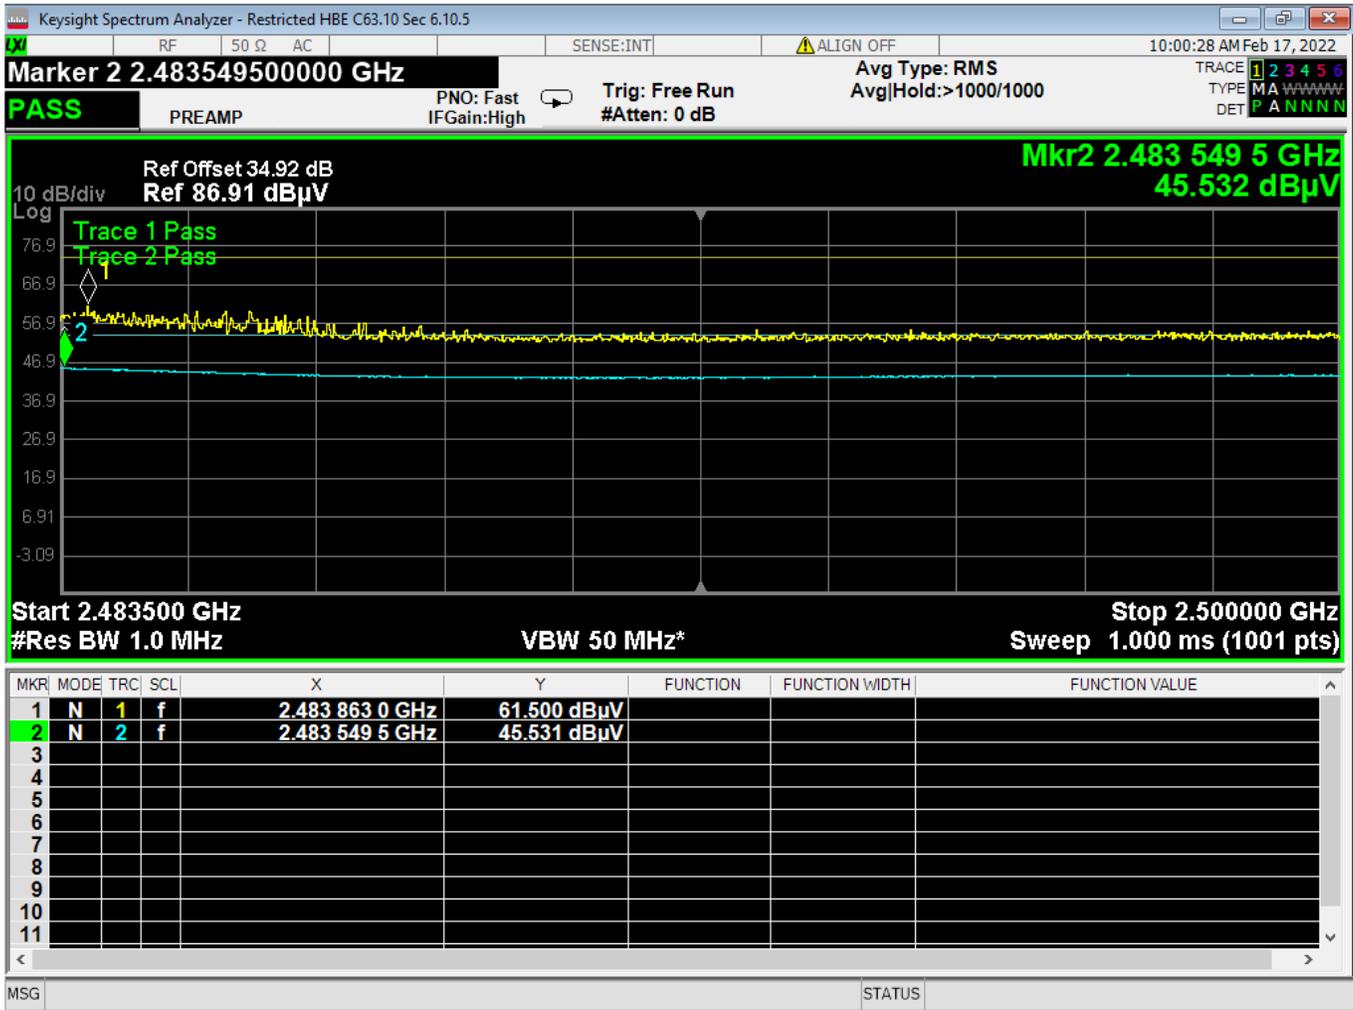

78 Higher Bandedge, Restricted, Wifi N, High Data Rate



Report Number:

R20211005-21-E9A

Rev

A

Prepared for:

Garmin International, Inc.

REPORT END

RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

Garmin International, Inc.
1200 E. 151st Street
Olathe, KS 66062

Dates of Test:
Test Report Number:


March 2-3, 2022
SAR.20220302
Revision A

FCC ID:	IPH-A4308
IC Certificate:	1792A-A4308
Model(s):	AA4308
Test Sample:	Engineering Unit Same as Production
Serial No.:	5217 & 5257
Equipment Type:	Digital Transmission System Transceiver
Classification:	Portable Transmitter Next to Extremity
TX Frequency Range:	2400 – 2480 MHz; 2412 – 2462 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	2450 MHz (b) – 18.0 dBm, 2450 MHz (g) – 14.0 dBm, 2450 MHz (n) – 14.0 dBm, 2450 MHz (BT) – 14.0 dBm, 2450 MHz (ANT) – 5.0 dBm, 13.56 MHz – <0 dBm Conducted
Signal Modulation:	QPSK, 16QAM, DSSS, OFDM
Antenna Type:	Internal Antenna
Application Type:	Certification
FCC Rule Parts:	Part 2, 15C
KDB Test Methodology:	KDB 447498 D01 v07, KDB 941225 D05 v02r05, KDB 865664 D01 v01r04, KDB 865664 D02 v01r02
Industry Canada:	RSS-102 Issue 5, Safety Code 6
Max. Stand Alone SAR Value:	0.97 W/kg Reported
Separation Distance:	0 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-1528:2020 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application has been denied FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton
Vice President



Testing Cert. #
2387.01

Table of Contents

1. Introduction	4
SAR Definition [5].....	5
2. SAR Measurement Setup.....	6
Robotic System.....	6
System Hardware.....	6
System Electronics.....	7
Probe Measurement System.....	7
3. Probe and Dipole Calibration.....	15
4. Phantom & Simulating Tissue Specifications.....	16
Head & Body Simulating Mixture Characterization	16
5. ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2].....	17
Uncontrolled Environment.....	17
Controlled Environment.....	17
6. Measurement Uncertainty	18
7. System Validation.....	19
Tissue Verification.....	19
Test System Verification.....	19
8. SAR Test Data Summary	20
Procedures Used To Establish Test Signal	20
Device Test Condition	20
SAR Data Summary – 2450 MHz Extremity 802.11b & BT Classic	23
9. Test Equipment List.....	24
10. Conclusion	25
11. References.....	26
Appendix A – System Validation Plots and Data	27
Appendix B – SAR Test Data Plots	30
Appendix C – SAR Test Setup Photos	32
Appendix D – Probe Calibration Data Sheets.....	35
Appendix E – Dipole Calibration Data Sheets	46
Appendix F – Phantom Calibration Data Sheets	53
Appendix G – Validation Summary.....	55

Comment/Revision	Date
Original Release	March 4, 2022
Revision A – Correct Device Description	April 28, 2022

Note: The latest version supersedes all previous versions listed in the above table. The latest version shall be used.

1. Introduction

This measurement report shows compliance of the Garmin International, Inc. Model AA4308 FCC ID: IPH-A4308 with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 1792A-A4308 with RSS102 Issue 5 & Safety Code 6. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Garmin International, Inc. Model AA4308 and therefore apply only to the tested sample.

The test procedures and limits, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2003 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the AA4308 Digital Transmission System Transceiver. The table also shows the tolerance for the power level for each mode.

Band	Technology	Rel.	Class	3GPP Nominal Power dBm	Setpoint Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
WiFi – 2.4 GHz	802.11b	N/A	N/A	N/A	N/A	N/A	N/A	18.0
WiFi – 2.4 GHz	802.11g	N/A	N/A	N/A	N/A	N/A	N/A	14.0
WiFi – 2.4 GHz	802.11n	N/A	N/A	N/A	N/A	N/A	N/A	14.0
Bluetooth	BT Classic	N/A	N/A	N/A	N/A	N/A	N/A	14.0
Bluetooth	BT BR	N/A	N/A	N/A	N/A	N/A	N/A	14.0
Bluetooth	BLE	N/A	N/A	N/A	N/A	N/A	N/A	5.0
Ant	Ant	N/A	N/A	N/A	N/A	N/A	N/A	5.0
13.56 MHz	13.56 MHz	N/A	N/A	N/A	N/A	N/A	N/A	< 0.0

SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

2. SAR Measurement Setup

Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

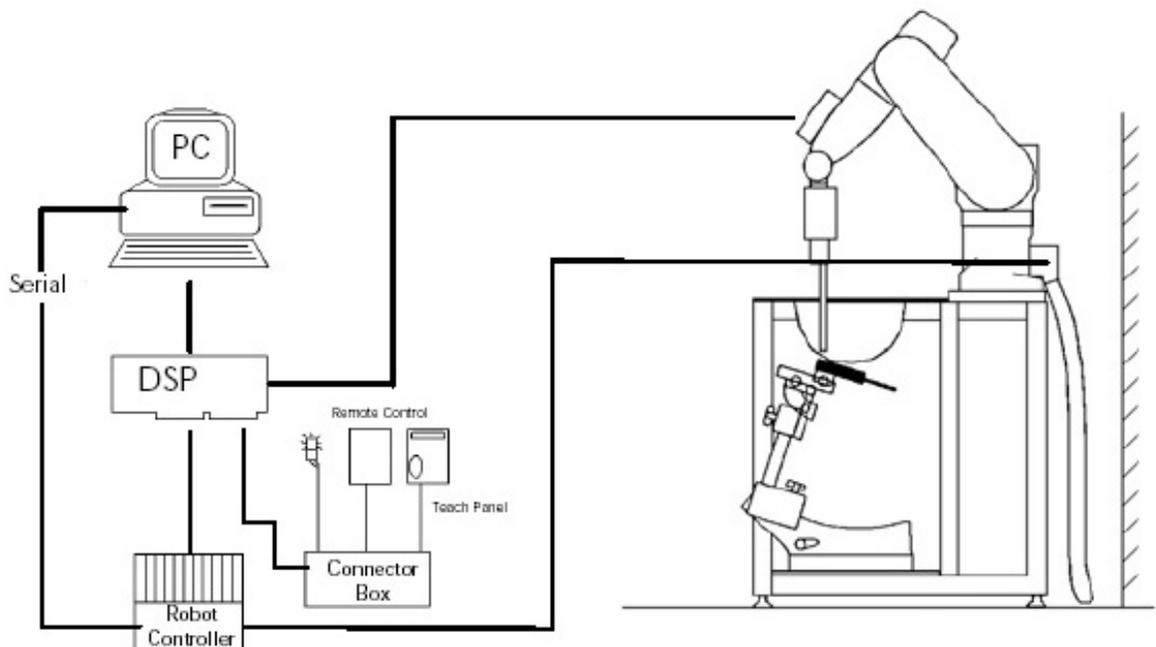


Figure 2.1 SAR Measurement System Setup

System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



DAE

System

Probe Specifications

Calibration: In air from 10 MHz to 6.0 GHz
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

Frequency: 10 MHz to 6 GHz

Linearity: ± 0.2 dB (30 MHz to 6 GHz)

Dynamic: 10 mW/kg to 100 W/kg

Range: Linearity: ± 0.2 dB

Dimensions: Overall length: 330 mm

Tip length: 20 mm

Body diameter: 12 mm

Tip diameter: 2.5 mm

Distance from probe tip to sensor center: 1 mm

Application: SAR Dosimetry Testing
Compliance tests of wireless device




Figure 2.2 Triangular Probe Configurations



Figure 2.3 Probe Thick-Film Technique

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

where:

Δt = exposure time (30 seconds),

σ = simulated tissue conductivity,

C = heat capacity of tissue (brain or muscle),

ρ = Tissue density (1.25 g/cm³ for brain tissue)

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

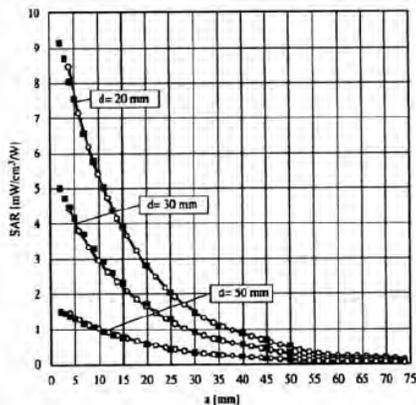


Figure 2.4 E-Field and Temperature Measurements at 900MHz

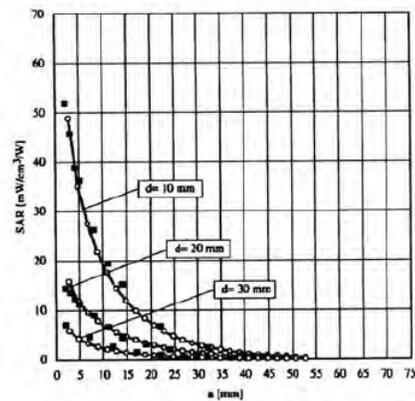


Figure 2.5 E-Field and Temperature Measurements at 1800MHz

Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{pwc} = equivalent power density of a plane wave in W/cm^2
 E_{tot} = total electric field strength in V/m

Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2 GHz is 15 mm in x - and y- dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
≤ 2 GHz	≤ 15 mm
2 – 4 GHz	≤ 12 mm
4 – 6 GHz	≤ 10 mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

SAM PHANTOM

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

Phantom Specification

Phantom: SAM Twin Phantom (V4.0)
Shell Material: Vivac Composite
Thickness: 2.0 ± 0.2 mm

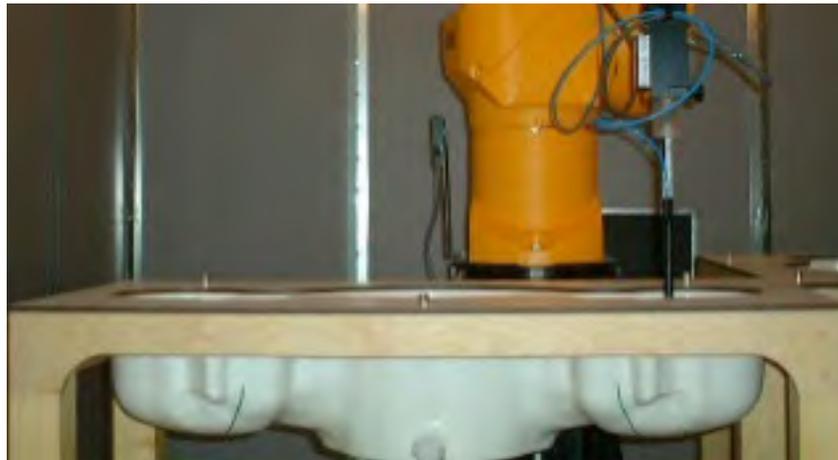


Figure 2.6 SAM Twin Phantom

Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeatedly be positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 2.7 Mounting Device

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

3. Probe and Dipole Calibration

See Appendix D and E.

4. Phantom & Simulating Tissue Specifications

Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in IEEE1528-2013 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

Table 4.1 Typical Composition of Ingredients for Tissue

Ingredients		Simulating Tissue
		2450 MHz Head
Mixing Percentage		
Water		Proprietary Purchased From Speag
Sugar		
Salt		
HEC		
Bactericide		
DGBE		
Dielectric Constant	Target	39.20
Conductivity (S/m)	Target	1.80

5. ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2]

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

7. System Validation

Tissue Verification

Table 7.1 Measured Tissue Parameters

		2450 MHz Head	
Date(s)		Mar. 2, 2022	
Liquid Temperature (°C)	20.0	Target	Measured
Dielectric Constant: ϵ		39.20	38.23
Conductivity: σ		1.80	1.81

See Appendix A for data printout.

Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at the test frequency by using the system kit. Power is extrapolated to 1 watt. (Graphic Plots Attached)

Table 7.2 System Dipole Validation Target & Measured

	Test Frequency	Targeted SAR _{1g} (W/kg)	Measure SAR _{1g} (W/kg)	Tissue Used for Verification	Deviation (%)	Plot Number
02-Mar-2022	2450 MHz	54.10	54.40	Head	+ 0.55	1

See Appendix A for data plots.

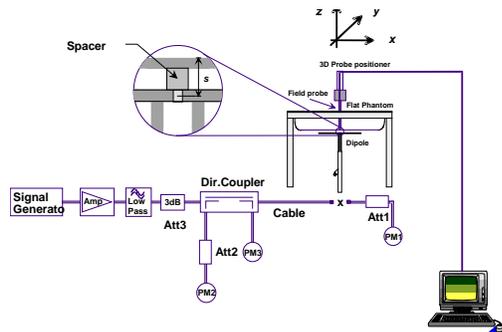


Figure 7.1 Dipole Validation Test Setup

8. SAR Test Data Summary

See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

Procedures Used To Establish Test Signal

The device was placed into simulated transmit mode using the manufacturer's test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a device, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula $((\text{end}/\text{start})-1)*100$ and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

The EUT was tested on the back side of the device in contact with the ELI Flat phantom for measurements. All measurements were conducted with the side of the device in direct contact with the phantom. All further test reductions are shown on page 21. The device does not allow for simultaneous Tx with the radios. See the photo in Appendix C for a pictorial of the setups.

All testing was conducted with the straps removed. The straps are made of plastic and would not cause any change in the SAR value.

The BLE and ANT transmitters are excluded from SAR testing. The both antennas has a minimum separation distance of 5 mm. Both transmitters are in the same band and the maximum power for BLE is 5.0 dBm and for ANT is 5.0 dBm. Therefore, if the BLE transmitter is excluded, the ANT transmitter would also be excluded. The calculations are listed below.

For the FCC, the formula to use is listed in 47 CFR 1.1307 b) which give a value of 8.7 dBm. The BLE is 5.0 dBm which is excluded since it is less than the calculated value.

For ISED, the limit is based on Table 1 in RSS-102 Issue 5 section 2.5.1. The table numbers are multiplied by 2.5 for extremity devices. Therefore, the maximum power for the transmitters are 17.5 mW to be excluded. The maximum power for the transmitters is 3.2 mW which is below the 17.5 mW limit.

The 13.56 MHz band a transmit power of less the 1 mW which is categorically excluded from SAR testing for both the FCC and ISED.

The device was on a minimum of 10 cm of Styrofoam during each test.

Table 8.1 Test Reduction Table

Mode	Side	Required Channel	Tested/Reduced
802.11b	Back	1 – 2412 MHz	Tested
		6 – 2437 MHz	Tested
		11 – 2462 MHz	Tested
	All Other Sides	1 – 2412 MHz	Reduced ³
		6 – 2437 MHz	Reduced ³
		11 – 2462 MHz	Reduced ³
802.11g	Back	1 – 2412 MHz	Reduced ²
		6 – 2437 MHz	Reduced ²
		11 – 2462 MHz	Reduced ²
	All Other Sides	1 – 2412 MHz	Reduced ³
		6 – 2437 MHz	Reduced ³
		11 – 2462 MHz	Reduced ³
802.11n	Back	1 – 2412 MHz	Reduced ²
		6 – 2437 MHz	Reduced ²
		11 – 2462 MHz	Reduced ²
	All Other Sides	1 – 2412 MHz	Reduced ³
		6 – 2437 MHz	Reduced ³
		11 – 2462 MHz	Reduced ³

Reduced¹ – When the reported SAR is >1.0 W/kg, test the next highest configuration until the SAR value is ≤ 2.0 W/kg per KDB 248227 D01 v02r02 section 5.1.1 2) page 9.

Reduced² – When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 3.0 W/kg, SAR is not required per KDB 248227 D01 v02r02 section 5.2.2 2) page 10.

Reduced³ - The remaining sides are not used next to the body.

Mode	Side	Required Channel	Tested/Reduced
BT Classic	Back	1 – 2402 MHz	Tested
		39 – 2440 MHz	Tested
		78 – 2480 MHz	Tested
	All Other Sides	1 – 2402 MHz	Reduced ³
		39 – 2440 MHz	Reduced ³
		78 – 2480 MHz	Reduced ³
BLE	Back	0 – 2404 MHz	Reduced ²
		17 – 2440 MHz	Reduced ²
		36 – 2478 MHz	Reduced ²
	All Other Sides	0 – 2404 MHz	Reduced ²
		17 – 2440 MHz	Reduced ²
		36 – 2478 MHz	Reduced ²
ANT	Back	1 – 2402 MHz	Reduced ²
		39 – 2440 MHz	Reduced ²
		78 – 2480 MHz	Reduced ²
	All Other Sides	1 – 2402 MHz	Reduced ²
		39 – 2440 MHz	Reduced ²
		78 – 2480 MHz	Reduced ²

Reduced¹ – When the reported SAR is >1.0 W/kg, test the next highest configuration until the SAR value is ≤ 2.0 W/kg per KDB 248227 D01 v02r02 section 5.1.1 2) page 9.

Reduced² – The transmitter is excluded per KDB447498 D01 v06 section 4.3.1 a) on page 12. See calculation on page 23 of this report.

Reduced³ - The remaining sides are not used next to the body.

Conducted Power

Band	Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Data Rate	Avg Power (dBm)	Tune-up Pwr (dBm)
2450 MHz	802.11b	20	1	2412	1 Mbps	16.34	18.00
			6	2437		16.72	18.00
			11	2462		13.61	18.00
	802.11g	20	1	2412	6 Mbps	8.04	14.00
			6	2437		13.73	14.00
			11	2462		7.35	14.00
	802.11n	20	1	2412	HT0	8.56	14.00
			6	2437		13.08	14.00
			11	2462		7.86	14.00


Band	Mode	Channel	Frequency (MHz)	Avg Power (dBm)	Tune-up Pwr (dBm)
2450 MHz	BT Classic	1	2402	11.73	14.0
		39	2440	12.92	14.0
		78	2480	12.69	14.0
	BLE	0	2404	4.52	5.00
		17	2440	4.52	5.00
		36	2478	1.50	5.00
	ANT	1	2402	0.01	5.00
		39	2440	3.25	5.00
		78	2480	-0.71	5.00

SAR Data Summary – 2450 MHz Extremity 802.11b & BT Classic

MEASUREMENT RESULTS								
Plot	Gap	Position/ Device	Frequency		Modulation	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.				
-----	0 mm	Back	2412	1	DSSS	16.34	0.617	0.90
1			2437	6	DSSS	16.72	0.723	0.97
-----			2462	11	DSSS	13.61	0.354	0.97
-----		Back	2402	1	BTBR	11.73	0.134	0.23
-----			2440	39	BTBR	12.92	0.181	0.23
-----			2480	78	BTBR	12.69	0.164	0.22

Extremity
4.0 W/kg (mW/g)
averaged over 10 gram

1. Battery is fully charged for all tests.
Power Measured Conducted ERP EIRP
2. SAR Measurement
Phantom Configuration Left Head Eli4 Right Head
SAR Configuration Head Body
3. Test Signal Call Mode Test Code Base Station Simulator
4. Test Configuration With Belt Clip Without Belt Clip N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

9. Test Equipment List

Table 9.1 Equipment Specifications

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI5 Flat Phantom	N/A	N/A	1251
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	08/06/2022	08/06/2021	759
SPEAG E-Field Probe EX3DV4	08/26/2022	08/26/2021	3693
Speag Validation Dipole D2450V2	06/21/2022	06/21/2021	881
Agilent N1911A Power Meter	03/16/2022	03/16/2021	GB45100254
Agilent N1922A Power Sensor	03/17/2022	03/17/2021	MY45240464
Agilent (HP) 8561E Spectrum Analyzer	03/15/2022	03/15/2021	3821A02288
Agilent (HP) 8350B Signal Generator	03/16/2022	03/16/2021	2749A10226
Agilent (HP) 83525A RF Plug-In	03/16/2022	03/16/2021	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/15/2022	03/15/2021	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/15/2022	03/15/2021	2904A00595
MiniCircuits BW-N20W5+ Fixed 20 dB Attenuator	N/A	N/A	N/A
MiniCircuits SPL-10.7+ Low Pass Filter	N/A	N/A	R8979513746
Apriel Dielectric Probe Assembly	N/A	N/A	0011
Head Equivalent Matter (2450 MHz)	N/A	N/A	N/A

10. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

11. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
- [6] Industry Canada, RSS – 102 Issue 5 Draft, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2014.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

Appendix A – System Validation Plots and Data

```
*****  
Test Result for UIM Dielectric Parameter  
Wed 02/Mar/2022  
Freq Frequency(GHz)  
FCC_eH Limits for Head Epsilon  
FCC_sH Limits for Head Sigma  
Test_e Epsilon of UIM  
Test_s Sigma of UIM  
*****  
Freq          FCC_eH FCC_sH Test_e Test_s  
2.4100        39.26  1.76  38.33  1.76  
2.4120        39.258 1.762 38.326 1.762*  
2.4200        39.25  1.77  38.31  1.77  
2.4300        39.24  1.78  38.29  1.78  
2.4370        39.226 1.787 38.283 1.794*  
2.4400        39.22  1.79  38.28  1.80  
2.4420        39.216 1.792 38.27  1.802*  
2.4500        39.20  1.80  38.23  1.81  
2.4600        39.19  1.81  38.23  1.82  
2.4620        39.186 1.812 38.226 1.822*  
2.4700        39.17  1.82  38.21  1.83  
2.4720        39.168 1.822 38.206 1.836*  
2.4800        39.16  1.83  38.19  1.86
```

* value interpolated

RF Exposure Lab

Plot 1

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN: 881

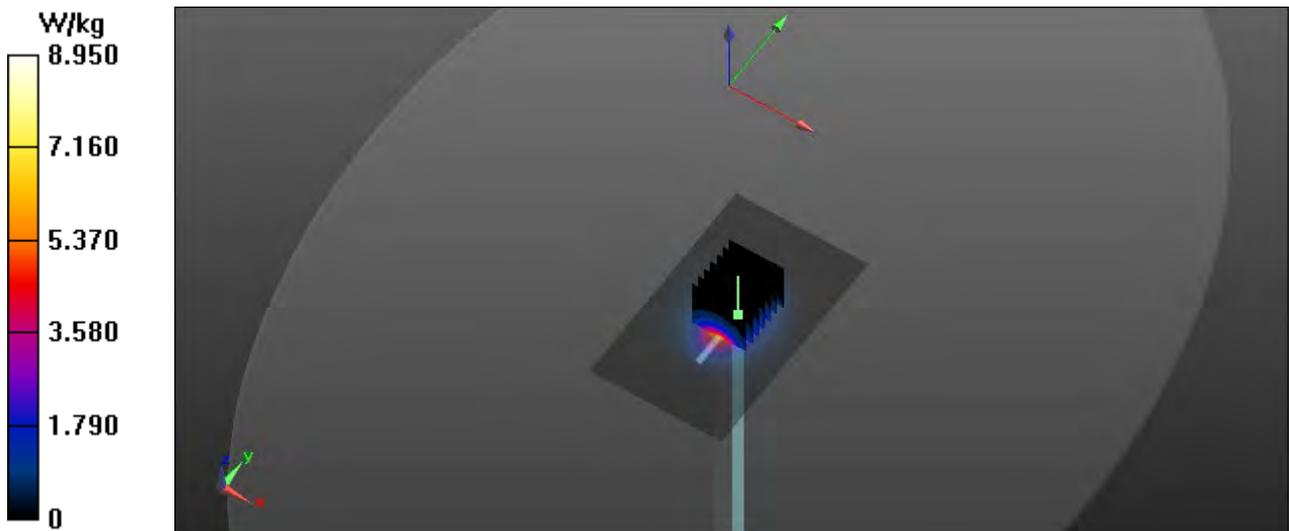
Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.23$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

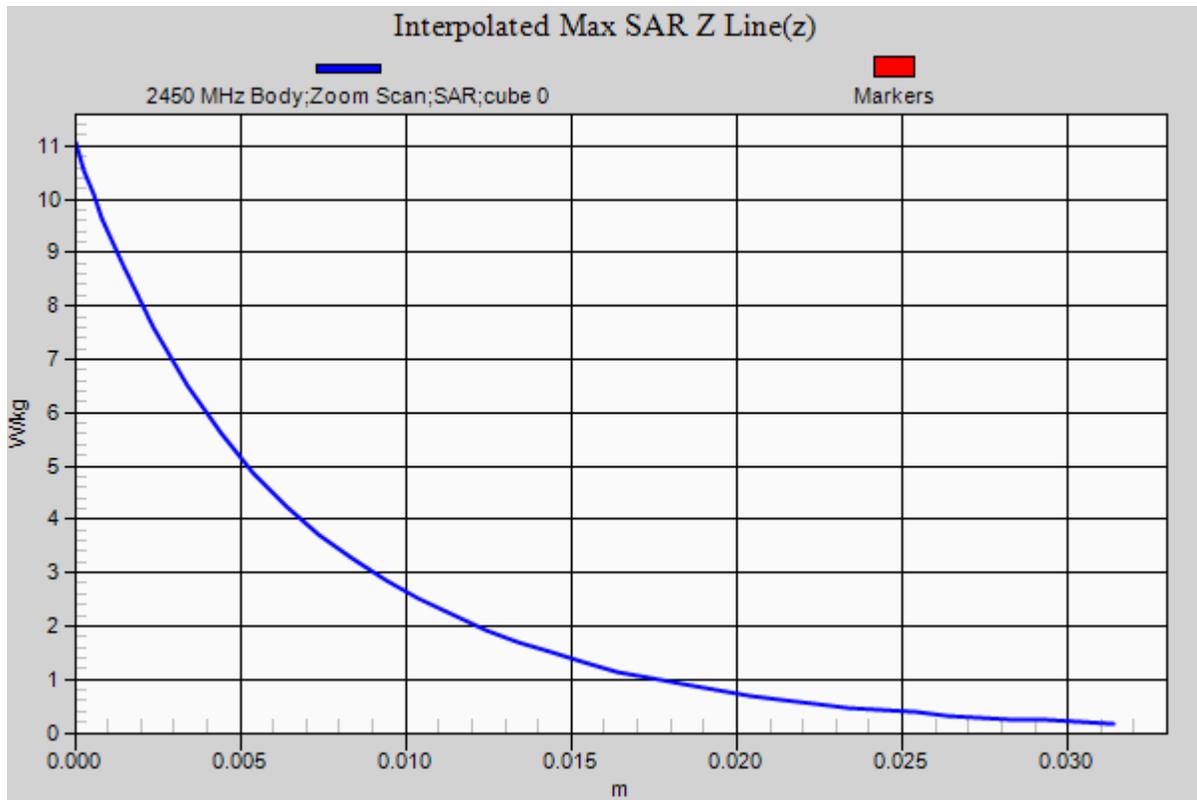
Test Date: Date: 3/2/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 – SN3693; ConvF(7.05, 7.05, 7.05); Calibrated: 8/26/2021;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/6/2021
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Head Verification/2450 MHz/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 8.59 W/kg

Head Verification/2450 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 51.876 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 11.01 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 5.44 W/kg; SAR(10 g) = 2.53 W/kg
Maximum value of SAR (measured) = 8.95 W/kg





Appendix B – SAR Test Data Plots

RF Exposure Lab

Plot 1

DUT: AA4308; Type: Portable Transmitter; Serial: 5217

Communication System: WiFi 802.11b (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 38.283$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/2/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.05, 7.05, 7.05); Calibrated: 8/26/2021
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/6/2021
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2450 MHz Small/Back Mid 6/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.19 W/kg

2450 MHz Small/Back Mid 6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

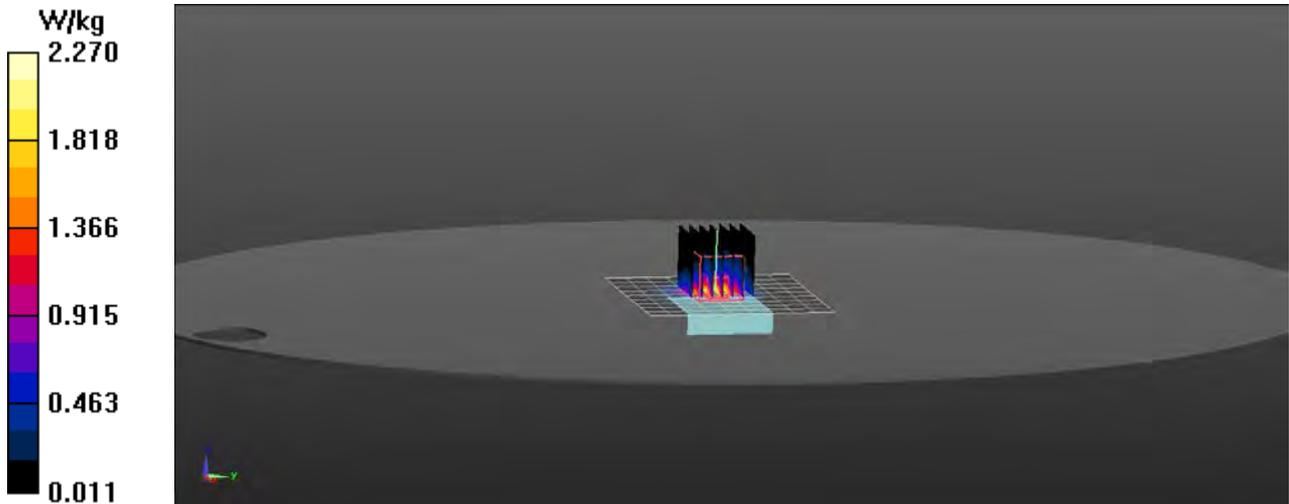
Reference Value = 28.90 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 1.57 W/kg; SAR(10 g) = 0.723 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.27 W/kg



Appendix D – Probe Calibration Data Sheets

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **EX3-3693_Aug21**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3693**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5,
QA CAL-25.v7
Calibration procedure for dosimetric E-field probes**

Calibration date: **August 26, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: CC2552 (20x)	09-Apr-21 (No. 217-03343)	Apr-22
DAE4	SN: 660	23-Dec-20 (No. DAE4-660_Dec20)	Dec-21
Reference Probe ES3DV2	SN: 3013	30-Dec-20 (No. ES3-3013_Dec20)	Dec-21
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Niels Kuster	Quality Manager	

Issued: September 2, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *D_{x,y,z}*; *VR_{x,y,z}*; *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.39	0.32	0.35	$\pm 10.1 \%$
DCP (mV) ^B	98.4	102.1	108.4	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	138.0	$\pm 3.3 \%$	$\pm 4.7 \%$
		Y	0.0	0.0	1.0		149.2		
		Z	0.0	0.0	1.0		139.7		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-70.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
13	55.0	0.75	13.69	13.69	13.69	0.00	1.00	± 13.3 %
750	41.9	0.89	9.33	9.33	9.33	0.42	0.80	± 12.0 %
900	41.5	0.97	8.90	8.90	8.90	0.37	0.99	± 12.0 %
1300	40.8	1.14	8.32	8.32	8.32	0.41	0.92	± 12.0 %
1450	40.5	1.20	8.00	8.00	8.00	0.36	0.80	± 12.0 %
1640	40.2	1.31	7.97	7.97	7.97	0.32	0.80	± 12.0 %
1750	40.1	1.37	7.85	7.85	7.85	0.29	0.86	± 12.0 %
1900	40.0	1.40	7.56	7.56	7.56	0.33	0.86	± 12.0 %
2300	39.5	1.67	7.19	7.19	7.19	0.31	0.90	± 12.0 %
2450	39.2	1.80	7.05	7.05	7.05	0.36	0.90	± 12.0 %
2600	39.0	1.96	6.97	6.97	6.97	0.35	0.90	± 12.0 %
3500	37.9	2.91	6.42	6.42	6.42	0.47	1.03	± 13.1 %
3700	37.7	3.12	6.40	6.40	6.40	0.39	1.26	± 13.1 %
5250	35.9	4.71	4.90	4.90	4.90	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.59	4.59	4.59	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.55	4.55	4.55	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
6500	34.5	6.07	5.20	5.20	5.20	0.20	2.50	± 18.6 %

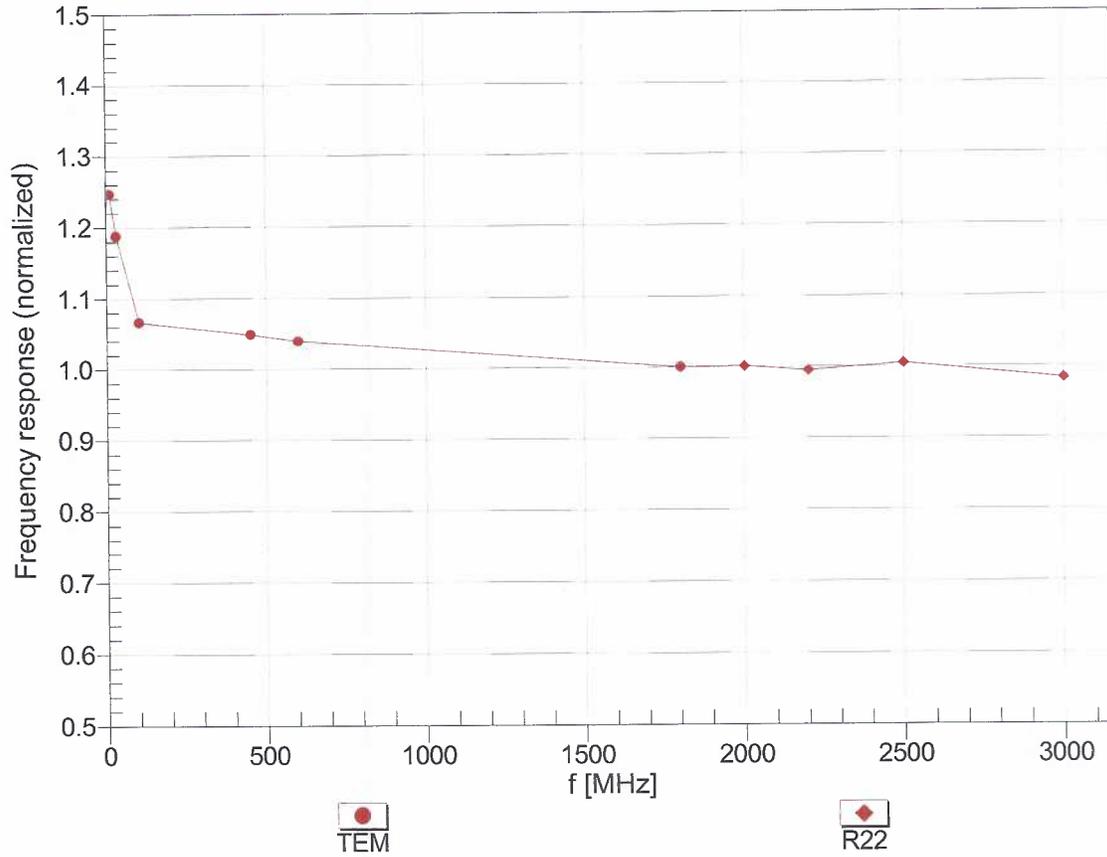
^C Frequency validity above 6GHz is ± 700 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies 6-10 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz; below ± 2% for frequencies between 3-6 GHz; and below ± 4% for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)






Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

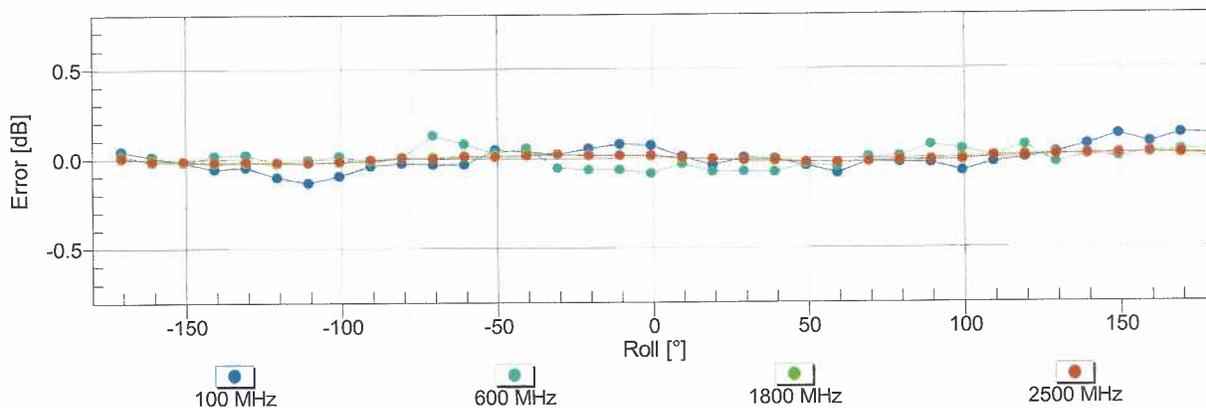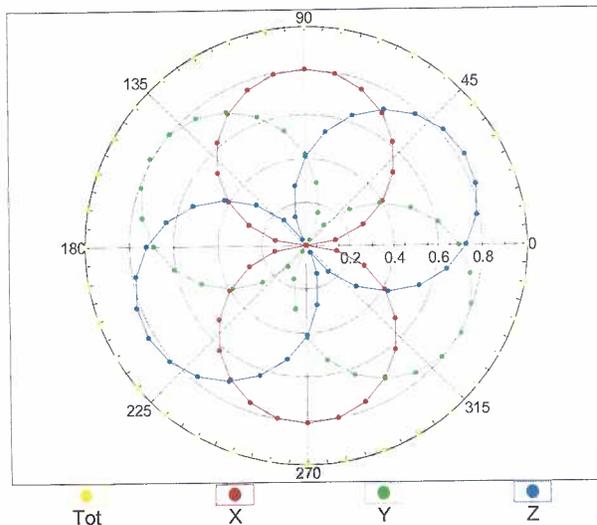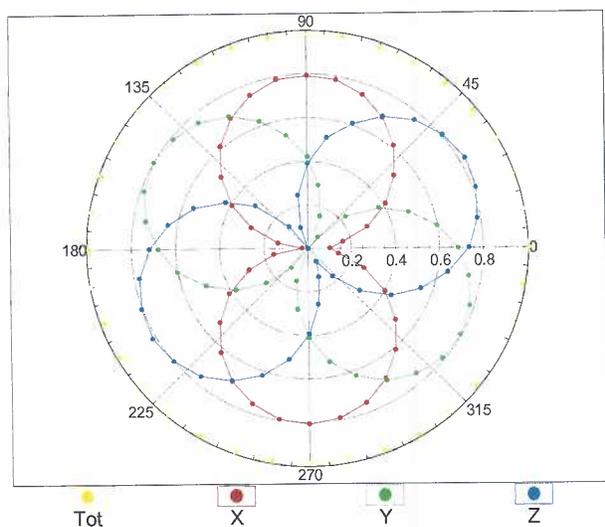f=1800 MHz,R22



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

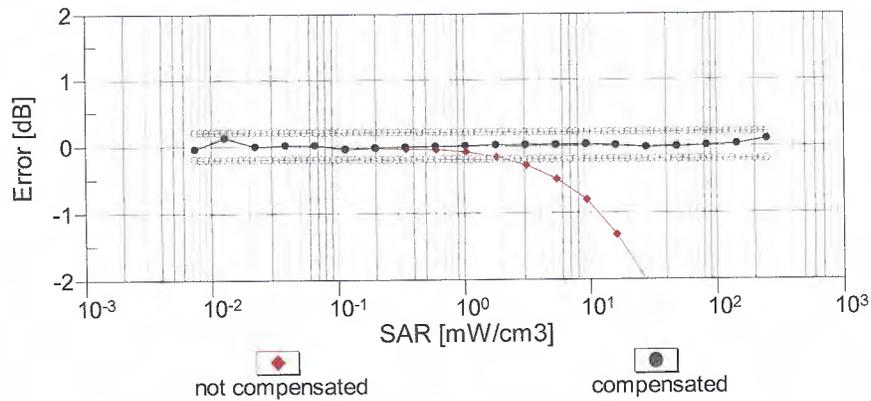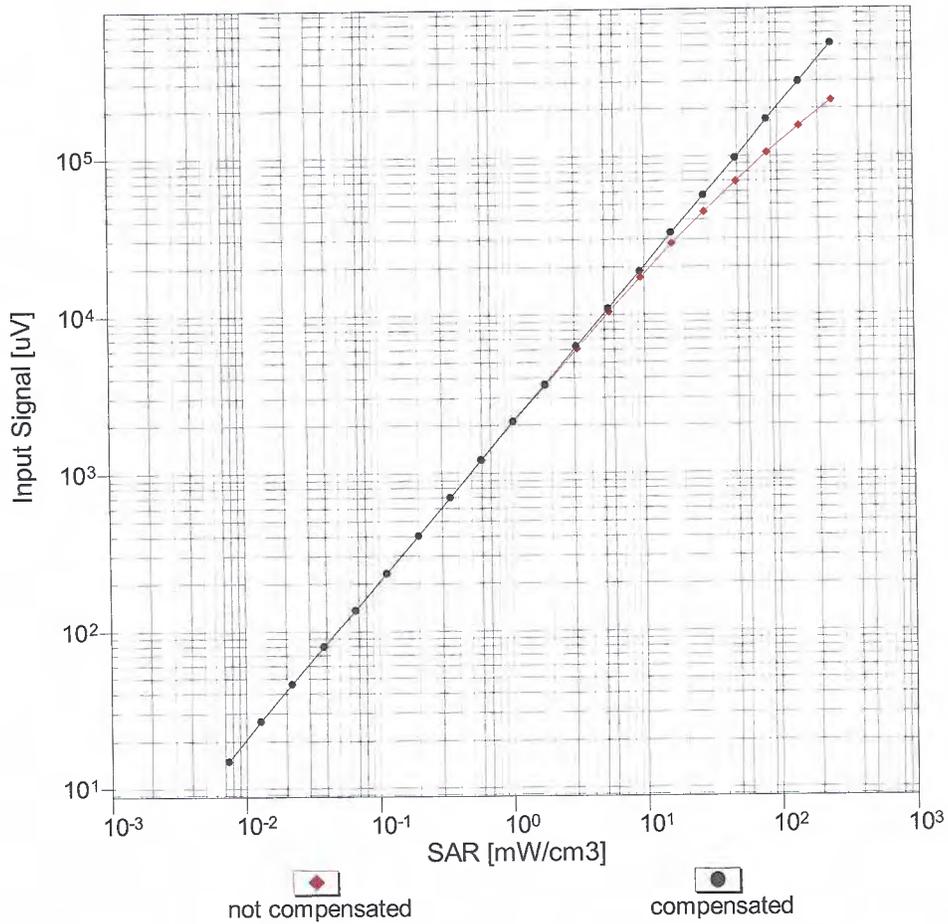
Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)




Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

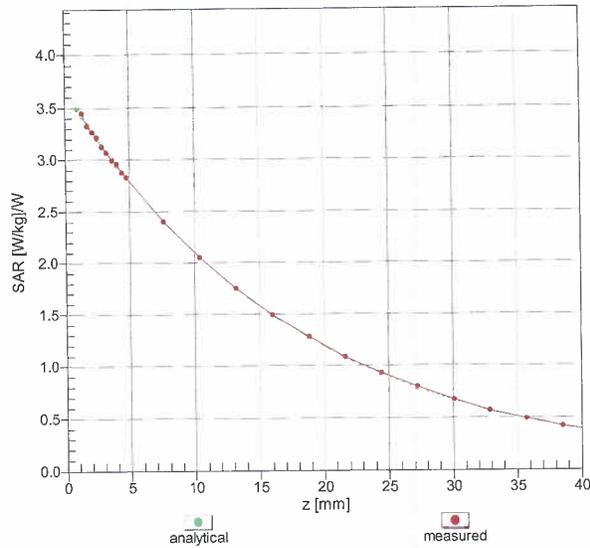f = 900 MHz, WGLS R9 (H_convF)





f = 1900 MHz, WGLS R22 (H_convF)

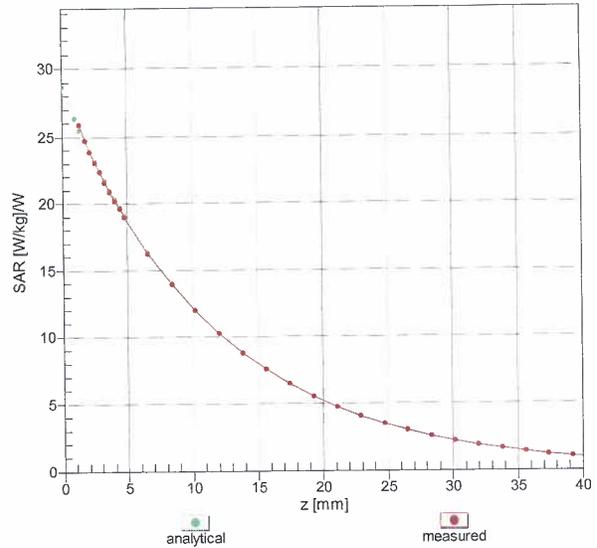

Deviation from Isotropy in Liquid

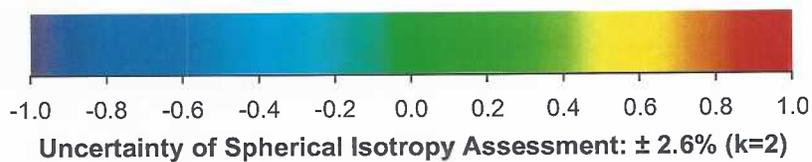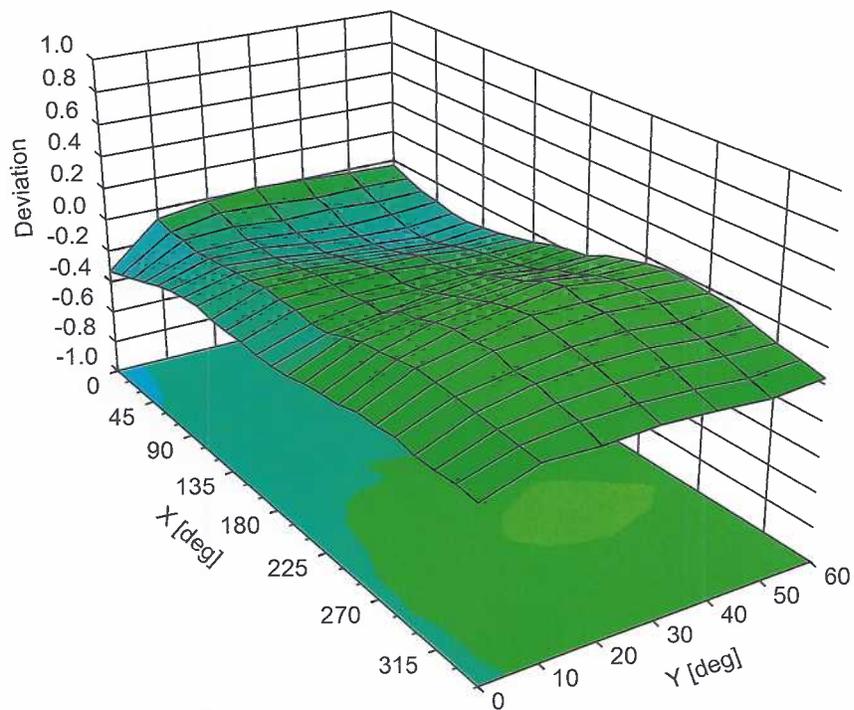Error (ϕ, θ), f = 900 MHz



Appendix E – Dipole Calibration Data Sheets

Jm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: SCS 0108

Client **RF Exposure Lab**

Certificate No: **D2450V2-881_Jun21**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:881**

Calibration procedure(s) **QA CAL-05 v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **June 03, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	<i>J. Katzman</i>

Approved by:	Katja Pokovic	Technical Manager	<i>K. Pokovic</i>
--------------	---------------	-------------------	-------------------

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.7 ± 6 %	1.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.9 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	54.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.0 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.3 Ω + 4.3 j Ω
Return Loss	- 24.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.156 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 03.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:881

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.96, 7.96, 7.96) @ 2450 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 119.0 V/m; Power Drift = 0.05 dB

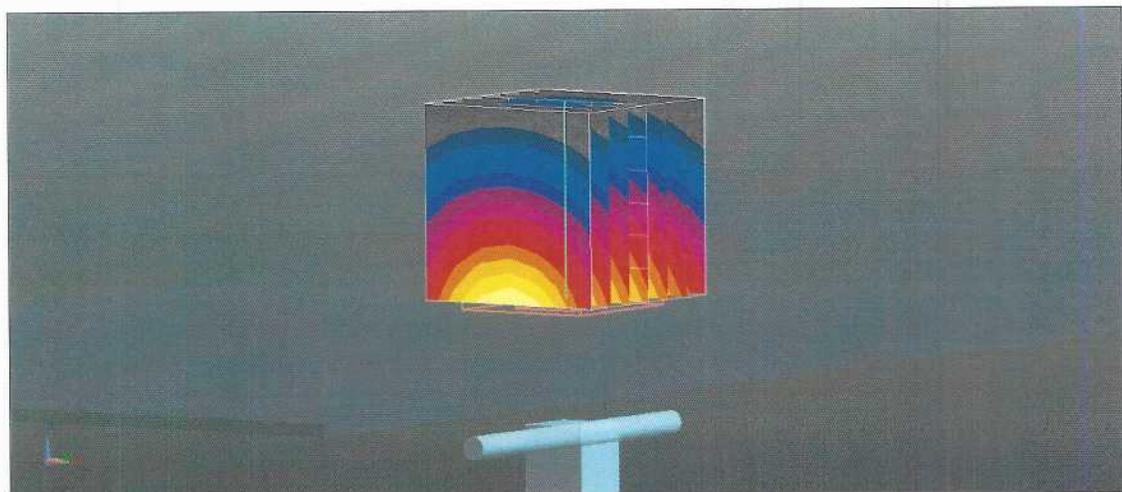

Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.34 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm


Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 23.1 W/kg



0 dB = 23.1 W/kg = 13.64 dBW/kg

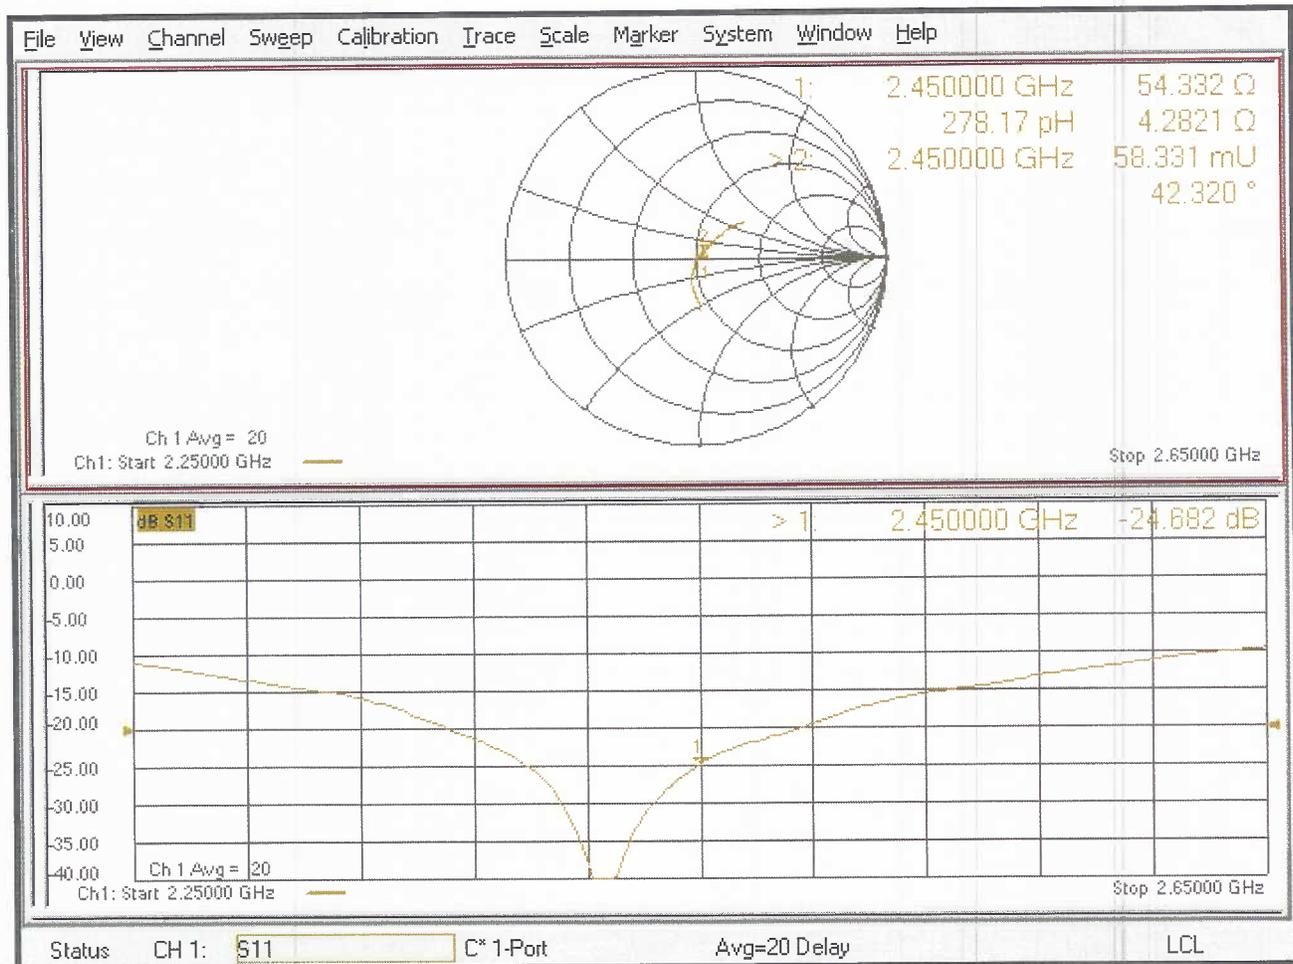Impedance Measurement Plot for Head TSL



Appendix F – Phantom Calibration Data Sheets

Certificate of Conformity / First Article Inspection

Item	Oval Flat Phantom ELI 4.0
Type No	QD OVA 001 B
Series No	1003 and higher
Manufacturer	Untersee Composites Knebelstrasse 8 CH-8268 Mannenbach, Switzerland

Tests

Complete tests were made on the prototype units QD OVA 001 AA 1001, QD OVA 001 AB 1002, pre-series units QD OVA 001 BA 1003-1005 as well as on the series units QD OVA 001 BB, 1006 ff.

Test	Requirement	Details	Units tested
Material thickness	Compliant with the standard requirements	Bottom plate: 2.0mm +/- 0.2mm	all
Material parameters	Dielectric parameters for required frequencies	< 6 GHz: Rel. permittivity = 4 +/-1, Loss tangent ≤ 0.05	Material sample
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions.	DGBE based simulating liquids. Observe Technical Note for material compatibility.	Equivalent phantoms, Material sample
Shape	Thickness of bottom material, Internal dimensions, Sagging compatible with standards from minimum frequency	Bottom elliptical 600 x 400 mm Depth 190 mm, Shape is within tolerance for filling height up to 155 mm, Eventual sagging is reduced or eliminated by support via DUT	Prototypes, Sample testing

Standards

- [1] CENELEC EN 50361-2001, « Basic standard for the measurement of the Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz) », July 2001
- [2] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [3] IEC 62209 – 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz – Measurement Procedure, Part 1: Hand-held mobile wireless communication devices", February 2005
- [4] IEC 62209 – 2, Draft, "Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices – Human models, Instrumentation and Procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30 MHz to 6 GHz Handheld and Body-Mounted Devices used in close proximity to the Body.", February 2005
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition January 2001

Based on the tests above, we certify that this item is in compliance with the standards [1] to [5] if operated according to the specific requirements and considering the thickness. The dimensions are fully compliant with [4] from 30 MHz to 6 GHz. For the other standards, the minimum lower frequency limit is limited due to the dimensional requirements ([1]: 450 MHz, [2]: 300 MHz, [3]: 800 MHz, [5]: 375 MHz) and possibly further by the dimensions of the DUT.

Date 28.4.2008 Signature / Stamp

s p e a g
Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com; http://www.speag.com

Appendix G – Validation Summary

Per FCC KDB 865664 D02 v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue equivalent media for system validation according to the procedures outlined in FCC KDB 865664 D01 v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point using the system that normally operates with the probe for routine SAR measurements and according to the required tissue equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

**Table G-1
SAR System Validation Summary**

SAR System #	Freq. (MHz)	Date	Probe S/N	Probe Type	Probe Cal. Point	Cond. (σ)	Perm. (ϵ_r)	CW Validation			Modulation Validation		
								Sens-itivity	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
1	2450	09/09/2021	3693	EX3DV4	2450 Head	1.83	39.02	Pass	Pass	Pass	OFDM/TDD	Pass	Pass