
Reactor® 40 Kicker Adapter 7

Installation Examples

You can use these photographic examples to help when following the instructions included with your Reactor 40 Kicker corepack and Reactor 40 Kicker Adapter 7 kit.


Throttle Cable Bracket and Throttle Linkage

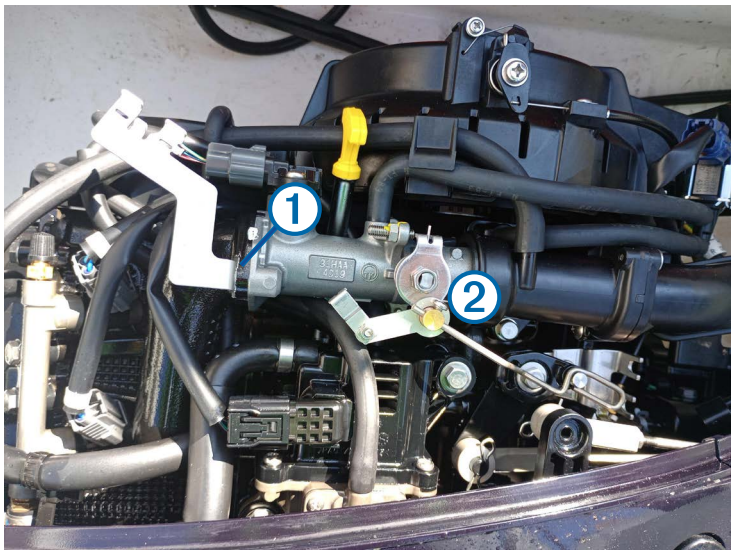

Use the existing bolt on the manifold ① to secure the cable bracket.


Remove the set screw and existing tiller throttle linkage rod to install the throttle linkage ②.

Throttle Actuator Cable

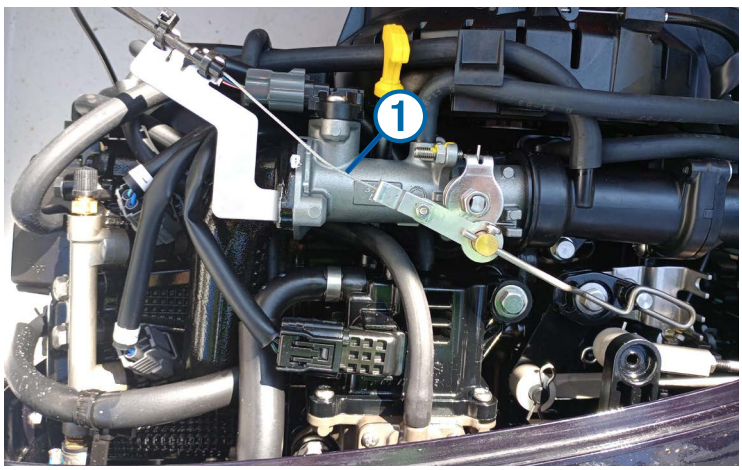

Connect the throttle actuator cable ① to the throttle linkage before securing it to the cable bracket using zip ties.

Fully Installed

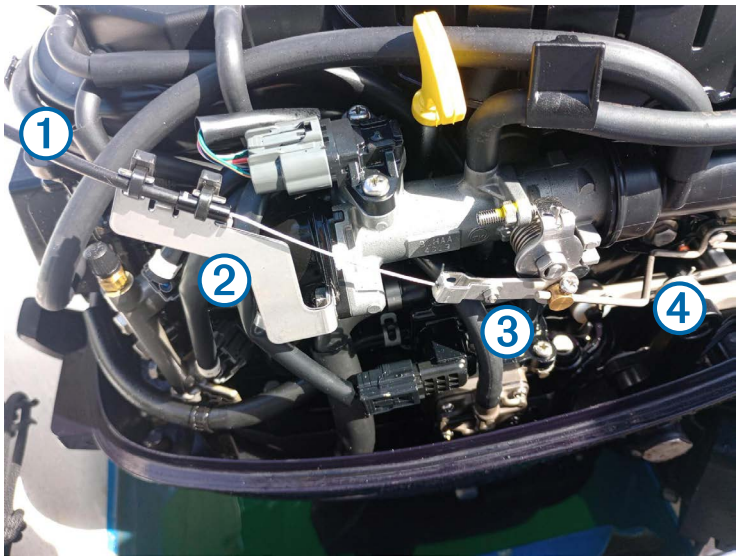

①	Throttle actuator cable
②	Throttle cable bracket
③	Throttle linkage
④	Tiller throttle linkage rod **NOTE**: The Reactor 40 Kicker Adapter 7 kit comes with two replacement rods, one shorter and one longer. Select the one designed to fit your engine.