



Garmin International, Inc.  
1200 East 151st Street  
Olathe, Kansas 66062  
P: 913-397-8200 F: 913-397-8282

13-Feb-26

**Manufacturer:** Garmin International, Inc.  
**Address:** 1200 E. 151st St.  
Olathe, KS 66062-3426  
U.S.A.  
**Chile Representative:** Matías Rodríguez Correa  
Rosario Norte 660 piso 24, Las Condes Santiago  
Province CP 7550083, Chile  
**Contact Email:** [matias.rodriguez@garmin.com](mailto:matias.rodriguez@garmin.com)  
**Subject:** SUBTEL, Chile (Resolution 737) Certification Compliance 2026  
**Commercial Name:** Tacx, NEO 2T Smart

|   | Información (Information)             |
|---|---------------------------------------|
| <b>Tipo de equipo (Equipment type)</b>                    | Portable Digital Transceiver          |
| <b>Marca (Brand)</b>                                      | TACX                                  |
| <b>Modelo (Model)</b>                                     | T2875                                 |
| <b>Tecnología o modulación (Technology or modulation)</b> | GFSK for ANT / GFSK for BLE           |
| <b>Frecuencias (Frequencies)</b>                          | 2402-2480 MHz / 2402-2480 MHz         |
| <b>Ganancia de antena (dBi) (Antenna gain (dBi))</b>      | ANT 2.00 dBi / BLE 2.00 dBi           |
| <b>P.i.r.e. (E.I R P.)</b>                                | 1.20 dBm, 1.31 mW / 1.22 dBm, 1.32 mW |
| <b>Módulos (Modules)</b>                                  | ANT, BLE                              |

Declaration of Conformity Statement: the equipment previously identified complies with the provisions established in the Technical Standard for Small Range Equipment, approved by Exempt Resolution No.1,985 of 2017, of the Undersecretary of Telecommunications.

Declaración de conformidad: El equipo anteriormente identificado cumple con las disposiciones establecidas en la Norma Técnica para Equipos de Corto Alcance, aprobada mediante la Resolución Exenta N° 1.985 de 2017, de la Subsecretaría de Telecomunicaciones.

|   |   |   |
|---|---|---|
| <b>Prüfbericht - Nr.:</b> 19052404.r01  |   | Seite 1 von 46<br>Page 1 of 46  |
| <i>Test Report No.:</i>   |   |   |
| <i>Client:</i>  | <b>Tacx b.v.</b><br>Rijksstraatweg 52, 2241BW Wassenaar, Netherlands  |   |
| <i>Test Item:</i>   | <b>Digital Transmission System (DTS)</b><br><b>BLE</b>  |   |
| <i>Identification:</i>  | <b>T2875</b>  | <i>Serial Number:</i> -- (conducted tests) and<br><b>800049670 (radiated tests)</b>   |
| <i>Project No.:</i>   | <b>19052404 / 89215557</b>  | <i>Date of Receipt:</i> <b>July 25, 2019</b>  |
| <i>Testing Location:</i>  | <b>TÜV Rheinland Nederland B.V.</b><br>Eiberkamp 10<br>9351VT Leek  |   |
| <i>Test Specification:</i>  | FCC 47 CFR Part 15, Subpart C, Section 15.247 (10-1-18 Edition)<br>KDB 558074 D01 15.247 Meas Guidance v05r02<br>RSS-Gen (Issue 5, April 2018) and RSS-247 (Issue 2, February 2017)<br>ANSI C63.10-2013 |   |
| <i>Test Result:</i>   | The test item <b>passed</b> the test specification(s).  |   |
| <i>Testing Laboratory:</i>  | <b>TÜV Rheinland Nederland B.V.</b><br>Eiberkamp 10<br>9351 VT Leek   |   |
| <i>Tested by:</i>   | <br>2019-09-18 R. van der Meer / Inspector   | <i>Reviewed by:</i> <br>2019-09-18 E. van der Wal / Reviewer |
| <i>Date</i>   | <i>Name/Position</i>  | <i>Signature</i>  |
| <i>Date</i>   | <i>Name/Position</i>  | <i>Signature</i>  |
| <i>Other Aspects:-.</i>   |   |   |
| <i>Abbreviations:</i> P(ass) = passed<br>F(ail) = failed<br>N/A = not applicable<br>N/T = not tested  |   |   |
| This report shall not be reproduced, except in full, without the written permission of<br>TÜV Rheinland Nederland B.V.<br>The test results relate only to the item(s) tested. |   |   |

Test Report No.:

**19052404.r01**

Page 2 of 46

## Test Summary

### **5.1.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT**

*RESULT: Pass*

### **5.1.2 6dB AND 99% BANDWIDTH**

*RESULT: Pass*

### **5.1.3 PEAK POWER SPECTRAL DENSITY**

*RESULT: Pass*

### **5.1.4 CONDUCTED OUT OF BAND SPURIOUS EMISSIONS**

*RESULT: Pass*

### **5.1.5 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER**

*RESULT: Pass*

### **5.2.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER**

*RESULT: Pass*



## Contents

|            |  |           |
|------------|--|-----------|
| <b>1.</b>  | <b>GENERAL REMARKS .....</b>   | <b>4</b>  |
| <b>1.1</b> | <b>COMPLEMENTARY MATERIALS .....</b>   | <b>4</b>  |
| <b>2.</b>  | <b>TEST SITES .....</b>  | <b>4</b>  |
| <b>2.1</b> | <b>TEST FACILITIES .....</b>   | <b>4</b>  |
| <b>2.2</b> | <b>LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....</b> | <b>5</b>  |
| <b>2.3</b> | <b>MEASUREMENT UNCERTAINTY .....</b>   | <b>6</b>  |
| <b>3.</b>  | <b>GENERAL PRODUCT INFORMATION.....</b>  | <b>7</b>  |
| <b>3.1</b> | <b>PRODUCT FUNCTION AND INTENDED USE.....</b>  | <b>7</b>  |
| <b>3.2</b> | <b>SYSTEM DETAILS .....</b>  | <b>7</b>  |
| <b>3.3</b> | <b>COUNTERMEASURES TO ACHIEVE COMPLIANCE .....</b>   | <b>8</b>  |
| <b>4.</b>  | <b>TEST SET-UP AND OPERATION MODES .....</b>   | <b>9</b>  |
| <b>4.1</b> | <b>TEST METHODOLOGY .....</b>  | <b>9</b>  |
| <b>4.2</b> | <b>OPERATION MODES .....</b>   | <b>9</b>  |
| <b>4.3</b> | <b>PHYSICAL CONFIGURATION FOR TESTING .....</b>  | <b>10</b> |
| <b>4.4</b> | <b>TEST SOFTWARE .....</b>   | <b>12</b> |
| <b>4.5</b> | <b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>   | <b>13</b> |
| <b>5.</b>  | <b>TEST RESULTS .....</b>  | <b>14</b> |
| <b>5.1</b> | <b>CONDUCTED MEASUREMENTS AT ANTENNA PORT.....</b>   | <b>14</b> |
| 5.1.1      | <i>Conducted Output Power.....</i>   | <i>14</i> |
| 5.1.2      | <i>6dB and 99% Bandwidth.....</i>  | <i>17</i> |
| 5.1.3      | <i>Peak Power Spectral Density .....</i>   | <i>22</i> |
| 5.1.4      | <i>Conducted Out Of Band Spurious Emissions.....</i>   | <i>25</i> |
| 5.1.5      | <i>Radiated Spurious Emissions of Transmitter.....</i>   | <i>28</i> |
| <b>5.2</b> | <b>AC POWER LINE CONDUCTED MEASUREMENTS.....</b>   | <b>40</b> |
| 5.2.1      | <i>AC Power Line Conducted Emission of Transmitter.....</i>  | <i>41</i> |
| 5.2.2      | <i>Plots of the AC Power-line Conducted Emissions.....</i>   | <i>42</i> |

Test Report No.:

**19052404.r01**

Page 4 of 46

## **1. General Remarks**

### **1.1 Complementary Materials**

There is no attachment to this test report.

## **2. Test Sites**

### **2.1 Test Facilities**

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 786213. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

Temperature (\*) : +15°C to +35°C  
Relative humidity(\*) : 20 % to 75 %  
Supply voltage : 120 VAC.

*(\*)When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.*

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

| Kind of Equipment                           | Manufacturer    | Model Name                           | Inventory number | Calibration date (mm/yyyy) | Calibration due date (mm/yyyy) |
|---|-----------------|--------------------------------------|------------------|----------------------------|--------------------------------|
| <b>For Antenna Port Conducted Emissions</b> |                 |                                      |                  |                            |                                |
| Temperature-Humiditymeter                   | Extech          | SD500                                | A00446           | 06/2019                    | 06/2020                        |
| Spectrum Analyzer                           | Rohde & Schwarz | FSV                                  | A01744           | 07/2018                    | 07/2020                        |
| RF Cable                                    | Huber + Suhner  | Sucoflex 102                         | A00347           | 07/2019                    | 07/2020                        |
| <b>For Radiated Emissions</b>               |                 |                                      |                  |                            |                                |
| Measurement Receiver                        | Rohde & Schwarz | ESCI                                 | A00314           | 03/2019                    | 03/2020                        |
| RF Cable S-AR                               | Gigalink        | APG0500                              | A00447           | 03/2019                    | 03/2020                        |
| Controller                                  | Maturo          | SCU/088/8090811                      | A00450           | N/A                        | N/A                            |
| Controller                                  | EMCS            | DOC202                               | A00257           | N/A                        | N/A                            |
| Test facility                               | Comtest         | FCC listed:<br>786213<br>IC: 2932G-2 | A00235           | 10/2017                    | 10/2020                        |
| Spectrum Analyzer                           | Rohde & Schwarz | FSV                                  | A00337           | 07/2018                    | 07/2020                        |
| Antenna mast                                | EMCS            | AP-4702C                             | A00258           | N/A                        | N/A                            |
| Temperature-Humiditymeter                   | Extech          | SD500                                | A00444           | 06/2018                    | 06/2020                        |
| Guidehorn 1-18 GHz                          | EMCO            | 3115                                 | A00008           | 12/2017                    | 12/2020                        |
| Guidehorn 18-40 GHz                         | EMCO            | RA42-K-F-4B-C                        | A00012           | 01/2018                    | 01/2021                        |
| Biconilog Testantenna                       | Teseq           | CBL 6111D                            | A00466           | 03/2019                    | 03/2020                        |
| 2.4 GHz bandreject filter                   | BSC             | XN-1783                              | A00065           | N/A                        | N/A                            |
| Bandpass filter 4-10 GHz                    | Reactel         | 7AS-7G-6G-511                        | A00131           | N/A                        | N/A                            |
| Bandpass filter 10-26 GHz                   | Reactel         | 9HS-10G/26.5G-S11                    | A00151           | N/A                        | N/A                            |
| Preamplifier 0.5 - 18 GHz                   | Miteq           | AMF-5D-005180-28-13p                 | A00247           | N/A                        | N/A                            |
| Filterbox                                   | EMCS            | RFS06S                               | A00255           | 04/2018                    | 04/2020                        |



Test Report No.:

**19052404.r01**

Page 6 of 46

| Kind of Equipment                           | Manufacturer    | Model Name | Inventory number | Calibration date (mm/yyyy) | Calibration due date (mm/yyyy) |
|---|-----------------|------------|------------------|----------------------------|--------------------------------|
| <b>For AC Powerline Conducted Emissions</b> |                 |            |                  |                            |                                |
| Pulse limiter                               | R&S             | ESH3-Z2    | 2788823 (A00051) | 11/2018                    | 11/2019                        |
| Variac                                      | RFT             | LSS020     | A00171           | NA                         | NA                             |
| LISN  | R&S             | ESH-2      | 2788791 (A00019) | 06/2019                    | 06/2020                        |
| Measurement Receiver                        | Rohde & Schwarz | ESCS30     | 2789421 (A00726) | 07/2019                    | 07/2020                        |
| RF Cable                                    | -               | -          | A01844           | 06/2019                    | 06/2020                        |
| Shielded room for Conducted emissions       | --              | --         | A00437           | NA                         | NA                             |
| Temperature-Humidity meter                  | Extech          | SD500      | 2789211 (A00441) | 06/2019                    | 06/2020                        |

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing. NA= Not Applicable

## 2.3 Measurement Uncertainty

**Table 2: Emission Measurement Uncertainty**

| Measurement Type                  | Frequency      | Uncertainty |
|-----------------------------------|----------------|-------------|
| Antenna Port Conducted Emission   | < 1.3GHz       | 1.7dB       |
|                                   | 1.3 - 40GHz    | 2.9 – 3.4dB |
| Radiated Emission                 | 150kHz - 30MHz | ±5.0dB      |
|                                   | 30MHz - 1GHz   | ±5.22dB     |
|                                   | > 1GHz         | ±5.22dB     |
| AC Power Line Conducted Emissions | 150kHz - 30MHz | ±3.6dB      |

### **3. General Product Information**

#### **3.1 Product Function and Intended Use**

The brand Tacx model T2875, hereafter referred to as EUT, is a Bluetooth Low Energy (BLE) transmitter used in an Interactive Smart Trainer with Electric Motor Brake for bicycles to transmit performance data to PC, Tablet or smartphone. The transmitter will support and utilizes GFSK modulation techniques. Although the chip used is capable of multiple data-rates only 2 Mbps is used. The EUT also contains a Digital Transmission System (DTS) operating in the frequencyband 2403-2480 MHz, based on ANT technology. The ANT+ transceiver is covered in a separate test report.

The content of this report and measurement results have not been changed other than the way of presenting the data.

#### **3.2 System Details**

Details and an overview of the system and all of its components, as it has been tested, may be found below.

|                       |   |  |
|-----------------------|---|--|
| EUT                   | : | Digital Transmission System, BLE                     |
| Manufacturer          | : | Tacx b.v.  |
| Brand                 | : | Tacx   |
| Model(s)              | : | T2875  |
| Serial Number         | : | N/A (conducted tests) and 800049670 (radiated tests) |
| Voltage input rating  | : | 48 Vdc (through AUX2)                                |
| Voltage output rating | : | --   |
| Current input rating  | : | --   |
| Antenna               | : | Internal, integrated on the PCB                      |
| Antenna Gain          | : | + 2.0 dBi  |
| Operating frequency   | : | 2402 MHz-2480 MHz.                                   |
| Modulation            | : | GFSK   |
| Data-rate             | : | 2 Mbps   |
| Remarks               | : | n.a.   |

*Test Report No.:*

**19052404.r01**

*Page 8 of 46*

### **Table 3: Interfaces present on the EUT**

There are no interface ports present on the EUT.

### **3.3 Countermeasures to achieve compliance**

No additional measures were employed to achieve compliance.

## **4. Test Set-up and Operation Modes**

### **4.1 Test Methodology**

The test methodology used is based on the requirements of RSS-GEN, RSS-247, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247.

The test methods, which have been used, are based on ANSI C63.10-2013.

### **4.2 Operation Modes**

The EUT has 2 operating modes: a) "at rest" – no person is operating the EUT and b) 'spinning' – in this mode a person is on the bike doing training. The EUT was tested in "at rest" mode. Testing was performed at the lowest operating frequency (2402 MHz), at the operating frequency in the middle of the specified frequency band (2440 MHz) and at the highest operating frequency (2480 MHz). These operation modes were selected after review of the capabilities and characteristics of the EUT. The test software as mentioned in section 4.4 enabled the settings of these modes.

The EUT has been tested in the modes as described in table below


| <b>Operation Mode</b> | <b>EUT Status</b> | <b>Frequency (MHz)</b> | <b>TX power control setting</b> |
|-----------------------|-------------------|------------------------|---------------------------------|
| Transmit (Tx)         | On – at rest      | 2402                   | 3                               |
| Transmit (Tx)         | On – at rest      | 2440                   | 3                               |
| Transmit (Tx)         | On – at rest      | 2480                   | 3                               |

### 4.3 Physical Configuration for Testing

For programming purposes only the EUT was connected to the usb port of a laptop computer. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel as specified in the test data. See section 4.5 for Auxiliary details.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2013.

**Figure 1a: Test Setup Diagram – antenna port conducted tests and programming.**

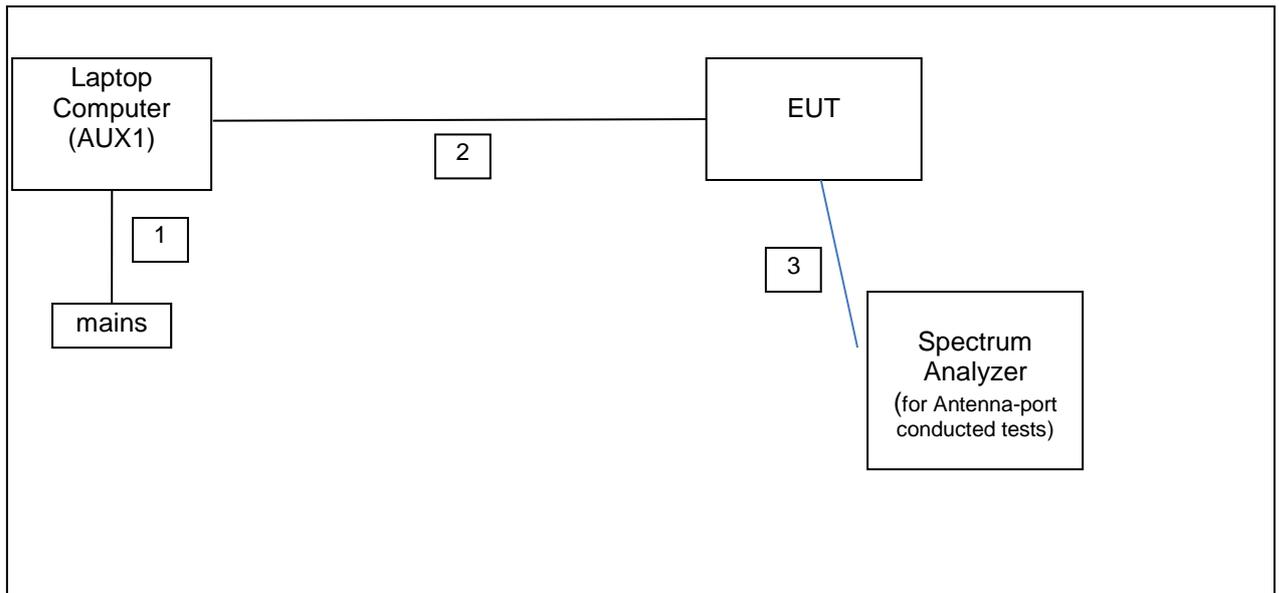

| No. | Port         | From       | To                | Remarks                |
|-----|--------------|------------|-------------------|------------------------|
| 1.  | Mains        | Mains      | Laptop (AUX1)     | Through a power supply |
| 2.  | Data com.    | Laptop USB | EUT               | --                     |
| 3.  | Antenna port | EUT        | Spectrum analyzer | Conducted tests        |
|     |              |            |                   |                        |

### 4.4 Test Software

A continuous transmit mode could be initiated by using test software as supplied by the applicant. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by the applicant and used during all tests is:

Test software : RASP v2.0.26

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.



Screenshot of the software (and settings) as used on AUX1

## 4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

The auxiliary items were not used during testing, but instead are only used to make the required settings for testing. For setting the transmit frequency, enable modulation etc.

1. AUX1

Product: Laptop Computer  
Brand: HP  
Model: J3T34EA#ABH  
Serial Number: CND424BVDG  
Remark: host for test software, property applicant



2. AUX2

Product: Power supply  
Brand: Mean Well  
Model: GSM40B48-P1L  
Serial Number: EB93G85008  
Remark: property applicant



Test Report No.:

**19052404.r01**

Page 14 of 46

## 5. Test Results

### 5.1 Conducted Measurements at Antenna Port

#### 5.1.1 Conducted Output Power

**RESULT: PASS**

Date of testing: 2019-08-19

Requirements:

FCC 15.247(b)(3)

For systems using digital modulation in the 2400-2483.5 MHz band, the maximum peak output power is 1W (+30dBm).

RSS-247 section 5.4(4): the e.i.r.p. shall not exceed 4 W (+36 dBm).

Test procedure:

The Peak Conducted Output Power was measured using the method according to section 11.9.1.1 in ANSI C63.10-2013.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

Measurement uncertainty is +/- 2.5 dB.

Notes:  $mW = 10^{(dBm/10)}$   
 $dBm = 10 \times \log(mW)$

**plots : Peak power plots,**

Figures 1a, 1b and 1c show plots of the Peak Power outputs, correction factors (= 0.1dB Cableloss) included in the reading.


Test Report No.:

**19052404.r01**

Page 15 of 46


**Conducted Output Power**

| Frequency [MHz] | Output Power [dBm]<br>(mW) | Limit [dBm]<br>(W) | Verdict [Pass/Fail] | Plot number |
|-----------------|----------------------------|--------------------|---------------------|-------------|
| 2402            | -0.78<br>(0.84 mW)         | +30<br>(1W)        | Pass                | 1A          |
| 2440            | -1.19<br>(0.76 mW)         | +30<br>(1W)        | Pass                | 1B          |
| 2480            | -1.51<br>(0.71 mW)         | +30<br>(1W)        | Pass                | 1C          |

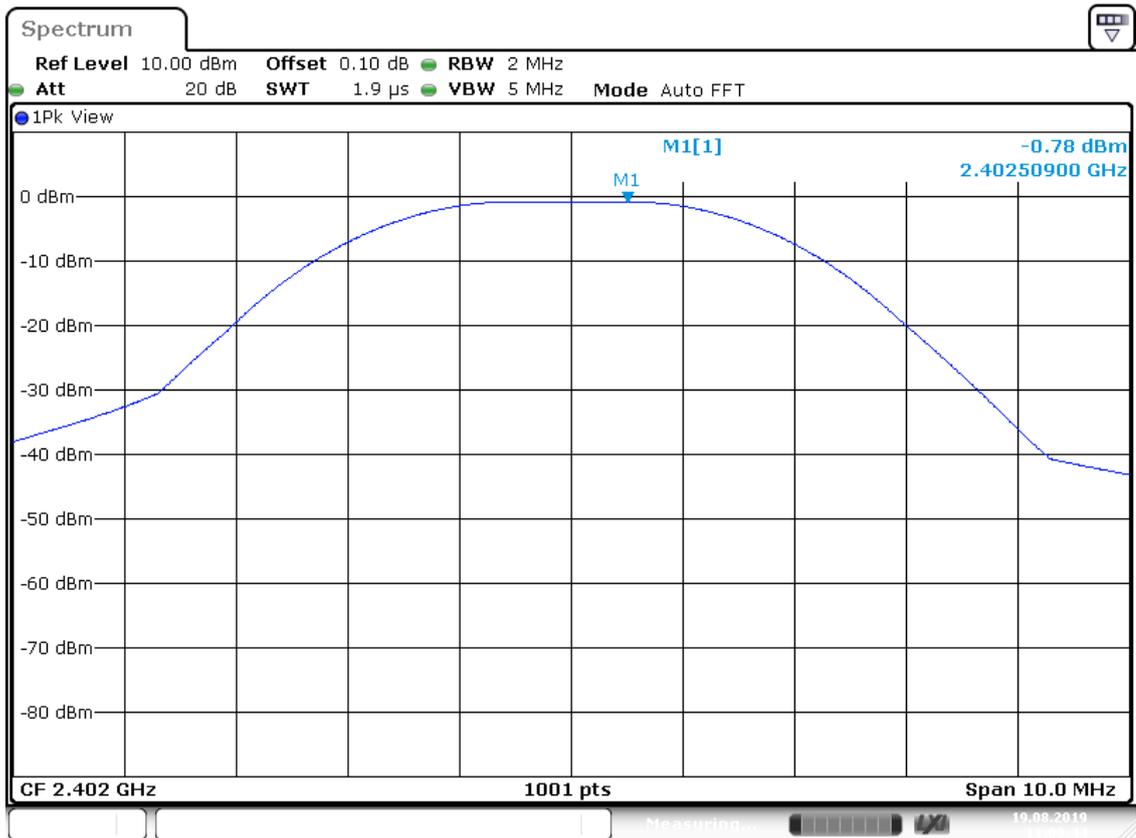


Date: 19.AUG.2019 11:09:44

Plot A

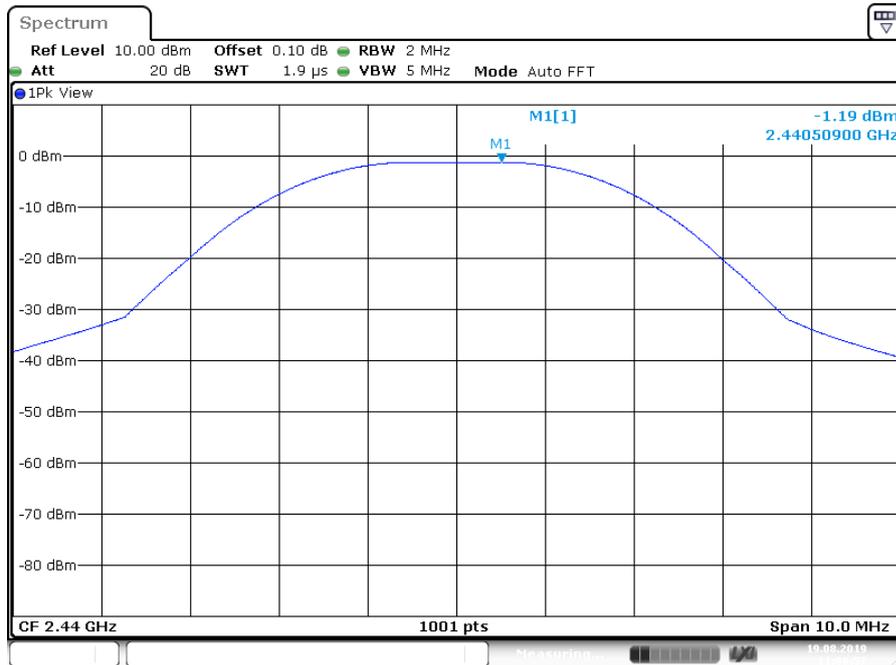

Plot B

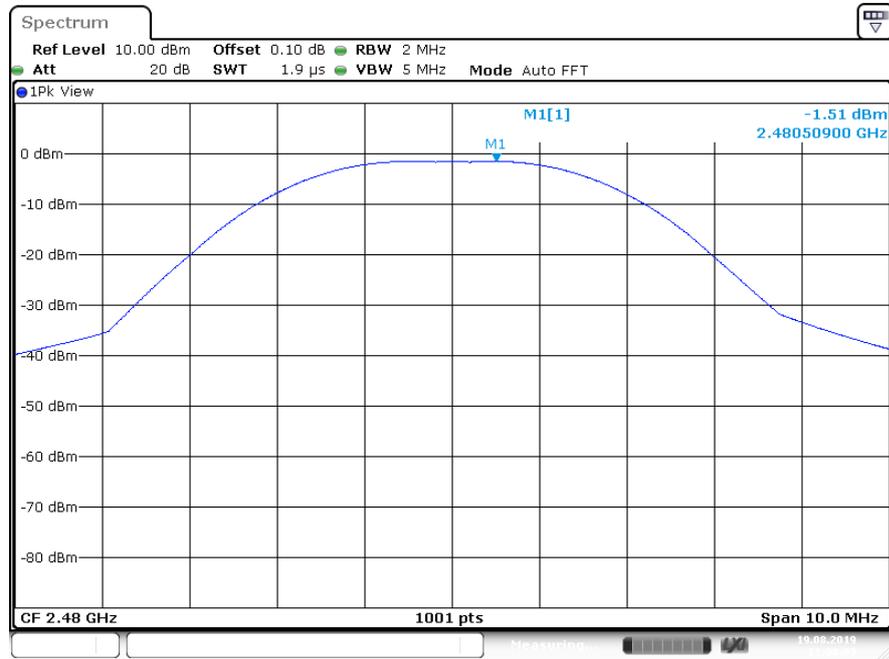

Plot C

Test Report No.:

**19052404.r01**

Page 17 of 46

## 5.1.2 6dB and 99% Bandwidth

### RESULT: PASS

Date of testing: 2019-08-19

#### Requirements:

FCC 15.247(a)(2) and RSS-247 Section 5.2(1)

For systems using digital modulation in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

#### Test procedure 6dB bandwidth:

ANSI C63.10-2013 section 11.8.1 Option 1

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

#### For 99% Bandwidth:

RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Measurement uncertainty is +/- 26kHz.

Plots A1,B1 and C1 shown on the next pages are of the 6 dB bandwidth.

Plots A2,B2 and C2 shown on the next pages are of the 99% bandwidth


Test Report No.:

**19052404.r01**

Page 18 of 46

**6dB Bandwidth**

| Operating Frequency [MHz] | 99% Bandwidth [kHz] | 6dB Bandwidth [kHz] | Limit 6dB BW [kHz] | Verdict [Pass/Fail] | Plot number |
|---------------------------|---------------------|---------------------|--------------------|---------------------|-------------|
| 2402                      | 2048                | 1138.8              | >500               | Pass                | A1/A2       |
| 2440                      | 2048                | 1143.8              | >500               | Pass                | B1/B2       |
| 2480                      | 2058                | 1148.8              | >500               | Pass                | C1/C2       |

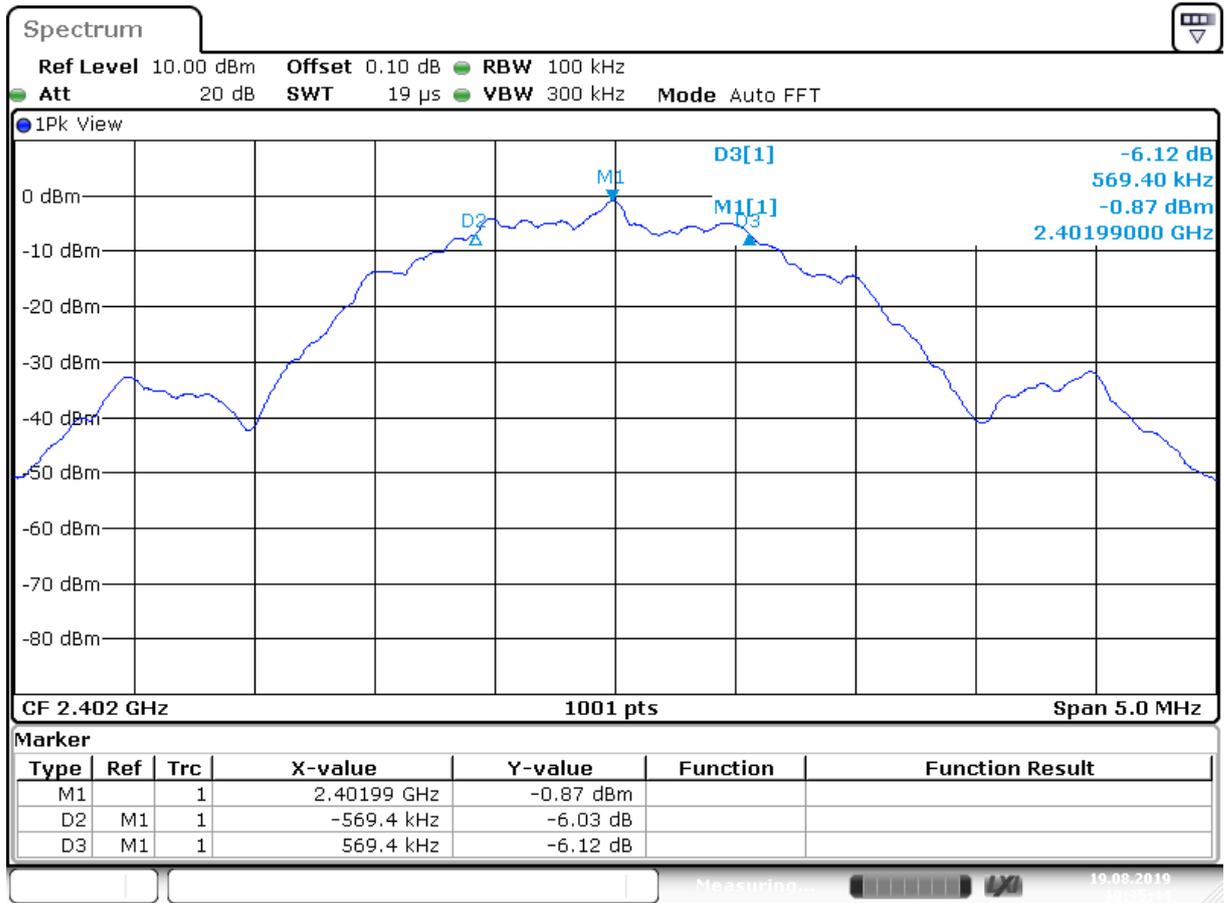


Date: 19.AUG.2019 10:35:44

Plot A1

Test Report No.:


19052404.r01

Page 19 of 46

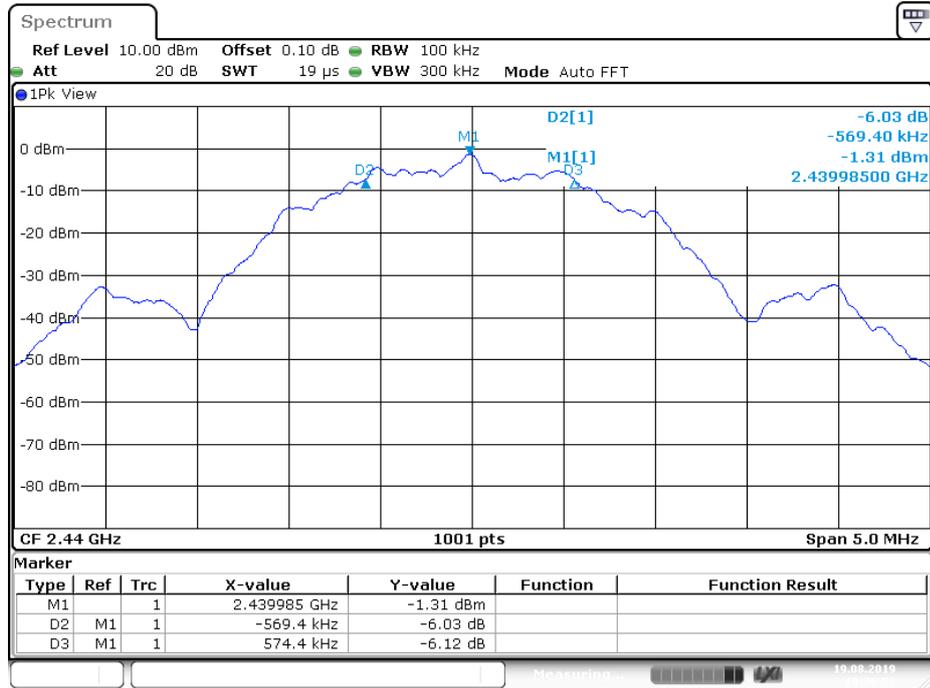


Date: 19 AUG 2019 10:36:52

Plot B1

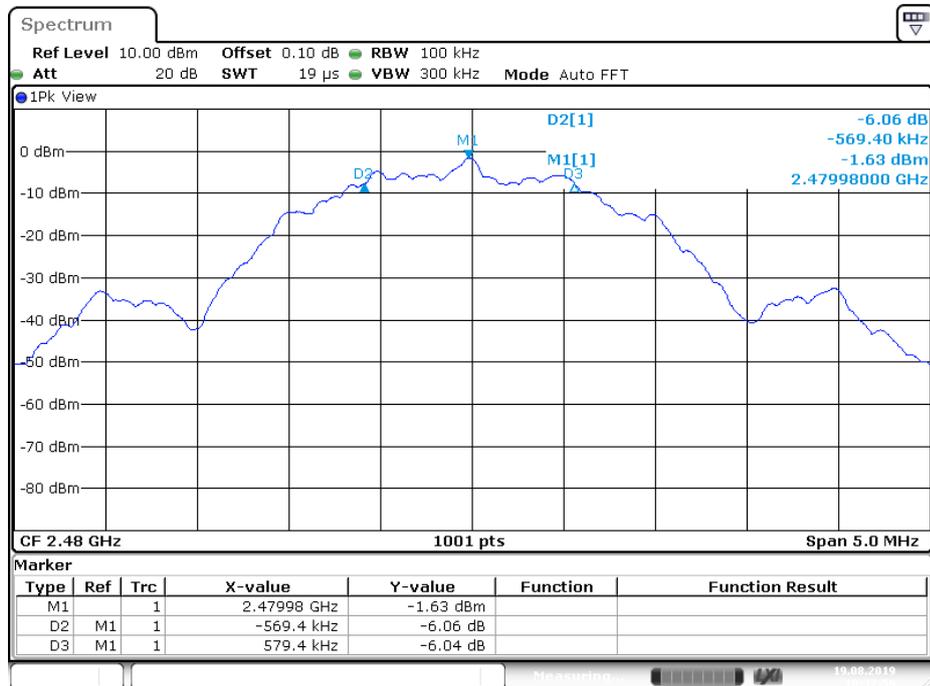


Date: 19 AUG 2019 10:38:00

Plot C1

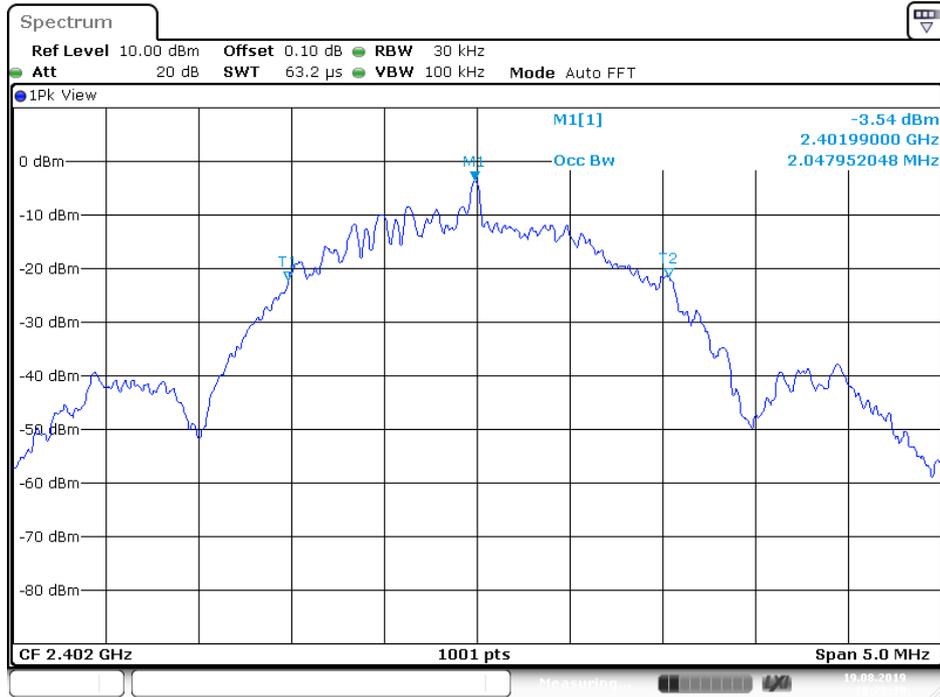

Plot A2

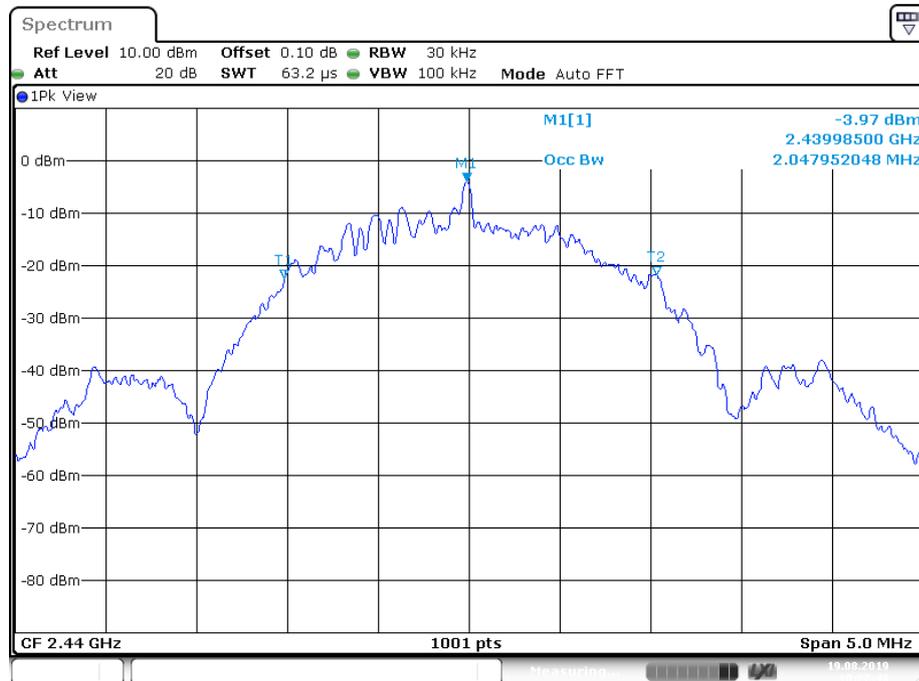


Plot B2

Test Report No.:

19052404.r01

Page 21 of 46

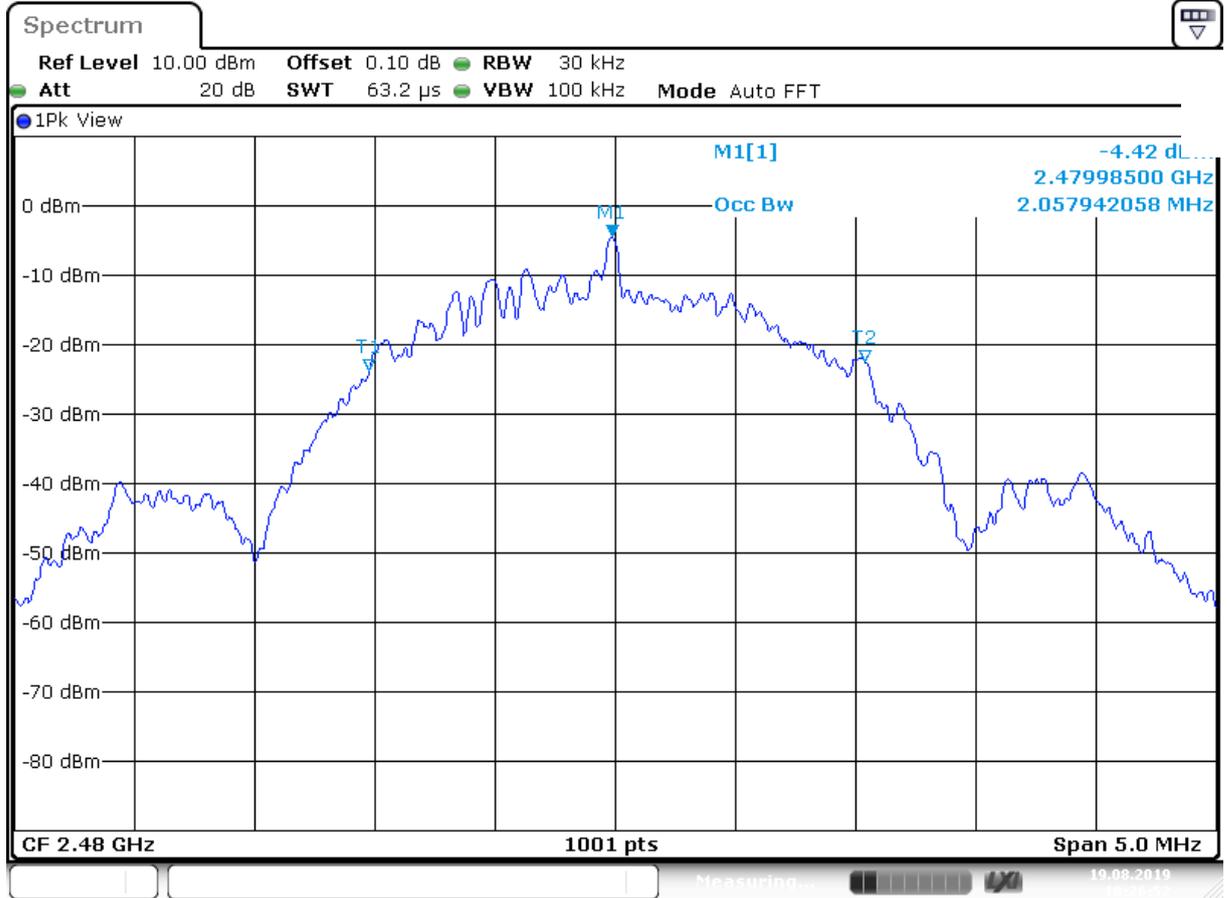

Date: 19.AUG.2019 10:26:53

Plot C2

Test Report No.:

**19052404.r01**

Page 22 of 46

### **5.1.3 Peak Power Spectral Density**

**RESULT: Pass**

Date of testing: 2019-08-19

Requirements:

FCC 15.247(e) and RSS-247 section 5.2(2)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

ANSI C63.10-2013

The section 11.10.2 PKPSD peak PSD procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables (0.1 dB).

Measurement uncertainty is +/- 1.1 dB.


Test Report No.:

**19052404.r01**

Page 23 of 46

**Peak Power Spectral Density**

| Operating Frequency [MHz] | Max PSD [dBm] | Limit [dBm] | Verdict [Pass/Fail] | Plot |
|---------------------------|---------------|-------------|---------------------|------|
| 2402                      | -18.82        | 8           | Pass                | A    |
| 2440                      | -19.17        | 8           | Pass                | B    |
| 2480                      | -19.65        | 8           | Pass                | C    |

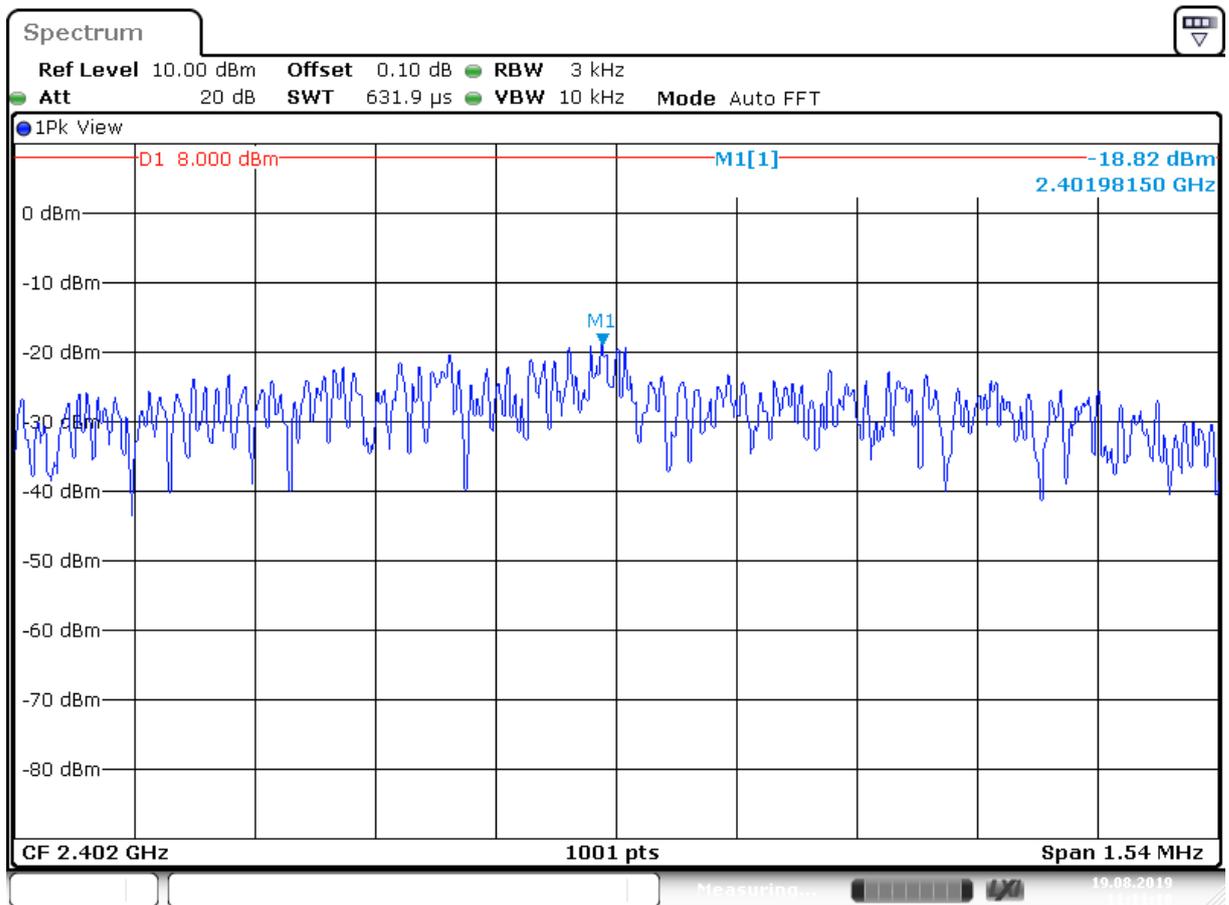


Date: 19.AUG.2019 11:11:18

Plot A


Test Report No.:

19052404.r01

Page 24 of 46

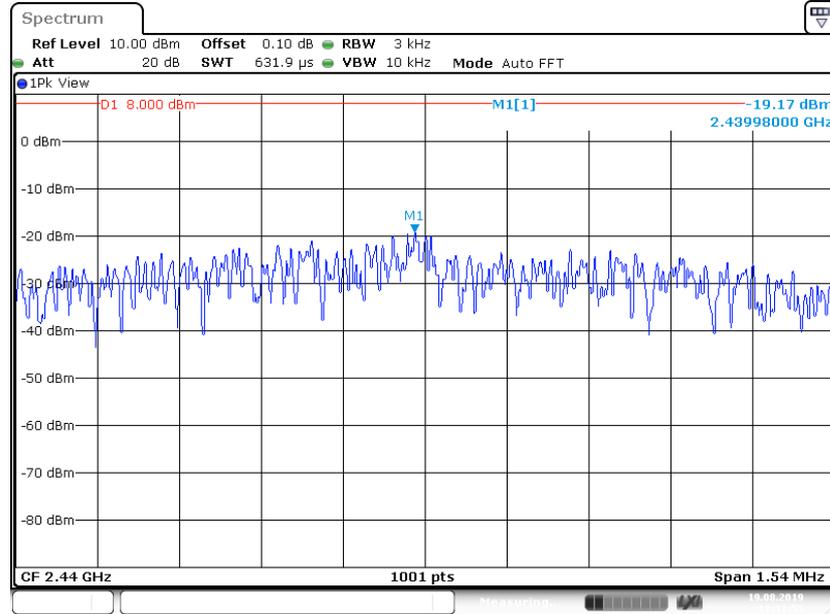

Plot B

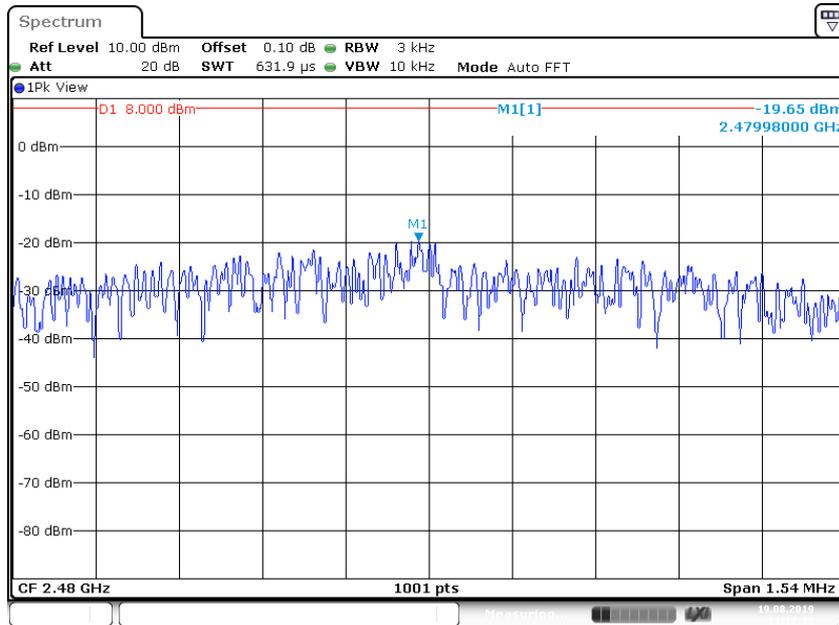

Plot C

Test Report No.:

**19052404.r01**

Page 25 of 46

## 5.1.4 Conducted Out Of Band Spurious Emissions

**RESULT: Pass**

Date of testing: 2019-08-19

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10-2013  
Section 11.13


An RF conducted measurement was done using the marker-delta method, as described in ANSI C63.10.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:  
RBW = 100kHz, VBW = 300kHz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.


Measurement uncertainty is +/- 2.5 dB.

Results: All out of band spurious emissions are more than 20 dB below the fundamental.  
See the figures on the following pages.

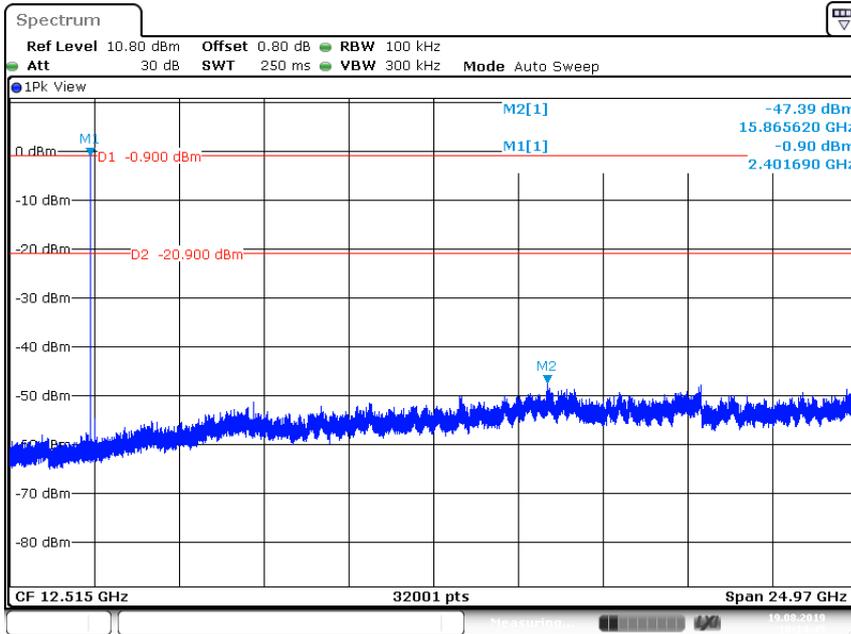


Plot: Conducted Emission, @2402 MHz

Plot showing more than 20 dB attenuation.

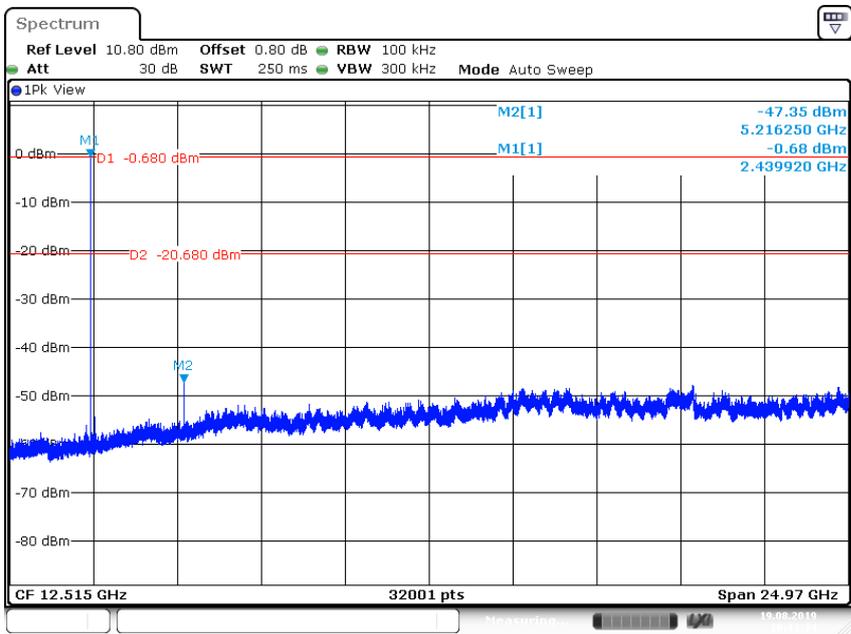

Plot: Conducted Emission, @2440 MHz.

Plot showing more than 20 dB attenuation

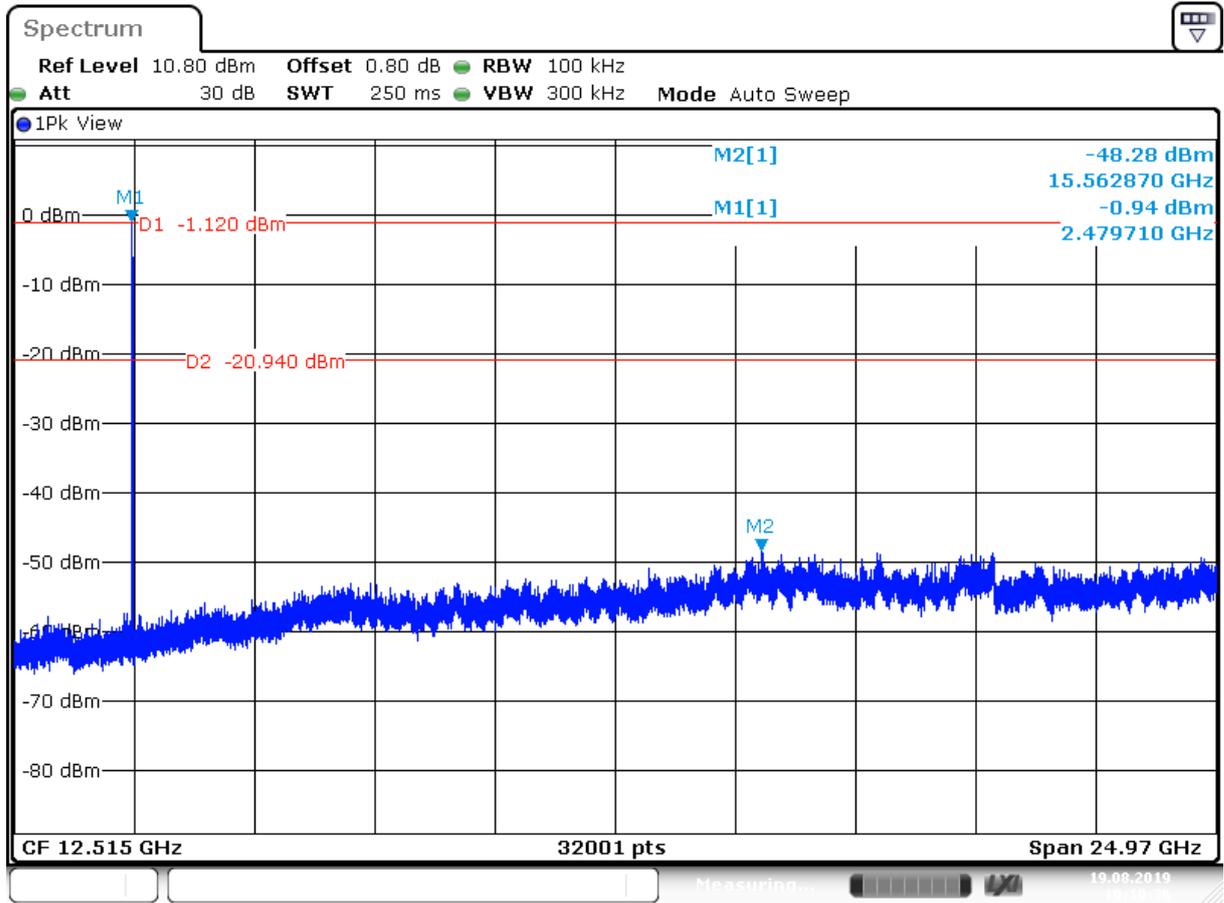

Date: 19 AUG 2019 10:10:36

Plot: Conducted Emission, @2480 MHz.  
Plot showing more than 20 dB attenuation.

Test Report No.:

**19052404.r01**

Page 28 of 46

## 5.1.5 Radiated Spurious Emissions of Transmitter

### RESULT: Pass

Date of testing: 2019-08-06/14

Frequency range: 30MHz - 25GHz

Requirements:

FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen Table 6, must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen Table 4.

Test procedure:

ANSI C63.10-2013

The EUT is considered as floor-standing equipment not typically installed with its base in direct electrical contact with, or connected to, a metal floor or grid. The EUT was placed on the test site turntable with insulation material in-between of 10mm thickness to prevent electric contact.

Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.


At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit. Where Peak (Pk) values were at least 6 dB under the Average (Av) limits, Av value was not tested. Where Average values were tested, Average values were measured using at least 10kHz Video Bandwidth.

**Radiated Emissions, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations**

| Frequency [MHz] | EUT frequency (MHz) | Antenna Orientation | Level QP [dBµV/m] | Limit QP [dBµV/m] | Verdict [Pass/Fail] |
|-----------------|---------------------|---------------------|-------------------|-------------------|---------------------|
| 183.3           | 2402                | Vertical            | 32.6              | 43.5              | Pass                |
| 88.2            | 2440                | Vertical            | 28.1              | 40.0              | Pass                |
| 264.7           | 2440                | Vertical            | 18.0              | 46.0              | Pass                |
| 59.7            | 2440                | Vertical            | 28.1              | 40.0              | Pass                |
| 250.7           | 2480                | Vertical            | 37.5              | 46.0              | Pass                |
| 800-960 noise   | -                   | Vertical            | 36.2              | 46.0              | Pass                |

- Notes:
- Level QP = Reading QP + Factor
  - Tested in modes as described in section 4.2, the 6 highest values noted. Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating mode or frequency.
  - \*R refers to a frequency in a restricted band
  - Quasi Peak detector used with a bandwidth of 120 kHz.
  - Measurement uncertainty is +/- 5.22 dB.

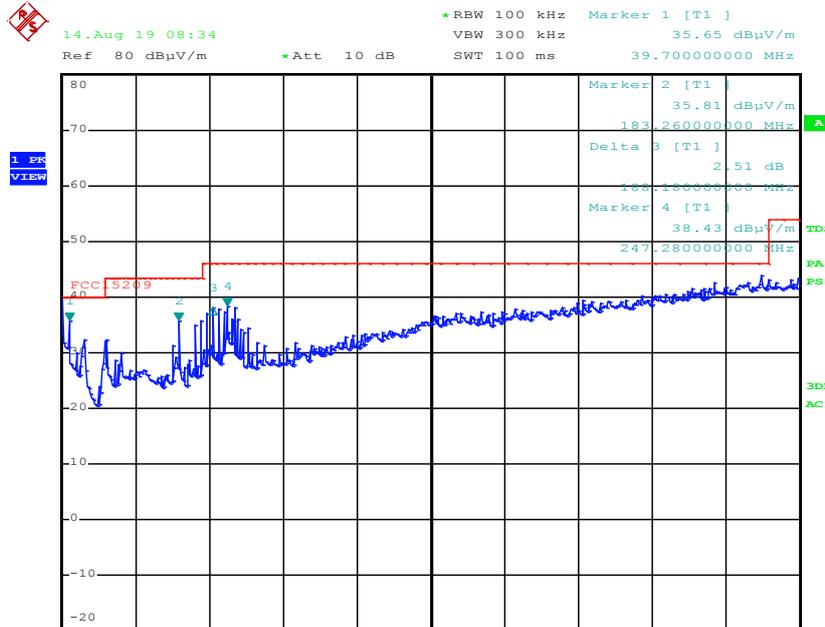

ORI


Date: 14.AUG.2019 08:34:26

Plot of the emissions @2402MHz, vertical Polarization (Peak detector values shown)

Test Report No.:


19052404.r01

Page 30 of 46

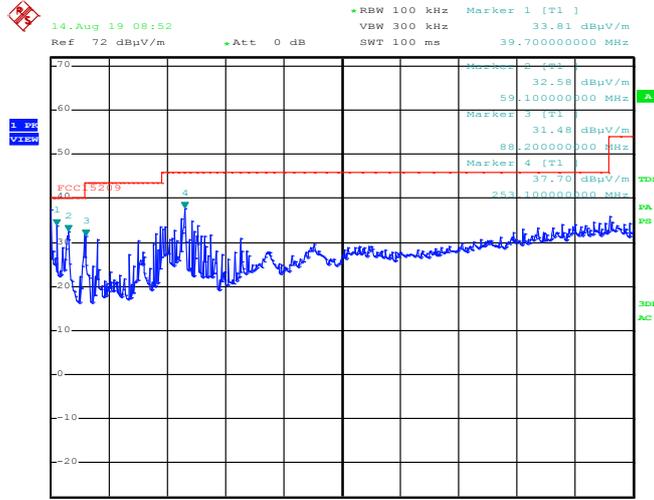

ORI  
Date: 14.AUG.2019 08:52:07

Plot of the emissions @2440MHz, vertical Polarization (Peak detector values shown)

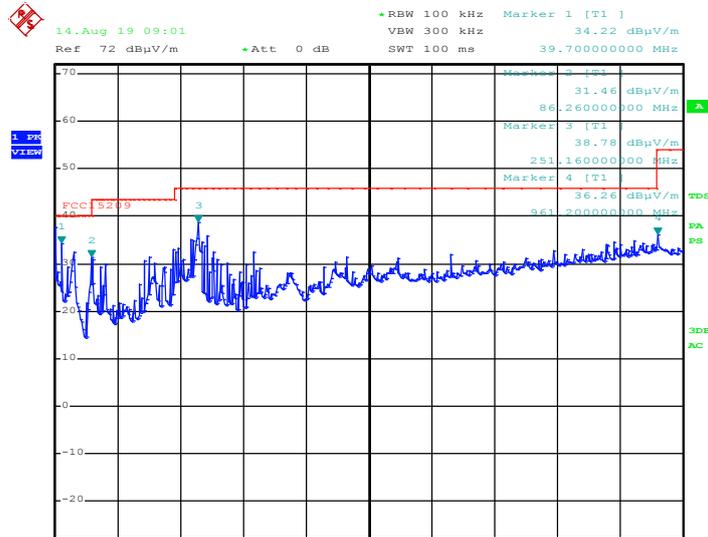

ORI  
Date: 14.AUG.2019 09:01:14

Plot of the emissions @2480MHz, vertical Polarization (Peak detector values shown)

Test Report No.:

**19052404.r01**

Page 31 of 46

**Radiated Emissions, 1 - 25GHz, 2402 MHz.**

| Frequency [MHz]     | Antenna Orientation | Detector | Bandwidth (MHz) | Level [dBµV/m]     | Limit [dBµV/m]     | Result |
|---------------------|---------------------|----------|-----------------|--------------------|--------------------|--------|
| 4688 <sup>*R</sup>  | Horizontal          | Pk       | 1               | 49.4               | 54 (Av)<br>74 (Pk) | Pass   |
| 4804 <sup>*H*</sup> | Horizontal          | Pk       | 1               | 55.5 Pk<br>52.2 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 4868 <sup>*R</sup>  | Horizontal          | Pk       | 1               | 50.3               | 54 (Av)<br>74 (Pk) | Pass   |
| 7206 <sup>*H</sup>  | Vertical            | Pk       | 1               | 58.8 Pk<br>52.3 Av | 54 (Av)<br>74 (Pk) | Pass   |

**Radiated Emissions, 1 - 25GHz, 2440 MHz.**


| Frequency [MHz]     | Antenna Orientation | Detector | Bandwidth (MHz) | Level [dBµV/m]     | Limit [dBµV/m]     | Result |
|---------------------|---------------------|----------|-----------------|--------------------|--------------------|--------|
| 4880 <sup>*H*</sup> | Vertical            | Pk       | 1               | 57.6 Pk<br>50.8 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 7320 <sup>*H*</sup> | Vertical            | Pk       | 1               | 57.6 Pk<br>49.0 Av | 54 (Av)<br>74 (Pk) | Pass   |

**Radiated Emissions, 1 - 25GHz, 2480 MHz.**

| Frequency [MHz]     | Antenna Orientation | Detector | Bandwidth (MHz) | Level [dBµV/m]     | Limit [dBµV/m]     | Result |
|---------------------|---------------------|----------|-----------------|--------------------|--------------------|--------|
| 4688 <sup>*R</sup>  | Horizontal          | Pk       | 1               | 50.7               | 54 (Av)<br>74 (Pk) | Pass   |
| 4690 <sup>*H*</sup> | Horizontal          | Pk       | 1               | 57.5 Pk<br>53.5 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 7440 <sup>*H*</sup> | Vertical            | Pk       | 1               | 55.1 Pk<br>47.9 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 10445               | Vertical            | Pk       | 1               | 54.7 Pk<br>42.4 Av | 54 (Av)<br>74 (Pk) | Pass   |


- Notes:
- \*R refers to a frequency in a restricted band,
  - \*H refers to a frequency which is a harmonic of the fundamental.
  - Field strength values of radiated emissions not listed in the tables above are more than 20 dB below the applicable limit.
  - Measurement uncertainty is +/- 5.5 dB.
  - a selection of plots is provided on the next pages

Plots of the radiated emissions

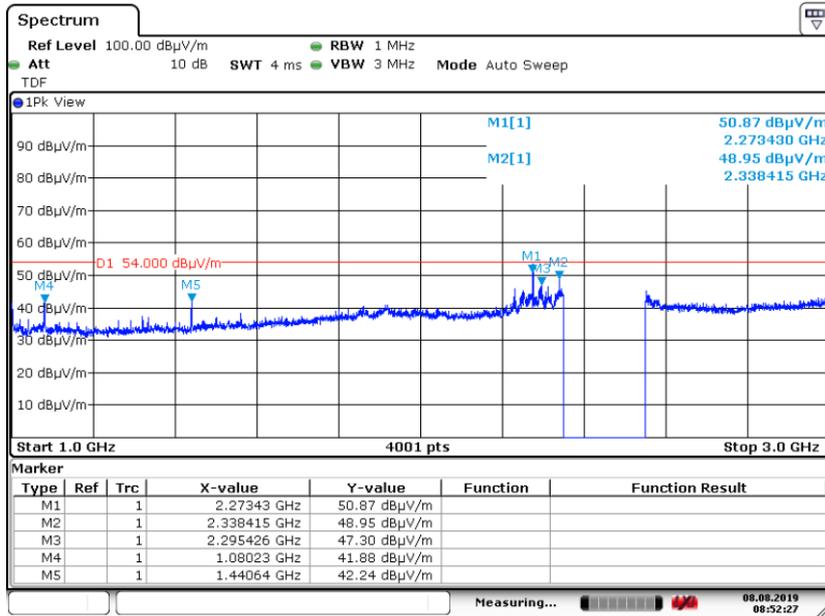


Date: 8.AUG.2019 08:52:26

Plot of the emissions in the range 1–3 GHz, @2402 MHz, Horizontal polarization, Peak values shown. Gap in the plot is by the 2G4 Notch filter used.

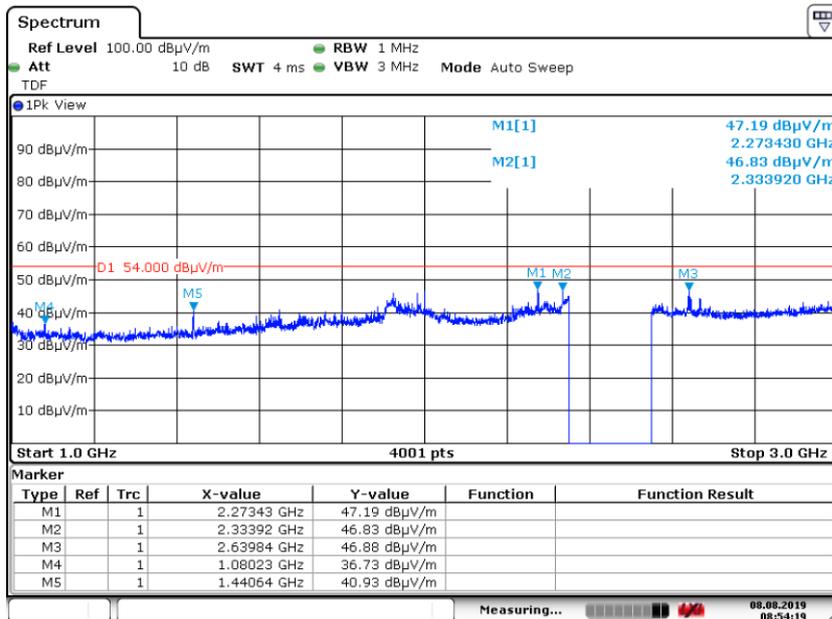


Date: 8.AUG.2019 08:54:19

Plot of the emissions in the range 1–3 GHz, @ 2402 MHz, Vertical polarization, Peak values shown. Gap in the plot is by the 2G4 Notch filter used.

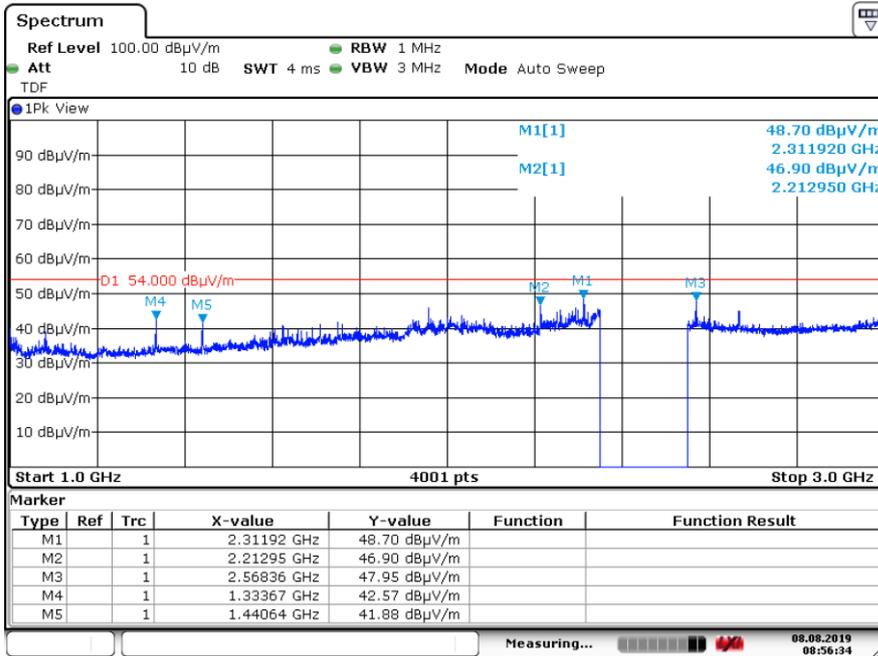

Date: 8.AUG.2019 08:56:34

Plot of the emissions in the range 1–3 GHz, @2440 MHz, Vertical polarization, Peak values shown, gap in the plot is of the used Notch filter

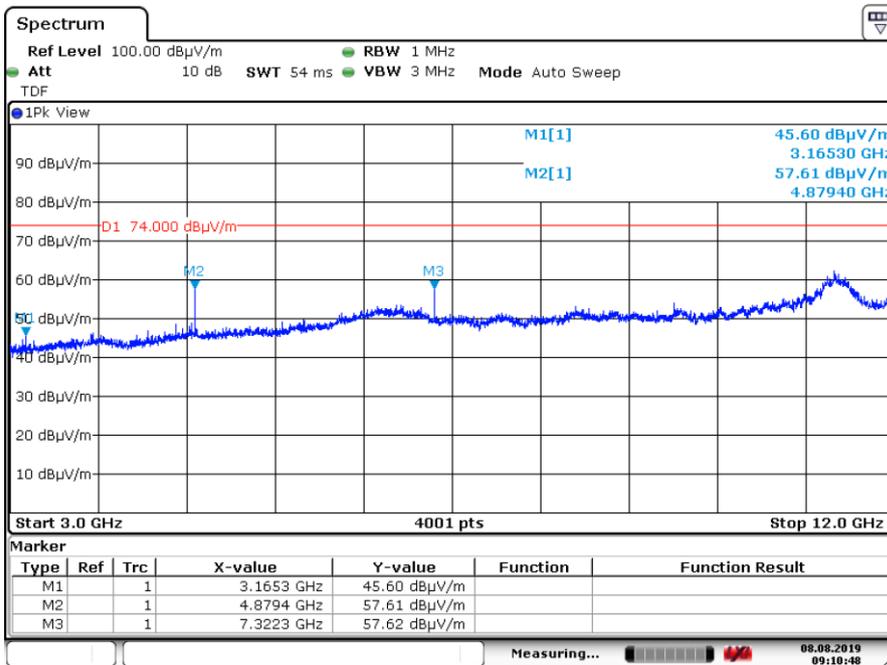


Date: 8.AUG.2019 09:10:48

Plot of the emissions in the range 3–12 GHz, @2440 MHz, Vertical polarization, Peak values shown


Test Report No.:

19052404.r01

Page 34 of 46

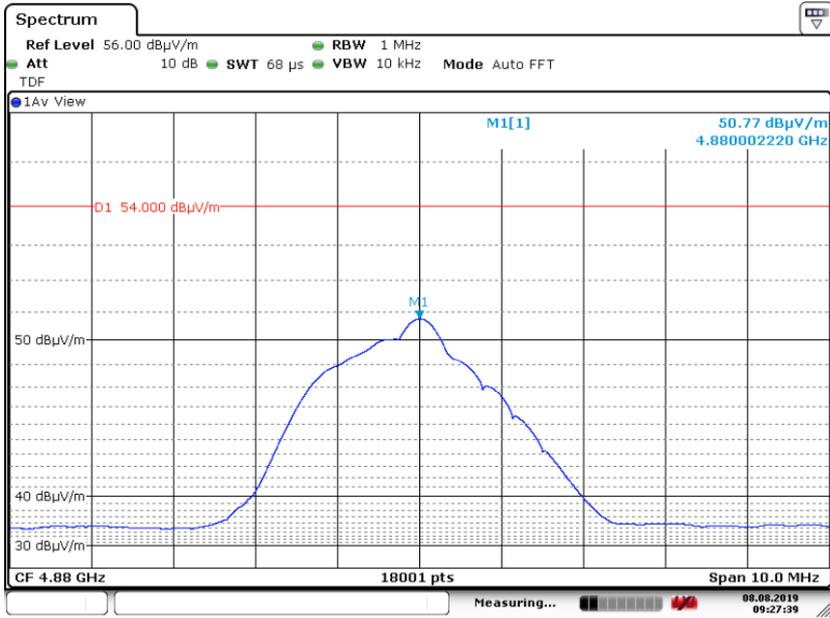

Date: 8.AUG.2019 09:27:39

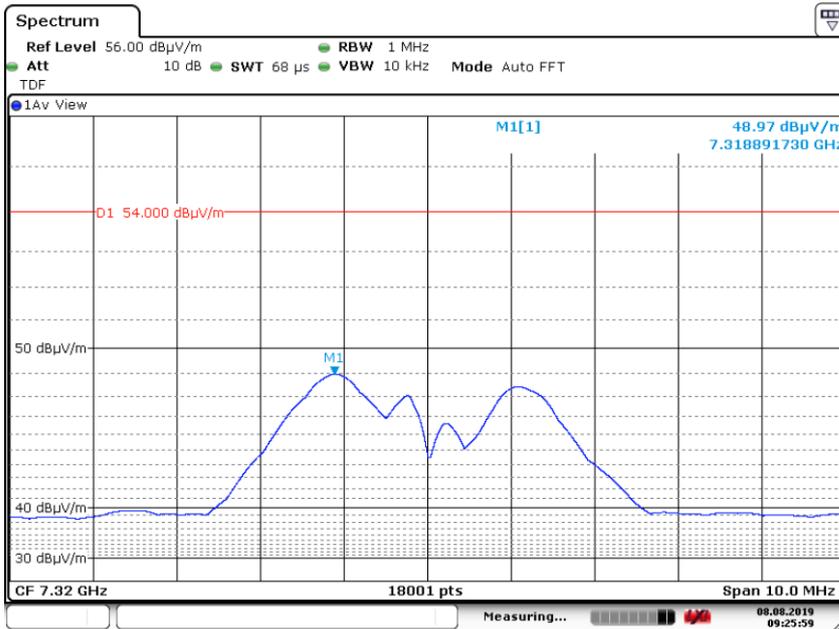


Date: 8.AUG.2019 09:25:59

Plots of the emissions in the range 3–12 GHz, @2440 MHz, Vertical polarization, Average values shown

Test Report No.:


19052404.r01

Page 35 of 46

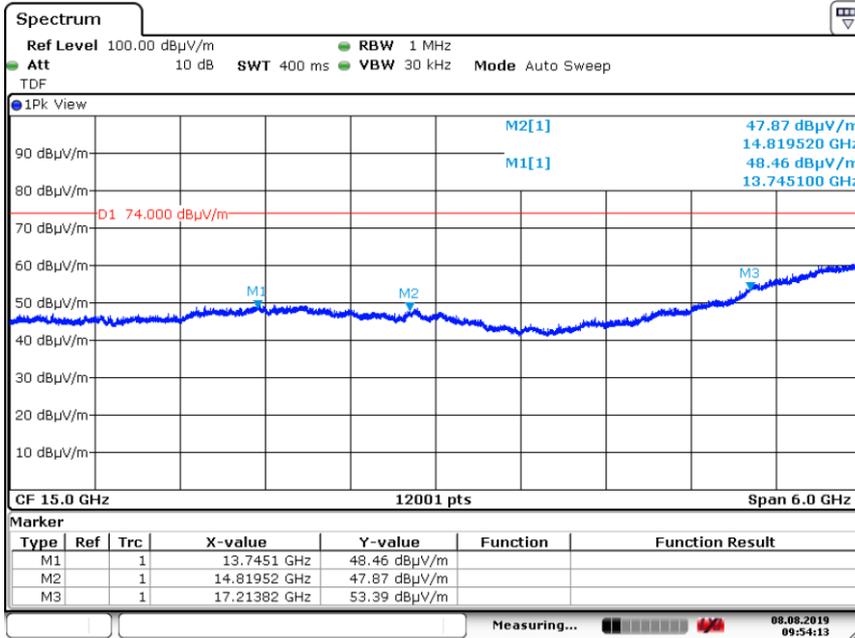

Date: 8.AUG.2019 09:54:13

Plot of the emissions in the range 12–18 GHz, @2440 MHz, Vertical polarization, Peak values shown

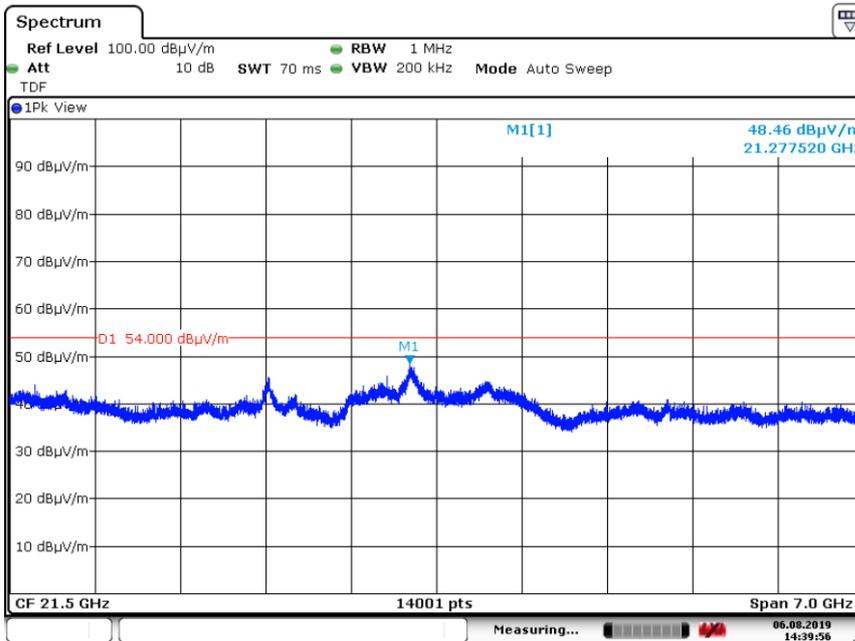


Date: 6.AUG.2019 14:39:55

Plot of the emissions in the range 18–25 GHz, @2440 MHz, Vertical polarization, Peak values shown


Test Report No.:

19052404.r01

Page 36 of 46

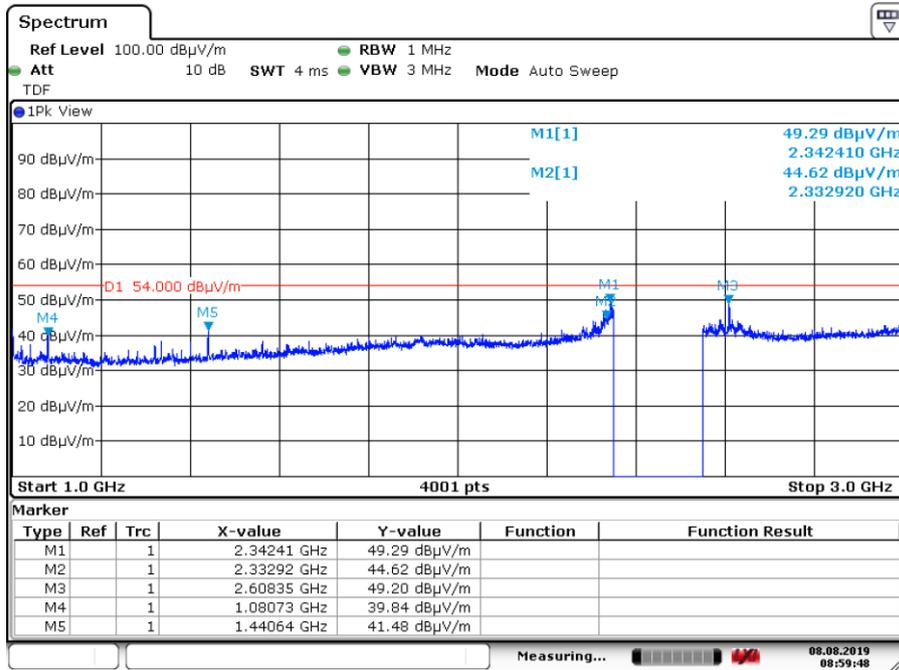

Plot of the emissions in the range 1-3 GHz, @2480 MHz, horizontal polarization, Peak values shown, gap in the plot is of the used Notch filter

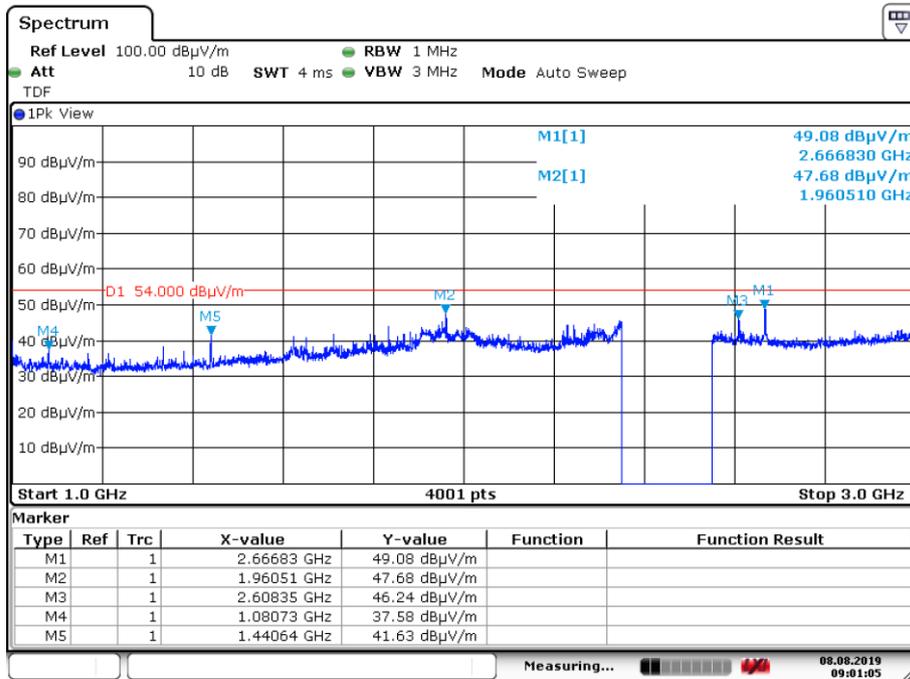


Plot of the emissions in the range 1-3 GHz, @2480 MHz, vertical polarization, Peak values shown, gap in the plot is of the used Notch filter

Test Report No.:


19052404.r01

Page 37 of 46

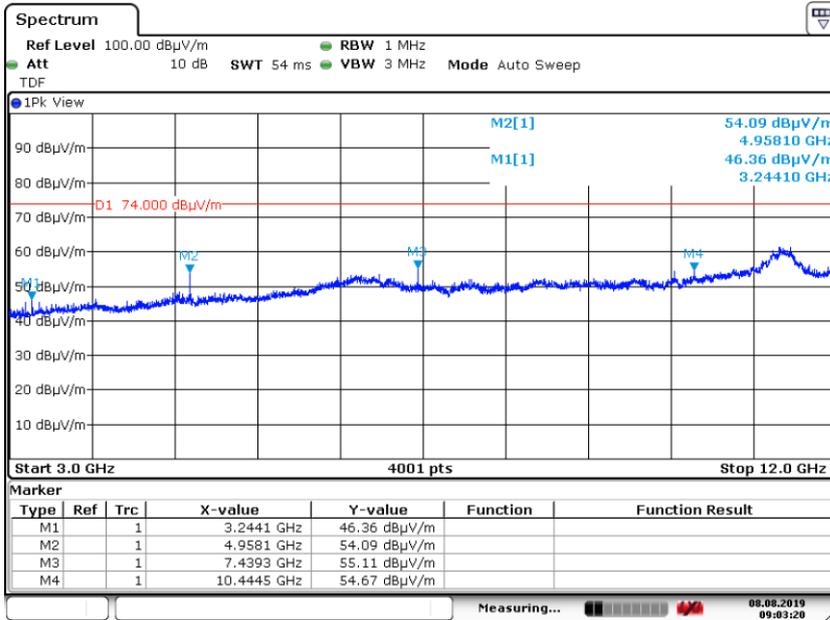

Date: 8.AUG.2019 09:03:20

Plot of the emissions in the range 3-12 GHz, @2480 MHz, vertical polarization, Peak values

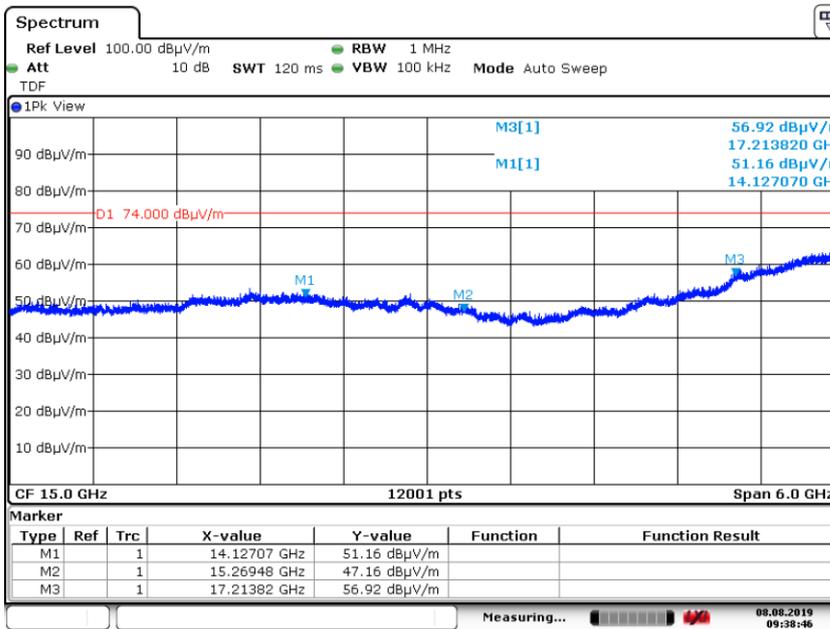


Date: 8.AUG.2019 09:38:47

Plot of the emissions in the range 12-18 GHz, @2480 MHz, vertical polarization, Peak values reduced VBW


Test Report No.:

19052404.r01

Page 38 of 46

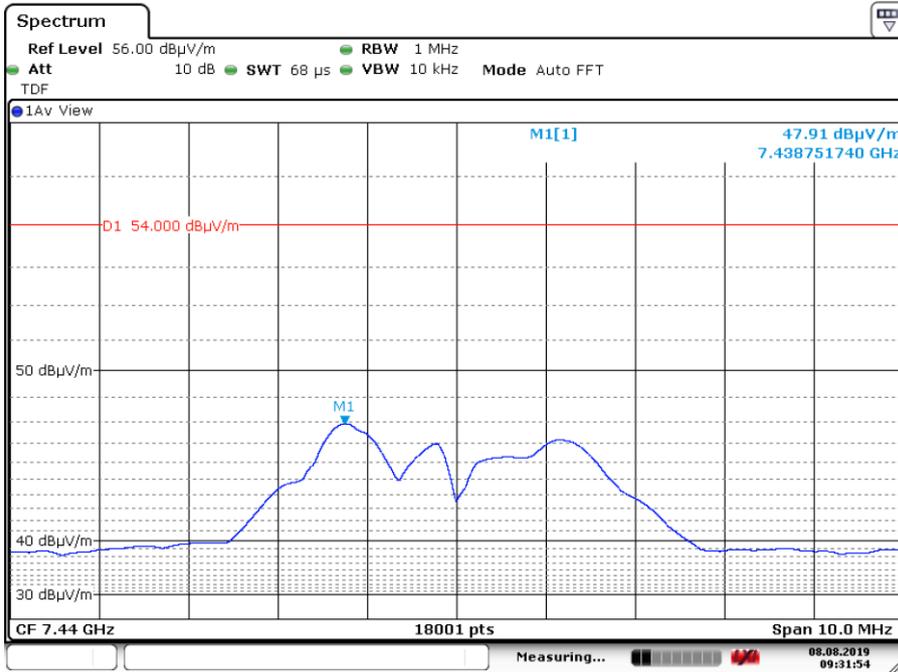

Date: 8.AUG.2019 09:31:55

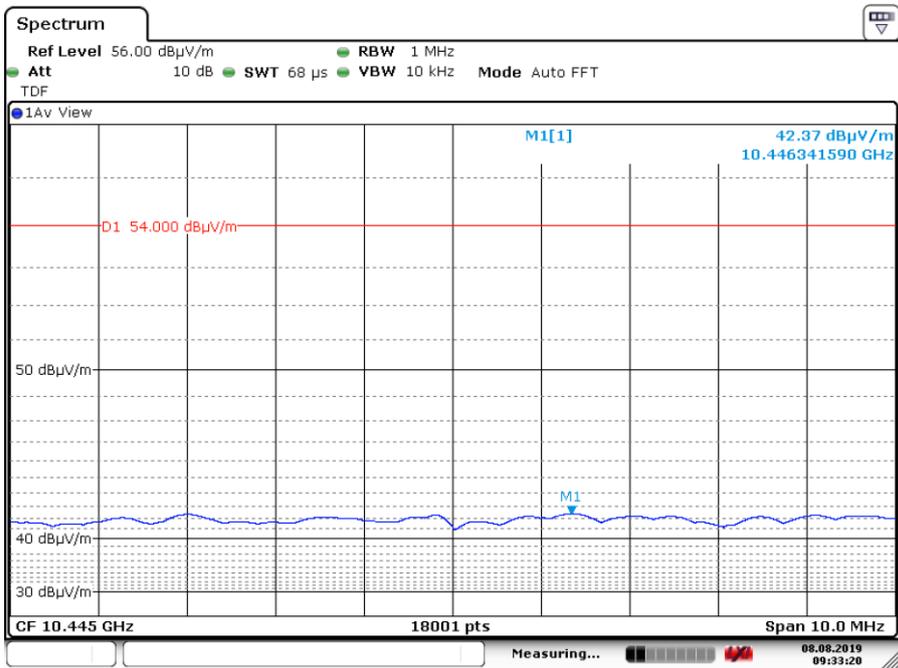


Date: 8.AUG.2019 09:33:20

Plots of the emissions in the range 3-12 GHz, @2480 MHz, vertical polarization, Average values

Test Report No.:

19052404.r01

Page 39 of 46

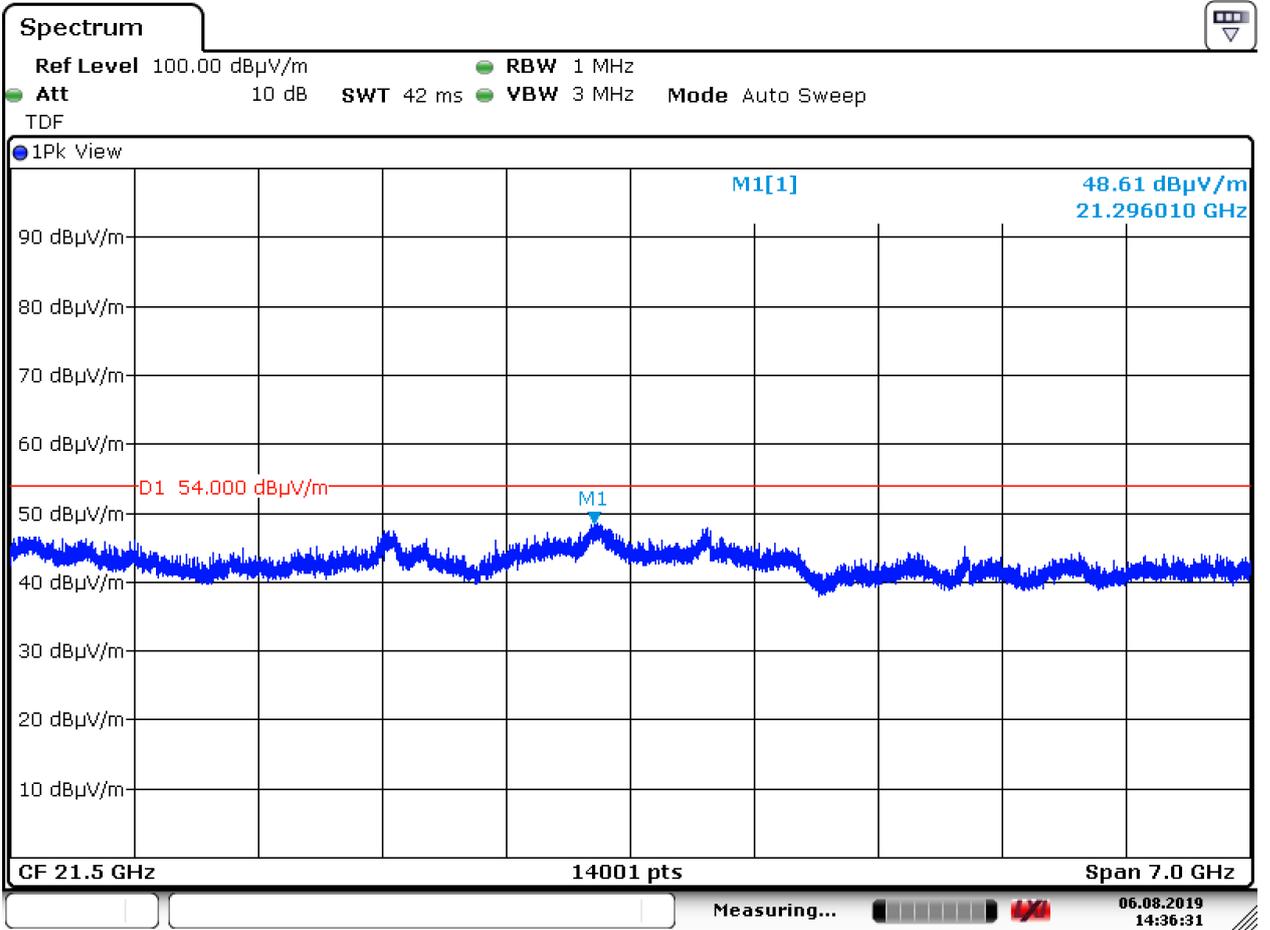

Date: 6.AUG.2019 14:36:31

Plot Radiated unwanted emissions in the range 18 – 25 GHz at 2480 MHz, reduced Video BW (Peak values, Antenna Vertical position shown).

## 5.2 AC Power Line Conducted Measurements

**RESULT: Pass.**

Date of testing: 2019-08-15

Requirements: for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) Quasi-Peak | Conducted Limit (dB $\mu$ V) Average |
|-----------------------------|---|--------------------------------------|
| 0.15 – 0.5                  | 66 to 56*                               | 56 to 46*                            |
| 0.5 – 5                     | 56                                      | 46                                   |
| 5 - 30                      | 46                                      | 50                                   |

\*Decreases with the logarithm of the frequency.

Test procedure:

ANSI C63.10-2013.

Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a 50  $\mu$ H / 50  $\Omega$  LISN. The frequency range from 150kHz to 30MHz was searched. The six highest EUT emissions relative to the limit were noted. The EUT is considered a floor-standing device. The EUT is placed on a non-conductive plate of 10mm thick above the ground plane, so to isolate it from the ground plane because the EUT normally does not make electrical contact with a ground plane. The EUT was positioned at least 80cm from the LISN. The power cable was routed over the non-conductive plate to the LISN.

**5.2.1 AC Power Line Conducted Emission of Transmitter**

| Frequency (MHz) | Measurement results (dBµV) L1 |    | Measurement results (dBµV) L2/Neutral |    | Limits (dBµV) |      | Verdict (Pass/Fail) |
|-----------------|-------------------------------|----|---------------------------------------|----|---------------|------|---------------------|
|                 | QP                            | AV | QP                                    | AV | QP            | AV   |                     |
| 0.1578          | 35.0                          | *3 | 45.4                                  | *3 | 65.5          | 55.5 | Pass                |
| 0.1773          | 41.0                          | *3 | 42.4                                  | *3 | 64.5          | 54.5 | Pass                |
| 0.3609          | 41.4                          | *3 | 41.4                                  | *3 | 58.7          | 48.7 | Pass                |
| 0.3844          | 46.0                          | *3 | 45.7                                  | *3 | 58.3          | 48.3 | Pass                |
| 0.6969          | 38.2                          | *3 | 38.0                                  | *3 | 56.0          | 46.0 | Pass                |
| 3.3224          | 35.4                          | *3 | 35.8                                  | *3 | 56.0          | 46.0 | Pass                |
| 20.040          | 40.4                          | *3 | 40.5                                  | *3 | 60.0          | 50.0 | Pass                |

The results of the AC power line conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.207(a) and RSS-Gen section 8.8, at the 120 Volts/ 60 Hz AC mains connection terminals of the AUX2 that connects to the EUT, are depicted in the table above.

Notes:

1. The resolution bandwidth used was 9 kHz.
2. From pre-test the worst case configuration proved to be the normal operation mode wherein both DTS transmitter and Bluetooth were operational but not transmitting simultaneously. Worst case values noted.
3. Qp values already within Av limits, therefor Av not tested.
4. Measurement uncertainty is +/- 3.5 dB.
5. Plots are provided on the next pages.

Test Report No.:


19052404.r01

Page 42 of 46

### 5.2.2 Plots of the AC Power-line Conducted Emissions

15. Aug 19 11:43

Overview Scan Settings (1 Range)  
:----- Frequencies -----: Receiver Settings :-----:  
Start Stop Step IF BW Detector M-Time Atten Preamp  
150k 30M 3.9k 9k PK 0.10ms 20dB LN OFF

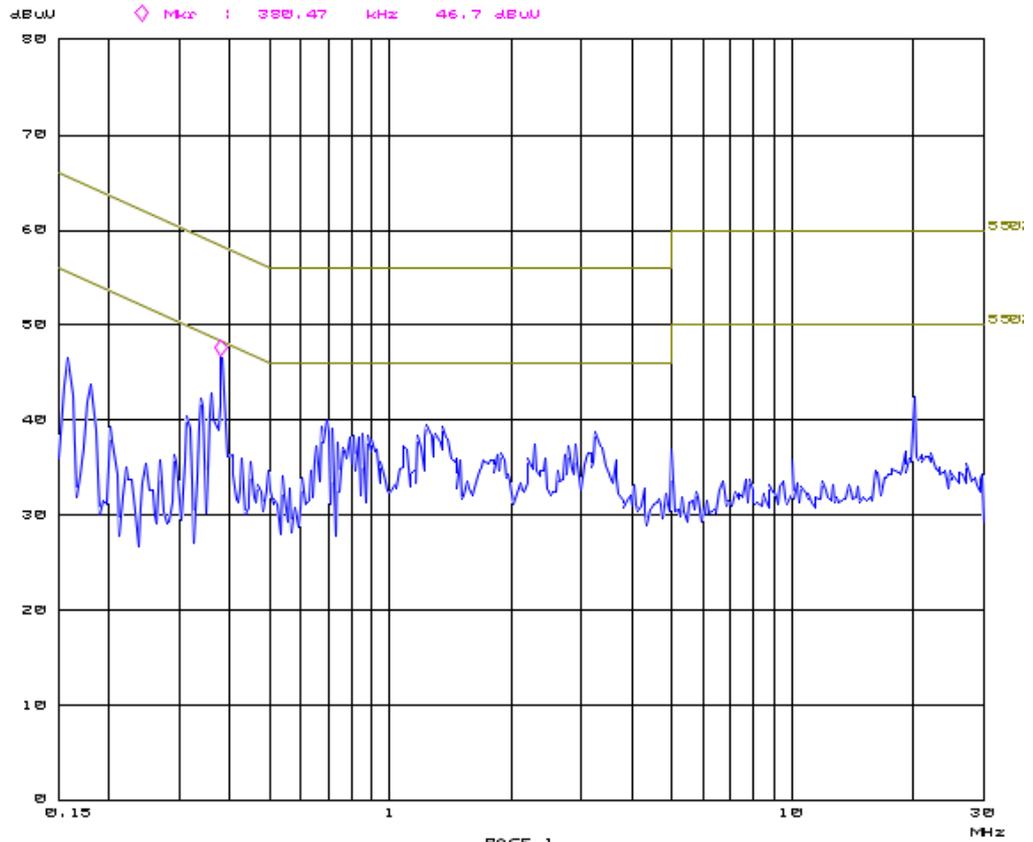

Plot of the AC Power-line Conducted emissions on L1, @2440



Test Report No.:


**19052404.r01**

Page 43 of 46

15. Aug 19 11:39

Overview Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |         |        |
|-------------|------|------|-------------------|----------|--------|---------|--------|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten   | Preamp |
| 150k        | 30M  | 3.9k | 9k                | PK       | 0.10ms | 20dB LN | OFF    |

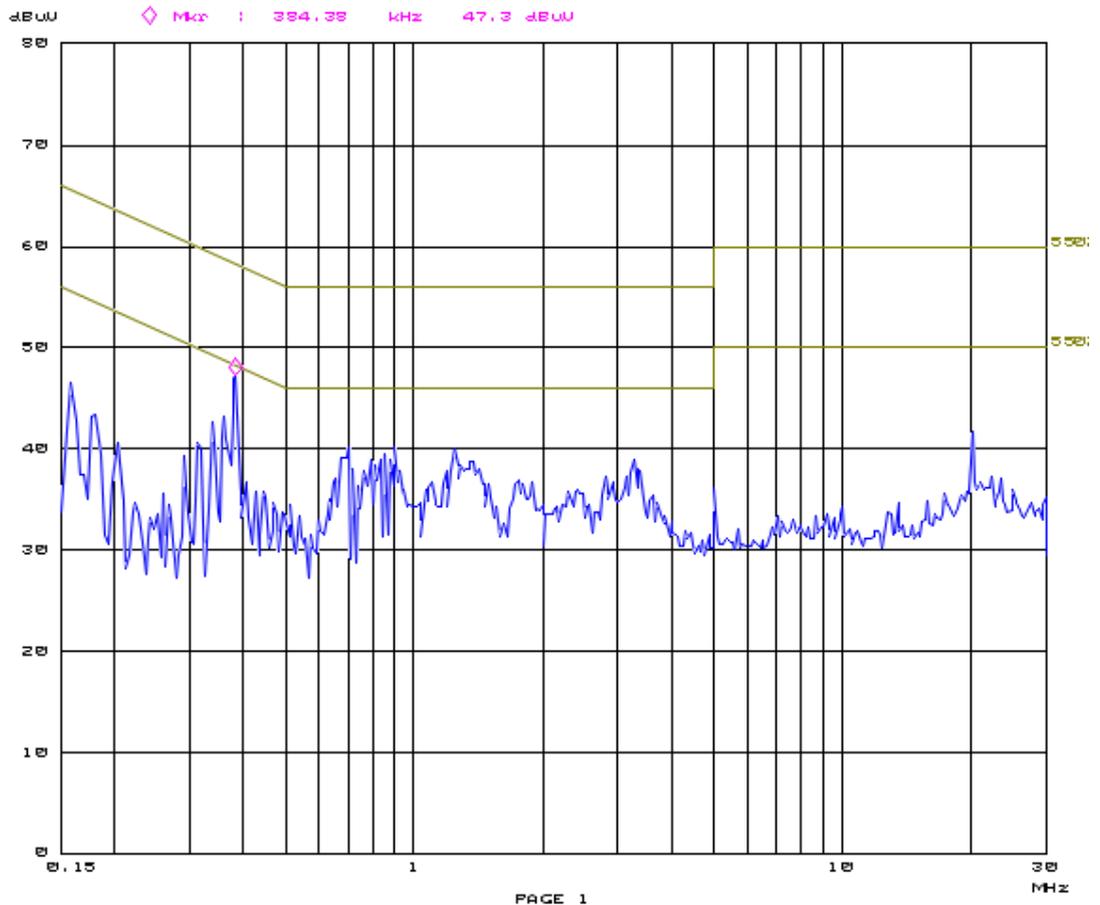

Plot of the AC Power-line Conducted emission on L2, @2402 MHz



Test Report No.:


**19052404.r01**

Page 44 of 46

15. Aug 19 11:42

Overview Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |         |        |
|-------------|------|------|-------------------|----------|--------|---------|--------|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten   | Preamp |
| 150k        | 30M  | 3.9k | 9k                | PK       | 0.10ms | 20dB LN | OFF    |

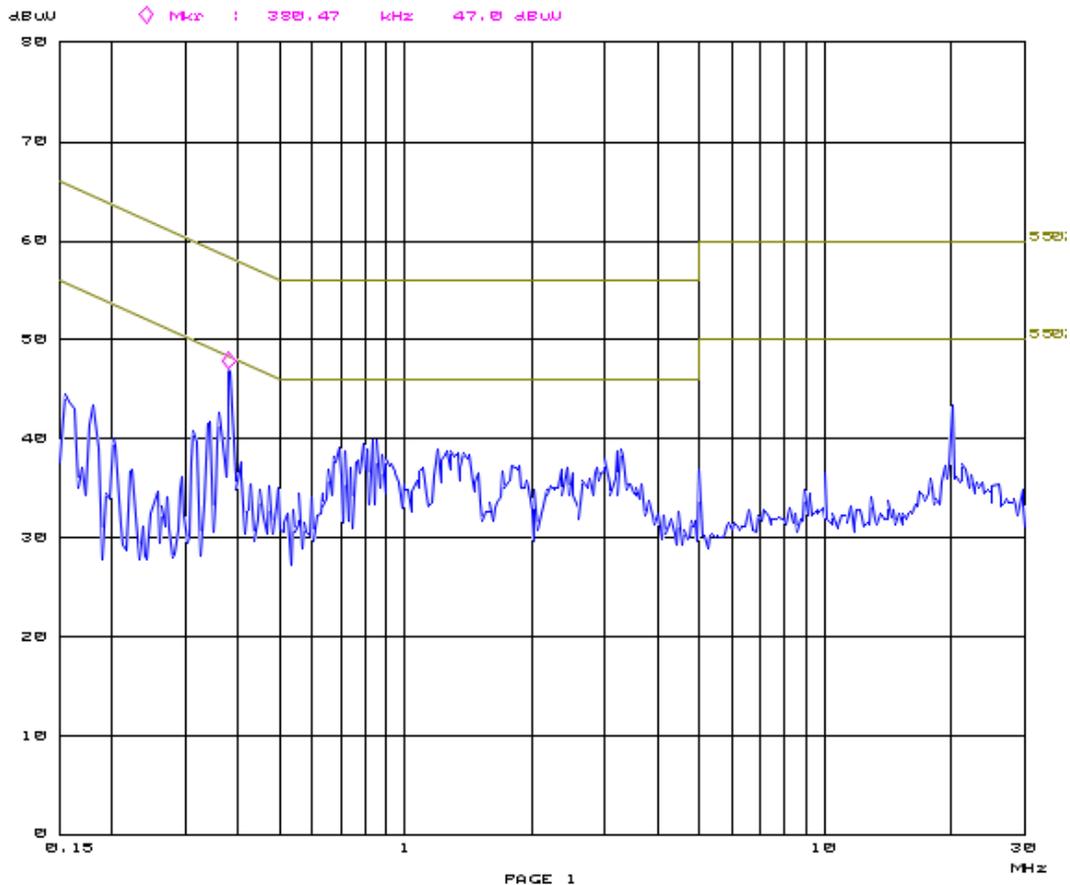

Plot of the AC Power-line Conducted emission on L2, @2440 MHz



Test Report No.:


**19052404.r01**

Page 45 of 46

15. Aug 19 11:45

Overview Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |         |        |
|-------------|------|------|-------------------|----------|--------|---------|--------|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten   | Preamp |
| 150k        | 30M  | 3.9k | 9k                | PK       | 0.10ms | 20dB LN | OFF    |

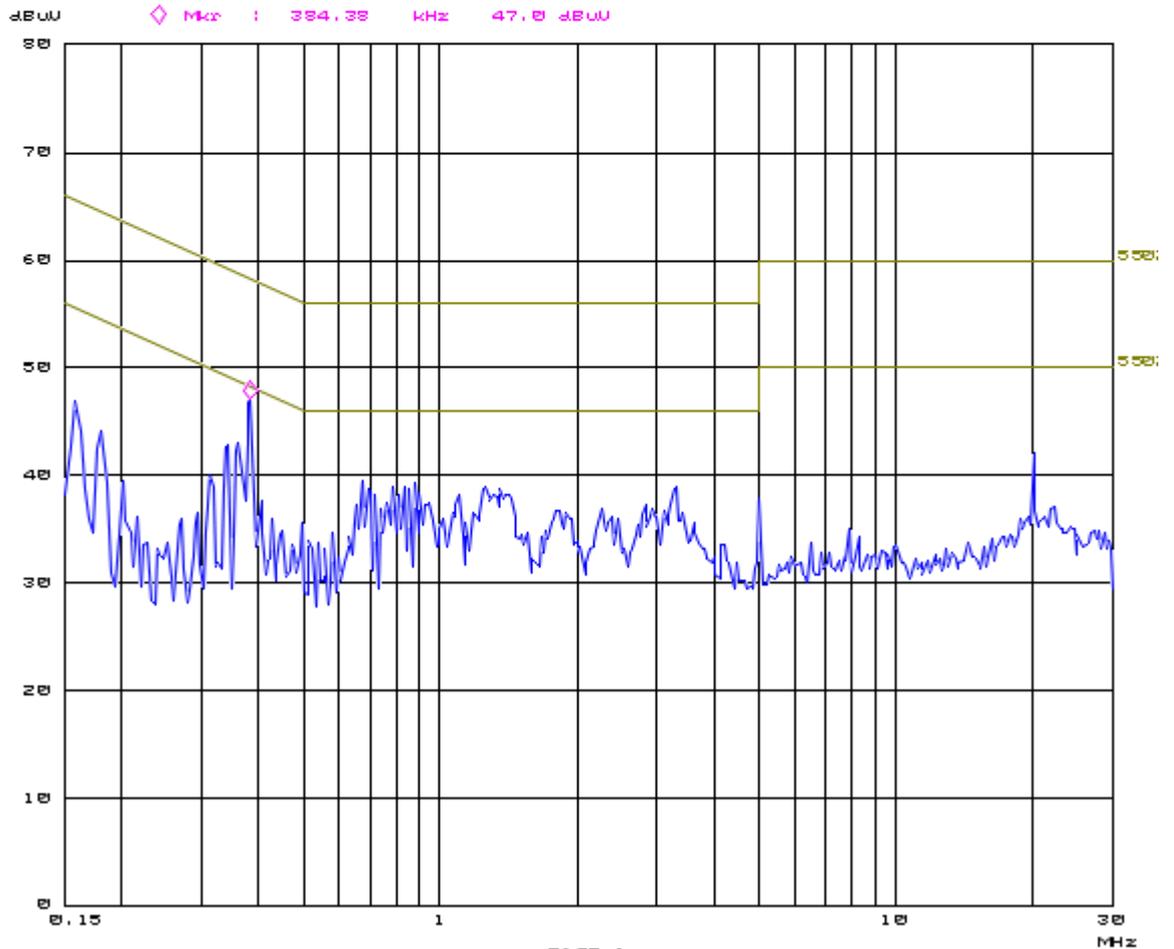

Plot of the AC Power-line Conducted emissions on L2, @2480 MHz



*Test Report No.:*

**19052404.r01**

*Page 46 of 46*

**End of report**

|   |   |                     |   |   |           |
|---|---|---------------------|---|---|-----------|
| <b>Test Report No.:</b>   |   | <b>19052404.r02</b> |   | Page 1 of 48  |           |
| Client:   | <b>Tacx b.v.</b><br>Rijksstraatweg 52, 2241BW Wassenaar, Netherlands  |                     |   |   |           |
| Test Item:  | <b>Digital Transmission System (DTS)</b><br><b>ANT</b>  |                     |   |   |           |
| Identification:   | <b>T2875</b>  | Serial Number:      | <b>- (conducted tests) and 800049670 (radiated tests)</b> |   |           |
| Project No.:  | <b>19052404</b>   | Date of Receipt:    | <b>July 25, 2019</b>                                      |   |           |
| Testing Location:   | <b>TÜV Rheinland Nederland B.V.</b><br>Eiberkamp 10<br>9351VT Leek  |                     |   |   |           |
| Test Specification:   | FCC 47 CFR Part 15, Subpart C, Section 15.247 (10-1-18 Edition)<br>KDB 558074 D01 15.247 Meas Guidance v05r02<br>RSS-Gen (Issue 5, April 2018) and RSS-247 (Issue 2, February 2017)<br>ANSI C63.10-2013 |                     |   |   |           |
| Test Result:  | The test item <b>passed</b> the test specification(s).  |                     |   |   |           |
| Testing Laboratory:   | <b>TÜV Rheinland Nederland B.V.</b><br>Eiberkamp 10<br>9351 VT Leek   |                     |   |   |           |
| Tested by:  |    |                     | Reviewed by:  |  |           |
| 2019-09-20  | R. van der Meer / Inspector   | 2019-09-20          |   | E. van der Wal / Reviewer   |           |
| Date  | Name/Position   | Signature           | Date  | Name/Position   | Signature |
| Other Aspects:-.  |   |                     |   |   |           |
| Abbreviations: P(ass) = passed<br>F(ail) = failed<br>N/A = not applicable<br>NT = not tested  |   |                     |   |   |           |
| This report shall not be reproduced, except in full, without the written permission of<br>TÜV Rheinland Nederland B.V.<br>The test results relate only to the item(s) tested. |   |                     |   |   |           |

Test Report No.:

**19052404.r02**

Page 2 of 48

## TEST SUMMARY

### **5.1.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT**

*RESULT: Pass*

### **5.1.2 6dB AND 99% BANDWIDTH**

*RESULT: Pass*

### **5.1.3 PEAK POWER SPECTRAL DENSITY**

*RESULT: Pass*

### **5.1.4 CONDUCTED OUT OF BAND EMISSIONS**

*RESULT: Pass*

### **5.1.5 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER**

*RESULT: Pass*

### **5.2.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER**

*RESULT: Pass*



## Contents

|            |  |           |
|------------|--|-----------|
| <b>1.</b>  | <b>GENERAL REMARKS .....</b>   | <b>4</b>  |
| <b>1.1</b> | <b>COMPLEMENTARY MATERIALS .....</b>   | <b>4</b>  |
| <b>2.</b>  | <b>TEST SITES .....</b>  | <b>4</b>  |
| <b>2.1</b> | <b>TEST FACILITIES .....</b>   | <b>4</b>  |
| <b>2.2</b> | <b>LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....</b> | <b>5</b>  |
| <b>2.3</b> | <b>MEASUREMENT UNCERTAINTY .....</b>   | <b>6</b>  |
| <b>3.</b>  | <b>GENERAL PRODUCT INFORMATION.....</b>  | <b>7</b>  |
| <b>3.1</b> | <b>PRODUCT FUNCTION AND INTENDED USE.....</b>  | <b>7</b>  |
| <b>3.2</b> | <b>SYSTEM DETAILS .....</b>  | <b>7</b>  |
| <b>3.3</b> | <b>COUNTERMEASURES TO ACHIEVE COMPLIANCE .....</b>   | <b>8</b>  |
| <b>4.</b>  | <b>TEST SET-UP AND OPERATION MODES .....</b>   | <b>9</b>  |
| <b>4.1</b> | <b>TEST METHODOLOGY .....</b>  | <b>9</b>  |
| <b>4.2</b> | <b>OPERATION MODES .....</b>   | <b>9</b>  |
| <b>4.3</b> | <b>PHYSICAL CONFIGURATION FOR TESTING .....</b>  | <b>10</b> |
| <b>4.4</b> | <b>TEST SOFTWARE .....</b>   | <b>12</b> |
| <b>4.5</b> | <b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>   | <b>13</b> |
| <b>5.</b>  | <b>TEST RESULTS .....</b>  | <b>14</b> |
| <b>5.1</b> | <b>CONDUCTED MEASUREMENTS AT ANTENNA PORT.....</b>   | <b>14</b> |
| 5.1.1      | <i>Conducted Output Power.....</i>   | <i>14</i> |
| 5.1.2      | <i>6dB and 99% Bandwidth.....</i>  | <i>17</i> |
| 5.1.3      | <i>Peak Power Spectral Density .....</i>   | <i>22</i> |
| 5.1.4      | <i>Conducted Out Of Band Spurious Emissions.....</i>   | <i>25</i> |
| 5.1.5      | <i>Radiated Spurious Emissions of Transmitter.....</i>   | <i>28</i> |
| <b>5.2</b> | <b>AC POWER LINE CONDUCTED MEASUREMENTS.....</b>   | <b>42</b> |
| 5.2.1      | <i>AC Power Line Conducted Emission of Transmitter.....</i>  | <i>43</i> |
| 5.2.2      | <i>Plots of the AC Power-line Conducted Emissions.....</i>   | <i>44</i> |

Test Report No.:

**19052404.r02**

Page 4 of 48

## **1. General Remarks**

### **1.1 Complementary Materials**

There is no attachment to this test report.

## **2. Test Sites**

### **2.1 Test Facilities**

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 786213. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

Temperature (\*) : +15°C to +35°C  
Relative humidity(\*) : 20 % to 75 %  
Supply voltage : 120 VAC.

*(\*)When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.*

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

| Kind of Equipment                           | Manufacturer    | Model Name                           | Inventory number | Calibration date (mm/yyyy) | Calibration due date (mm/yyyy) |
|---|-----------------|--------------------------------------|------------------|----------------------------|--------------------------------|
| <b>For Antenna Port Conducted Emissions</b> |                 |                                      |                  |                            |                                |
| Temperature-Humiditymeter                   | Extech          | SD500                                | A00446           | 06/2019                    | 06/2020                        |
| Spectrum Analyzer                           | Rohde & Schwarz | FSV                                  | A01744           | 07/2018                    | 07/2020                        |
| RF Cable                                    | Huber + Suhner  | Sucoflex 102                         | A00347           | 07/2019                    | 07/2020                        |
| <b>For Radiated Emissions</b>               |                 |                                      |                  |                            |                                |
| Measurement Receiver                        | Rohde & Schwarz | ESCI                                 | 2789083 (A00317) | 03/2019                    | 03/2020                        |
| RF Cable S-AR                               | Gigalink        | APG0500                              | A00447           | 03/2019                    | 03/2020                        |
| Controller                                  | Maturo          | SCU/088/8090811                      | A00450           | N/A                        | N/A                            |
| Controller                                  | EMCS            | DOC202                               | A00257           | N/A                        | N/A                            |
| Test facility                               | Comtest         | FCC listed:<br>786213<br>IC: 2932G-2 | A00235           | 10/2017                    | 10/2020                        |
| Spectrum Analyzer                           | Rohde & Schwarz | FSV                                  | A00337           | 07/2018                    | 07/2020                        |
| Antenna mast                                | EMCS            | AP-4702C                             | A00258           | N/A                        | N/A                            |
| Temperature-Humiditymeter                   | Extech          | SD500                                | A00444           | 06/2018                    | 06/2020                        |
| Guidehorn 1-18 GHz                          | EMCO            | 3115                                 | A00008           | 12/2017                    | 12/2020                        |
| Guidehorn 18-40 GHz                         | EMCO            | RA42-K-F-4B-C                        | A00012           | 01/2018                    | 01/2021                        |
| Biconilog Testantenna                       | Teseq           | CBL 6111D                            | A00466           | 03/2019                    | 03/2020                        |
| 2.4 GHz bandreject filter                   | BSC             | XN-1783                              | A00065           | N/A                        | N/A                            |
| Bandpass filter 4-10 GHz                    | Reactel         | 7AS-7G-6G-511                        | A00131           | N/A                        | N/A                            |
| Bandpass filter 10-26 GHz                   | Reactel         | 9HS-10G/26.5G-S11                    | A00151           | N/A                        | N/A                            |
| Preamplifier 0.5 - 18 GHz                   | Miteq           | AMF-5D-005180-28-13p                 | A00247           | N/A                        | N/A                            |
| Filterbox                                   | EMCS            | RFS06S                               | A00255           | 04/2018                    | 04/2020                        |



Test Report No.:

**19052404.r02**

Page 6 of 48

| Kind of Equipment                           | Manufacturer    | Model Name | Inventory number | Calibration date (mm/yyyy) | Calibration due date (mm/yyyy) |
|---|-----------------|------------|------------------|----------------------------|--------------------------------|
| <b>For AC Powerline Conducted Emissions</b> |                 |            |                  |                            |                                |
| Pulse limiter                               | R&S             | ESH3-Z2    | 2788823 (A00051) | 11/2018                    | 11/2019                        |
| Variac                                      | RFT             | LSS020     | A00171           | NA                         | NA                             |
| LISN  | R&S             | ESH-2      | 2788791 (A00019) | 06/2019                    | 06/2020                        |
| Measurement Receiver                        | Rohde & Schwarz | ESCS30     | 2789421 (A00726) | 07/2019                    | 07/2020                        |
| RF Cable                                    | -               | -          | A01844           | 06/2019                    | 06/2020                        |
| Shielded room for Conducted emissions       | --              | --         | A00437           | NA                         | NA                             |
| Temperature-Humidity meter                  | Extech          | SD500      | 2789211 (A00441) | 06/2019                    | 06/2020                        |

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing. NA= Not Applicable

## 2.3 Measurement Uncertainty

**Table 2: Emission Measurement Uncertainty**

| Measurement Type                  | Frequency      | Uncertainty |
|-----------------------------------|----------------|-------------|
| Antenna Port Conducted Emission   | < 1.3GHz       | 1.7dB       |
|                                   | 1.3 - 40GHz    | 2.9 – 3.4dB |
| Radiated Emission                 | 150kHz - 30MHz | ±5.0dB      |
|                                   | 30MHz - 1GHz   | ±5.22dB     |
|                                   | > 1GHz         | ±5.22dB     |
| AC Power Line Conducted Emissions | 150kHz - 30MHz | ±3.6dB      |

### **3. General Product Information**

#### **3.1 Product Function and Intended Use**

The brand Tacx model T2875, hereafter referred to as EUT, is an ANT+ transmitter used in an Interactive Smart Trainer with Electric Motor Brake for bicycles to transmit performance data to PC, Tablet or smartphone. The transmitter will support and utilizes GFSK modulation techniques. Although the chip used is capable of multiple data-rates only 1 Mbps is used. The EUT also contains a Digital Transmission System (DTS) operating in the frequencyband 2403-2480 MHz, based on BLE technology. The BLE transceiver is covered in a separate test report.

The content of this report and measurement results have not been changed other than the way of presenting the data.

#### **3.2 System Details**

Details and an overview of the system and all of its components, as it has been tested, may be found below.

|                       |   |  |
|-----------------------|---|--|
| EUT                   | : | Digital Transmission System, ANT+                    |
| Manufacturer          | : | Tacx b.v.  |
| Brand                 | : | Tacx   |
| Model(s)              | : | T2875  |
| Serial Number         | : | N/A (conducted tests) and 800049670 (radiated tests) |
| Voltage input rating  | : | 48 Vdc (through AUX2)                                |
| Voltage output rating | : | --   |
| Current input rating  | : | --   |
| Antenna               | : | Internal, integrated on the PCB                      |
| Antenna Gain          | : | + 2.0 dBi  |
| Operating frequency   | : | 2403 MHz-2480 MHz.                                   |
| Modulation            | : | GFSK   |
| Data-rate             | : | 1 Mbps   |
| Remarks               | : | n.a.   |

*Test Report No.:*

**19052404.r02**

*Page 8 of 48*

**Table 3: Interfaces present on the EUT**

There are no interface ports present on the EUT.

**3.3 Countermeasures to achieve compliance**

No additional measures were employed to achieve compliance.

## 4. Test Set-up and Operation Modes

### 4.1 Test Methodology

The test methodology used is based on the requirements of RSS-GEN, RSS-247, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247.

The test methods, which have been used, are based on ANSI C63.10-2013.

### 4.2 Operation Modes

The EUT has 2 operating modes: a) "at rest" – no person is operating the EUT and b) 'spinning' – in this mode a person is on the bike doing training. The EUT was tested in "at rest" mode. Testing was performed at the lowest operating frequency (2403 MHz), at the operating frequency in the middle of the specified frequency band (2442 MHz) and at the highest operating frequency (2480 MHz). These operation modes were selected after review of the capabilities and characteristics of the EUT. The test software as mentioned in section 4.4 enabled the settings of these modes.

The EUT has been tested in the modes as described in table below

| Operation Mode | EUT Status   | Frequency (MHz) | TX power control setting |
|----------------|--------------|-----------------|--------------------------|
| Transmit (Tx)  | On – at rest | 2403            | 3                        |
| Transmit (Tx)  | On – at rest | 2442            | 3                        |
| Transmit (Tx)  | On – at rest | 2480            | 3                        |


### 4.3 Physical Configuration for Testing

For programming purposes only the EUT was connected to the usb port of a laptop computer. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel as specified in the test data. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis and the test system was configured in a way that a load condition was emulated by a bicycle wheel that was spun by a controllable speed.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2013.

**Figure 1a: Test Setup Diagram – antenna port conducted tests and programming.**

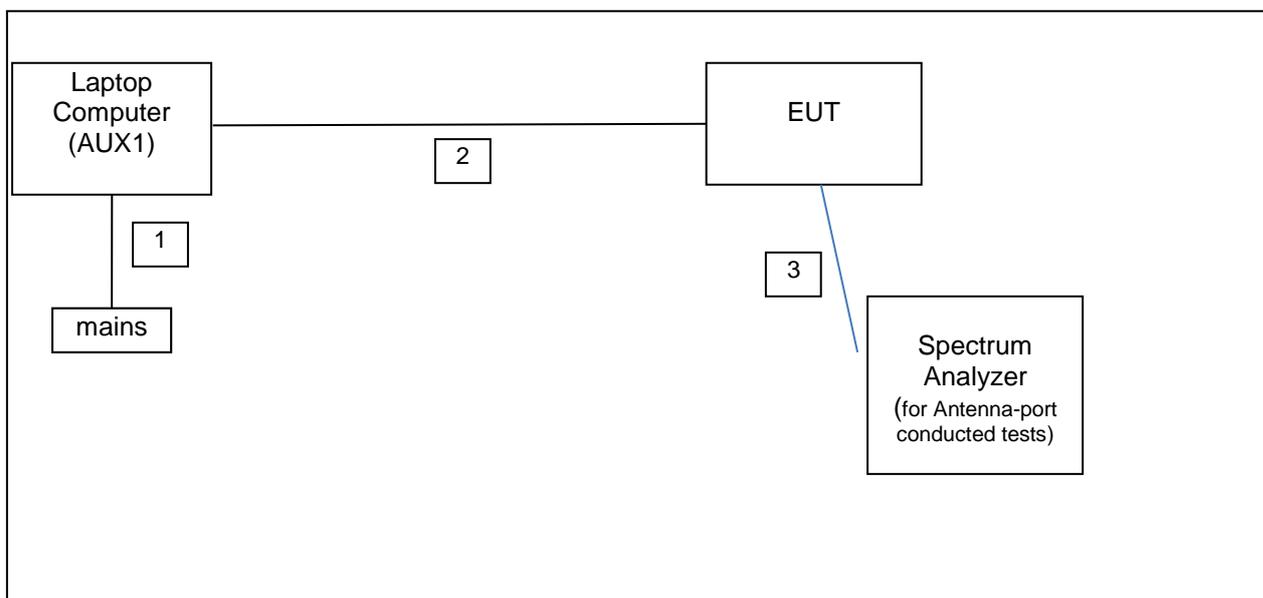


| No. | Port         | From       | To                | Remarks                |
|-----|--------------|------------|-------------------|------------------------|
| 1.  | Mains        | Mains      | Laptop (AUX1)     | Through a power supply |
| 2.  | Data com.    | Laptop USB | EUT               | --                     |
| 3.  | Antenna port | EUT        | Spectrum analyzer | Conducted tests        |
|     |              |            |                   |                        |

### 4.4 Test Software

A continuous transmit mode could be initiated by using test software as supplied by the applicant. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by the applicant and used during all tests is:

Test software : RASP v2.0.26

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

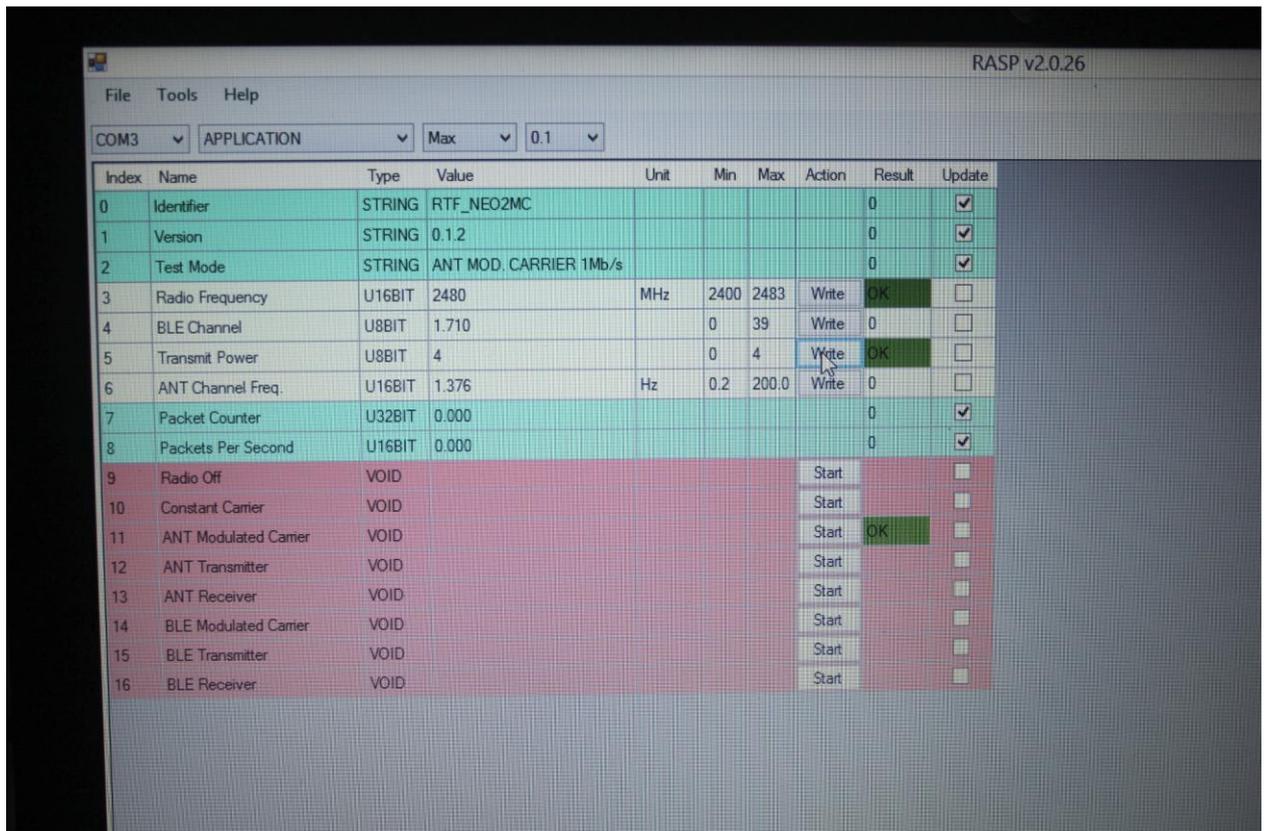

Screenshot of the software (and settings) as used on AUX1

## 4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

The auxiliary items were not used during testing, but instead are only used to make the required settings for testing. For setting the transmit frequency, enable modulation etc.

1. AUX1

Product: Laptop Computer  
Brand: HP  
Model: J3T34EA#ABH  
Serial Number: CND424BVDG  
Remark: host for test software, property applicant



2. AUX2

Product: Power supply  
Brand: Mean Well  
Model: GSM40B48-P1L  
Serial Number: EB93G85008  
Remark: property applicant



Test Report No.:

**19052404.r02**

Page 14 of 48

## 5. Test Results

### 5.1 Conducted Measurements at Antenna Port

#### 5.1.1 Conducted Output Power

**RESULT: PASS**

Date of testing: 2019-08-19

Requirements:

FCC 15.247(b)(3)

For systems using digital modulation in the 2400-2483.5 MHz band, the maximum peak output power is 1W (+30dBm).

RSS-247 section 5.4(4): the e.i.r.p. shall not exceed 4 W (+36 dBm).

Test procedure:

The Peak Conducted Output Power was measured using the method according to section 11.9.1.1 in ANSI C63.10-2013.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

Measurement uncertainty is +/- 2.5 dB.

Notes:  $mW = 10^{(dBm/10)}$   
 $dBm = 10 \times \log(mW)$

**plots : Peak power plots,**

Figures 1a, 1b and 1c show plots of the Peak Power outputs, correction factors (= 0.1dB Cableloss) included in the reading.


Test Report No.:

**19052404.r02**

Page 15 of 48


**Conducted Output Power**

| Frequency [MHz] | Output Power [dBm]<br>(mW) | Limit [dBm]<br>(W) | Verdict [Pass/Fail] | Plot number |
|-----------------|----------------------------|--------------------|---------------------|-------------|
| 2403            | -0.80<br>(0.83 mW)         | +30<br>(1W)        | Pass                | 1A          |
| 2442            | -1.26<br>(0.75 mW)         | +30<br>(1W)        | Pass                | 1B          |
| 2480            | -1.50<br>(0.71 mW)         | +30<br>(1W)        | Pass                | 1C          |

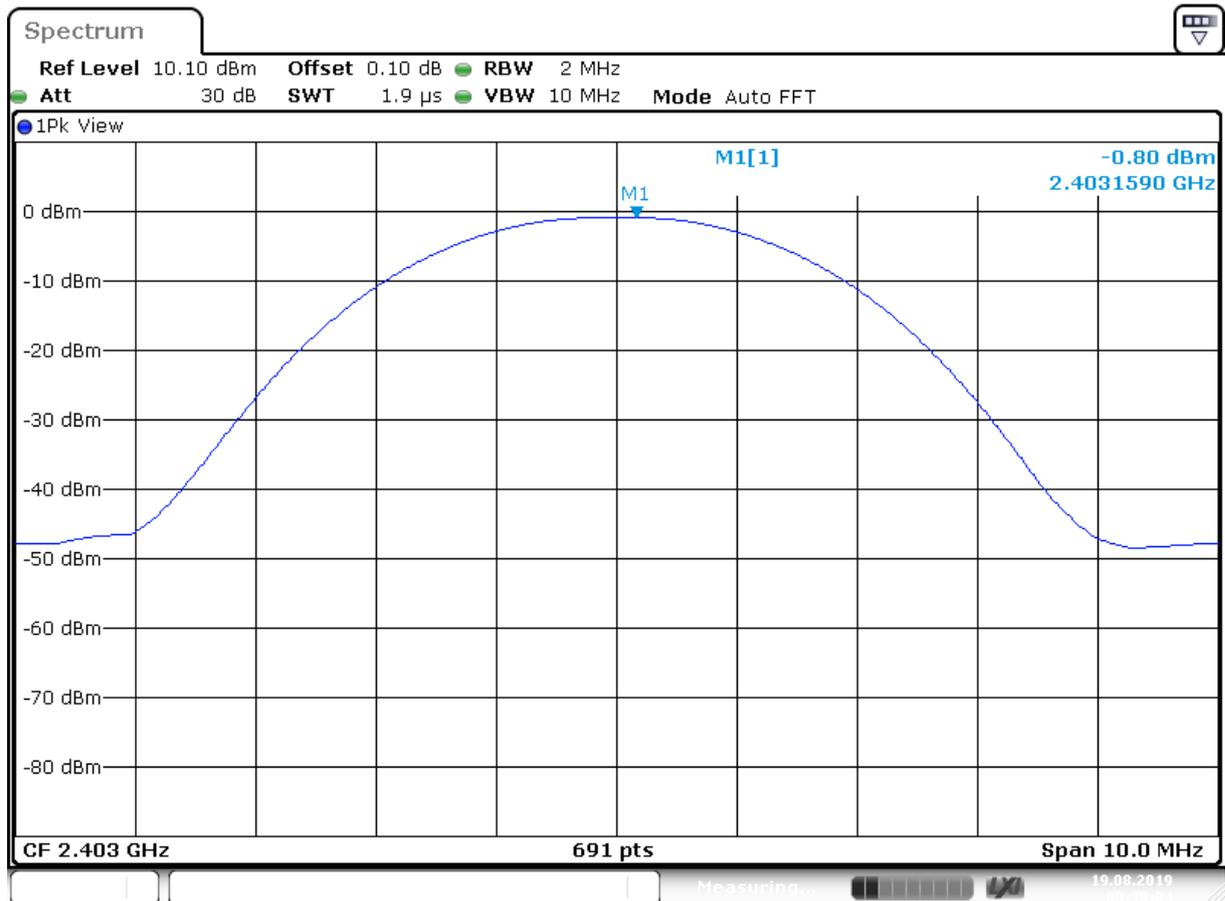


Date: 19.AUG.2019 09:38:04

Plot A

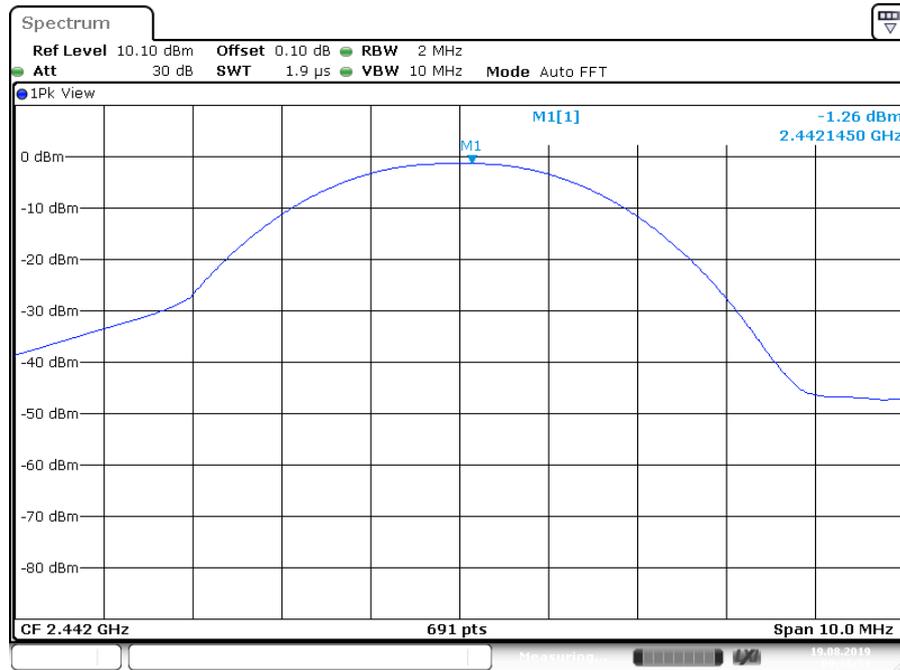

Plot B

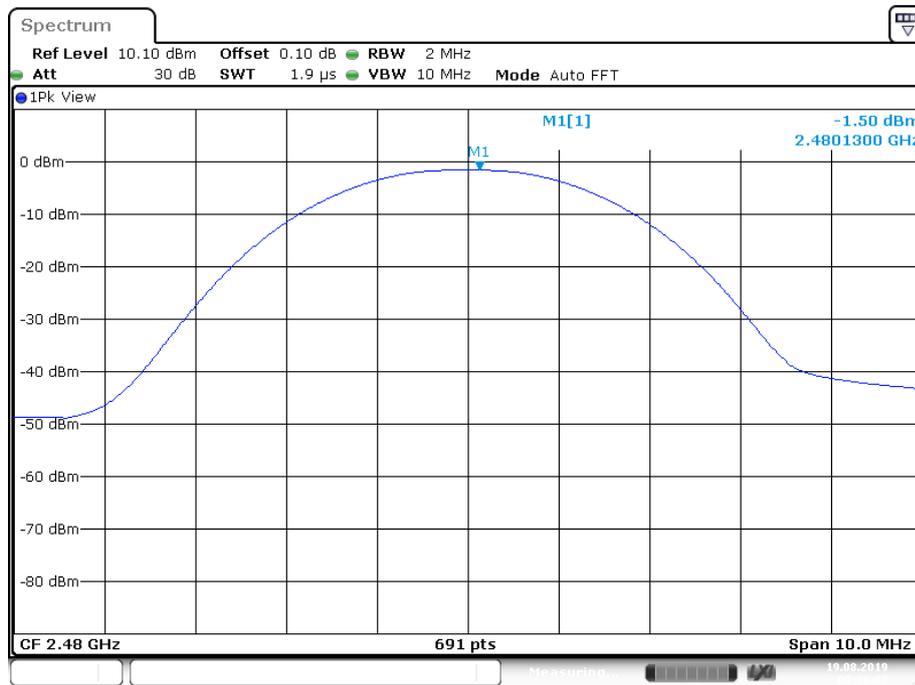

Plot C

Test Report No.:

**19052404.r02**

Page 17 of 48

## 5.1.2 6dB and 99% Bandwidth

### RESULT: PASS

Date of testing: 2019-08-19

#### Requirements:

FCC 15.247(a)(2) and RSS-247 Section 5.2(1)

For systems using digital modulation in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

#### Test procedure 6dB bandwidth:

ANSI C63.10-2013 section 11.8.1 Option 1

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

#### For 99% Bandwidth:

RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Measurement uncertainty is +/- 26kHz.

Plots A1,B1 and C1 shown on the next pages are of the 6 dB bandwidth.

Plots A2,B2 and C2 shown on the next pages are of the 99% bandwidth


Test Report No.:

**19052404.r02**

Page 18 of 48


**6dB Bandwidth**

| Operating Frequency [MHz] | 99% Bandwidth [kHz] | 6dB Bandwidth [kHz] | Limit 6dB BW [kHz] | Verdict [Pass/Fail] | Plot number |
|---------------------------|---------------------|---------------------|--------------------|---------------------|-------------|
| 2403                      | 934.35              | 504.19              | >500               | Pass                | A1/A2       |
| 2442                      | 913.78              | 500.70              | >500               | Pass                | B1/B2       |
| 2480                      | 917.78              | 500.70              | >500               | Pass                | C1/C2       |

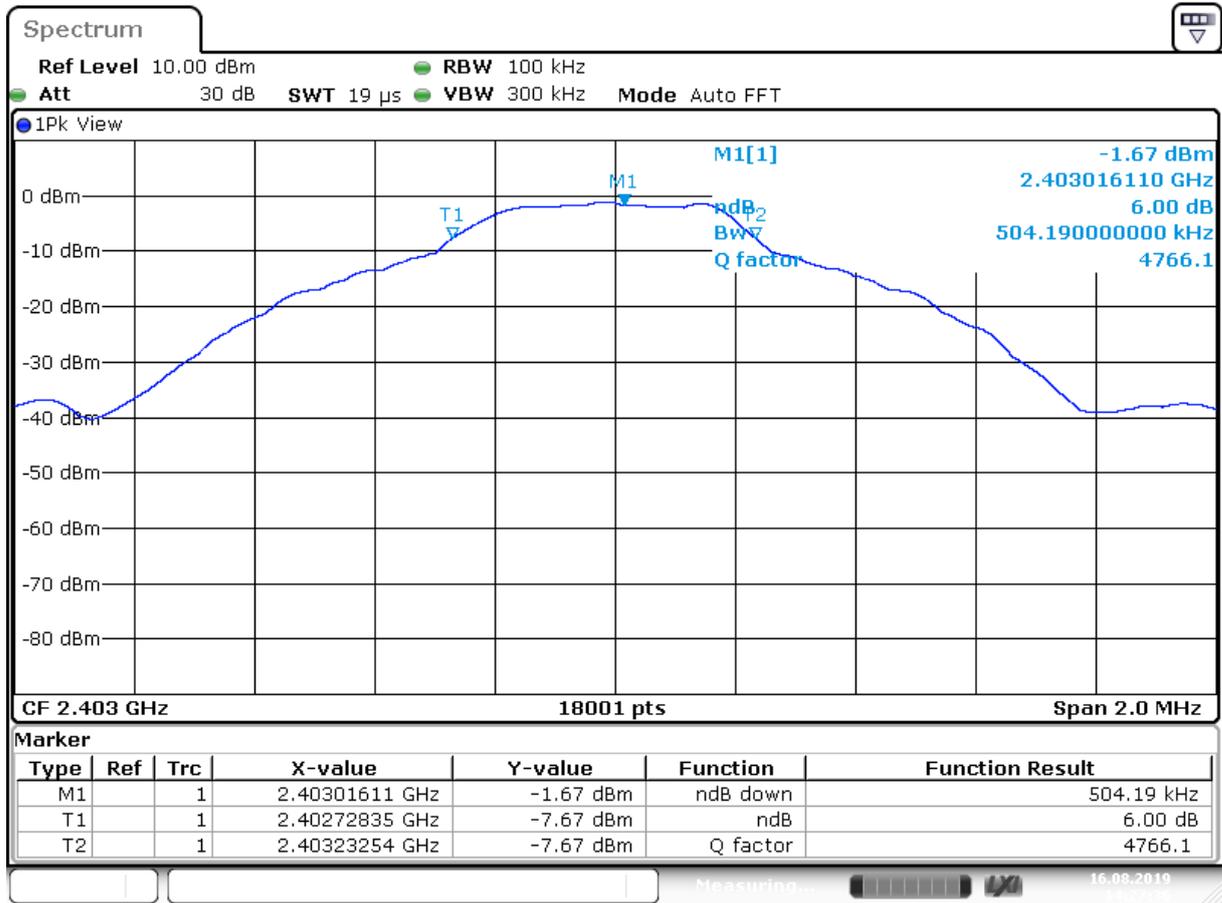


Date: 16.AUG.2019 14:27:36

Plot A1

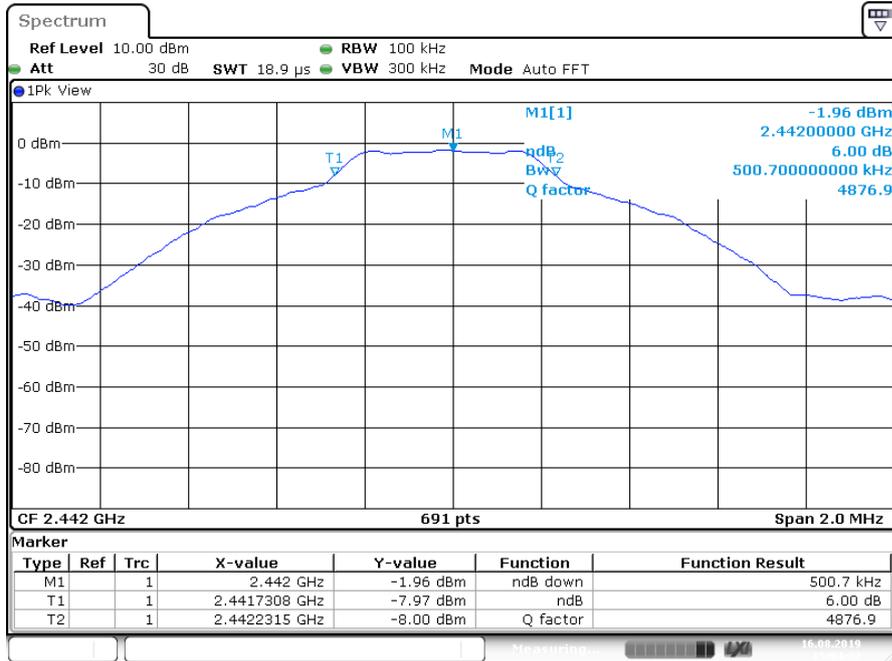


Date:16 AUG 2019 15:04:22

Plot B1

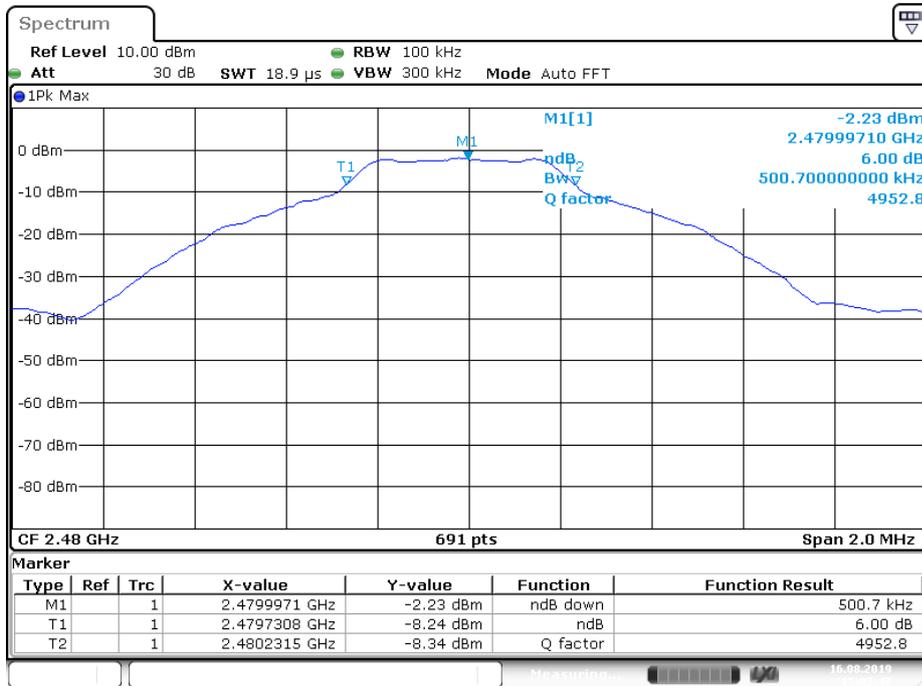


Date:16 AUG 2019 15:02:47


Plot C1

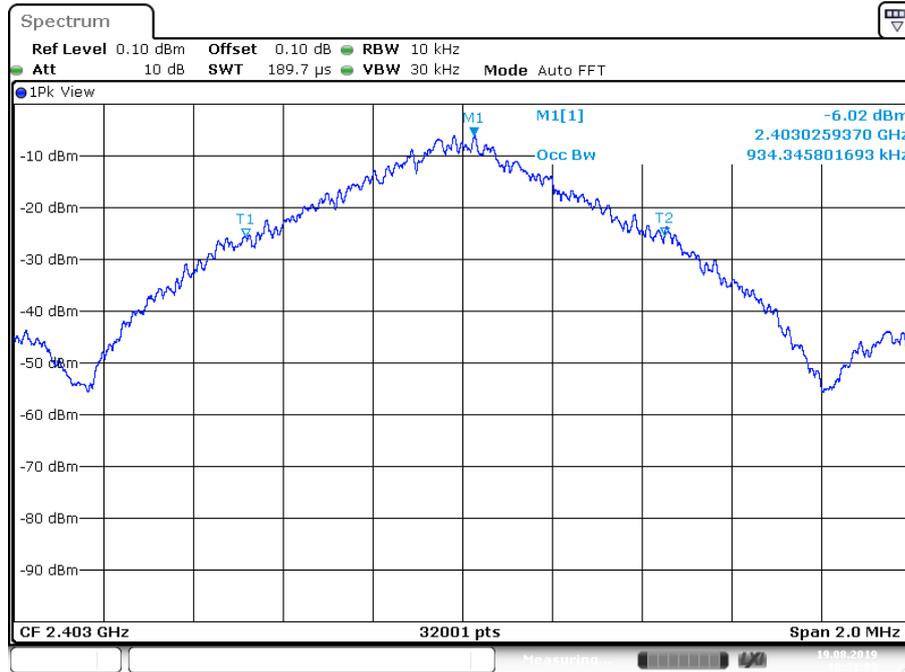

Plot A2

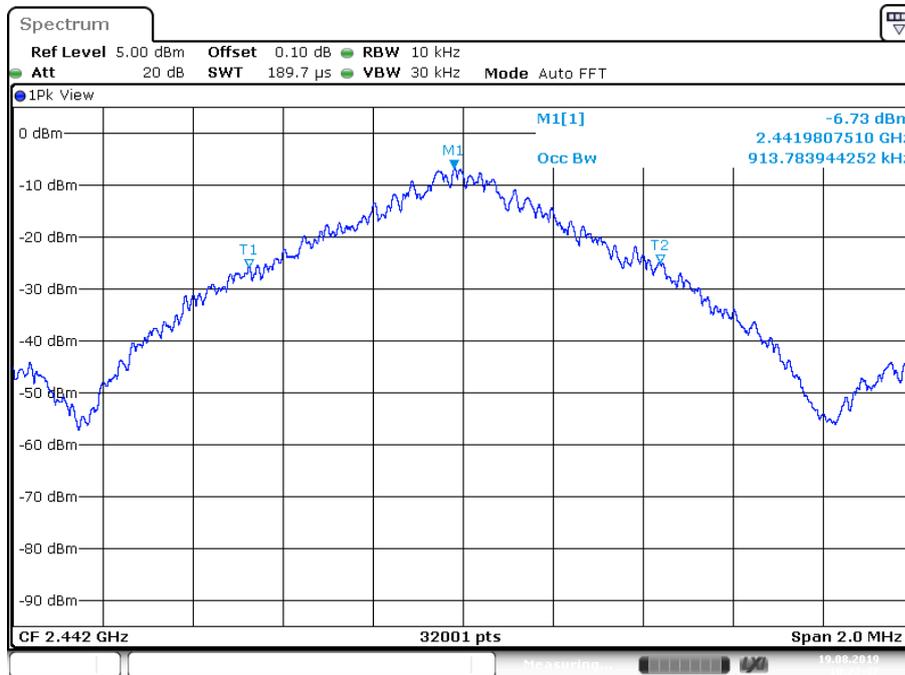

Plot B2

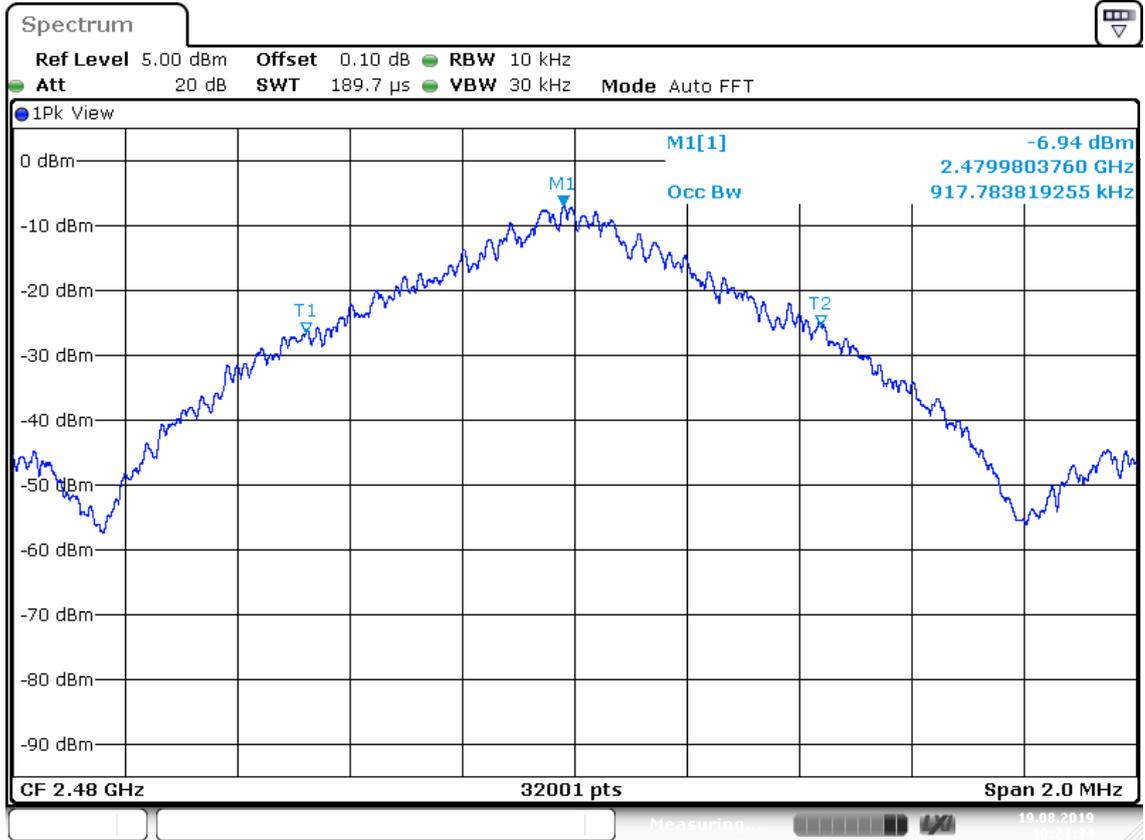

Date: 19.AUG.2019 10:23:34

Plot C2

Test Report No.:

**19052404.r02**

Page 22 of 48

### **5.1.3 Peak Power Spectral Density**

#### **RESULT: Pass**

Date of testing: 2019-08-19

#### Requirements:

FCC 15.247(e) and RSS-247 section 5.2(2)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

#### Test procedure:

ANSI C63.10-2013

The section 11.10.2 PKPSD peak PSD procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables.

Measurement uncertainty is +/- 1.1 dB.


Test Report No.:

**19052404.r02**

Page 23 of 48

**Peak Power Spectral Density**

| Operating Frequency [MHz] | Max PSD [dBm] | Limit [dBm] | Verdict [Pass/Fail] | Plot |
|---------------------------|---------------|-------------|---------------------|------|
| 2403                      | -10.61        | 8           | Pass                | A    |
| 2442                      | -11.07        | 8           | Pass                | B    |
| 2480                      | -11.28        | 8           | Pass                | C    |

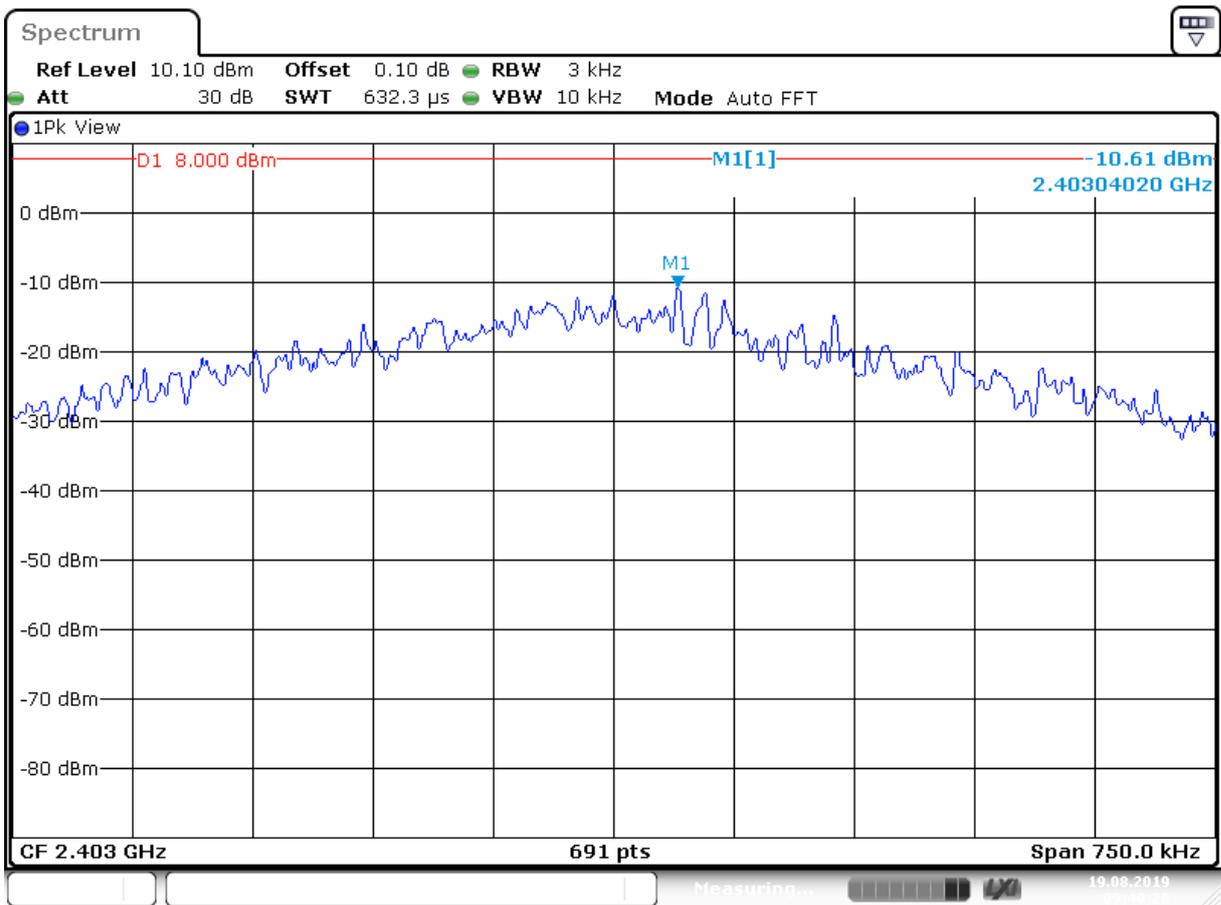


Date: 19.AUG.2019 09:40:28

Plot A


Test Report No.:

19052404.r02

Page 24 of 48

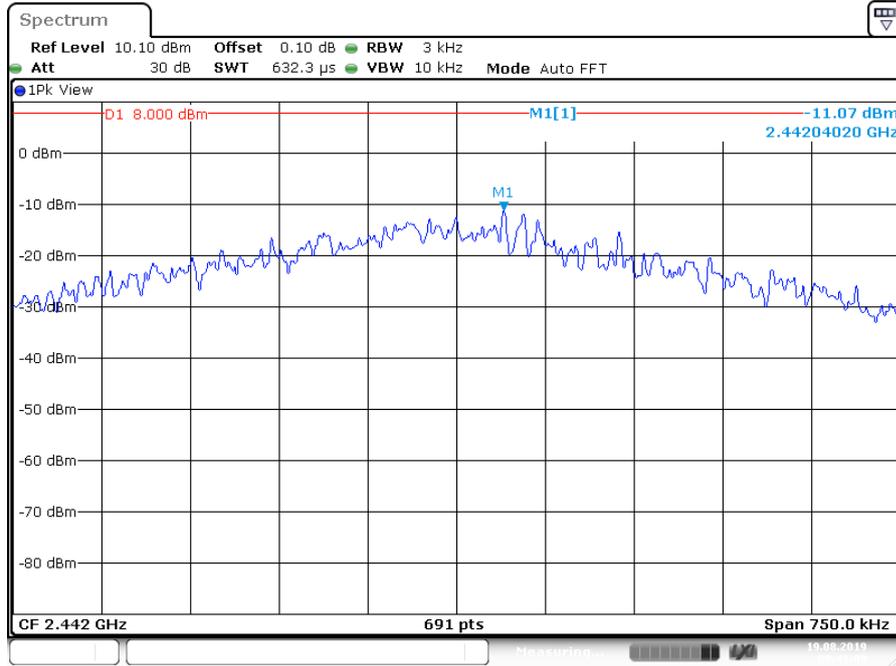

Plot B

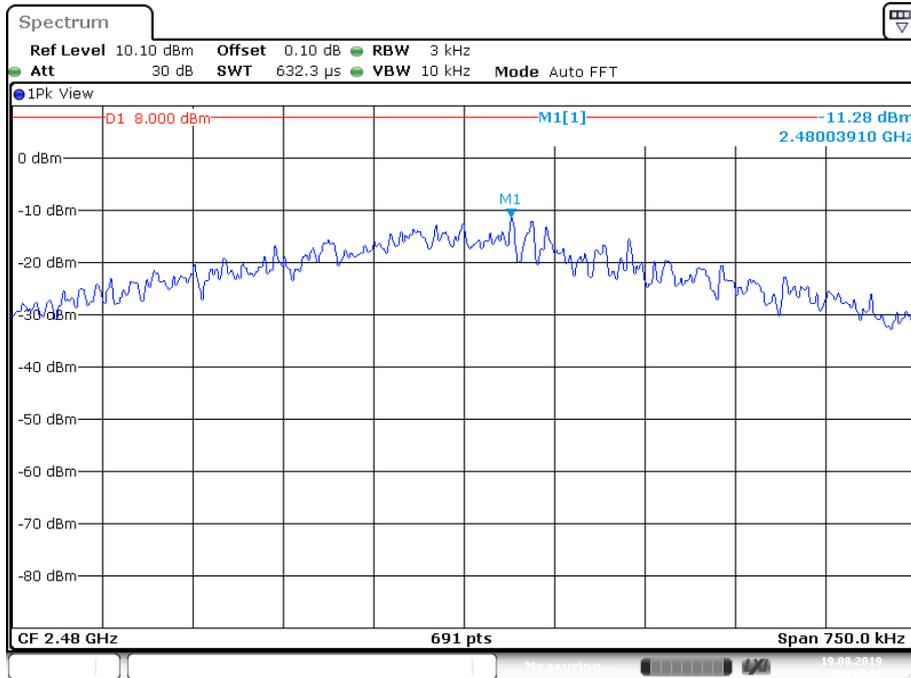

Plot C

Test Report No.:

**19052404.r02**

Page 25 of 48

## 5.1.4 Conducted Out Of Band Spurious Emissions

**RESULT: Pass**

Date of testing: 2019-08-19

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10-2013  
Section 11.13

An RF conducted measurement was used with the marker-delta method, as described in ANSI C63.10.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:  
RBW = 100kHz, VBW = 300kHz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.


Measurement uncertainty is +/- 2.5 dB.

Results: All out of band spurious emissions are more than 20 dB below the fundamental.  
See the figures on the following pages.


Test Report No.:

19052404.r02

Page 26 of 48

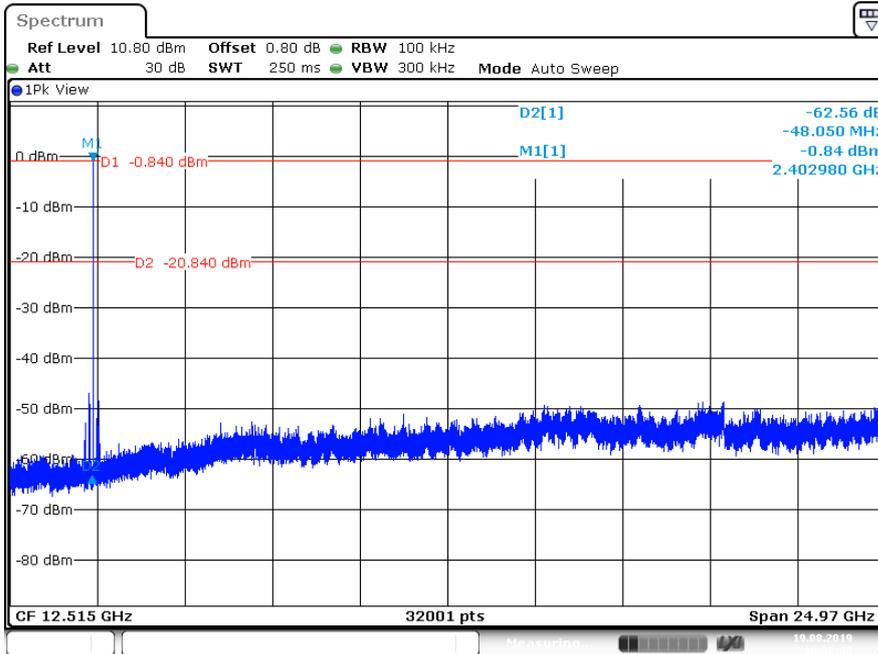

Plot: Conducted Emission @2403 MHz

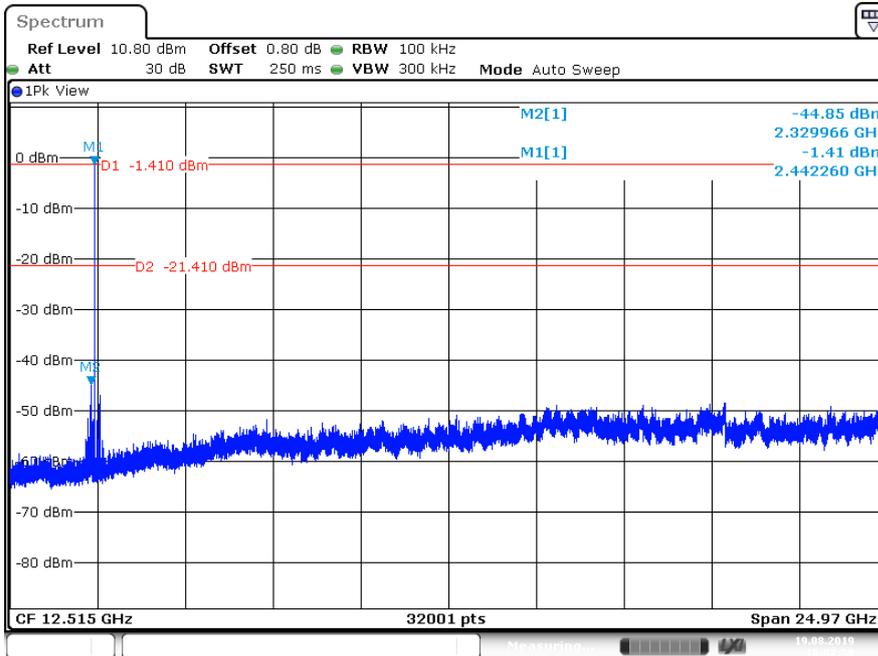


Plot: Conducted Emission @2442 MHz

Test Report No.:

19052404.r02

Page 27 of 48

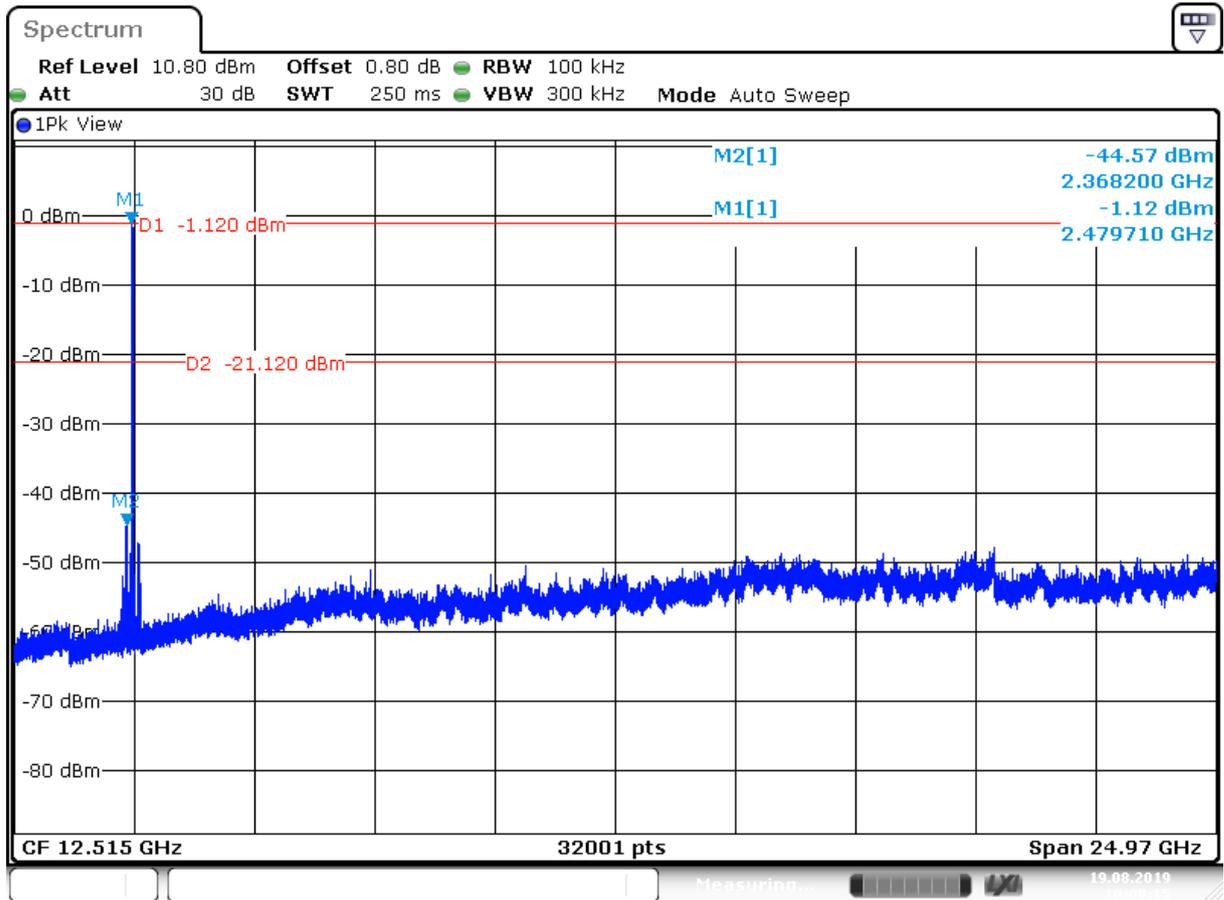

Date: 19 AUG 2019 10:09:16

Plot: Conducted Emission, @2480 MHz.

Test Report No.:

**19052404.r02**

Page 28 of 48

## 5.1.5 Radiated Spurious Emissions of Transmitter

### RESULT: Pass

Date of testing: 2019-08-07 & 13

Frequency range: 30MHz - 25GHz

#### Requirements:

FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen Table 6, must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen Table 4.

#### Test procedure:

ANSI C63.10-2013

The EUT is considered as floor-standing equipment not typically installed with its base in direct electrical contact with, or connected to, a metal floor or grid. The EUT was placed on the test site turntable with insulation material in-between of 10mm thickness to prevent electric contact.

Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit. Where Peak (Pk) values were at least 6 dB under the Average (Av) limits, Av value was not tested. Where Average values were tested, Average values were measured using at least 10kHz Video Bandwidth.

Test Report No.:


**19052404.r02**

Page 29 of 48

**Radiated Emissions, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations**

| Frequency [MHz] | EUT frequency (MHz) | Antenna Orientation | Level QP [dBµV/m] | Limit QP [dBµV/m] | Verdict [Pass/Fail] |
|-----------------|---------------------|---------------------|-------------------|-------------------|---------------------|
| 534.4           | 2403                | Horizontal          | 23.9              | 46.0              | Pass                |
| 212.4           | 2403                | Vertical            | 26.0              | 43.5              | Pass                |
| 220.9           | 2442                | Vertical            | 34.8              | 46.0              | Pass                |
| 227.9           | 2442                | Vertical            | 34.8              | 46.0              | Pass                |
| 247.3           | 2442                | Vertical            | 30.7              | 46.0              | Pass                |
| 800-960 noise   | 2480                | Vertical            | 32.0              | 46.0              | Pass                |

- Notes:
- Level QP = Reading QP + Factor
  - Tested in modes as described in section 4.2, the 6 highest values noted. Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating mode or frequency.
  - \*R refers to a frequency in a restricted band
  - Quasi Peak detector used with a bandwidth of 120 kHz.
  - Measurement uncertainty is +/- 5.22 dB.

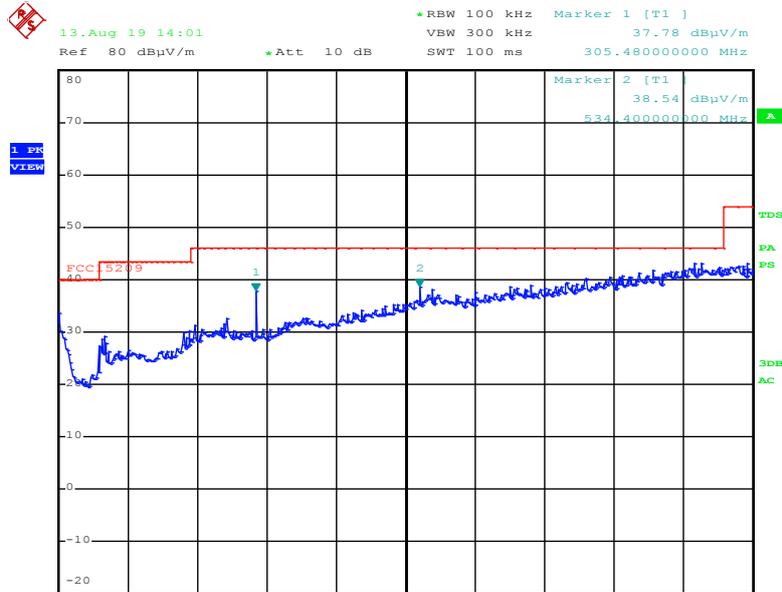


ORI  
 Date: 13.AUG.2019 14:01:30

Plot of the emissions (@2403 MHz, Antenna Horizontal)  
 (Peak detector values shown)

Test Report No.:


**19052404.r02**

Page 30 of 48

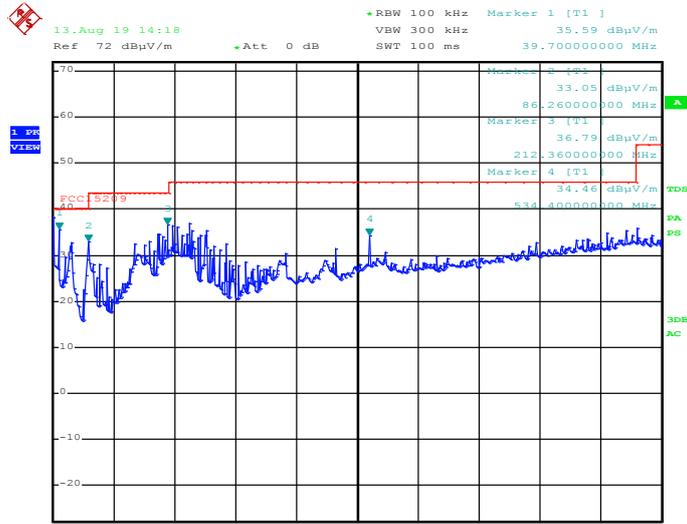

ORI  
 Date: 13.AUG.2019 14:18:11

Plot of the emissions (@2442 MHz, Antenna Vertical)  
 (Peak detector values shown)

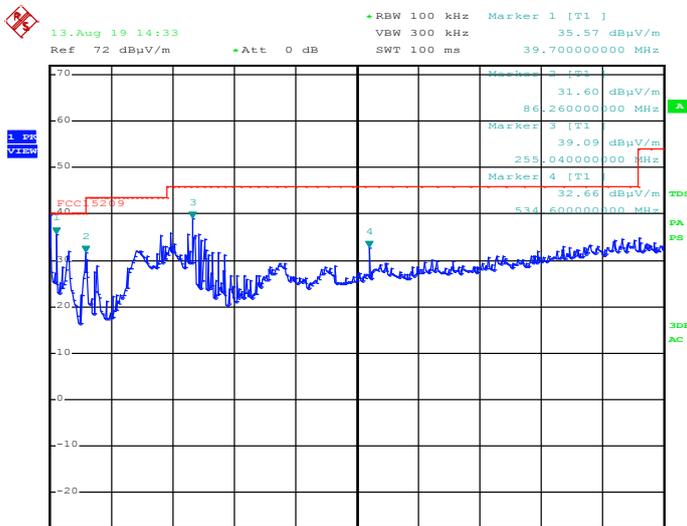

ORI  
 Date: 13.AUG.2019 14:33:21

Plot of the emissions (@2480 MHz, Antenna Vertical)  
 (Peak detector values shown)

Test Report No.:

**19052404.r02**

Page 31 of 48

**Radiated Emissions, 1 - 25GHz, 2403 MHz.**

| Frequency [MHz]           | Antenna Orientation | Detector | Bandwidth (MHz) | Level [dBµV/m]     | Limit [dBµV/m]     | Result |
|---------------------------|---------------------|----------|-----------------|--------------------|--------------------|--------|
| 2259 <sup>*R</sup>        | Horizontal          | Pk       | 1               | 54.0 Pk<br>48.9 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 2275 <sup>*R</sup>        | Horizontal          | Pk       | 1               | 55.7 Pk<br>50.7 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 4806 <sup>*H*R</sup>      | Horizontal          | Pk       | 1               | 58.3 Pk<br>50.3 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 7209 <sup>*H</sup>        | Horizontal          | Pk       | 1               | 54.7 Pk<br>46.0 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 14026                     | Horizontal          | Pk       | 1               | 58.6 Pk<br>45.8 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 17718 <sup>*R</sup> noise | Horizontal          | Pk       | 1               | 68.7 Pk<br>53.8 Av | 54 (Av)<br>74 (Pk) | Pass   |

**Radiated Emissions, 1 - 25GHz, 2442 MHz.**

| Frequency [MHz]           | Antenna Orientation | Detector | Bandwidth (MHz) | Level [dBµV/m]     | Limit [dBµV/m]     | Result |
|---------------------------|---------------------|----------|-----------------|--------------------|--------------------|--------|
| 2314 <sup>*R</sup>        | Vertical            | Pk       | 1               | 52.5               | 54 (Av)<br>74 (Pk) | Pass   |
| 2570                      | Vertical            | Pk       | 1               | 53.1               | 54 (Av)<br>74 (Pk) | Pass   |
| 4883 <sup>*H*R</sup>      | Vertical            | Pk       | 1               | 50.0               | 54 (Av)<br>74 (Pk) | Pass   |
| 7326 <sup>*H*R</sup>      | Vertical            | Pk       | 1               | 55.6 Pk<br>47.3 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 12075 <sup>*R</sup> noise | Vertical            | Pk       | 1               | 55.2 Pk<br>47.0 Av | 54 (Av)<br>74 (Pk) | Pass   |
| 17718 <sup>*R</sup> noise | Horizontal          | Pk       | 1               | 68.7 Pk<br>53.8 Av | 54 (Av)<br>74 (Pk) | Pass   |

Test Report No.:

**19052404.r02**


Page 32 of 48

**Radiated Emissions, 1 - 25GHz, 2480 MHz.**

| Frequency [MHz]          | Antenna Orientation | Detector | Bandwidth (MHz) | Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Result |
|--------------------------|---------------------|----------|-----------------|----------------------|----------------------|--------|
| 2640                     | Horizontal          | Pk       | 1               | 51.2                 | 54 (Av)<br>74 (Pk)   | Pass   |
| 4960 <sup>H</sup> *R     | Vertical            | Pk       | 1               | 56.1 Pk<br>53.1 Av   | 54 (Av)<br>74 (Pk)   | Pass   |
| 7440 <sup>H</sup> *R     | Vertical            | Pk       | 1               | 57.0 Pk<br>53.6 Av   | 54 (Av)<br>74 (Pk)   | Pass   |
| 13805 noise              | Vertical            | Pk       | 1               | 59.1 Pk<br>47.0 Av   | 54 (Av)<br>74 (Pk)   | Pass   |
| 17718 <sup>R</sup> noise | Horizontal          | Pk       | 1               | 68.7 Pk<br>53.8 Av   | 54 (Av)<br>74 (Pk)   | Pass   |


- Notes:
- \*R refers to a frequency in a restricted band,
  - \*H refers to a frequency which is a harmonic of the fundamental.
  - Field strength values of radiated emissions not listed in the tables above are more than 20 dB below the applicable limit.
  - Measurement uncertainty is +/- 5.5 dB.
  - a selection of plots is provided on the next pages

Plots of the radiated emissions

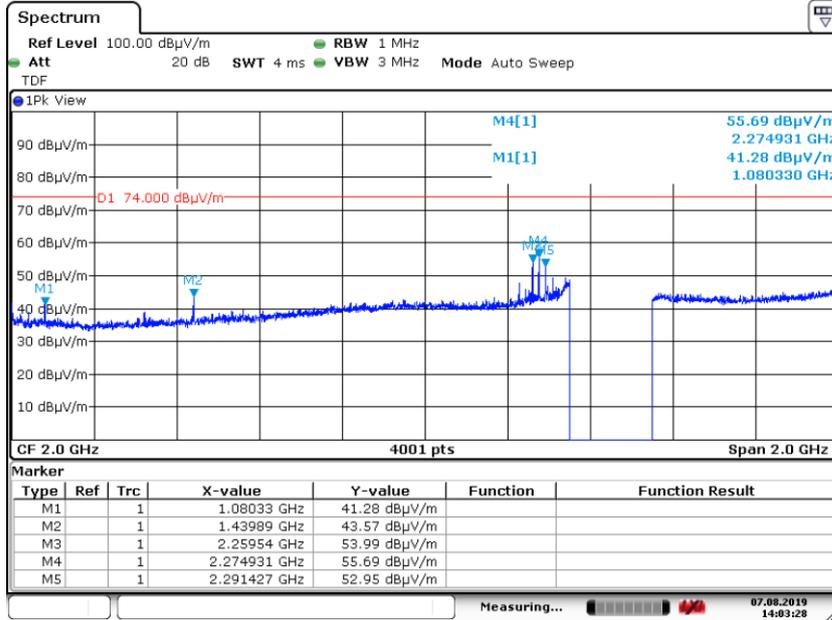


Date: 7.AUG.2019 14:03:28

Plot of the emissions at 2403 MHz, Horizontal polarization, Peak values shown

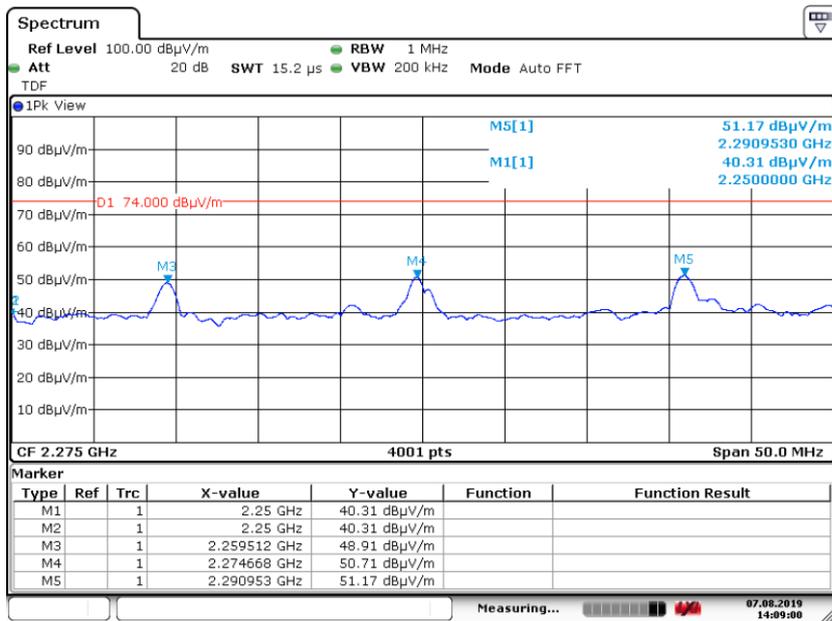


Date: 7.AUG.2019 14:09:00

Plot of the emissions at 2403 MHz, Horizontal polarization, 2.25 and 2.27 GHz, shown (reduced VBW)

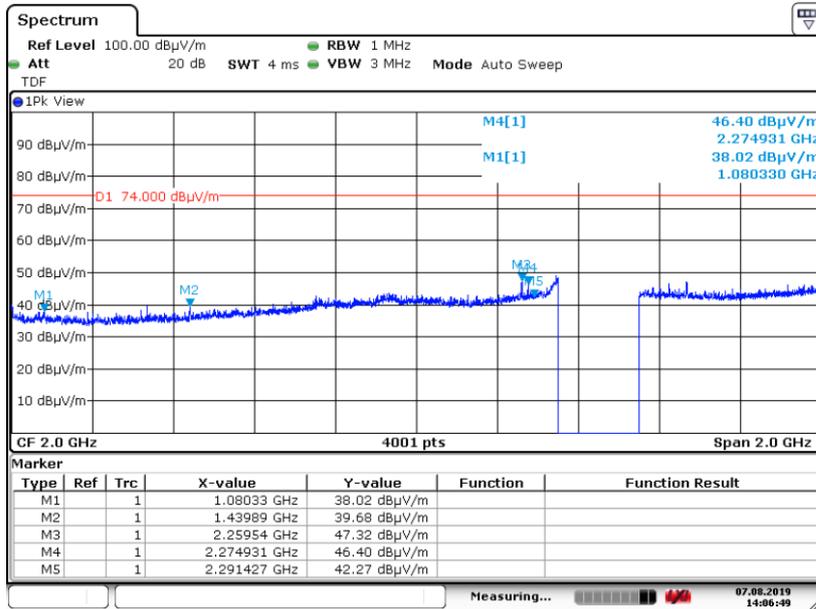


Date: 7.AUG.2019 14:06:48

Plot of the emissions at 2403 MHz in the range 1 – 3 GHz, Vertical polarization, Peak values shown. (gap in the plot is of the used 2.4 GHz Notch filter).

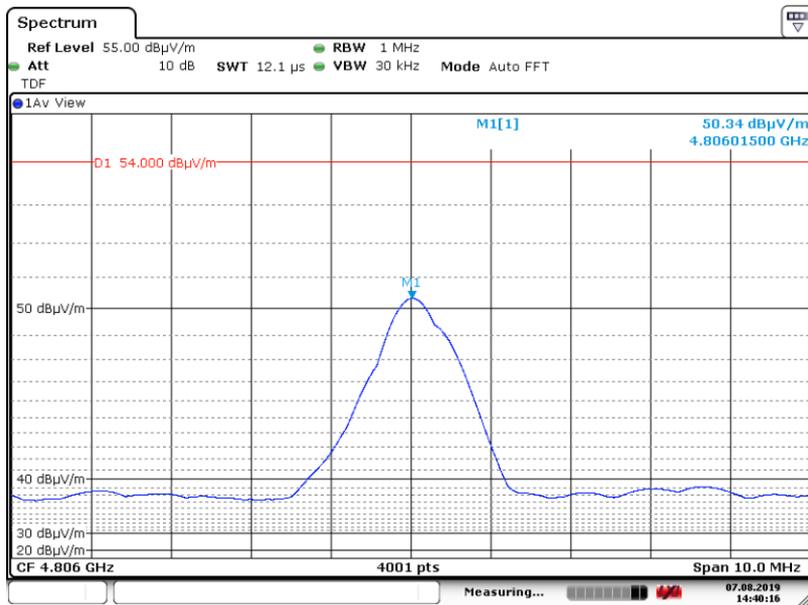


Date: 7.AUG.2019 14:40:15

Plot of the emissions at 2403 MHz, Horizontal polarization, Average value at 4.8 GHz shown

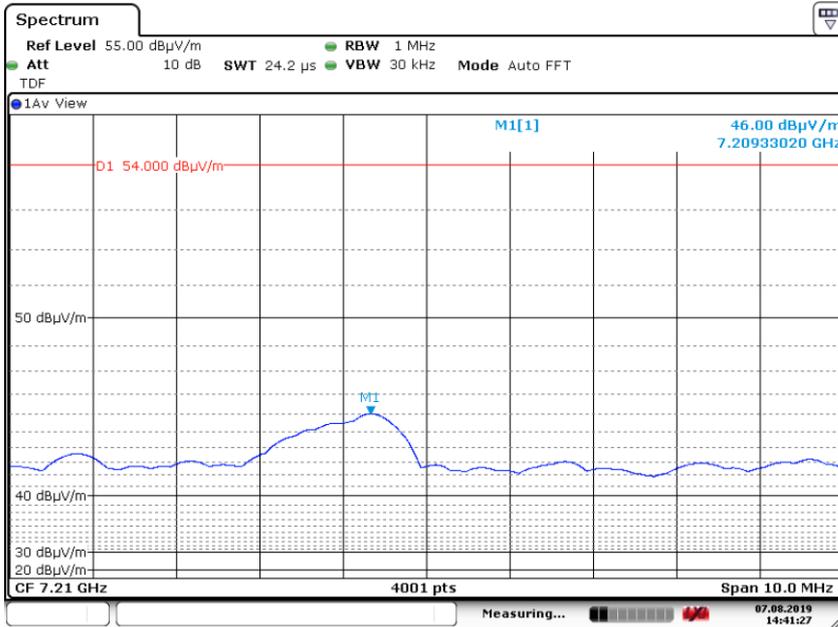


Date: 7.AUG.2019 14:41:26

Plot of the emissions at 2403 MHz, Horizontal polarization, Average value at 7.2 GHz shown

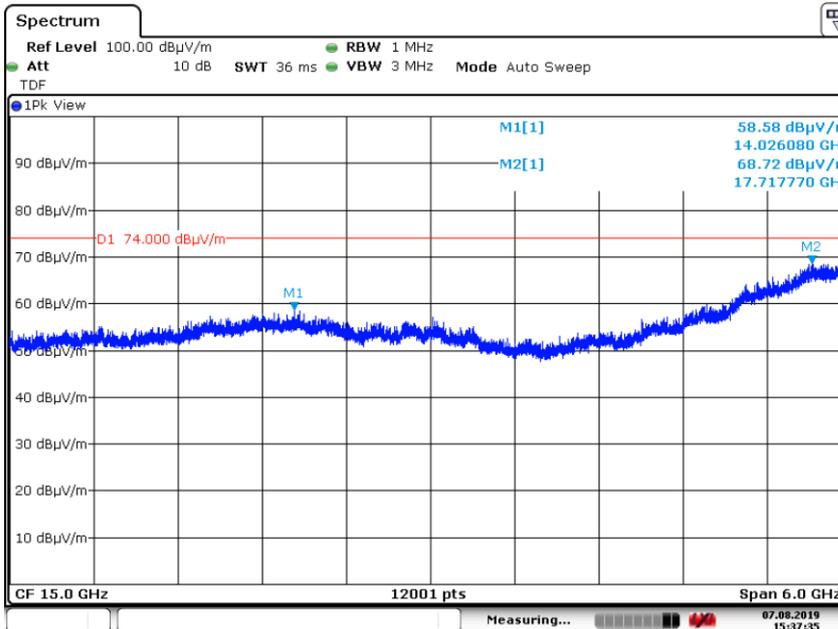


Date: 7.AUG.2019 15:37:34

Plot of the emissions at 2403 MHz in the range 12 – 18 GHz, vertical polarization, Peak values shown.

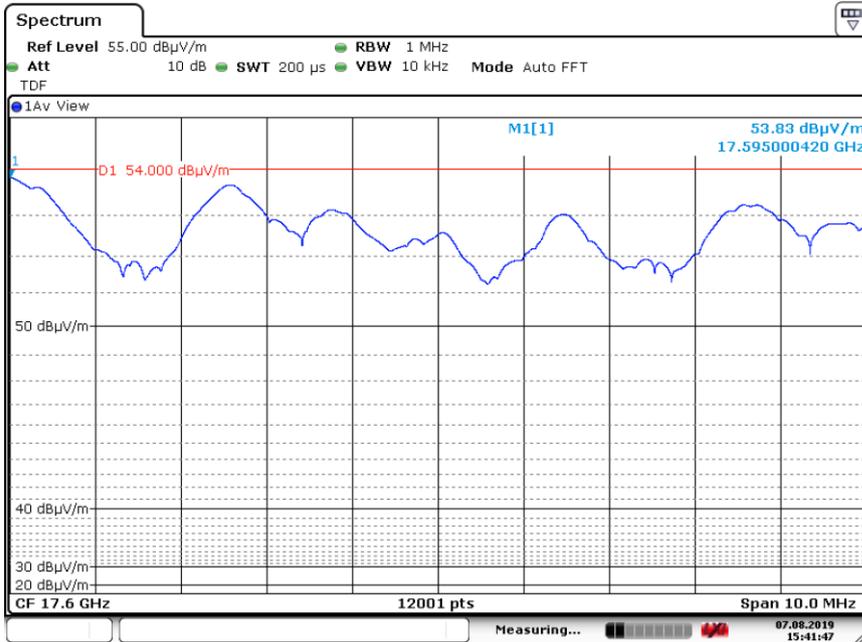


Date: 7.AUG.2019 15:41:46

Plot of the emissions in the range 12 – 18 GHz, vertical polarization, general noise level. Peak values shown-Reduced VBW.

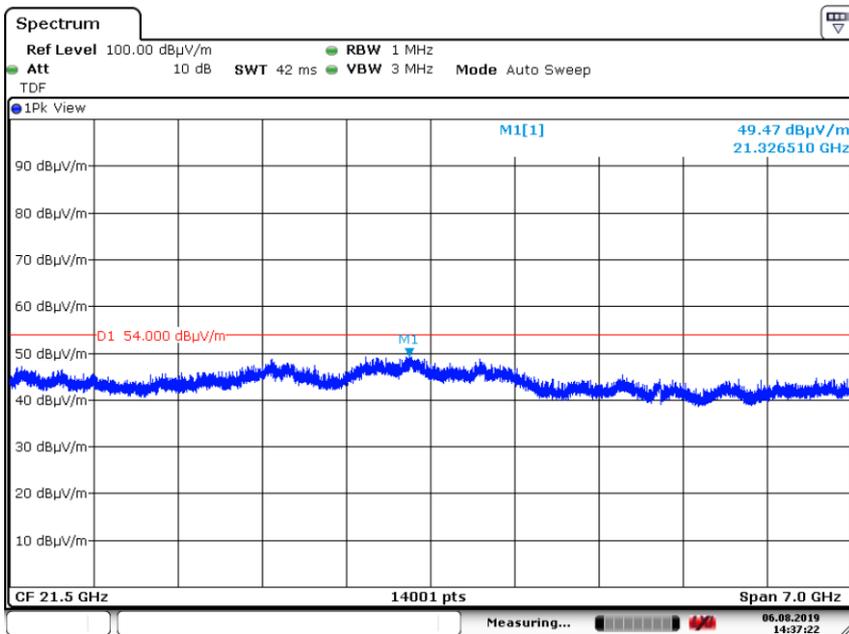


Date: 6.AUG.2019 14:37:22

Plot of the emissions at 2403 MHz in the range 18 – 25 GHz, vertical polarization, Peak values shown.

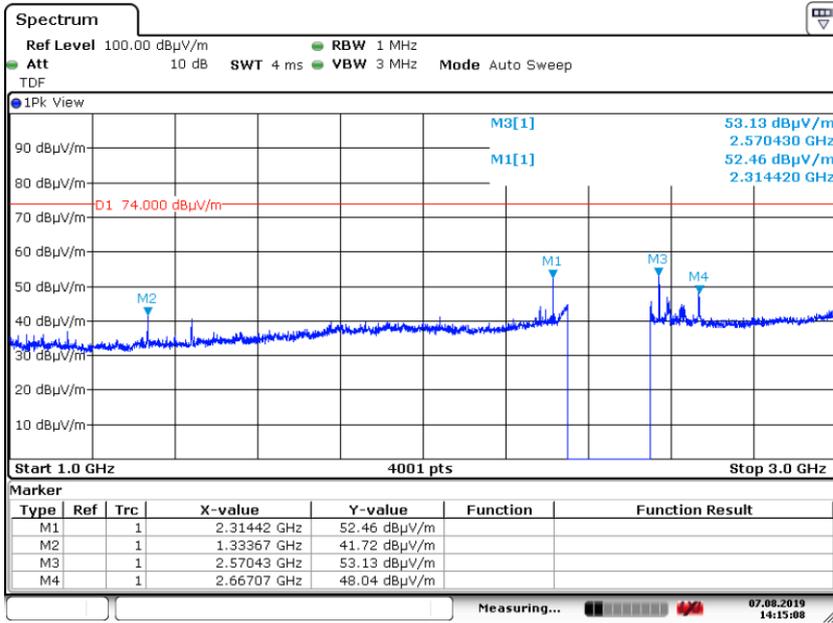


Date: 7.AUG.2019 14:15:07

Plot of the emissions at 2442 MHz in the range 1 – 3 GHz, Vertical polarization, Peak values shown. (gap in the plot is of the used 2.4 GHz Notch filter).

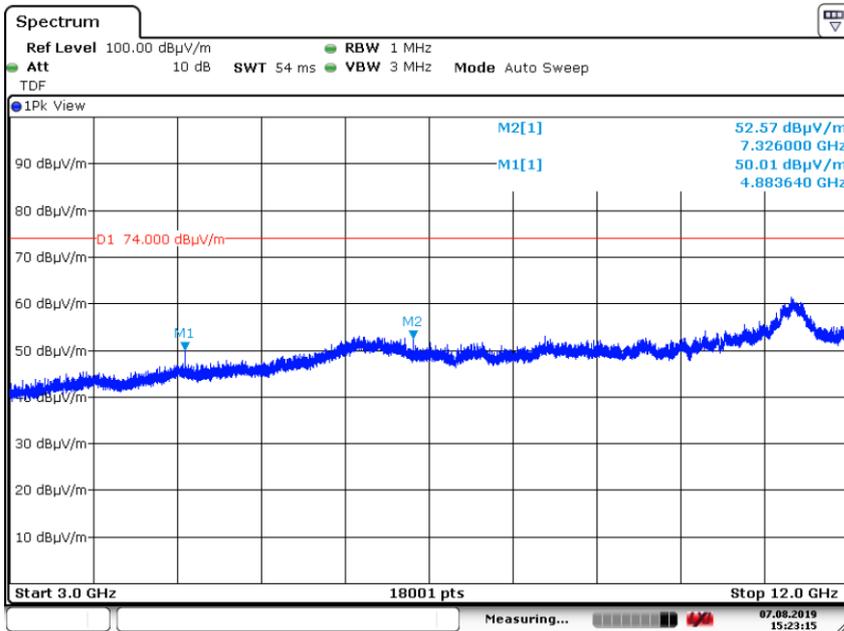


Date: 7.AUG.2019 15:23:14

Plot of the emissions at 2442 MHz in the range 3 – 12 GHz, Vertical polarization, Peak values shown

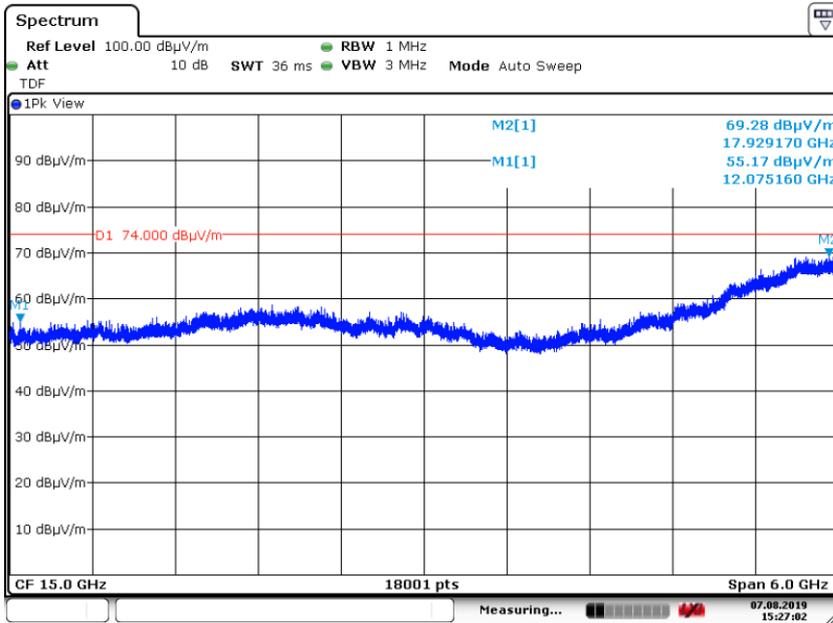


Date: 7.AUG.2019 15:27:02

Plot of the emissions at 2442 MHz in the range 12 – 18 GHz, vertical polarization, Peak values shown.

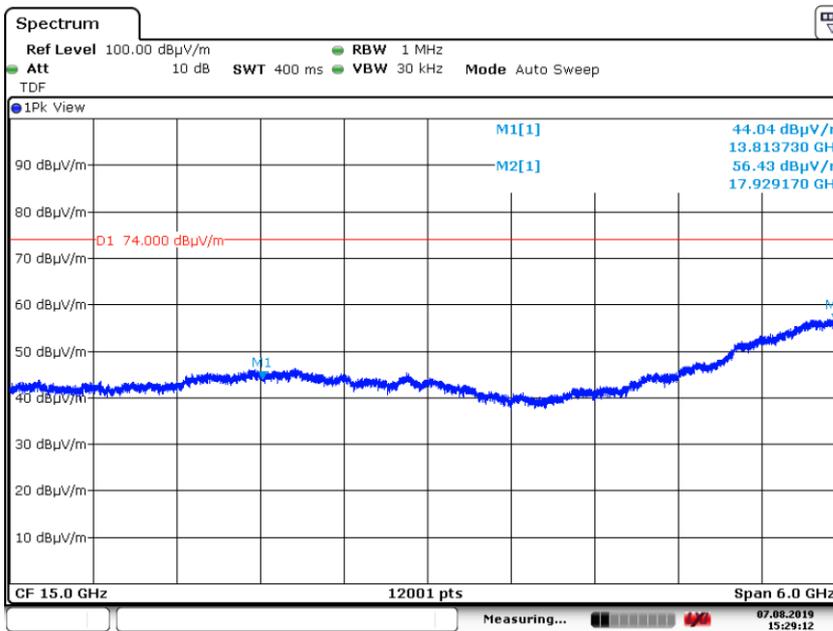


Date: 7.AUG.2019 15:29:11

Plot of the emissions at 2442 MHz in the range 12 – 18 GHz, vertical polarization, Peak values shown. (Reduced Video Bandwidth used)

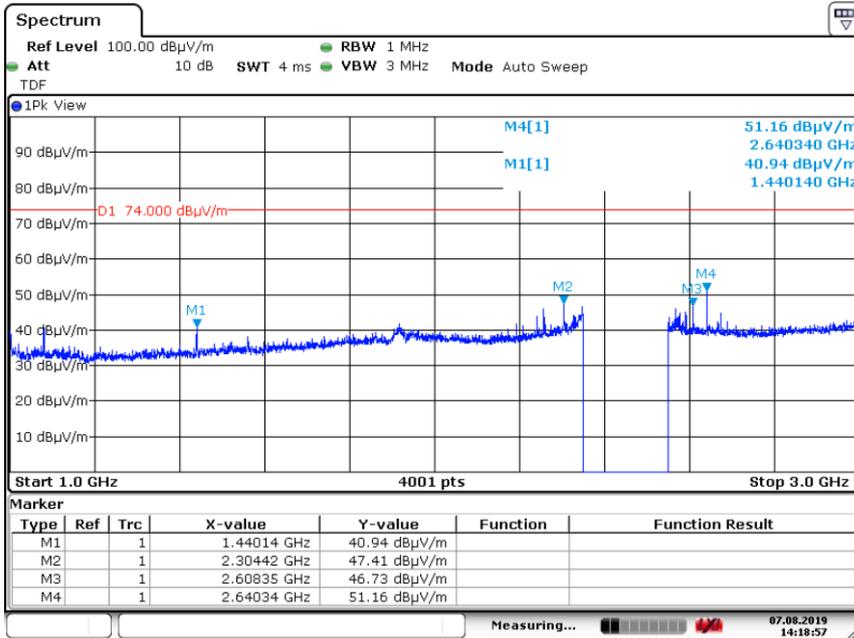

Date: 7.AUG.2019 14:18:56

Plot of the emissions at 2480 MHz in the range 1 – 3 GHz, Horizontal polarization, Peak values shown. (gap in the plot is of the used 2.4 GHz Notch filter).

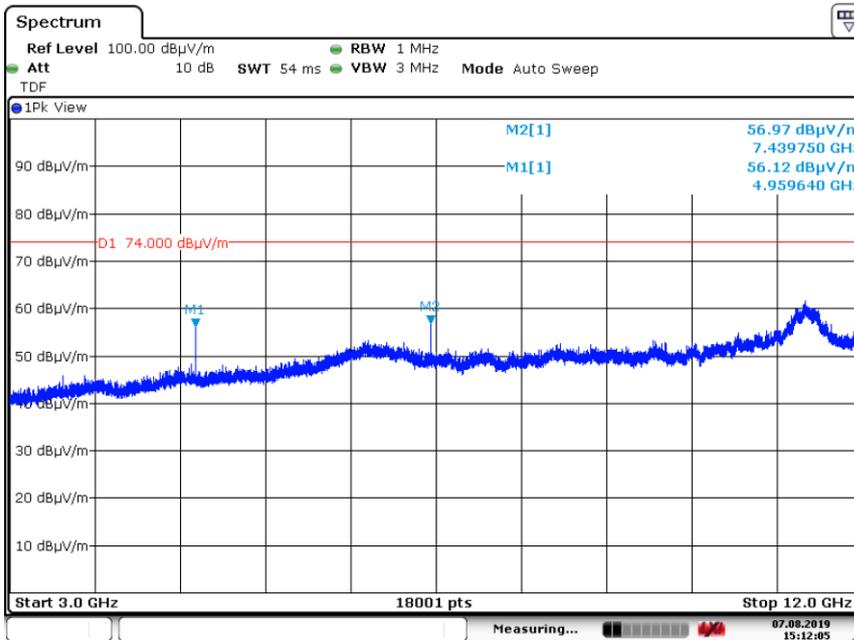


Date: 7.AUG.2019 15:12:04

Plot of the emissions at 2480 MHz in the range 3 – 12 GHz, Vertical polarization, Peak values shown

Test Report No.:


**19052404.r02**

Page 40 of 48

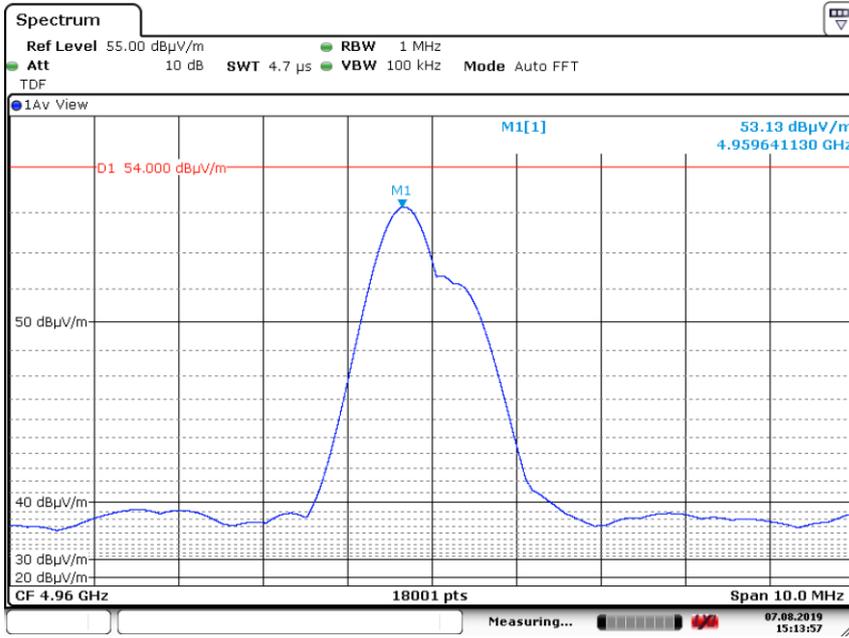


Date: 7.AUG.2019 15:13:57

Plot of the emissions at 2480 MHz in the range 3 – 12 GHz, Vertical polarization, Average value at 4.96 GHz shown.

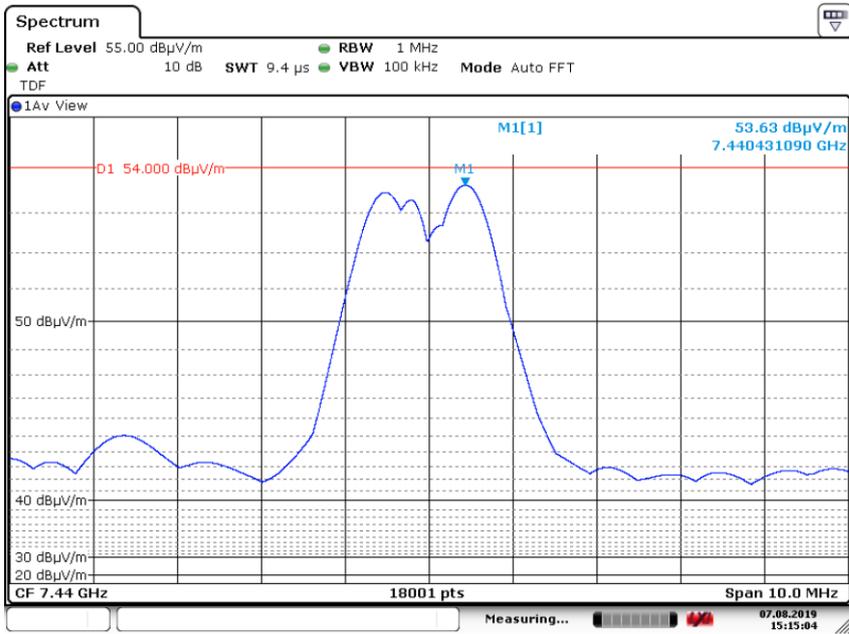


Date: 7.AUG.2019 15:15:03

Plot of the emissions at 2480 MHz in the range 3 – 12 GHz, Vertical polarization, Average value at 7.44 GHz shown.

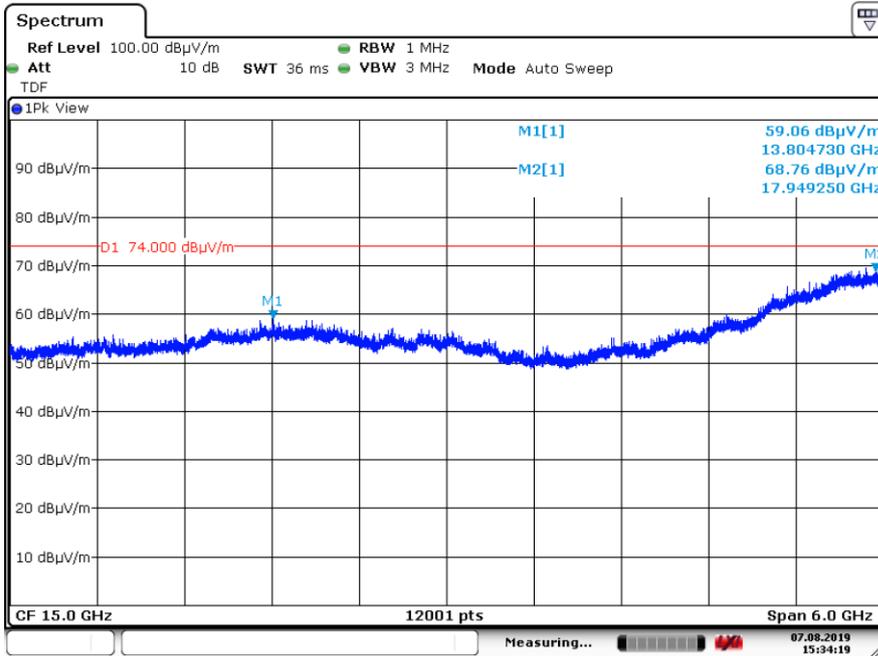

Date: 7.AUG.2019 15:34:18

Plot of the emissions at 2480 MHz in the range 12 – 18 GHz, vertical polarization, Peak values shown. (Reduced Video Bandwidth used)

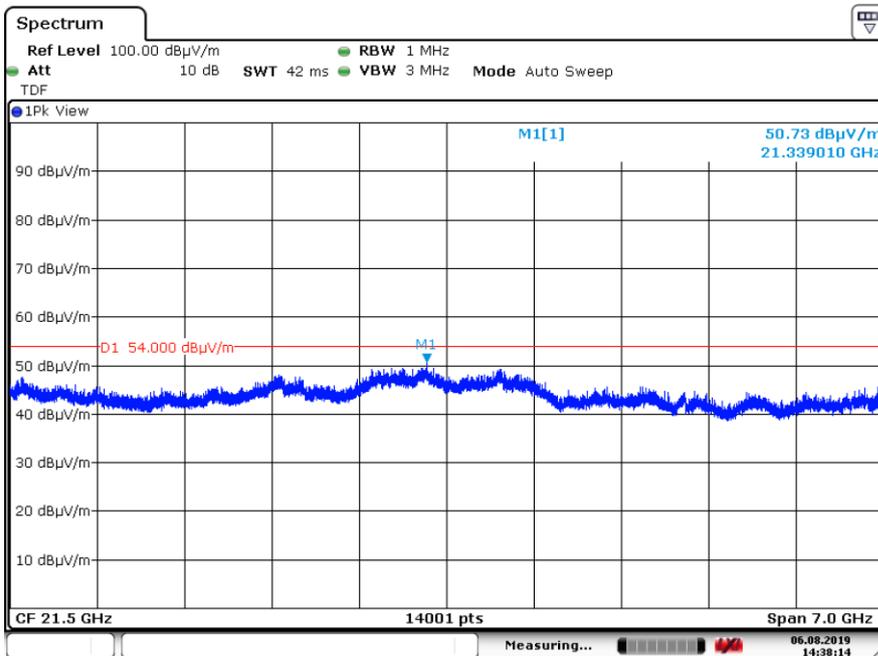

Date: 6.AUG.2019 14:38:13

Plot of the emissions at 2480 MHz in the range 18 – 25 GHz, vertical polarization, Peak values shown.

## 5.2 AC Power Line Conducted Measurements

**RESULT: Pass.**

Date of testing: 2019-08-15

Requirements: for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) Quasi-Peak | Conducted Limit (dB $\mu$ V) Average |
|-----------------------------|---|--------------------------------------|
| 0.15 – 0.5                  | 66 to 56*                               | 56 to 46*                            |
| 0.5 – 5                     | 56                                      | 46                                   |
| 5 - 30                      | 46                                      | 50                                   |

\*Decreases with the logarithm of the frequency.

Test procedure:

ANSI C63.10-2013.

Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a 50  $\mu$ H / 50  $\Omega$  LISN. The frequency range from 150kHz to 30MHz was searched. The six highest EUT emissions relative to the limit were noted. The EUT is considered a floor-standing device. The EUT is placed on a non-conductive plate of 10mm thick above the ground plane, so to isolate it from the ground plane because the EUT normally does not make electrical contact with a ground plane. The EUT was positioned at least 80cm from the LISN. The power cable was routed over the non-conductive plate and support materials to the LISN.



Test Report No.:

**19052404.r02**

Page 43 of 48

**5.2.1 AC Power Line Conducted Emission of Transmitter**

| Frequency (MHz) | Measurement results (dBµV) L1 |    | Measurement results (dBµV) L2/Neutral |    | Limits (dBµV) |      | Verdict (Pass/Fail) |
|-----------------|-------------------------------|----|---------------------------------------|----|---------------|------|---------------------|
|                 | QP                            | AV | QP                                    | AV | QP            | AV   |                     |
| 0.1578          | 35.0                          | *3 | 45.4                                  | *3 | 65.5          | 55.5 | Pass                |
| 0.1773          | 41.0                          | *3 | 42.4                                  | *3 | 64.5          | 54.5 | Pass                |
| 0.3609          | 41.4                          | *3 | 41.4                                  | *3 | 58.7          | 48.7 | Pass                |
| 0.3844          | 46.0                          | *3 | 45.7                                  | *3 | 58.3          | 48.3 | Pass                |
| 0.6969          | 38.2                          | *3 | 38.0                                  | *3 | 56.0          | 46.0 | Pass                |
| 3.3224          | 35.4                          | *3 | 35.8                                  | *3 | 56.0          | 46.0 | Pass                |
| 20.040          | 40.4                          | *3 | 40.5                                  | *3 | 60.0          | 50.0 | Pass                |

The results of the AC power line conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.207(a) and RSS-Gen section 8.8, at the 120 Volts/ 60 Hz AC mains connection terminals of the AUX2 that connects to the EUT, are depicted in the table above.

Notes:

1. The resolution bandwidth used was 9 kHz.
2. Measurement uncertainty is +/- 3.5 dB.
3. Plots are provided on the next pages.

Test Report No.:


19052404.r02

Page 44 of 48

### 5.2.2 Plots of the AC Power-line Conducted Emissions

15. Aug 19 11:23

Overview Scan Settings (1 Range)  
:----- Frequencies -----: Receiver Settings -----:  
Start Stop Step IF BW Detector M-Time Atten Preamp  
150k 30M 3.9k 9k PK 0.10ms 20dB LN OFF

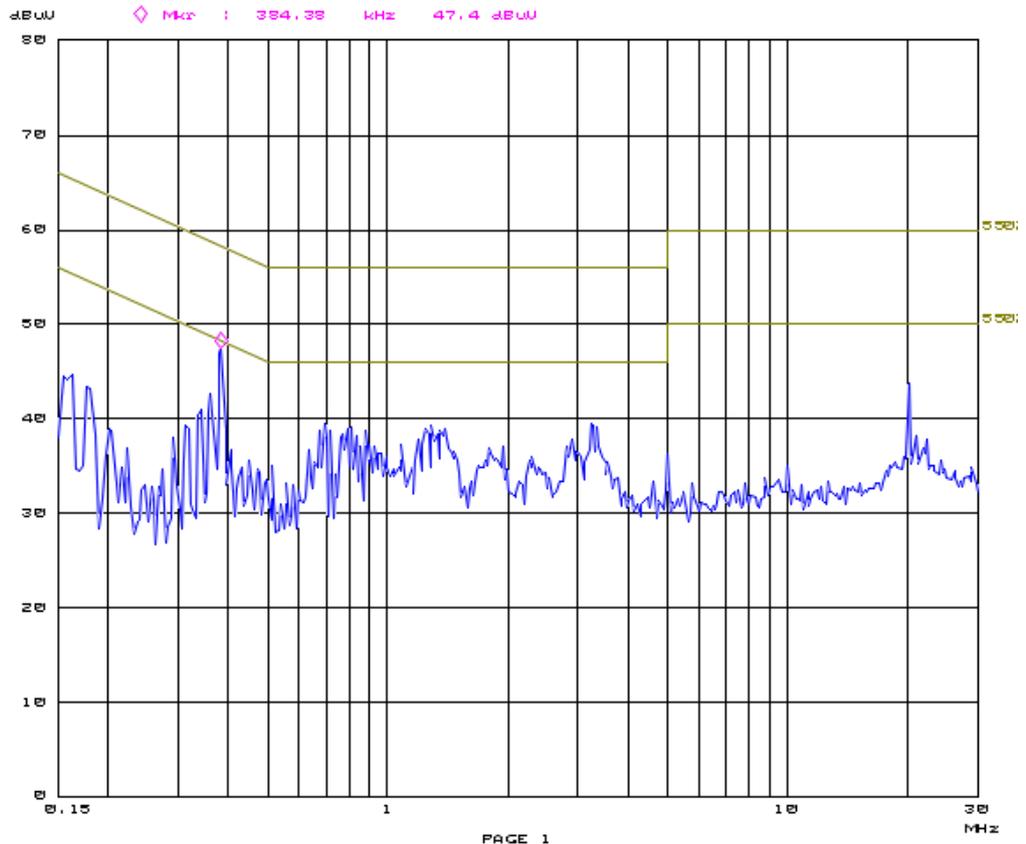

Plot of the AC Power-line Conducted emissions on L1, @2403

Test Report No.:


**19052404.r02**

Page 45 of 48

15. Aug 19 11:27

Overview Scan Settings (1 Range)

```
!----- Frequencies -----! Receiver Settings -----!  
Start Stop Step IF BW Detector M-Time Atten Preamp  
150k 30M 3.9k 9k PK 0.10ms 20dB LN OFF
```

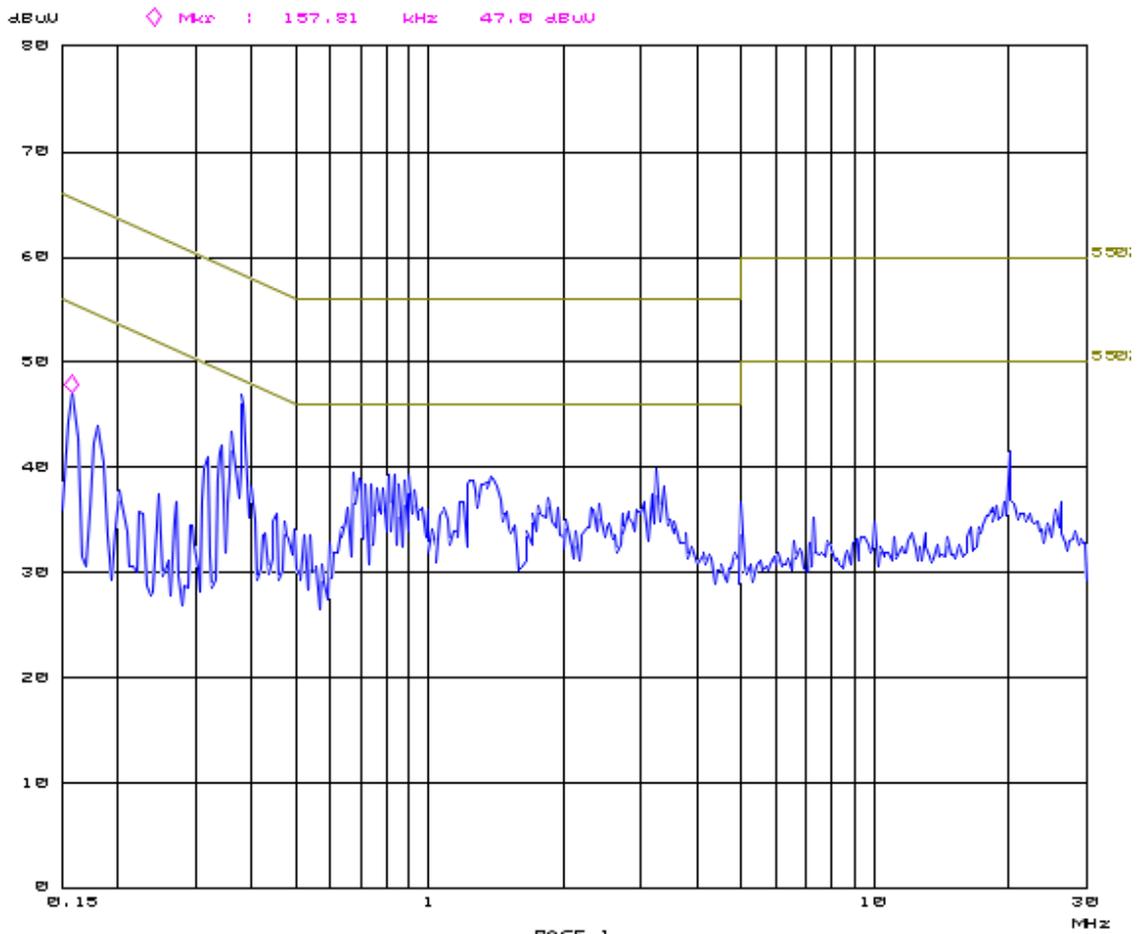

Plot of the AC Power-line Conducted emissions on L2, @2403 MHz



Test Report No.:


**19052404.r02**

Page 46 of 48

15. Aug 19 11:31

Overview Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |         |        |
|-------------|------|------|-------------------|----------|--------|---------|--------|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten   | Preamp |
| 150k        | 30M  | 3.9k | 9k                | PK       | 0.10ms | 20dB LN | OFF    |

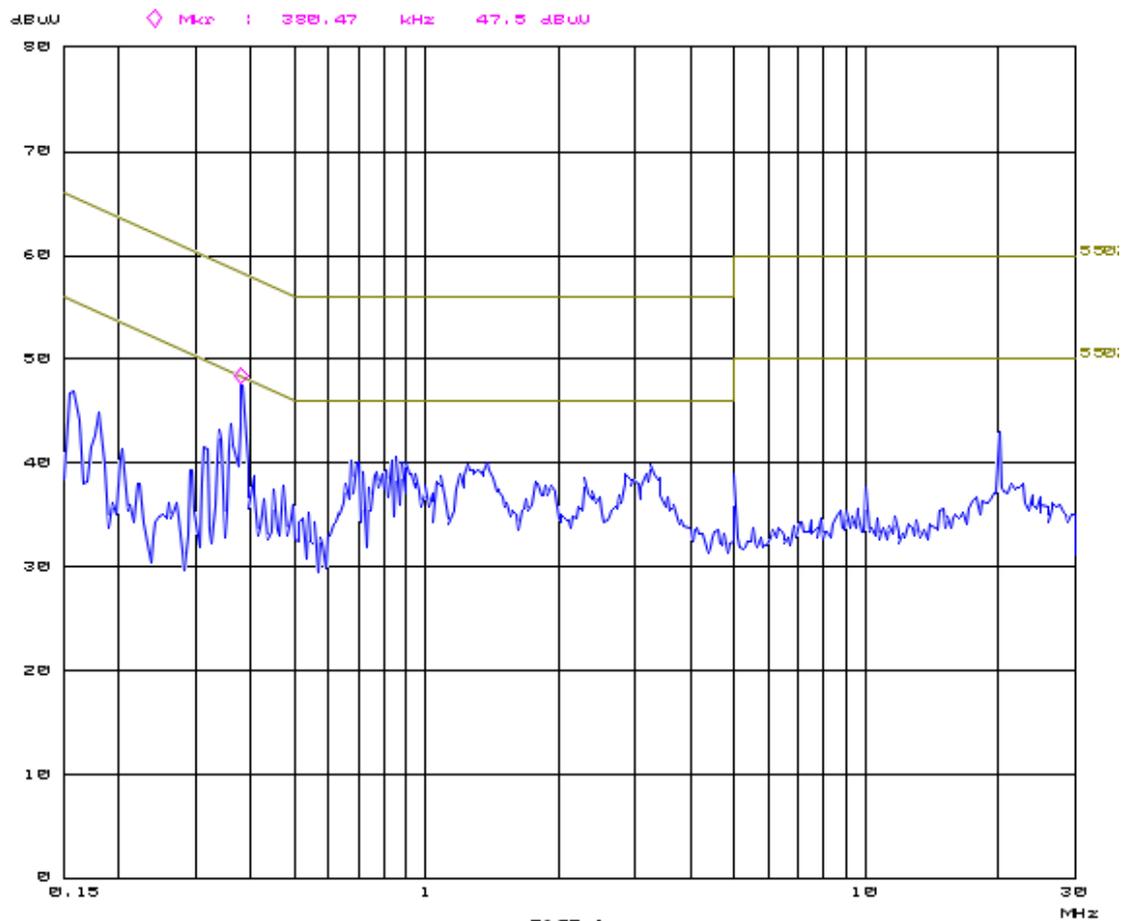

Plot of the AC Power-line Conducted emissions on L2, @2442 MHz

Test Report No.:


**19052404.r02**

Page 47 of 48

15. Aug 19 11:37

Overview Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |         |         |  |
|-------------|------|------|-------------------|----------|--------|---------|---------|--|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten   | Presamp |  |
| 150k        | 30M  | 3.9k | 9k                | PK       | 0.10ms | 20dB LN | OFF     |  |

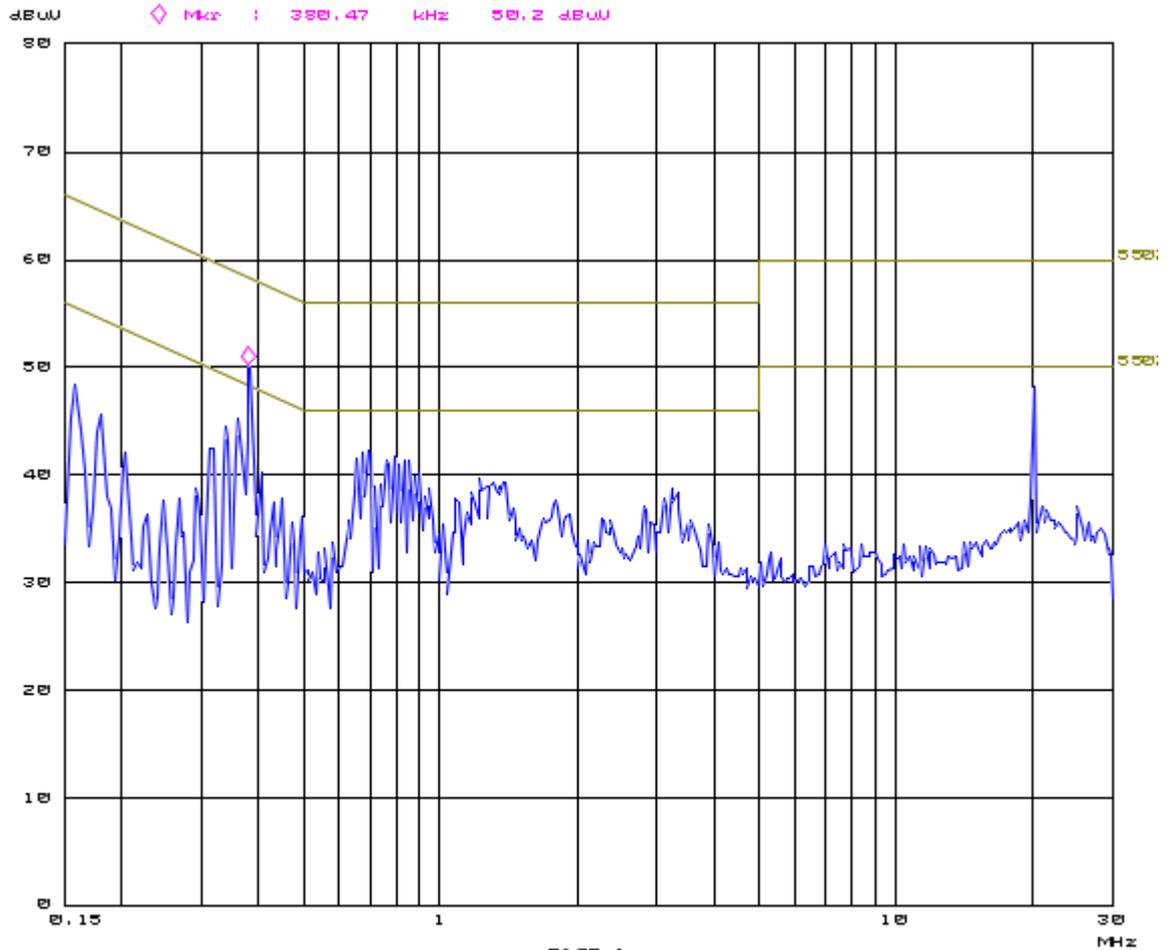

Plot of the AC Power-line Conducted emissions on L2, @2480 MHz



*Test Report No.:*

**19052404.r02**

*Page 48 of 48*

**End of report**

To whom it may concern,

On behalf of our customer Tacx b.v., we hereby declare the following device:

FCC ID : 2AAMI-T2875  
Brand : Tacx  
Model : T2875  
Description : Wireless Communication Device

The EUT has 2 transmitters (BLE and ANT+) which never send simultaneously. The highest output power is from the BLE part. The RF exposure assessment is based on the BLE mode. The EUT is considered as 'Mobile' use.

The EUT has a maximum rated output power in BLE mode of 0.84 mW in the frequency range of 2402 – 2480 MHz which means that the worst case prediction of power density (100% reflection) at 20 cm distance (worst case) can be calculated as follows :

$$S = \frac{EIRP}{4 \cdot \pi \cdot R^2} \quad (\text{power density without reflection})$$

$$S = \frac{2^2 \cdot EIRP}{4 \cdot \pi \cdot R^2} \quad (\text{power density with 100\% reflection})$$

$$S = \frac{2^2 \cdot EIRP}{4 \cdot \pi \cdot R^2} = \frac{EIRP \text{ (mW)}}{\pi \cdot (20\text{cm})^2} = \frac{0.84}{\pi \cdot (20)^2} = 0.0007 \text{ mW/cm}^2$$

(limit = 10 W/m<sup>2</sup> is 1.0 mW/cm<sup>2</sup>)

This means that the equipment is in compliance with FCC KDB Publication 447498, 47 C.F.R. §1.1310 and §2.1091

The EUT fulfils the requirements of RSS-102 Issue 5 Section 2.5.2. stating:  
*at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz.*

For this EUT this calculates to:  $1.31 \times 10^{-2} (2400^{0.6834}) = 2.7 \text{ W}$ .

The EUT's maximum rate output power (EIRP) of 0.84 mW is within this requirement.

*Note: For conservativeness, the lowest frequency is used for calculation.*

Best regards,  
TÜV Rheinland Nederland B.V.



R. van der Meer, Test Engineer