



Garmin International, Inc.
1200 East 151st Street
Olathe, Kansas 66062
P: 913-397-8200 F: 913-397-8282

16-Feb-26

Manufacturer: Garmin International, Inc.

Address: 1200 E. 151st St.
Olathe, KS 66062-3426
U.S.A.

Chile Representative: Matías Rodríguez Correa
Rosario Norte 660 piso 24, Las Condes Santiago
Province CP 7550083, Chile

Contact Email: matias.rodriguez@garmin.com

Subject: SUBTEL, Chile (Resolution 737) Certification Compliance 2026

Commercial Name: echoMAP Ultra 2 16"

	Información (Information)
Tipo de equipo (Equipment type)	Portable Digital Transceiver
Marca (Brand)	Garmin 
Modelo (Model)	A05043
Tecnología o modulación (Technology or modulation)	BT (GFSK, $\pi/4$ DQPSK, 8DPSK), BLE (GMSK), WiFi 2.4GHz (802.11 b/g/n), ANT (GFSK)
Frecuencias (Frequencies)	BT (2402MHz-2480MHz), BLE (2402MHz- 2480MHz), WiFi 2.4GHz (2412MHz – 2462MHz), ANT (2402MHz- 2480MHz)
Ganancia de antena (dBi) (Antenna gain (dBi))	BT Dipole (5.8 dBi), BLE Dipole (5.8 dBi), WiFi 2.4GHz Dipole (5.8 dBi), ANT (5.8 dBi)
P.i.r.e. (E.I R P.)	BT (12.78dBm, 18.96mW), BLE (5.8dBm, 3.8mW), WiFi 2.4GHz (16.21dBm, 41.78mW), ANT (-1.96dBm, 0.63mW)
Módulos (Modules)	BT , BLE, WiFi 2.4GHz, ANT

Declaration of Conformity Statement: the equipment previously identified complies with the provisions established in the Technical Standard for Small Range Equipment, approved by Exempt Resolution No.1,985 of 2017, of the Undersecretary of Telecommunications.

Declaración de conformidad: El equipo anteriormente identificado cumple con las disposiciones establecidas en la Norma Técnica para Equipos de Corto Alcance, aprobada mediante la Resolución Exenta N° 1.985 de 2017, de la Subsecretaría de Telecomunicaciones.



Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

47CFR Paragraph 15.247 FHSS and
Industry Canada RSS-GEN Issue 5 and RSS-247 Issue 3
Application For Grant of Certification
Model: A05043

2402-2480 MHz (DSS)
Frequency Hopping Spread Spectrum
License Exempt Intentional Radiator
FCC ID: IPH-05043 IC: 1792A-05043

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062
Jeff Hailey
Staff Compliance Engineer

Test Report Number: 250404
Test Date: April 4, 2025 – May 27, 2025

Authorized Signatory: 
Patrick Powell
Rogers Labs, a division of The Compatibility Center LLC
FCC Designation: US5305
ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS..... 2

REVISIONS..... 4

EXECUTIVE SUMMARY 5

OPINION / INTERPRETATION OF RESULTS 5

EQUIPMENT TESTED..... 8

 Equipment Operational Modes.....9

 Equipment Function10

 Equipment Configuration.....11

ENVIRONMENTAL CONDITIONS..... 11

APPLICATION FOR CERTIFICATION..... 12

APPLICABLE STANDARDS 13

TEST PROCEDURES..... 14

 AC Line Conducted Emission Test Procedure14

 Radiated Emission Procedure14

 Antenna Port Conducted Emission Test Procedure.....14

 Diagram 1 Test arrangement for power-line conducted emissions.....15

 Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....16

 Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)17

 Diagram 4 Test arrangement for Antenna Port Conducted emissions.....18

TEST SITE LOCATIONS 18

UNITS OF MEASUREMENTS 19

STATEMENT OF MODIFICATIONS AND DEVIATIONS 20

INTENTIONAL RADIATORS..... 20

Antenna Requirements20

Restricted Bands of Operation20

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 2, BT BR (GFSK)21

Summary of Results for Radiated Emissions in Restricted Bands21

General Radiated Emissions Procedure22

Table 4 General Radiated Emissions Data - Horizontal Polarization23

Table 5 General Radiated Emissions Data - Vertical Polarization23

Figure 1 Plot of General Radiated Emissions (30 MHz – 230 MHz)24

Figure 2 Plot of General Radiated Emissions (200 MHz – 1.2 GHz)25

Figure 3 Plot of General Radiated Emissions (1 GHz – 3 GHz).....26

Figure 4 Plot of General Radiated Emissions (3 GHz – 6 GHz).....27

Figure 5 Plot of General Radiated Emissions (6 GHz – 12 GHz).....28

Figure 6 Plot of General Radiated Emissions (12 GHz – 18 GHz).....29

Figure 7 Plot of General Radiated Emissions (18 GHz – 25 GHz).....30

Summary of Results for General Radiated Emissions31

Operation in the Band 2400 – 2483.5 MHz32

Figure 8 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 2, BT BR34

Figure 9 Plot of Transmitter Emissions 20-dB Occupied Bandwidth Mode 2, BT BR35

Figure 10 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 2, BT BR.....36

Figure 11 Plot of Number of Hopping Channels Mode 2, BT BR37

Figure 12 Plot of Number of Hopping Channels Mode 2, BT BR38

Figure 13 Plot of Number of Hopping Channels Mode 2, BT BR39

Figure 14 Plot of Number of Hopping Channels Mode 2, BT BR40

Figure 15 Plot of Channel Separation Mode 2, BT BR41

Figure 16 Plot of Dwell time On Channel Mode 2, BT BR.....42

Figure 17 Plot of Number of Times on Channel over 6 Second Period Mode 2, BT BR.....43

Figure 18 Plot of Transmitter Emissions Low Band Edge Mode 2, BT BR.....44

Figure 20 Plot of Transmitter Emissions High Band Edge Mode 2, BT BR.....45

Transmitter Emissions Data.....46

Table 6 Transmitter Radiated Emissions Mode 2, BT BR46

Table 7 Transmitter Antenna Port Conducted Data Mode 2, BT BR47

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator47

ANNEX..... 48

Annex A Measurement Uncertainty Calculations.....49

Annex B Test Equipment.....50

Annex C Laboratory Certificate of Accreditation.....52

Revisions

Revision 1 Issued – June 24, 2025

Executive Summary

License Exempt Digital Transmission System Intentional Radiator operating under Title 47 of the Code of Federal Regulations (47CFR) Paragraph 15.247 and Industry Canada RSS-247 Issue 3 and RSS-GEN Issue 5, Frequency Hopping Spread Spectrum (FHSS) or Direct Sequence Spread Spectrum (DSS) transmitter operations in the 2400-2483.5 MHz frequency band.

Name of Applicant: Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

PMN: A05043

FCC ID: IPH-05043 IC: 1792A-05043

Operating Frequency Range: 2402-2480 MHz

Operation Direct Sequence Spread Spectrum (DSS) communication mode 2

A05043 was chosen for transmitter configuration testing and used for final measurements.

Mode	Antenna Port Conducted Power Watts	99% OBW (kHz)	20-dB OBW (kHz)
Mode 2, BT BR (GFSK)	0.004	905.3	979.1

This report addresses EUT Operations as Direct Sequence Spread Spectrum Transmitter using transmitter modulation in Mode 2 Note, the production device utilizes two non-user accessible integral antennas with 1.8 dBi (ANT) and 5.8 dBi (BT and WiFi) gain.

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Bands 47CFR 15.205, RSS-210 4.1	-0.1	Complies
Conducted Emissions as per 47CFR 15.207, RSS-GEN 8.8	N/A	Complies
Radiated Emissions 47CFR 15.209, RSS-GEN 8.9	-8.51	Complies
Harmonic Emissions per 47CFR 15.247, RSS-247	-0.1	Complies

Tests performed include

47CFR

§15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20-dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20-dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(c) Operation with directional antenna gains greater than 6 dBi.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 Issue 3

5.1 Frequency hopping systems (FHS)

FHSs employ a spread spectrum technology in which the carrier is modulated with coded information in a conventional manner, causing a conventional spreading of the radio frequency (RF) energy around the carrier frequency. The carrier frequency is not fixed, but changes at fixed intervals under the direction of a coded sequence.

FHSs are not required to employ all available hopping frequencies during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the requirements in this section in case the transmitter is presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of frequency hopping equipment and must distribute its transmissions over the minimum number of hopping channels specified in this section.

Incorporation of intelligence into an FHS that enables it to recognize other users of the band and to avoid occupied frequencies is permitted provided that the FHS does it individually and independently chooses or adapts its hopset. The coordination of FHSs in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The following applies to FHSs in each of the three bands:

a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system's radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

c) For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

d) FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

e) FHSs operating in the band 5725-5850 MHz shall use at least 75 hopping channels. The maximum 20 dB bandwidth of the hopping channel shall be 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30-second period.

Equipment Tested

Model: A05043

Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

Equipment	Model / PN	Serial Number
EUT #1 Radiated	A05043	3495259652
EUT #2 Antenna Port	A05043	3495259647
Garmin GT56 Transducer	010-13073-00	6QR262970
Power Cable	320-01043-50	n/a
Garmin GCV20 Sonar Box	010-01156-02	5JW004749 5JW004754
Garmin Heading Sensor	010-1141710	543023755
HDMI Load	n/a	n/a
Garmin NMEA Starter Kit	010-11442-00	n/a

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

The design may operate one transmitter chain at a time and is not capable of simultaneous transmission on more than one port.

Software (FVIN): 40.42; Antennas: 2.4 GHz ANT dipole (1.8 dBi), 2.4 GHz WiFi/BT dipole (5.8 dBi)


Equipment Operational Modes

Mode	Transmitter Operation
mode 1	ANT (GFSK)
mode 2	BT BR (GFSK)
mode 3	BT (2EDR $\pi/4$ DQPSK)
mode 4	BT (3EDR 8DPSK)
mode 5	BT BLE (GMSK)
mode 6	802.11b
mode 7	802.11g
mode 8	802.11n

Equipment Function

The EUT is a transceiver with display and GNSS. The radio supports 802.11b, 802.11g, 802.11n, BTC, BLE and ANT transmit and receive. For more detailed feature descriptions, please refer to the manufacturer's specifications or user's manual. The typical use configuration has the EUT and powered from direct current power. The design provides interface capability as presented below and wireless communications with compatible equipment. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections than those presented in the configuration options as described by the manufacturer and presented below. For testing purposes, the EUT received power from external direct current power supply. During testing, the test system was configured to operate in a manufacturer defined modes. The manufacturer provided test software for testing transmitter and equipment function. The software provided the ability to operate the transmitters at near 100% duty cycle for testing purposes. The testing mode of operation exceeds typical duty cycle operation of production equipment. As requested by the manufacturer the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

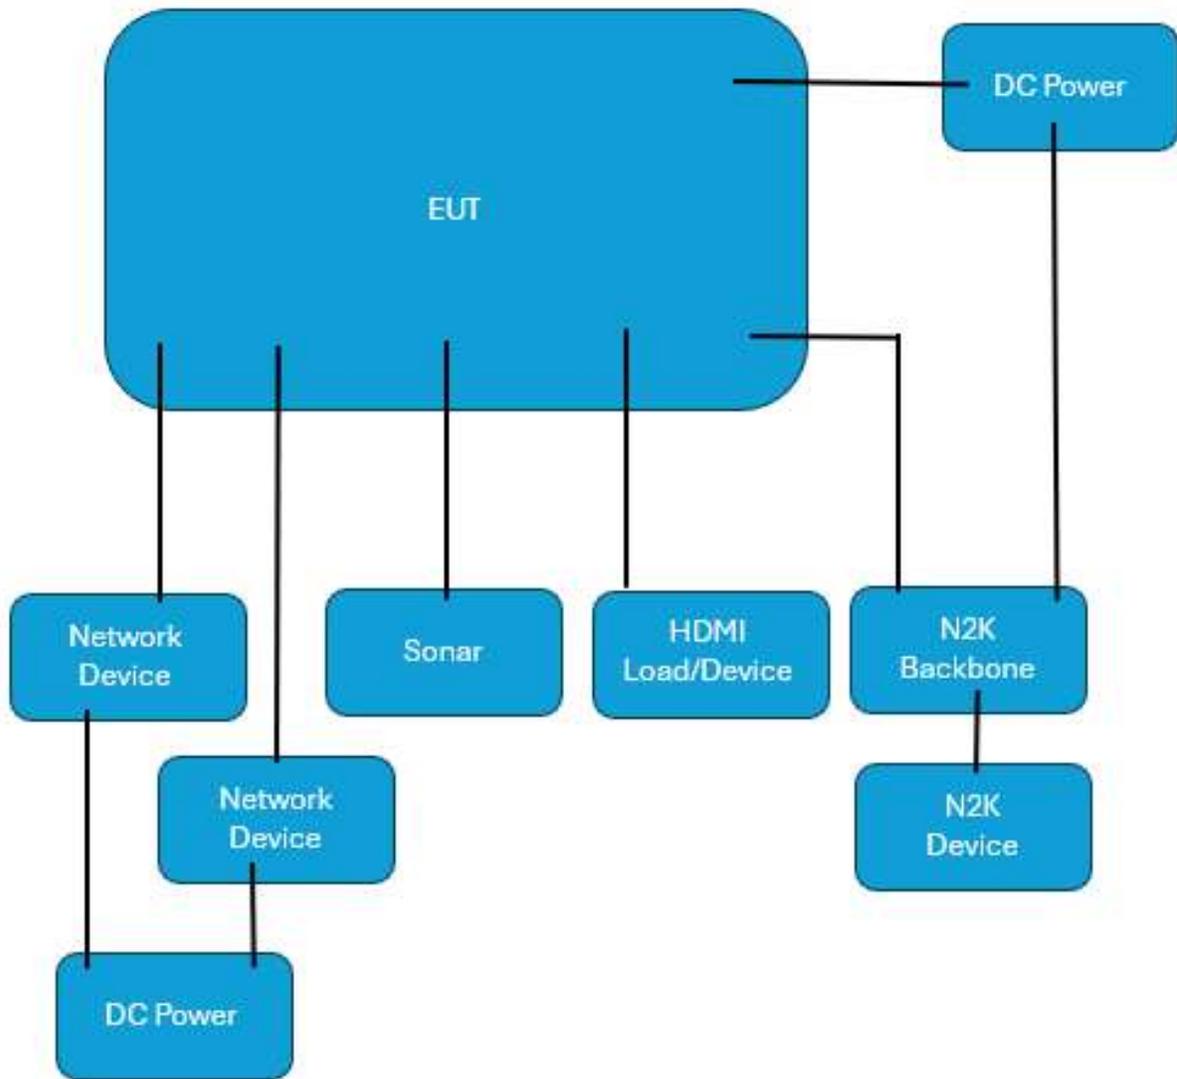

Environmental Conditions

Ambient Temperature	22.2° C
Relative Humidity	31.0 %
Atmospheric Pressure	1016.7 mb

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: HVIN: A05043
FCC ID: IPH-05043 IC: 1792A-05043
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from external direct current power provided from installation vehicle. The EUT provides interface ports for power, loads and communications as presented in this filing.
- (9) Transition Provisions of 47CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards

The following information is submitted in accordance with the eCFR (electronic Title 47 Code of Federal Regulations) (47CFR), dated February 15, 2024: Part 2, Subpart J, Part 15C Paragraph 15.247, RSS-247 Issue 3, and RSS-GEN Issue 5. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2020. This report documents compliance for the EUT operations as Frequency Hopping Spread Spectrum (DSS) Transmitter.

Test Procedures

AC Line Conducted Emission Test Procedure

The design operates from Direct Current power only and offers no provision to interface with Utility AC Power systems. Therefore, No AC Line conducted emissions testing was required or performed.


Radiated Emission Procedure

Radiated emissions testing was performed as required in 47CFR 15C, RSS-247 Issue 3, RSS-GEN and specified in ANSI C63.10-2020. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. Per above requirements, the frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions and all significant results reported. All other unreported findings were at least 20 dB below limits. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure


The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2020. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram 4 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Diagram 1 Test arrangement for power-line conducted emissions

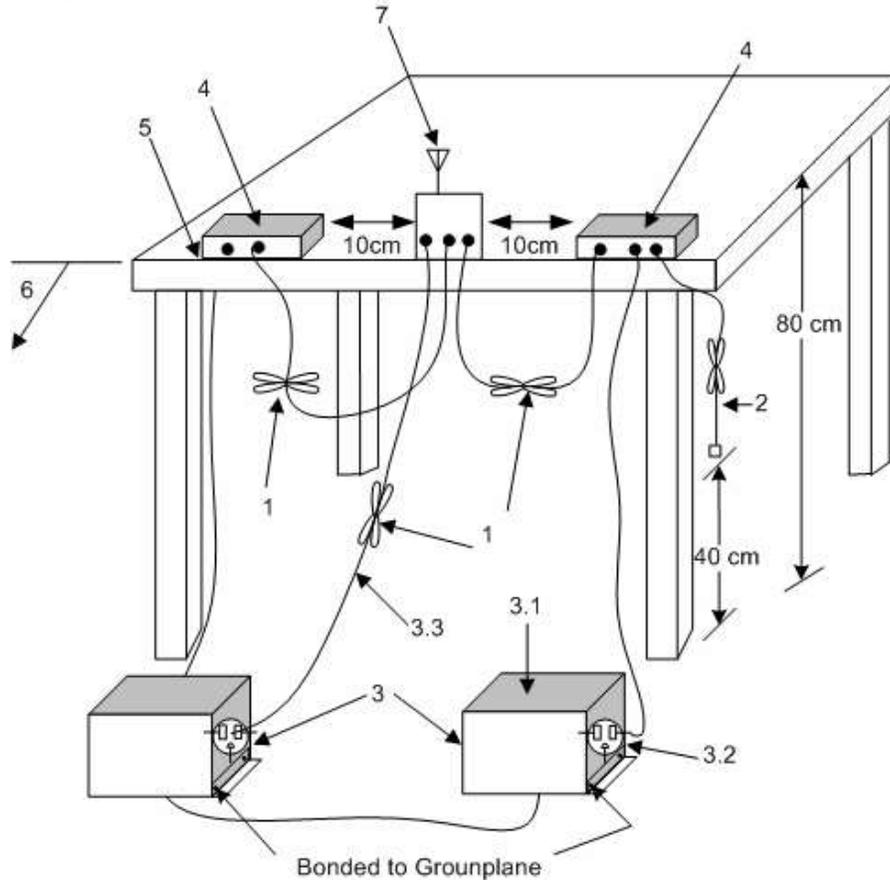

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test


Diagram 2 Test arrangement for radiated emissions of tabletop equipment

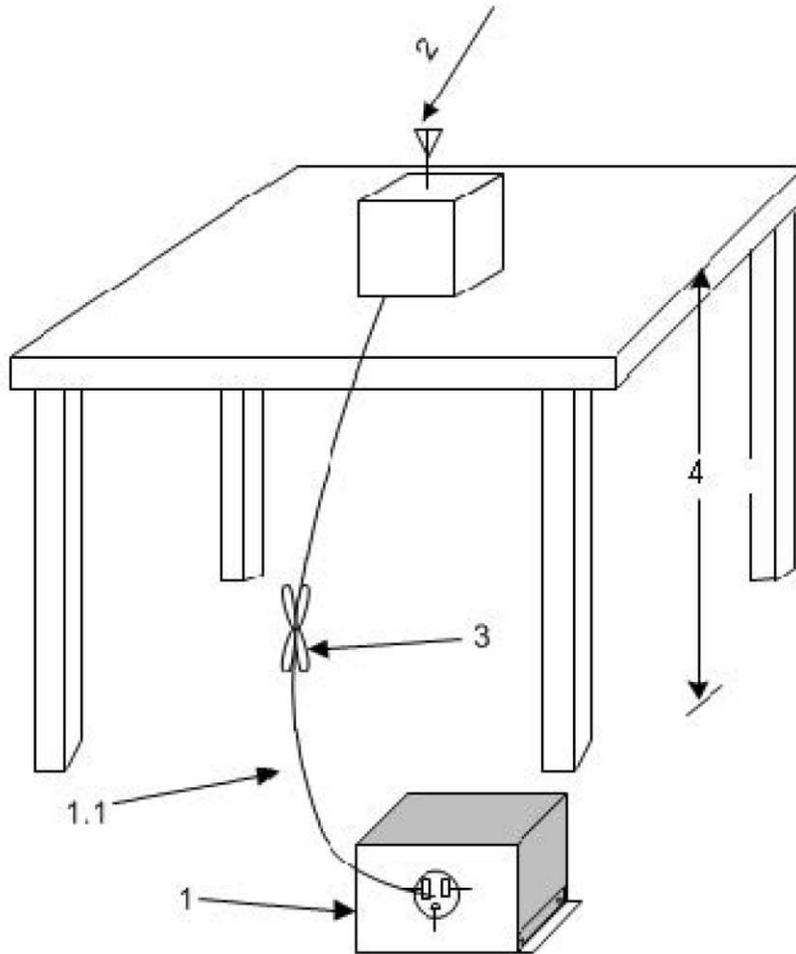

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).
 - 1.1. LISN spaced at least 80 cm from the nearest part of the EUT chassis.
2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).
4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)

Below 1 GHz

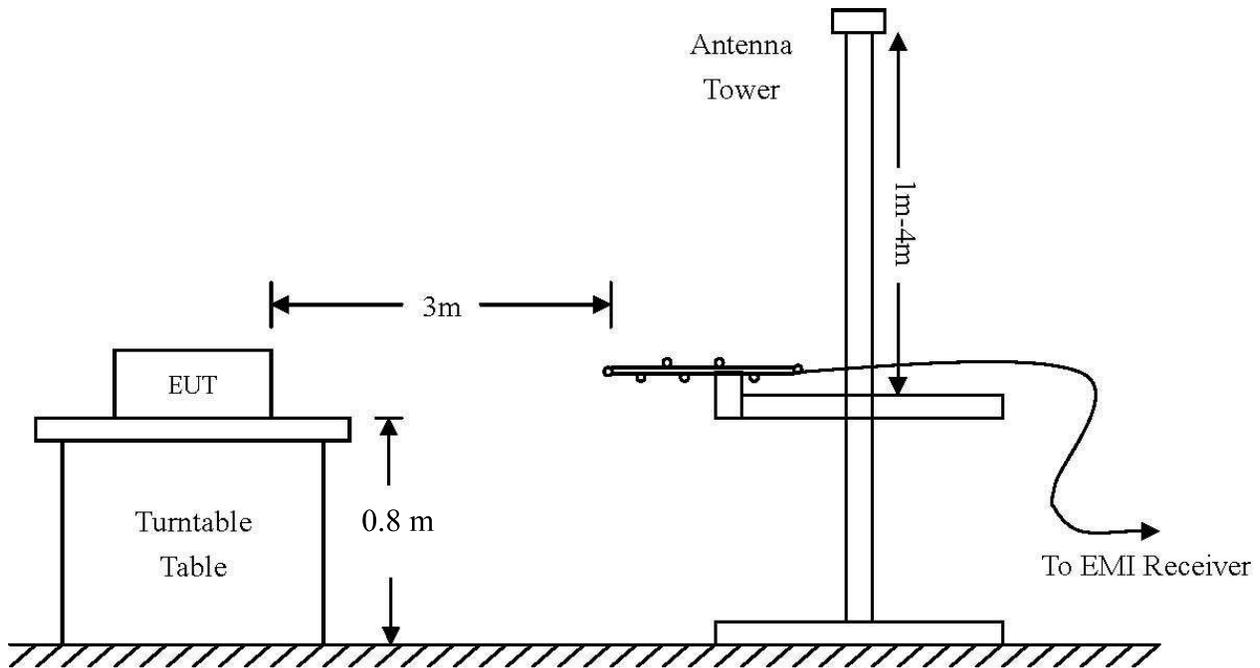

Above 1 GHz:


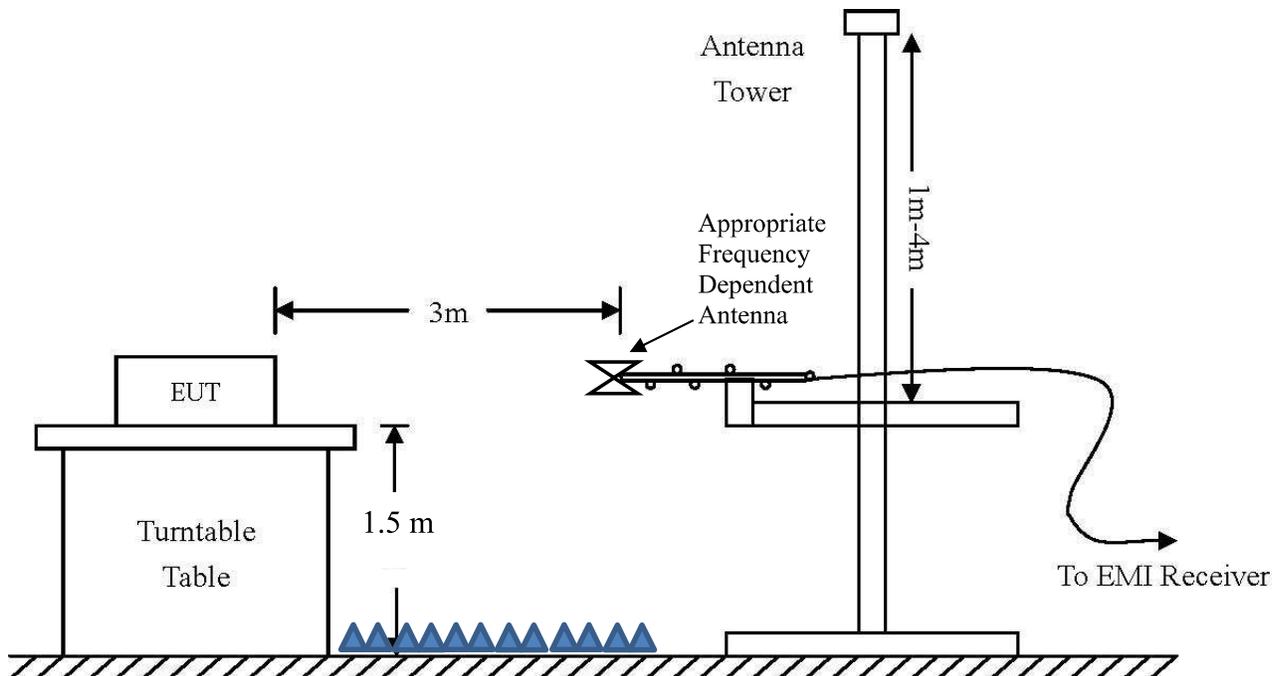


Diagram 4 Test arrangement for Antenna Port Conducted emissions
Spectrum Analyzer

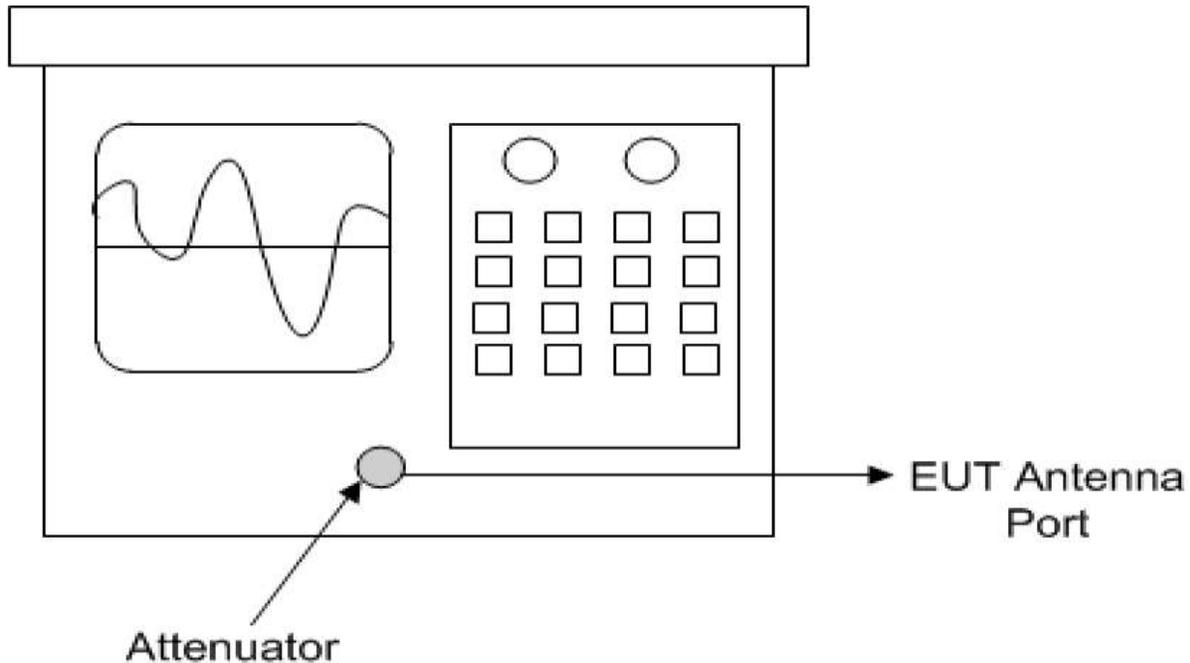

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS or at the 3 meters Outdoor Area Test Site (OATS) in the satellite location.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dB μ V; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dB μ V/m; dB referenced to one microvolt per meter

Note: The limit is expressed for a measurement in dB μ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters. Sample calculation demonstrates corrected field strength reading for Semi-Anechoic Chamber using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB/m) + Losses (dB) - Gain (dB)$

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 500 kHz	VBW = 3 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the 47CFR Part 15C, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Intentional Radiators

The following information is submitted supporting compliance with the requirements of 47CFR, Subpart C, paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5.

Antenna Requirements

The EUT incorporates integral non-user accessible system. Production equipment offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the SAC. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the SAC, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2020 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 2, BT BR (GFSK)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	49.0	36.1	50.2	36.1	54.0	-17.9	-17.9
2483.5	50.3	37.1	52.8	38.3	54.0	-16.9	-15.7
4804.0	48.4	35.9	48.9	36.0	54.0	-18.1	-18.0
4882.0	49.3	36.3	49.7	36.4	54.0	-17.7	-17.6
4960.0	49.5	36.4	48.9	36.2	54.0	-17.6	-17.8
7206.0	56.8	47.2	61.5	53.9	54.0	-6.8	-0.1
7323.0	56.6	45.9	61.7	53.9	54.0	-8.1	-0.1
7440.0	57.2	47.7	60.5	52.8	54.0	-6.3	-1.2
12010.0	58.7	44.8	57.9	44.8	54.0	-9.2	-9.2
12205.0	58.8	45.6	58.7	45.6	54.0	-8.4	-8.4
12400.0	58.9	45.7	59.3	45.7	54.0	-8.3	-8.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C and RSS-247 Issue 3 Intentional Radiator requirements. The EUT demonstrated a worst-case minimum margin of -0.1 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

General Radiated Emissions Procedure

Testing for the radiated emissions were performed as specified in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. For testing purposes, the EUT was arranged as presented in the applicable configuration diagrams above and operated through all modes as presented.

Exploratory radiated emissions measurements were performed in the SAC chamber or screen room, finding maximized emissions over frequency, EUT orientation, antenna height and polarity. This data is then used to focus the final radiated emissions measurements on these maximized points.

Final radiated emissions data were taken with the EUT located in the OATS or SAC at distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 6,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop, Biconical, Broadband Biconilog, Log Periodic, and Double Ridge or Pyramidal Horns and mixers above 1 GHz.

Refer to tables 2 and 3 for general radiated emissions data and figures one through seven for plots of the worst case radiated emissions taken in the SAC (30 MHz to 1 GHz) and screen room (1 to 25 GHz).

Table 4 General Radiated Emissions Data - Horizontal Polarization

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
349.99	39.54	37.08	47	-9.92
439.13	36.099	29.93	47	-17.07
448.9	35.434	27.53	47	-19.47
825.35	40.372	33.02	47	-13.98
861.11	50.02	37.43	47	-9.57
878.75	42.532	33.66	47	-13.34

Table 5 General Radiated Emissions Data - Vertical Polarization

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
439.43	42.023	38.49	47	-8.51
450.11	34.95	28.49	47	-18.51
826.12	40.804	32.58	47	-14.42
861.38	48.53	36.82	47	-10.18
872.45	43.019	34.41	47	-12.59
879.02	40.355	31.42	47	-15.58

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Figure 1 Plot of General Radiated Emissions (30 MHz – 230 MHz)



Figure 2 Plot of General Radiated Emissions (200 MHz – 1.2 GHz)

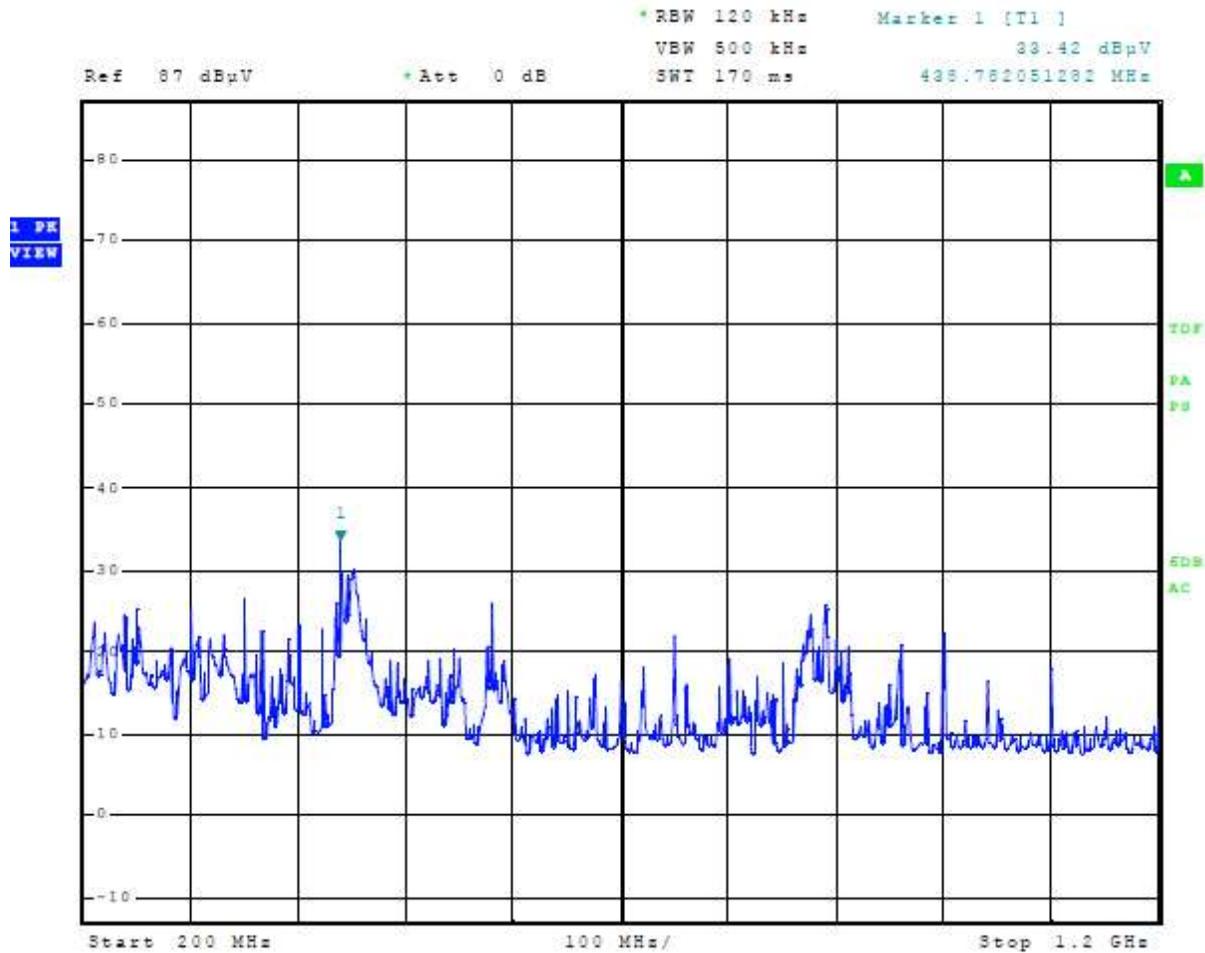


Figure 3 Plot of General Radiated Emissions (1 GHz – 3 GHz)

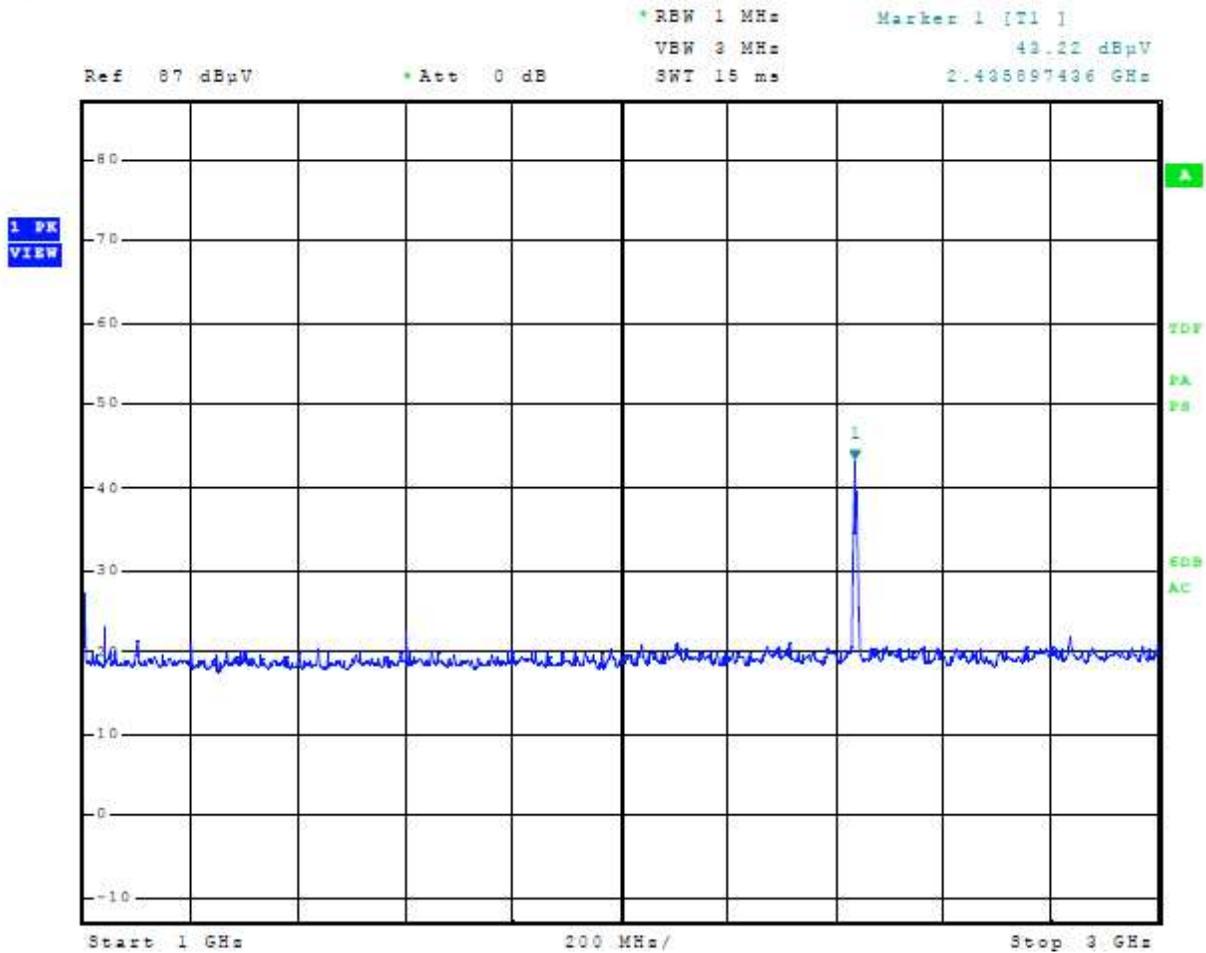




Figure 4 Plot of General Radiated Emissions (3 GHz – 6 GHz)

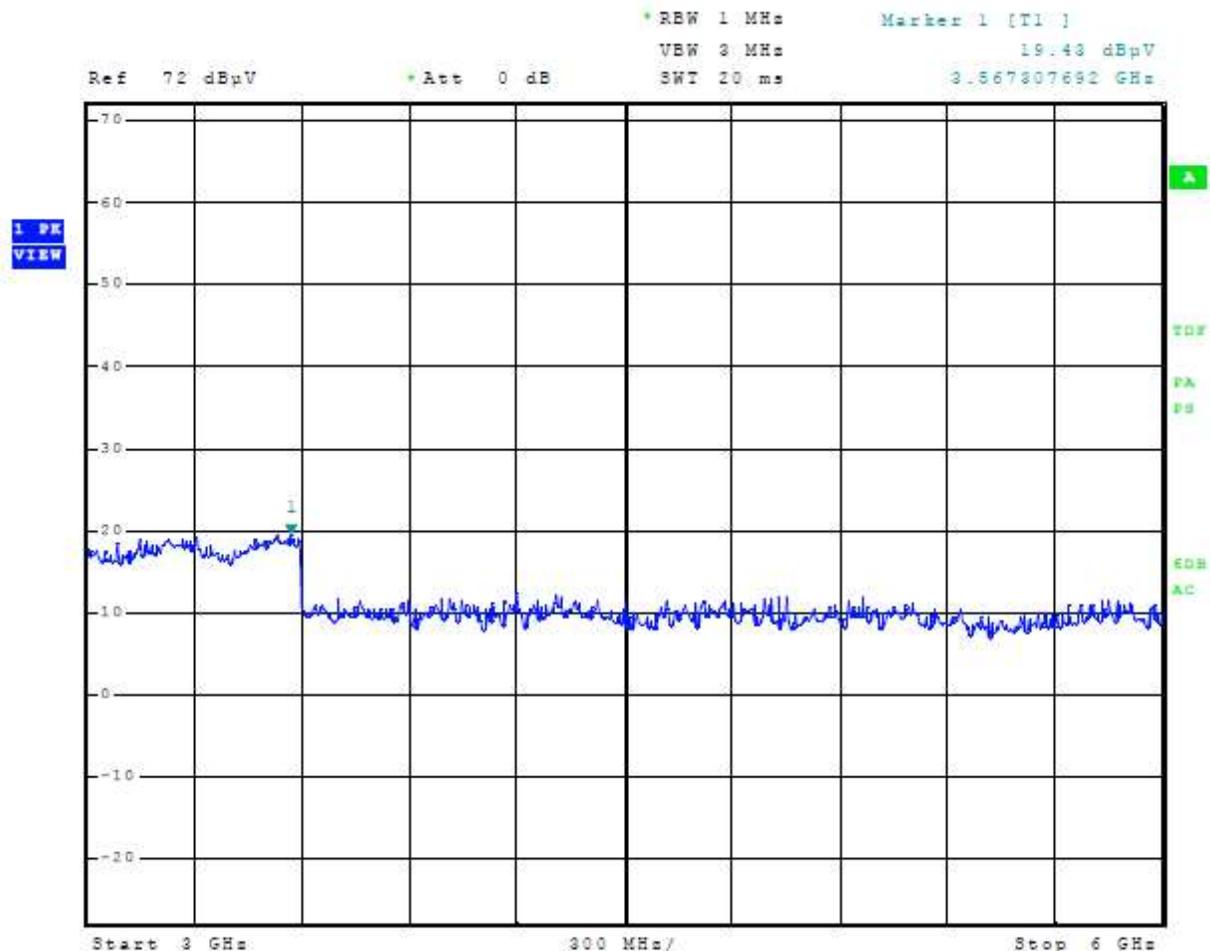


Figure 5 Plot of General Radiated Emissions (6 GHz – 12 GHz)

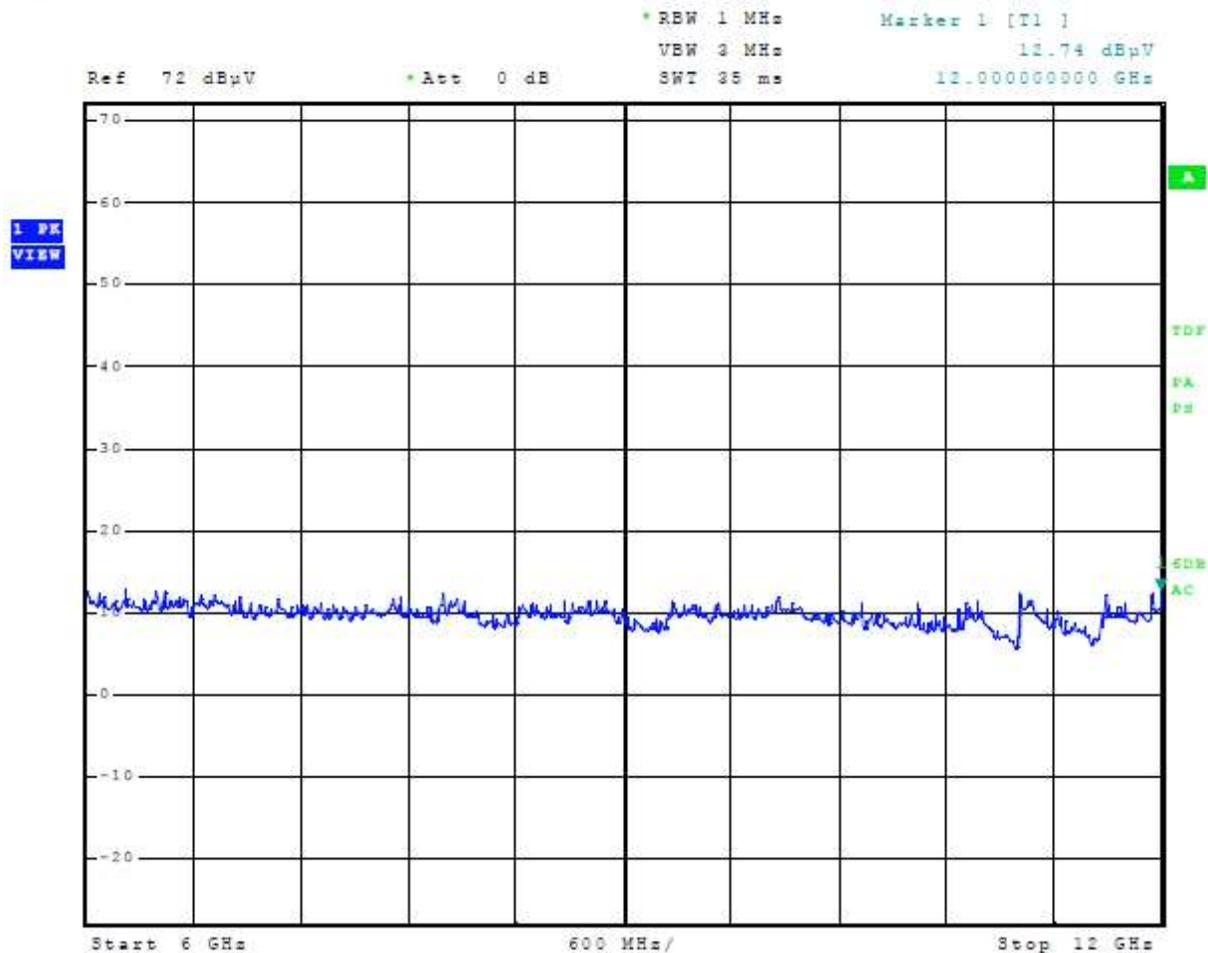


Figure 6 Plot of General Radiated Emissions (12 GHz – 18 GHz)


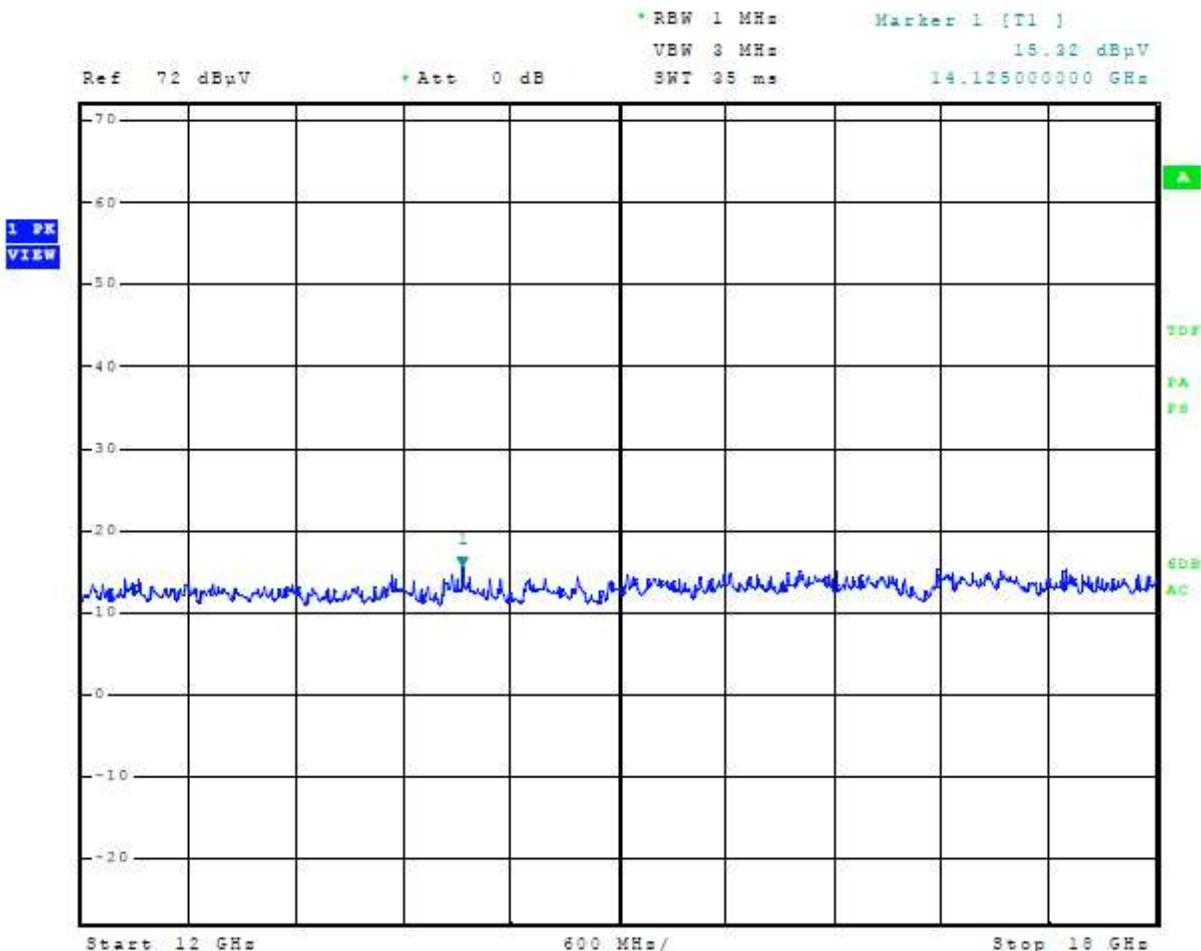


Figure 7 Plot of General Radiated Emissions (18 GHz – 25 GHz)

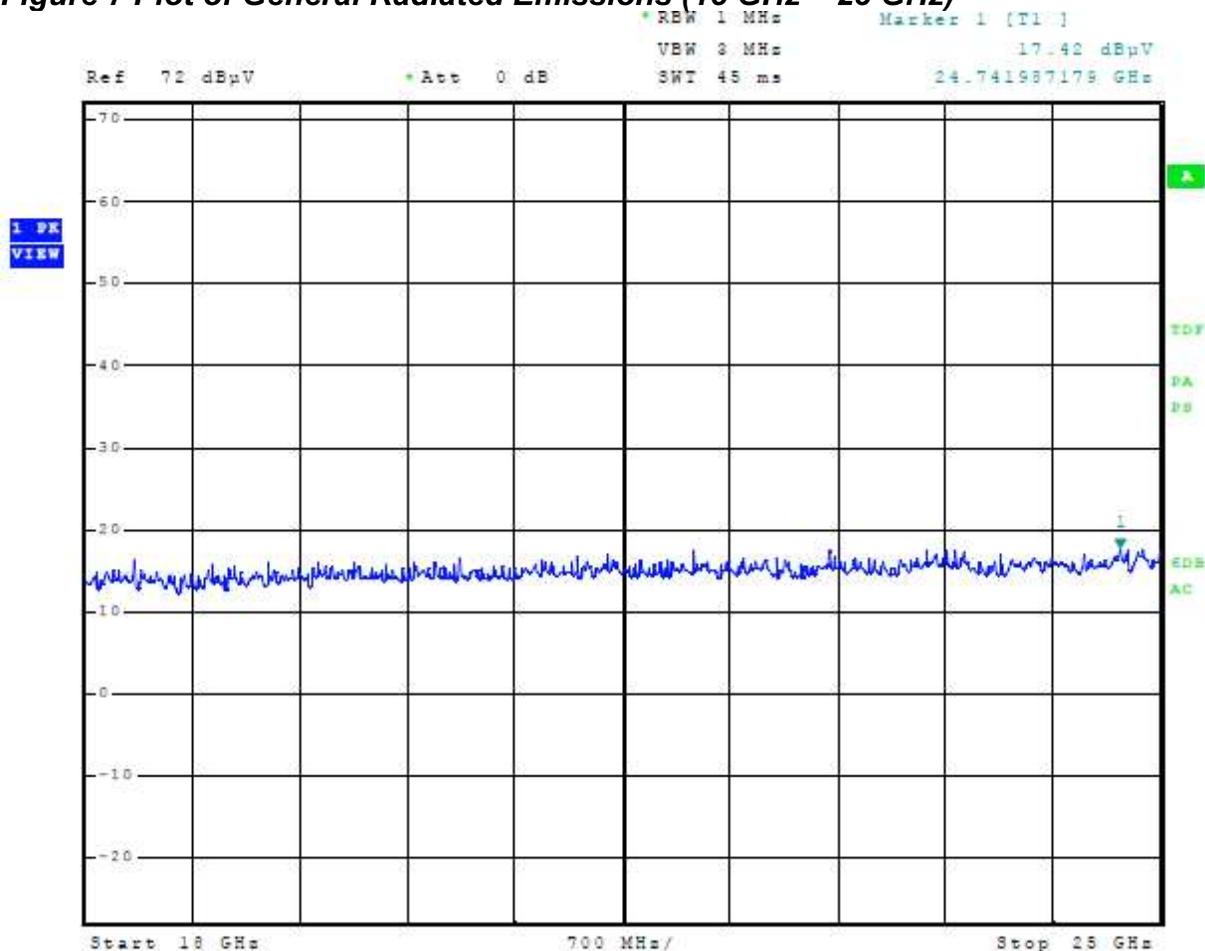

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C paragraph 15.209, RSS-210 Issue 11, and RSS-GEN Issue 5 Intentional Radiators. The EUT worst-case transmitter configuration demonstrated a minimum margin of -8.51 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

Test procedures of ANSI C63.10-2020 and KDB 558074 D01 15.247 Meas Guidance v05 were used during transmitter testing. The transmitter peak power was measured at the antenna port as described in ANSI C63.10-2020. The 20-dB and 99% emission bandwidths were measured as described in C63.10-2013. The channel separation and the number of hopping channels were measured at the antenna port as described in C63.10-2013. The system utilizes at least 15 channels with average time of occupancy on any channel not exceeding 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. The transmitter radiated spurious and general emissions were measured on an open area test site @ 3 meters. During radiated emissions measurements, the EUT sample #1 was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the measurement antenna. The amplitude of each emission was then recorded from the measurement results. The test system gains and losses were accounted for in the measurement results presented. The amplitude of each radiated emission was maximized by equipment orientation and placement on the turn table, raising and lowering the FSM (Field Strength Measuring) antenna, changing the FSM antenna polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dB μ V/m @ 3 meters. Antenna port conducted emission data and plots were taken using test sample #2.

Requirement:

Average occupancy time Requirement:

Average time of occupancy on any channel shall not be greater than 400 mS (0.4 seconds) within a 30 second period (0.4 times the number of hopping channels of 79).

Time on channel:

The design resides on channel 60 times in 6 seconds (300 times in a 30 second period) transmitting each time for 141.9 μ S. This equates to an average time of occupancy of (300*141.9 μ S) 42.6 mS over 30 seconds.

The 42.6 mS average time of occupancy over 30 seconds demonstrates compliance with the requirement of less than 400 mS in 30 second period. Additional Frequency Hopping detail may be found in the operational description exhibits.

Refer to figures three through twelve showing plots taken of the 2402-2480 MHz BT BR (GFSK) Frequency Hopping Spread Spectrum operation displaying compliance with the specifications.

Figure 8 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 2, BT BR

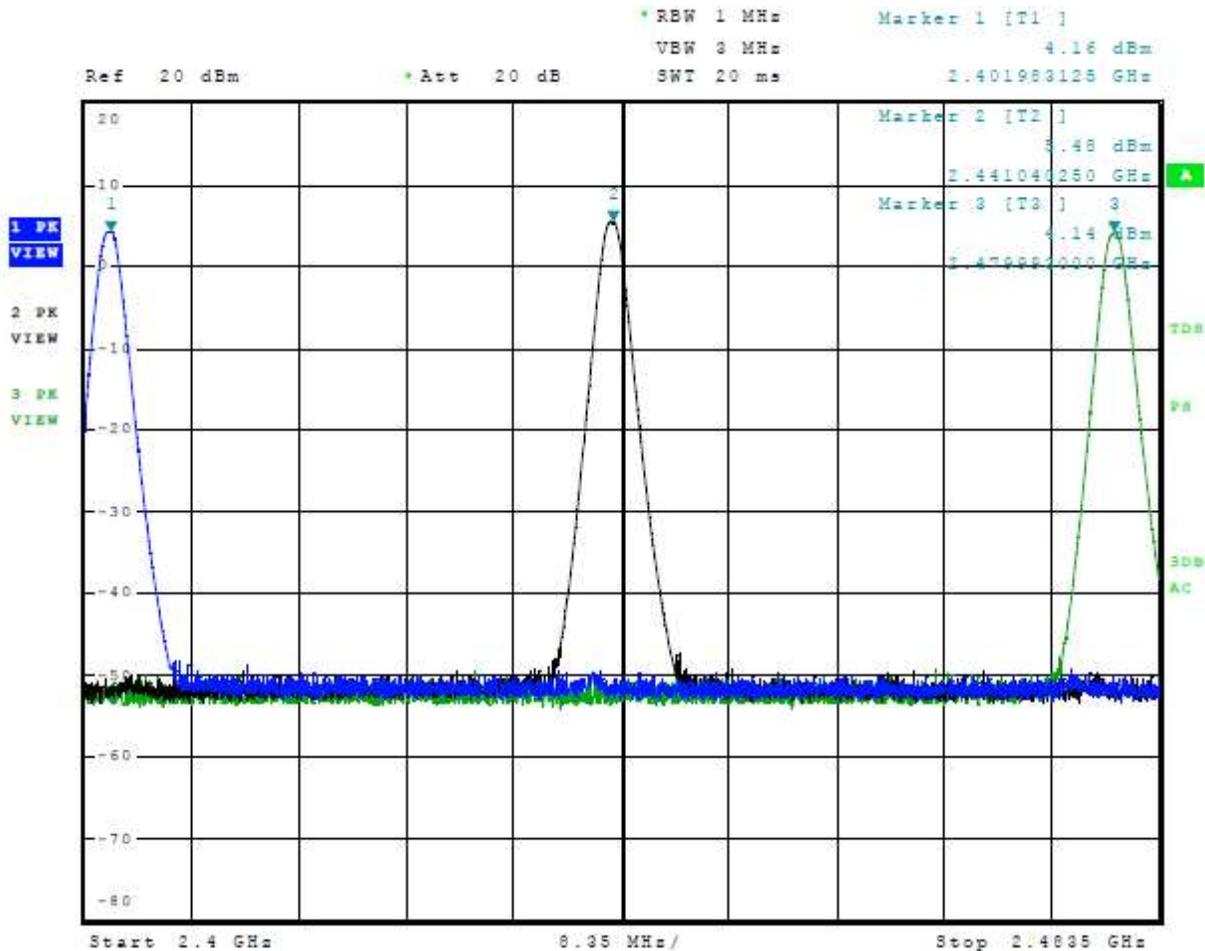


Figure 9 Plot of Transmitter Emissions 20-dB Occupied Bandwidth Mode 2, BT BR

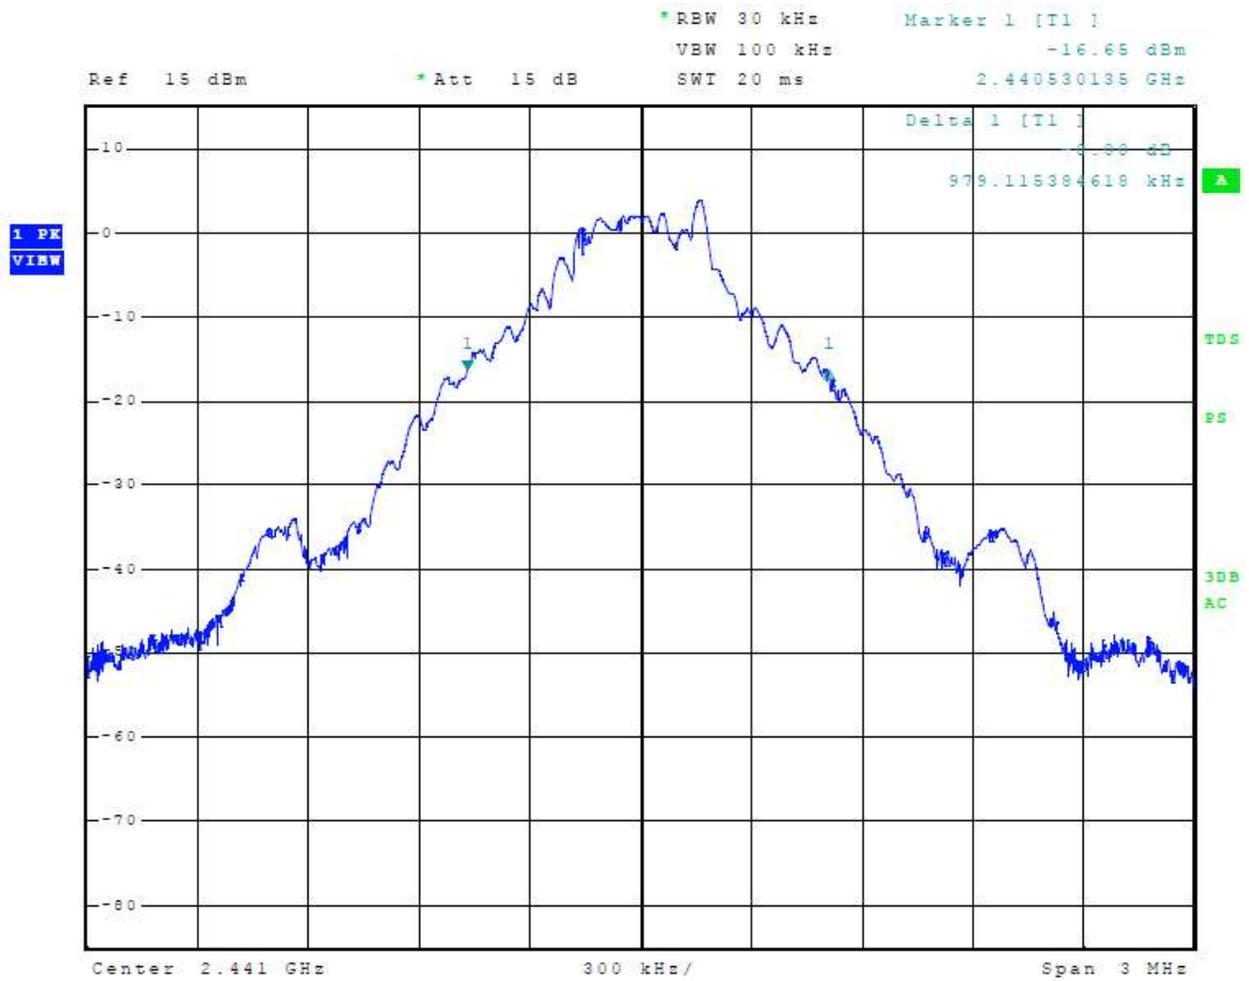


Figure 10 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 2, BT BR

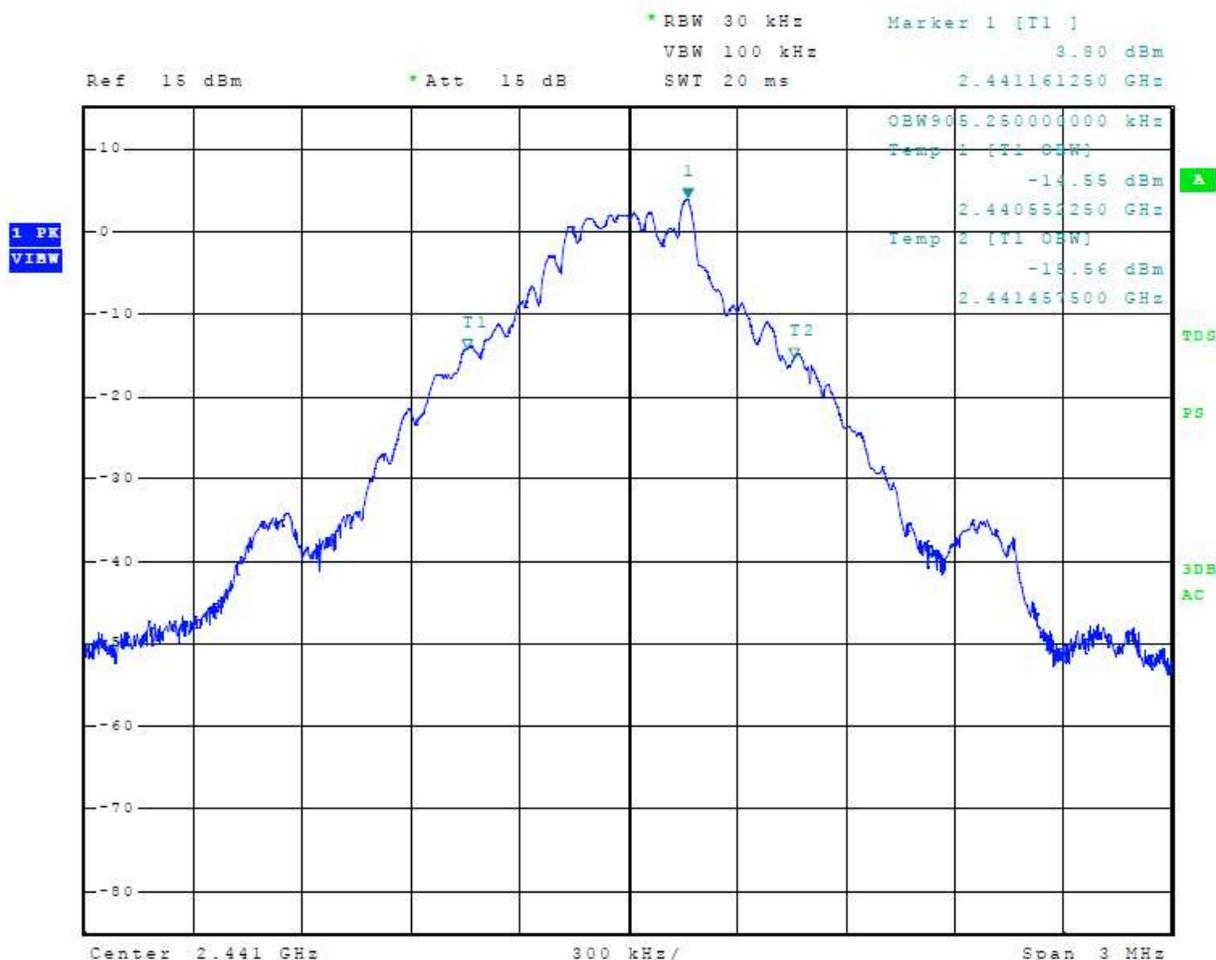


Figure 11 Plot of Number of Hopping Channels Mode 2, BT BR

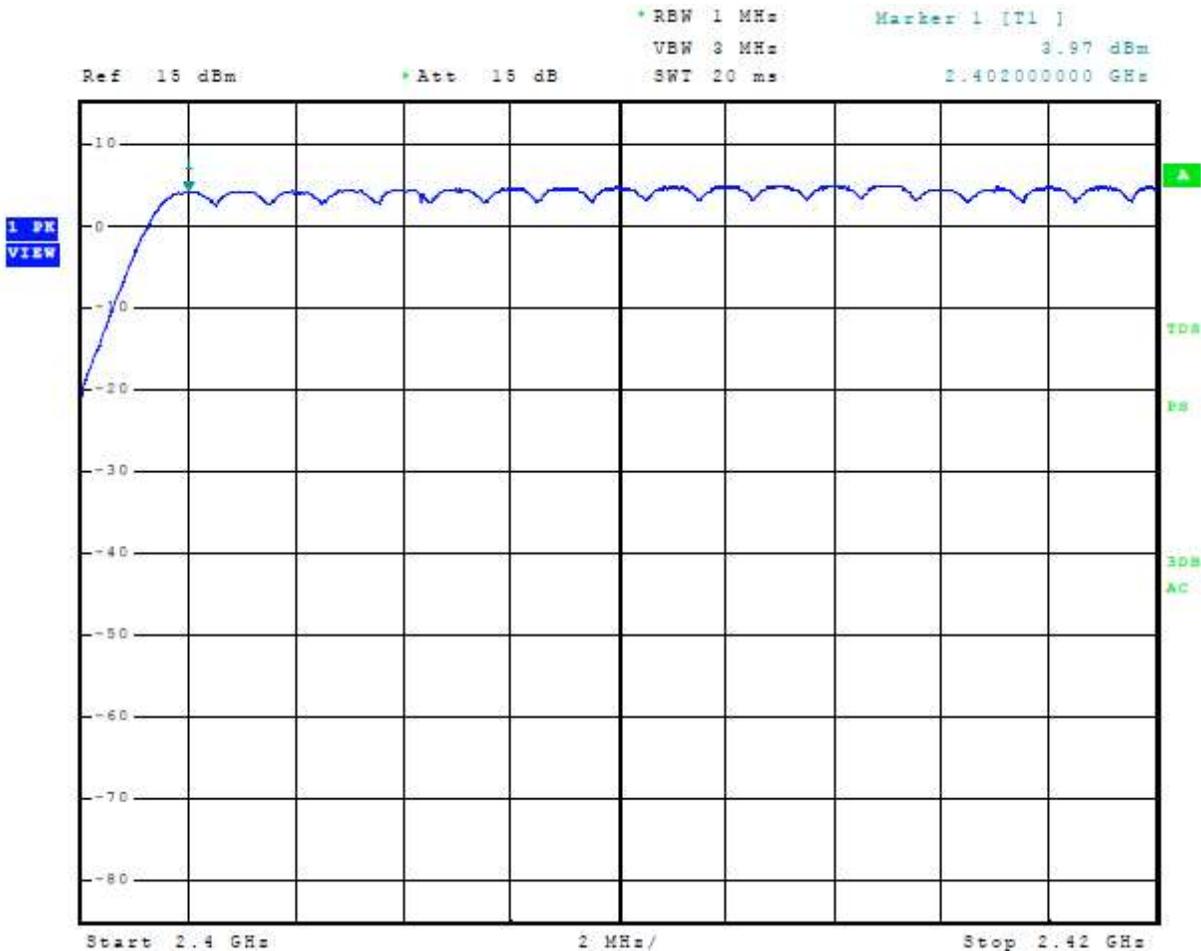


Figure 12 Plot of Number of Hopping Channels Mode 2, BT BR

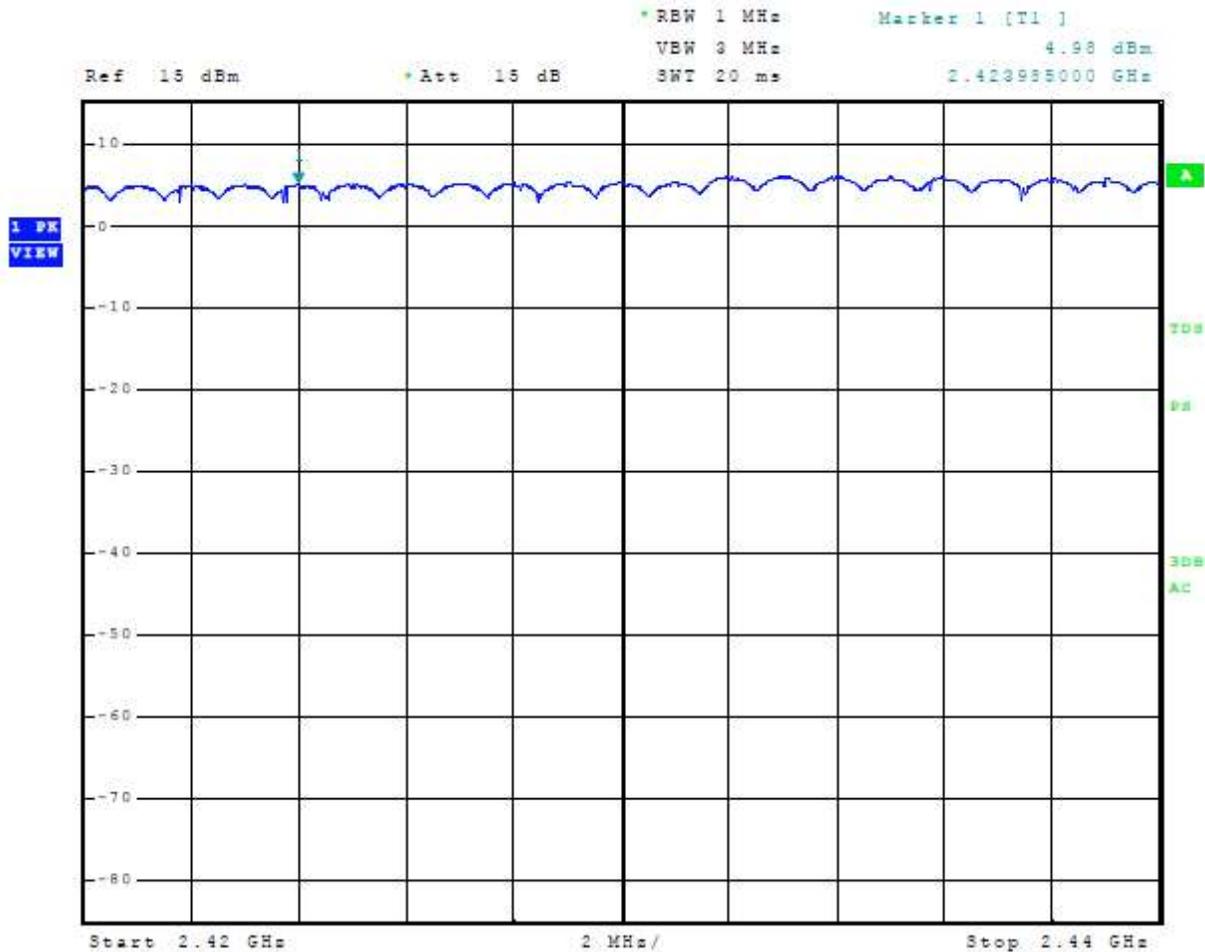


Figure 13 Plot of Number of Hopping Channels Mode 2, BT BR

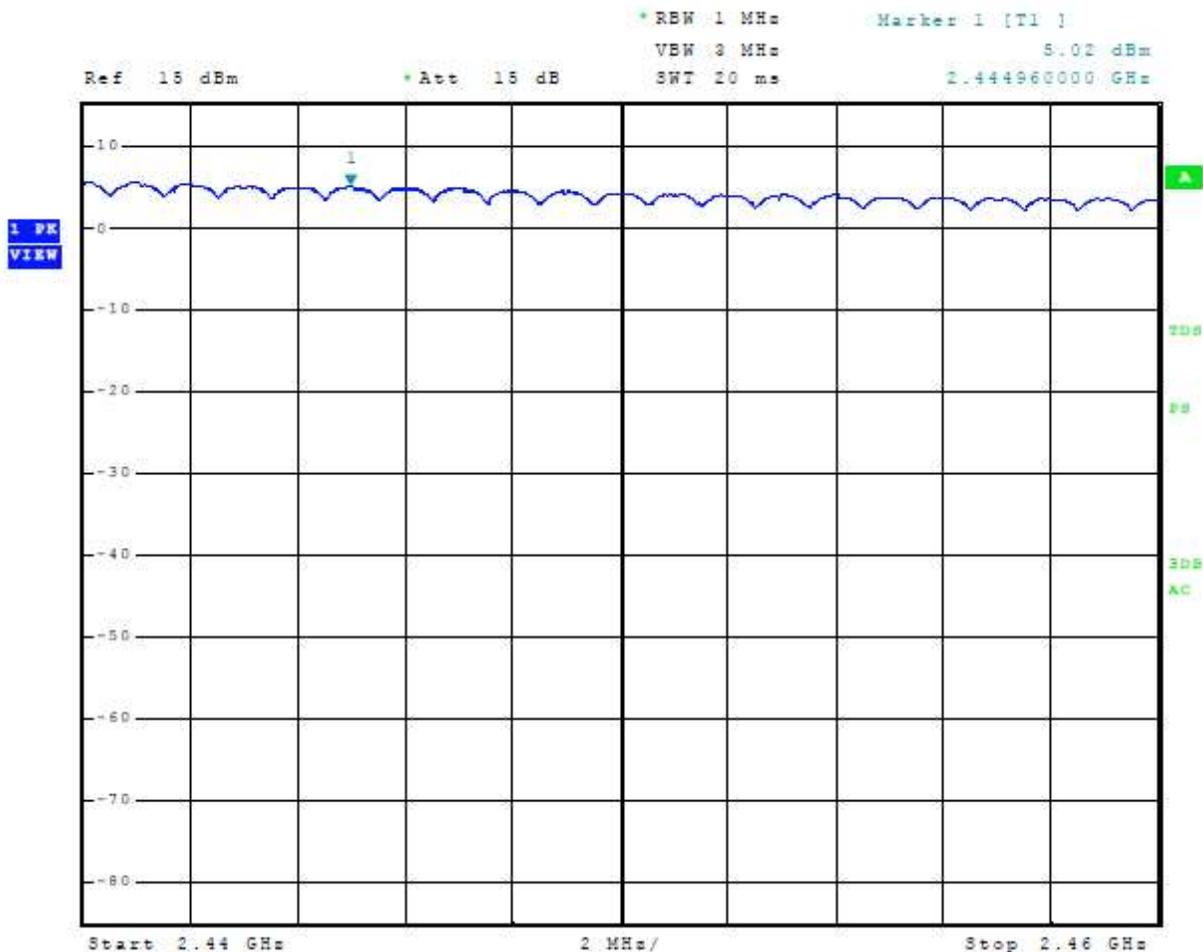


Figure 14 Plot of Number of Hopping Channels Mode 2, BT BR

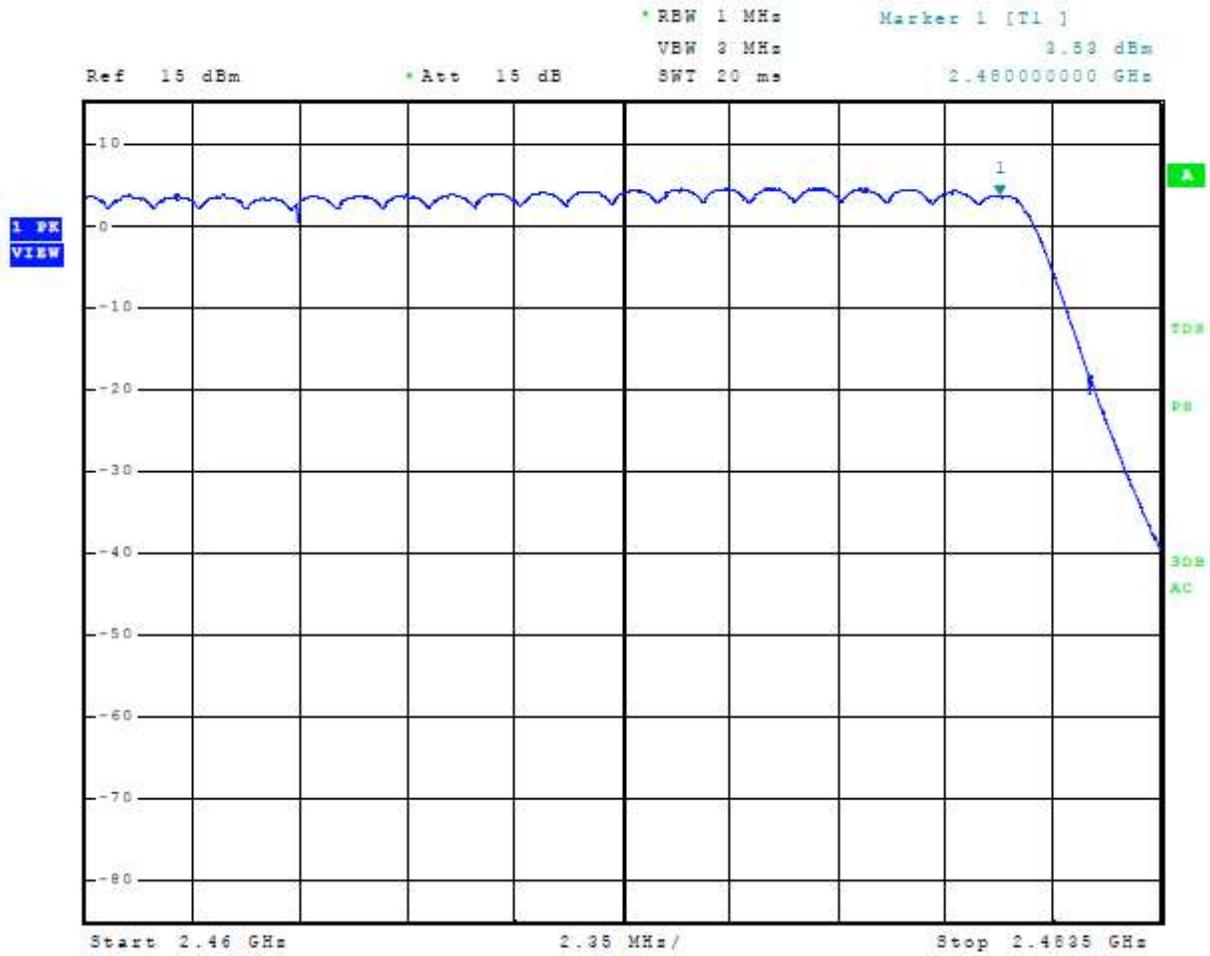


Figure 15 Plot of Channel Separation Mode 2, BT BR

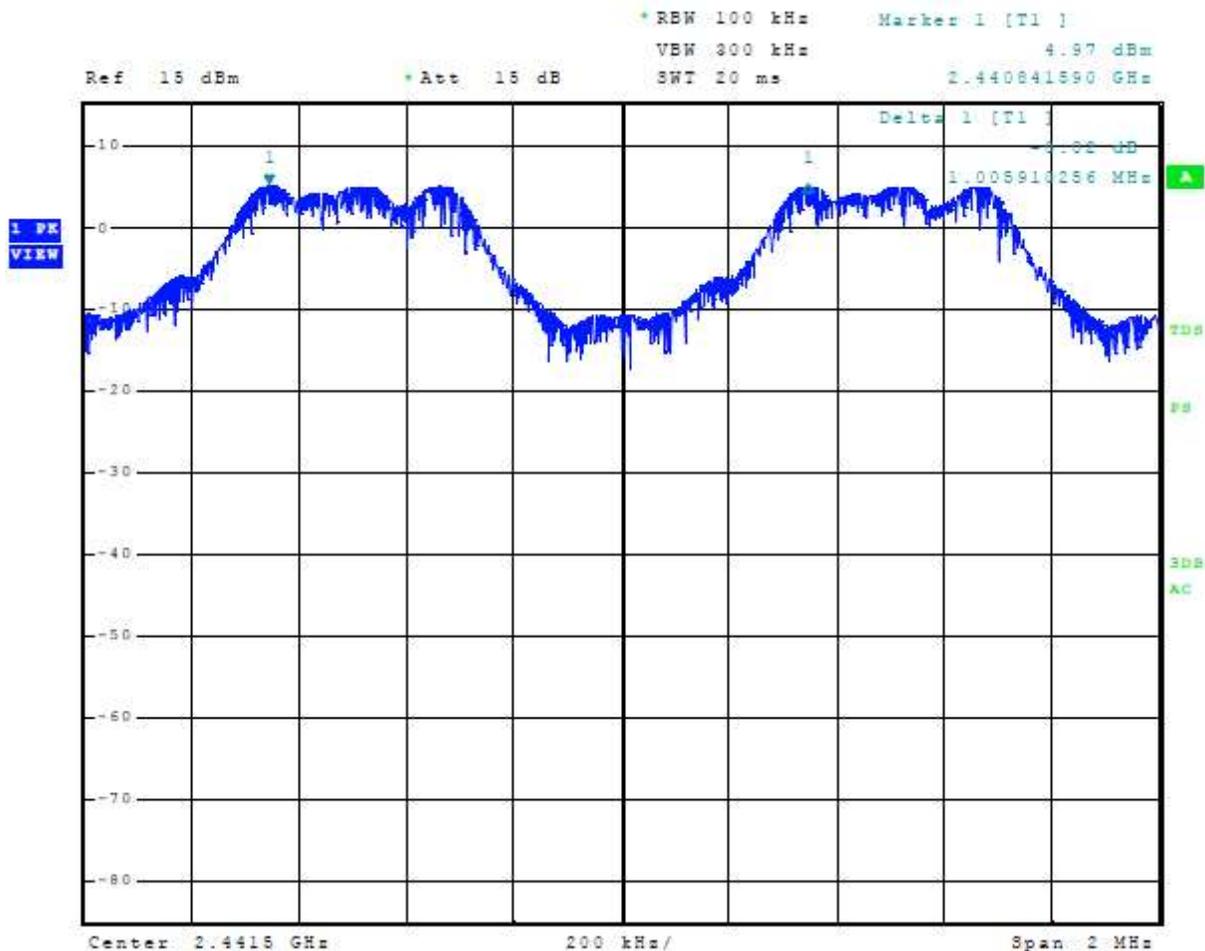


Figure 16 Plot of Dwell time On Channel Mode 2, BT BR

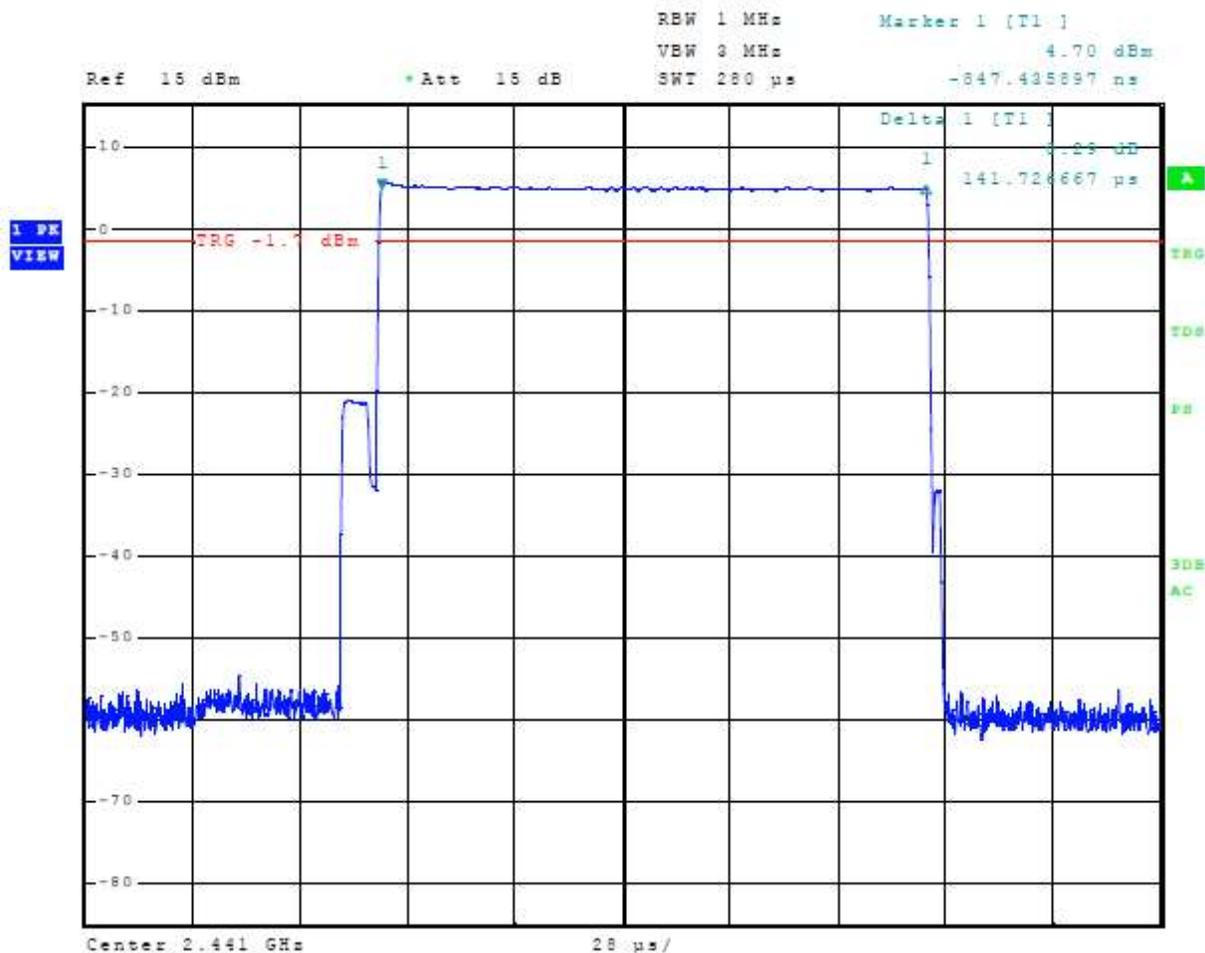


Figure 17 Plot of Number of Times on Channel over 6 Second Period Mode 2, BT BR

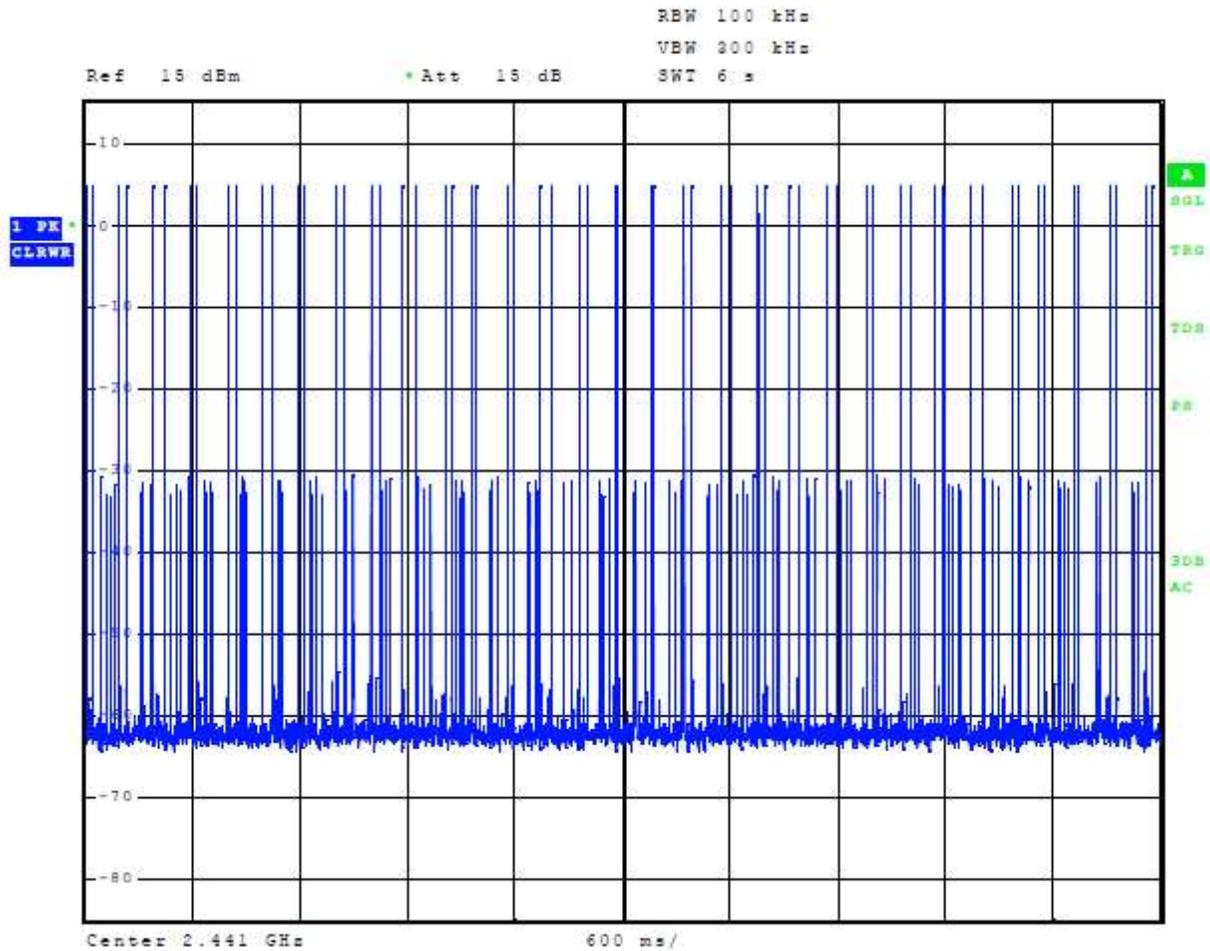


Figure 18 Plot of Transmitter Emissions Low Band Edge Mode 2, BT BR


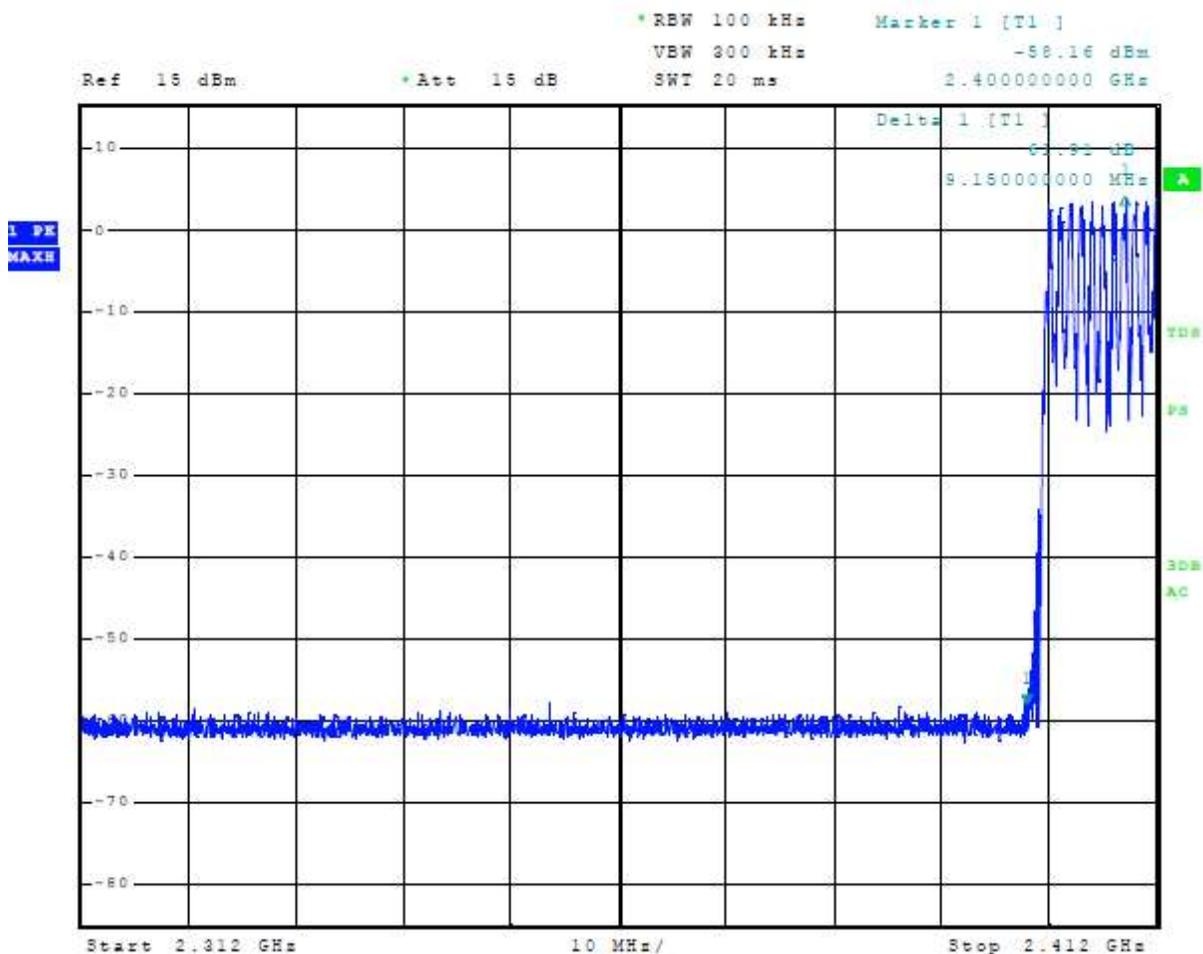


Figure 20 Plot of Transmitter Emissions High Band Edge Mode 2, BT BR

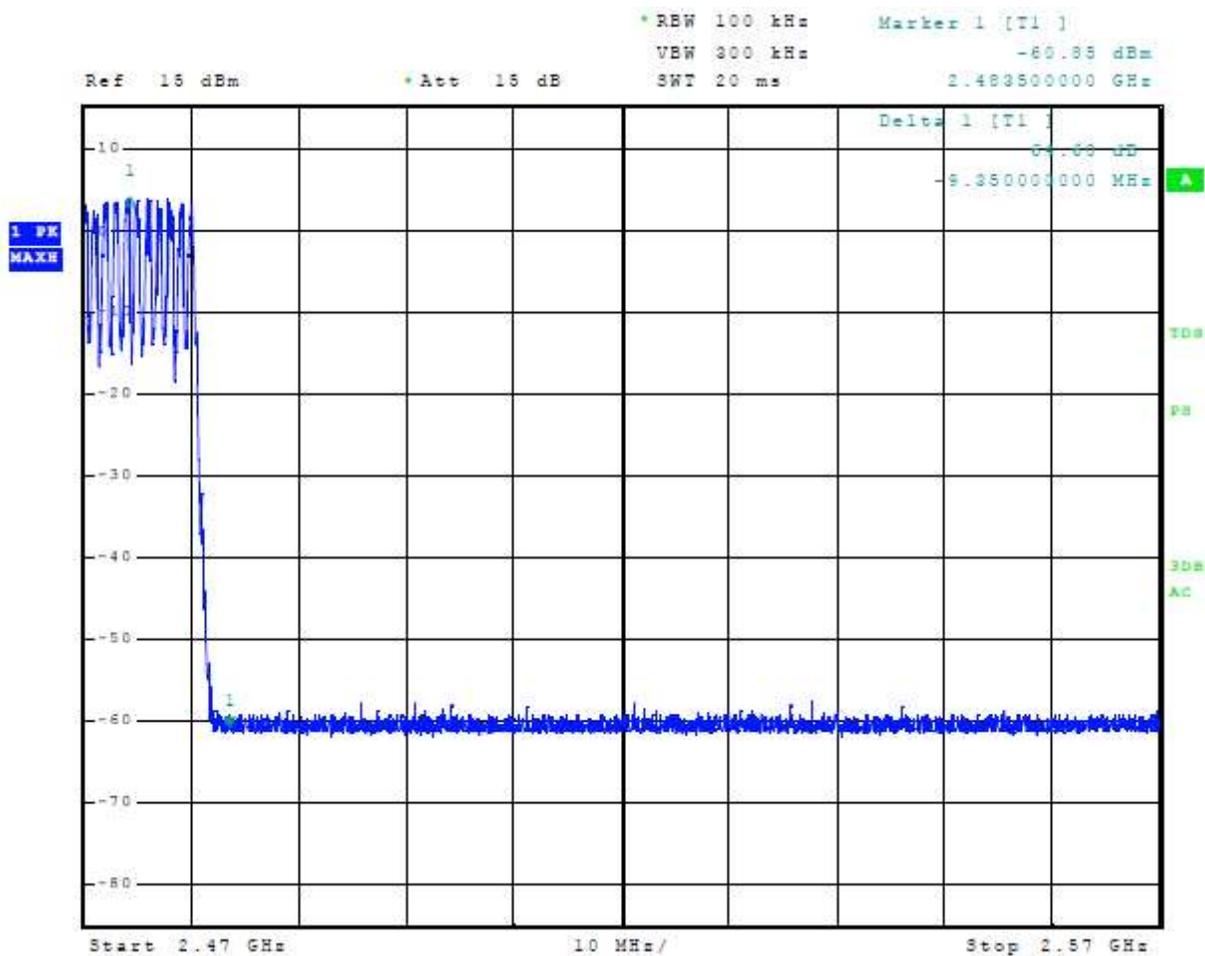

Transmitter Emissions Data

Table 6 Transmitter Radiated Emissions Mode 2, BT BR

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	48.4	35.9	48.9	36.0	54.0	-18.1	-18.0
7206.0	56.8	47.2	61.5	53.9	54.0	-6.8	-0.1
9608.0	55.9	43.4	56.6	43.4	54.0	-10.6	-10.6
12010.0	58.7	44.8	57.9	44.8	54.0	-9.2	-9.2
14412.0	60.0	46.9	60.3	46.9	54.0	-7.1	-7.1
16814.0	65.7	52.3	65.1	52.3	54.0	-1.7	-1.7
19216.0	63.5	50.6	63.3	50.6	54.0	-3.4	-3.4
21618.0	64.7	52.1	64.8	52.1	54.0	-1.9	-1.9
24020.0	66.5	53.3	66.3	53.3	54.0	-0.7	-0.7
2441.0	--	--	--	--	--	--	--
4882.0	49.3	36.3	49.7	36.4	54.0	-17.7	-17.6
7323.0	56.6	45.9	61.7	53.9	54.0	-8.1	-0.1
9764.0	55.9	43.1	56.3	43.1	54.0	-10.9	-10.9
12205.0	58.8	45.6	58.7	45.6	54.0	-8.4	-8.4
14646.0	60.5	47.6	61.1	47.6	54.0	-6.4	-6.4
17087.0	63.8	50.8	63.3	50.8	54.0	-3.2	-3.2
19528.0	63.4	50.6	63.6	50.6	54.0	-3.4	-3.4
21969.0	66.4	52.7	65.8	52.7	54.0	-1.3	-1.3
24410.0	66.3	52.4	66.1	52.4	54.0	-1.6	-1.6
2480.0	--	--	--	--	--	--	--
4960.0	49.5	36.4	48.9	36.2	54.0	-17.6	-17.8
7440.0	57.2	47.7	60.5	52.8	54.0	-6.3	-1.2
9920.0	56.8	43.6	56.7	43.7	54.0	-10.4	-10.3
12400.0	58.9	45.7	59.3	45.7	54.0	-8.3	-8.3
14880.0	60.2	47.1	60.9	47.1	54.0	-6.9	-6.9
17360.0	64.2	50.9	63.8	50.8	54.0	-3.1	-3.2
19840.0	63.9	50.8	63.7	50.8	54.0	-3.2	-3.2
22320.0	65.1	52.0	65.5	52.0	54.0	-2.0	-2.0
24800.0	65.1	52.0	65.1	52.0	54.0	-2.0	-2.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 7 Transmitter Antenna Port Conducted Data Mode 2, BT BR

Frequency MHz	Antenna Port Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	20-dB Occupied Bandwidth (kHz)
Mode 2, BT BR			
2402	0.003	905.3	967.2
2441	0.004	905.3	979.1
2480	0.003	903.8	965.8

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5. The antenna port conducted output power measured was 0.004 Watts. The unit utilizes 79 hopping channels with the average time of occupancy less than 0.4 seconds over the required time. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -0.1 dB below the limit. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment
- Annex C Laboratory Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/20/2025	3/20/2026
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/17/2025	3/17/2027
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	3/17/2025	3/17/2027
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/8/2024	7/8/2025
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/21/2025	1/21/2026
<input type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
<input type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/26/2023	9/26/2025
<input checked="" type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/19/2025	3/19/2026
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/21/2025	3/21/2026
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
<input type="checkbox"/> Attenuator	Fairview	SA6NFNF100W-40 (1625)	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Weather station	Davis	6152 (A70927D44N)		7/11/2024	7/11/2025

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input type="checkbox"/> Frequency Counter: Leader		LDC-825 (8060153)		3/19/2025	3/19/2026
<input type="checkbox"/> ISN	Com-Power	Model ISN T-8 (600111)		3/19/2025	3/19/2026
<input type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	9/16/2024	9/16/2025
<input type="checkbox"/> LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
<input checked="" type="checkbox"/> LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(4M)(281184)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/22/2025	3/22/2026
<input checked="" type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/20/2025	3/20/2026
<input type="checkbox"/> Antenna:	Solar	9229-1 & 9230-1		2/5/2025	2/5/2026
<input type="checkbox"/> CDN:	Com-Power	Model CDN M325E		9/16/2024	9/16/2025
<input type="checkbox"/> Oscilloscope Scope: Tektronix		MDO 4104		2/5/2025	2/5/2026
<input type="checkbox"/> EMC Transient Generator HVT		TR 3000		2/5/2025	2/5/2026
<input type="checkbox"/> AC Power Source (Ametech, California Instruments)				2/5/2025	2/5/2026
<input checked="" type="checkbox"/> Field Intensity Meter: EFM-018				2/5/2025	2/5/2026
<input checked="" type="checkbox"/> ESD Simulator: MZ-15				2/5/2025	2/5/2026
<input type="checkbox"/> Injection Clamp Luthi Model EM101					not required
<input type="checkbox"/> R.F. Power Amp ACS 230-50W					not required
<input type="checkbox"/> R.F. Power Amp EIN Model: A301					not required
<input type="checkbox"/> R.F. Power Amp A.R. Model: 10W 1010M7					not required
<input type="checkbox"/> R.F. Power Amp A.R. Model: 50U1000					not required
<input checked="" type="checkbox"/> Temperature Chamber					not required
<input checked="" type="checkbox"/> Shielded Room					not required
POSSIBLY USE FOR GARMIN GPS TESTING					
<input type="checkbox"/> GNSS Sig Gen SG80K, SN: GNSS-00952					not required

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0

Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique on ISO/IEC 17025).*

2025-03-11 through 2026-03-31

Effective Dates



For the National Voluntary Laboratory Accreditation Program

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone/Fax: (913) 660-0666

Revision 1

FCC ID: IPH-05043 IC: 1792A-05043

Test: 250404

Test to: 47CFR 15C, RSS-Gen RSS-247

File: A05043 DTS TstRpt 250404 r1

Garmin International, Inc.

PMN: A05043

SN's: 3512701210, 3512701215

Date: June 24, 2025

Page 52 of 52



Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

47CFR, PART 15C - Intentional Radiators
47CFR Paragraph 15.247 and
Industry Canada RSS-247 Issue 3 and RSS-GEN Issue 5
Application For Grant of Certification
Model: A05043

2402-2480 and 2412-2462 MHz Digital Transmission System (DTS)
FCC ID: IPH-05043 IC: 1792A-05043

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062
Jeff Hailey
Staff Compliance Engineer

Test Report Number: 250404
Test Date: April 4, 2025 – May 27, 2025

Authorized Signatory: 

Patrick Powell
Rogers Labs, a division of The Compatibility Center LLC
FCC Designation: US5305
ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS..... 2

REVISIONS..... 5

EXECUTIVE SUMMARY 6

OPINION / INTERPRETATION OF RESULTS 7

EQUIPMENT TESTED..... 9

Equipment Operational Modes.....10

Equipment Function11

Equipment Configuration.....12

ENVIRONMENTAL CONDITIONS..... 12

APPLICATION FOR CERTIFICATION..... 13

TEST SITE LOCATIONS 14

UNITS OF MEASUREMENTS 15

STATEMENT OF MODIFICATIONS AND DEVIATIONS 15

APPLICABLE STANDARDS..... 16

INTENTIONAL RADIATORS..... 16

Antenna Requirements16

TEST PROCEDURES..... 17

AC Line Conducted Emission Test Procedure17

Radiated Emission Procedure17

Antenna Port Conducted Emission Test Procedure.....17

Diagram 1 Test arrangement for power-line conducted emissions.....18

Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....19

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)20

Diagram 4 Test arrangement for Antenna Port Conducted emissions.....21

RESTRICTED BANDS OF OPERATION 21

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 3, BT (2EDR DQPSK)22

Table 2 Radiated Emissions in Restricted Frequency Bands Data Mode 4, BT (3EDR 8DPSK)23

Table 3 Radiated Emissions in Restricted Frequency Bands Data Mode 5, BT (BLE GMSK)24

Table 4 Radiated Emissions in Restricted Frequency Bands Data Mode 6, 802.11b25

Table 5 Radiated Emissions in Restricted Frequency Bands Data Mode 7, 802.11g26

Table 6 Radiated Emissions in Restricted Frequency Bands Data Mode 8, 802.11n27

Summary of Results for Radiated Emissions in Restricted Bands27

AC LINE CONDUCTED EMI PROCEDURE..... 28

GENERAL RADIATED EMISSIONS PROCEDURE..... 28

Table 7 General Radiated Emissions Data - Horizontal Polarization29

Table 8 General Radiated Emissions Data - Vertical Polarization29

Figure 1 Plot of General Radiated Emissions (30 MHz – 230 MHz)30

Figure 2 Plot of General Radiated Emissions (200 MHz – 1.2 GHz)31

Figure 3 Plot of General Radiated Emissions (1 GHz – 3 GHz).....32

Figure 4 Plot of General Radiated Emissions (3 GHz – 6 GHz).....33

Figure 5 Plot of General Radiated Emissions (6 GHz – 12 GHz).....34

Figure 6 Plot of General Radiated Emissions (12 GHz – 18 GHz).....35

Figure 7 Plot of General Radiated Emissions (18 GHz – 25 GHz).....36

Summary of Results for General Radiated Emissions36

OPERATION IN THE BAND 2400 – 2483.5 MHZ 37

Figure 8 Plot of Transmitter Operation in 2402-2480 MHz Mode 3, BT (2EDR DQPSK)38

Figure 9 Plot of Transmitter Operation in 2402-2480 MHz Mode 4, BT (3EDR 8DPSK)39

Figure 10 Plot of Transmitter Operation in 2402-2480 MHz Mode 5 BT BLE (GMSK)40

Figure 11 Plot of Transmitter Operation in 2402-2480 MHz Mode 6, 802.11b41

Figure 12 Plot of Transmitter Operation in 2402-2480 MHz Mode 7, 802.11g42

Figure 13 Plot of Transmitter Operation in 2402-2480 MHz Mode 8, 802.11n43

Figure 14 Plot of Emissions Low Band Edge Mode 3, BT (2EDR DQPSK)44

Figure 15 Plot of Emissions Low Band Edge Mode 4, BT (3EDR 8DPSK).....45

Figure 16 Plot of Emissions Low Band Edge Mode 5 BT BLE (GMSK)46

Figure 17 Plot of Emissions Low Band Edge Mode 6, 802.11b47

Figure 18 Plot of Emissions Low Band Edge Mode 7, 802.11g.....48

Figure 19 Plot of Emissions Low Band Edge Mode 8, 802.11n49

Figure 20 Plot of Transmitter Emissions High Band Edge Mode 3, BT (2EDR DQPSK)50

Figure 21 Plot of Transmitter Emissions High Band Edge Mode 4, BT (3EDR 8DPSK)51

Figure 22 Plot of Transmitter Emissions High Band Edge Mode 5 BT BLE (GMSK)52

Figure 23 Plot of Transmitter Emissions High Band Edge Mode 6, 802.11b.....53

Figure 24 Plot of Transmitter Emissions High Band Edge Mode 7, 802.11g54

Figure 25 Plot of Transmitter Emissions High Band Edge Mode 8, 802.11n.....55

Figure 26 Plot of 6-dB Occupied Bandwidth Mode 3, BT (2EDR DQPSK).....56

Figure 27 Plot of 99% Occupied Bandwidth Mode 3, BT (2EDR DQPSK).....57

Figure 28 Plot of 6-dB Occupied Bandwidth Mode 4, BT (3EDR 8DPSK).....58

Figure 29 Plot of 99% Occupied Bandwidth Mode 4, BT (3EDR 8DPSK).....59

Figure 30 Plot of 6-dB Occupied Bandwidth Mode 5, BT BLE (GMSK).....60

Figure 31 Plot of 99% Occupied Bandwidth Mode 5, BT BLE (GMSK).....61

Figure 32 Plot of 6-dB Occupied Bandwidth Mode 6, 802.11b62

Figure 33 Plot of 99% Occupied Bandwidth Mode 6, 802.11b.....63

Figure 34 Plot of 6-dB Occupied Bandwidth Mode 7, 802.11g.....64

Figure 35 Plot of 99% Occupied Bandwidth Mode 7, 802.11g65

Figure 36 Plot of 6-dB Occupied Bandwidth Mode 8, 802.11n66

Figure 37 Plot of 99% Occupied Bandwidth Mode 8, 802.11n.....67

Figure 38 Plot of Transmitter Power Spectral Density Mode 3, BT (2EDR DQPSK)68

Figure 39 Plot of Transmitter Power Spectral Density Mode 4, BT (3EDR 8DPSK)69

Figure 40 Plot of Transmitter Power Spectral Density Mode 5, BT BLE (GMSK)70

Figure 41 Plot of Transmitter Power Spectral Density Mode 6, 802.11b71

Figure 42 Plot of Transmitter Power Spectral Density Mode 7, 802.11g72

Figure 43 Plot of Transmitter Power Spectral Density Mode 8, 802.11n73

TRANSMITTER EMISSIONS DATA..... 74

Table 9 Transmitter Radiated Emissions Mode 3, BT (2EDR DQPSK)74

Table 10 Transmitter Radiated Emissions Mode 4, BT (3EDR 8DPSK)75

Table 11 Transmitter Radiated Emissions Mode 5, BT BLE (GMSK)76

Table 12 Transmitter Radiated Emissions Mode 6, 802.11b77

Table 13 Transmitter Radiated Emissions Mode 7, 802.11g78

Table 14 Transmitter Radiated Emissions Mode 8, 802.11n79

Table 15 Transmitter Antenna Port Conducted Data modes 3-580

Table 16 Transmitter Antenna Port Conducted Data modes 6-881

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator81

ANNEX..... 82

Annex A Measurement Uncertainty Calculations.....83

Annex B Test Equipment.....84

Annex C Laboratory Certificate of Accreditation.....86

Revisions

Revision 1 Issued June 24, 2025

Executive Summary

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under Code of Federal Regulations Title 47 (47CFR) Part 15C paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5, operation in the 2400 – 2483.5 MHz band.

Name of Applicant: Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

PMN: A05043

FCC ID: IPH-05043 IC: 1792A-05043

Operating Frequency Range: 2402-2480 MHz

A05043 was chosen for transmitter configuration testing and used for final measurements.

Operational communication modes 3 through 8:

Mode	Power (Watts)	99% OBW (kHz)	6-dB OBW (kHz)
Mode 3, BT (2EDR $\pi/4$ DQPSK)	0.005	1,216.5	1,076.7
Mode 4, BT (3EDR 8DPSK)	0.005	1,214.3	1,079.6
Mode 5, BT BLE (GMSK)	.001	1,056.0	668.5
Mode 6, 802.11b	0.003	11,340.0	8,745.0
Mode 7, 802.11g	0.010	17,160.0	16,282.0
Mode 8, 802.11n	.011	18,230.0	17,509.5

This report addresses EUT Operations as Digital Transmission System using transmitter modulations in modes 3 through 8. Note, the production device utilizes two non-user accessible integral antennas with 1.8 dBi (ANT) and 5.8 dBi (BT and WiFi) gain.

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Band Emissions 15.205, RSS-GEN, RSS-247	-0.5	Complies
AC Line Emissions as per 47CFR 15.207, RSS-GEN 8.8	N/A	Complies
Radiated Emissions 47 CFR 15.209, RSS-GEN 8.9	-8.51	Complies
Harmonic Emissions per 47CFR 15.247, RSS-247	-0.5	Complies
Power Spectral Density per 47CFR 15.247, RSS-247	-8.9	Complies

Tests performed include:

47CFR 15.247

(a) (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one-Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the

restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 Issue 3

5.2 Digital transmission systems

DTS's include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz

- a) The minimum 6 dB bandwidth shall be 500 kHz.
- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d),(i.e., the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) requirements

Devices shall comply with the following requirements, where applicable:

- d) For DTS's employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

5.5 Unwanted emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Equipment Tested

Model: A05043

Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

Equipment	Model / PN	Serial Number
EUT #1 Radiated	A05043	3495259652
EUT #2 Antenna Port	A05043	3495259647
Garmin GT56 Transducer	010-13073-00	6QR262970
Power Cable	320-01043-50	n/a
Garmin GCV20 Sonar Box	010-01156-02	5JW004749 5JW004754
Garmin Heading Sensor	010-1141710	543023755
HDMI Load	n/a	n/a
Garmin NMEA Starter Kit	010-11442-00	n/a

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

The design may operate one transmitter chain at a time and is not capable of simultaneous transmission on more than one port.

Software (FVIN): 40.42; Antennas: 2.4 GHz ANT dipole (1.8 dBi), 2.4 GHz WiFi/BT dipole (5.8 dBi)


Equipment Operational Modes

Mode	Transmitter Operation
mode 1	ANT (GFSK)
mode 2	BT BR (GFSK)
mode 3	BT (2EDR $\pi/4$ DQPSK)
mode 4	BT (3EDR 8DPSK)
mode 5	BT BLE (GMSK)
mode 6	802.11b
mode 7	802.11g
mode 8	802.11n

Equipment Function

The EUT is a transceiver with display and GNSS. The radio supports 802.11b, 802.11g, 802.11n, BTC, BLE and ANT transmit and receive. For more detailed feature descriptions, please refer to the manufacturer's specifications or user's manual. The typical use configuration has the EUT and powered from direct current power. The design provides interface capability as presented below and wireless communications with compatible equipment. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections than those presented in the configuration options as described by the manufacturer and presented below. For testing purposes, the EUT received power from external direct current power supply. During testing, the test system was configured to operate in a manufacturer defined modes. The manufacturer provided test software for testing transmitter and equipment function. The software provided the ability to operate the transmitters at near 100% duty cycle for testing purposes. The testing mode of operation exceeds typical duty cycle operation of production equipment. As requested by the manufacturer the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

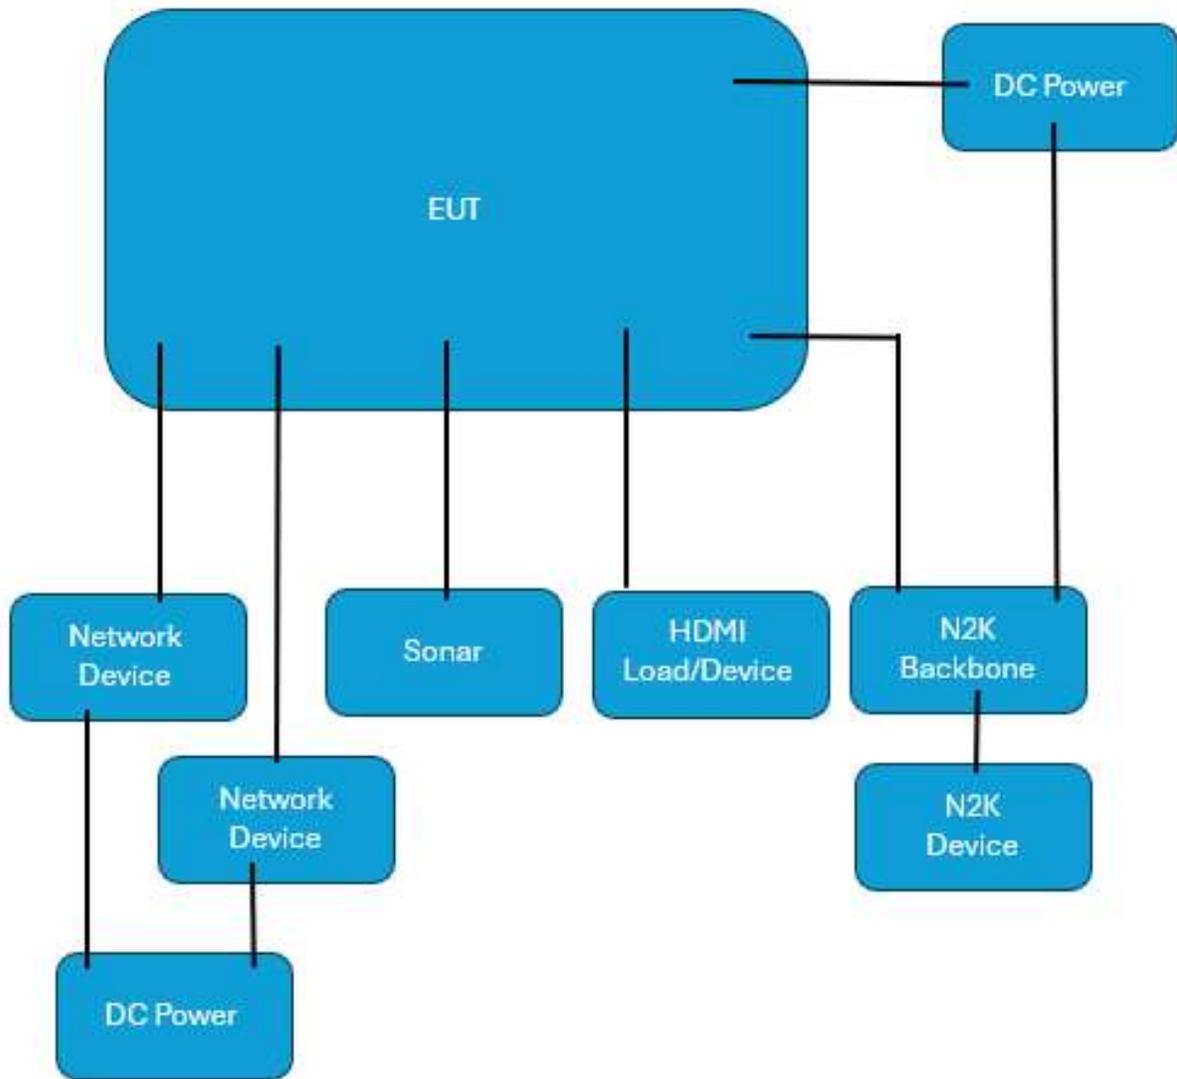

Environmental Conditions

Ambient Temperature	22.2° C
Relative Humidity	31.0 %
Atmospheric Pressure	1016.7 mb

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: HVIN: A05043
FCC ID: IPH-05043 IC: 1792A-05043
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from external direct current power provided from installation vehicle. The EUT provides interface ports for power, loads and communications as presented in this filing.
- (9) Transition Provisions of 47CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to this DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS or at the 3 meters Outdoor Area Test Site (OATS) in the satellite location.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dBμV; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dBμV/m; dB referenced to one microvolt per meter

Note: The limit is expressed for a measurement in dBμV/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters. Sample calculation demonstrates corrected field strength reading for Semi-Anechoic Chamber using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB/m) + Losses (dB) - Gain (dB)$

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHZ
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 500 kHz	VBW = 3 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the 47CFR Part 15C, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Applicable Standards

The following information is submitted in accordance with the eCFR (electronic Title 47 Code of Federal Regulations) (47CFR), dated November 18, 2024: Part 2, Subpart J, Part 15C Paragraph 15.247, RSS-247 Issue 3, and RSS-GEN Issue 5. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013. This report documents compliance for the EUT operations as Digital Transmission Systems operation.

Intentional Radiators

The following information is submitted supporting compliance with the requirements of 47CFR, Subpart C, paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5.

Antenna Requirements

The EUT incorporates integral non-user accessible system. Production equipment offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Test Procedures

AC Line Conducted Emission Test Procedure

The design operates from Direct Current power only and offers no provision to interface with Utility AC Power systems. Therefore, No AC Line conducted emissions testing was required or performed.


Radiated Emission Procedure

Radiated emissions testing was performed as required in 47CFR 15C, RSS-247 Issue 3, RSS-GEN and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. Per above requirements, the frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions and all significant results reported. All other unreported findings were at least 20 dB below limits. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure

The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram 4 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.


Diagram 2 Test arrangement for radiated emissions of tabletop equipment

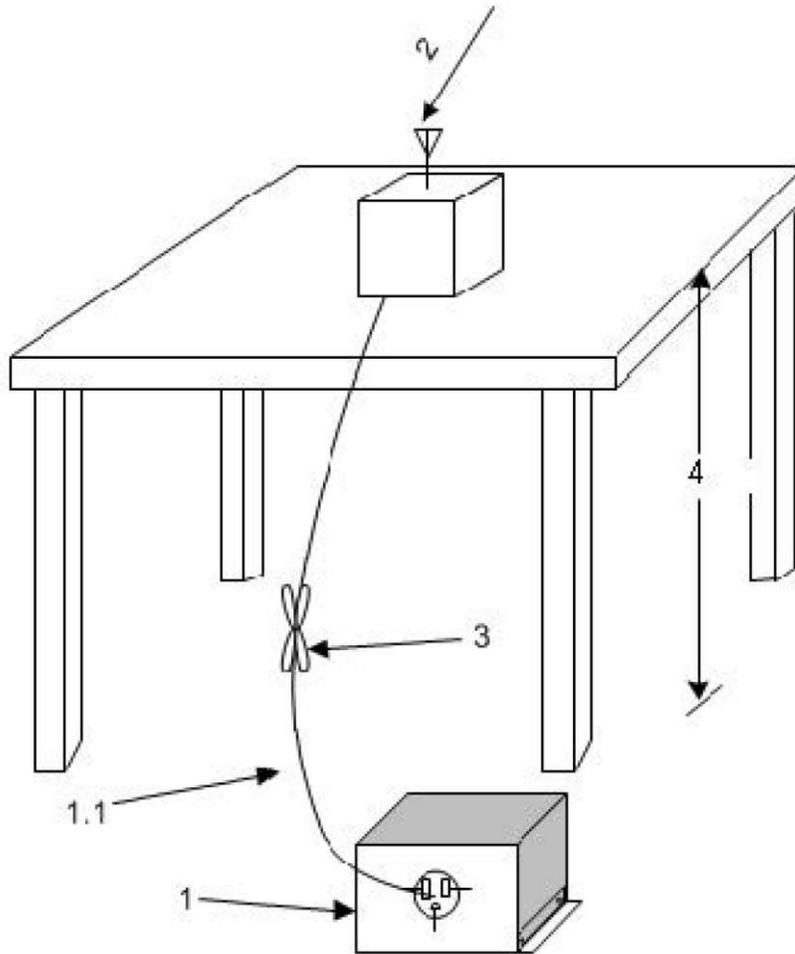

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).
 - 1.1. LISN spaced at least 80 cm from the nearest part of the EUT chassis.
2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).
4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)

Below 1 GHz

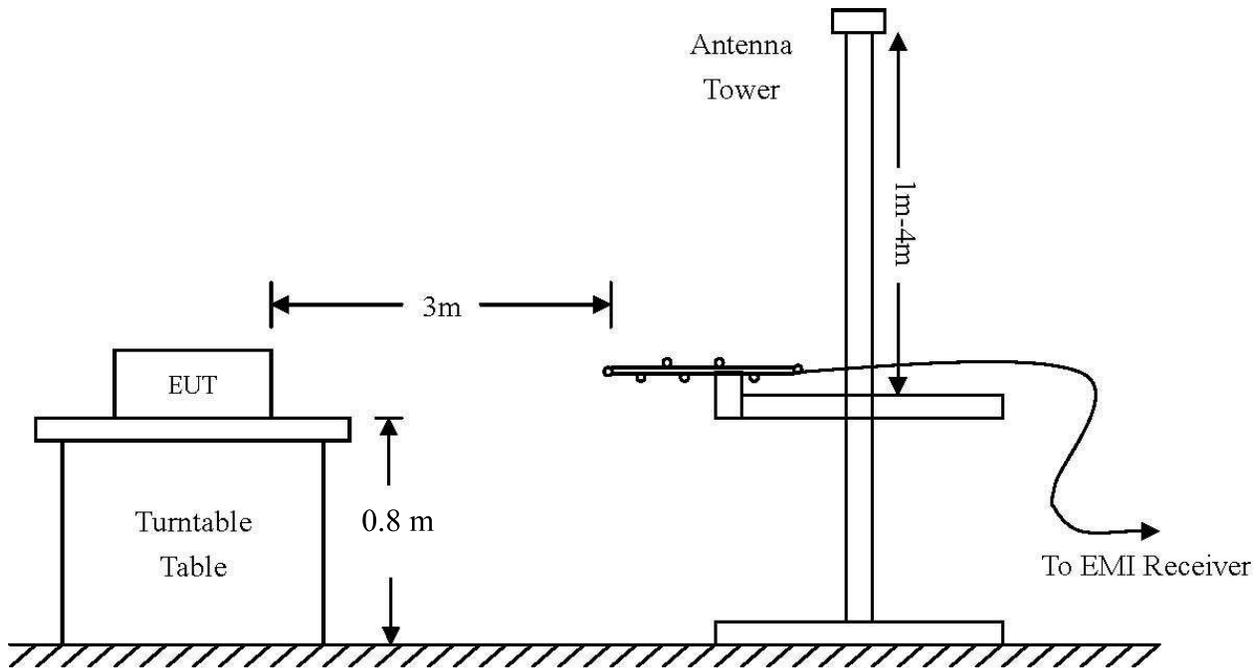

Above 1 GHz:


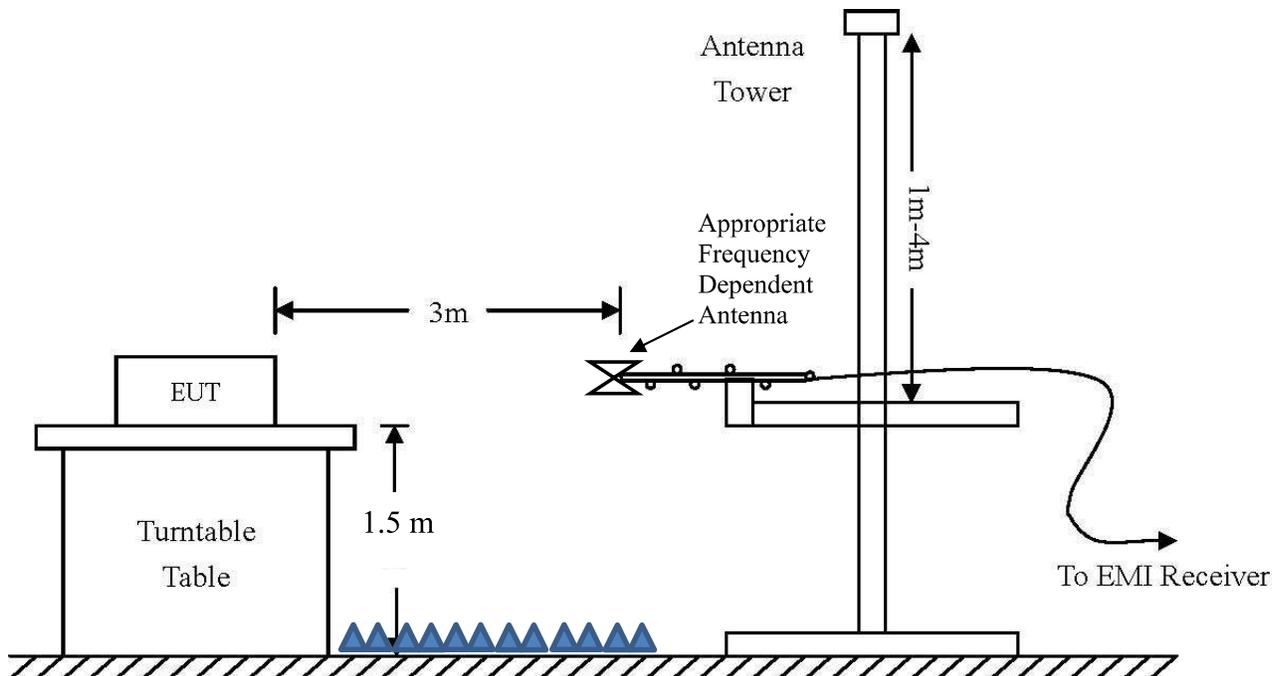


Diagram 4 Test arrangement for Antenna Port Conducted emissions
Spectrum Analyzer

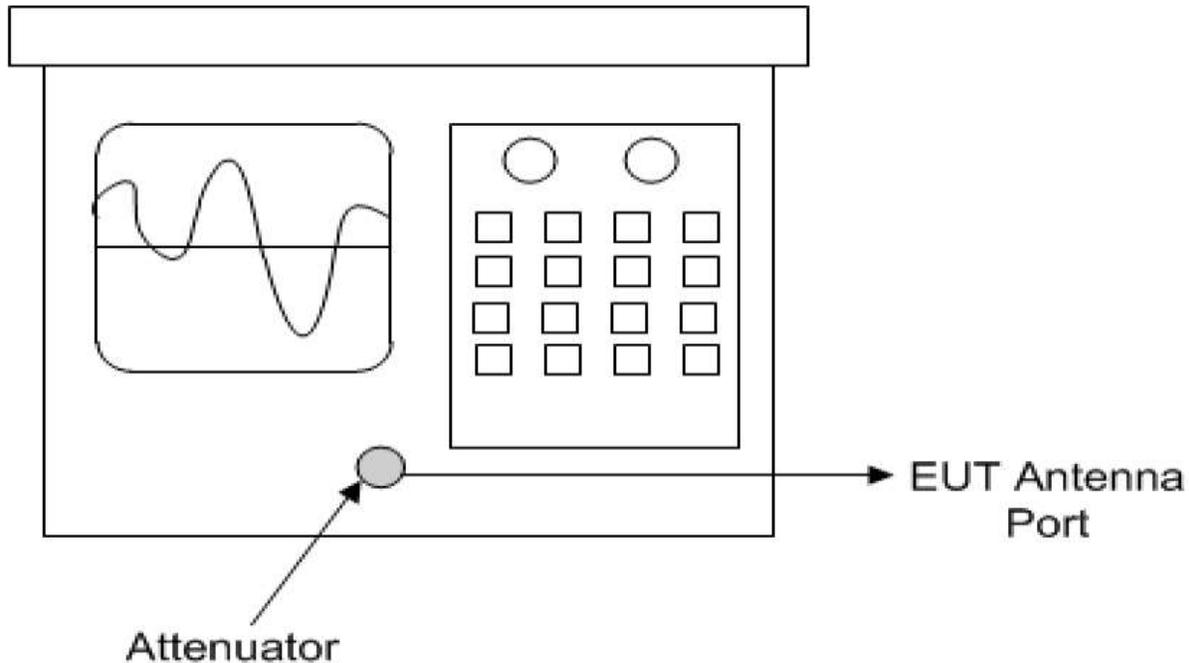

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the SAC. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the SAC, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 3, BT (2EDR DQPSK)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	49.6	36.2	49.5	36.2	54.0	-17.8	-17.8
2483.5	51.5	37.3	53.4	38.2	54.0	-16.7	-15.8
4804.0	49.3	35.9	49.3	36.0	54.0	-18.1	-18.0
4880.0	50.0	36.3	49.7	36.4	54.0	-17.7	-17.6
4960.0	49.1	36.6	49.5	36.3	54.0	-17.4	-17.7
7206.0	58.1	47.0	63.2	53.4	54.0	-7.0	-0.6
7320.0	57.9	46.6	63.6	53.5	54.0	-7.4	-0.5
7440.0	59.7	49.3	62.0	52.3	54.0	-4.7	-1.7
12010.0	58.2	45.2	59.1	45.2	54.0	-8.8	-8.8
12200.0	58.9	45.8	58.3	45.9	54.0	-8.2	-8.1
12400.0	58.9	45.8	58.5	45.8	54.0	-8.2	-8.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 2 Radiated Emissions in Restricted Frequency Bands Data Mode 4, BT (3EDR 8DPSK)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	49.3	36.1	49.5	36.2	54.0	-17.9	-17.8
2483.5	50.4	36.9	52.3	38.2	54.0	-17.1	-15.8
4804.0	48.8	35.9	49.0	36.0	54.0	-18.1	-18.0
4882.0	49.6	36.3	49.6	36.5	54.0	-17.7	-17.5
4960.0	49.1	36.2	49.5	36.3	54.0	-17.8	-17.7
7206.0	59.0	46.4	65.1	53.0	54.0	-7.6	-1.0
7323.0	58.7	45.9	62.7	53.3	54.0	-8.1	-0.7
7440.0	61.7	50.0	64.9	53.2	54.0	-4.0	-0.8
12010.0	58.6	45.1	58.1	45.1	54.0	-8.9	-8.9
12205.0	59.3	45.7	58.5	45.7	54.0	-8.3	-8.3
12400.0	58.4	45.7	59.0	45.6	54.0	-8.3	-8.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 3 Radiated Emissions in Restricted Frequency Bands Data Mode 5, BT (BLE GMSK)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	49.3	36.2	49.5	36.1	54.0	-17.8	-17.9
2483.5	49.9	36.7	50.2	36.9	54.0	-17.3	-17.1
4804.0	49.2	35.9	48.9	35.9	54.0	-18.1	-18.1
4884.0	49.0	36.1	49.6	36.1	54.0	-17.9	-17.9
4960.0	49.4	36.0	49.3	36.0	54.0	-18.0	-18.0
7206.0	52.9	40.0	53.8	41.5	54.0	-14.0	-12.5
7326.0	53.0	40.3	55.3	41.9	54.0	-13.7	-12.1
7440.0	53.2	40.3	54.4	41.3	54.0	-13.7	-12.7
12010.0	58.3	45.1	58.1	45.0	54.0	-8.9	-9.0
12210.0	59.0	45.7	58.9	45.6	54.0	-8.3	-8.4
12400.0	58.6	45.7	59.1	45.6	54.0	-8.3	-8.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 4 Radiated Emissions in Restricted Frequency Bands Data Mode 6, 802.11b

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	50.1	36.3	50.6	36.7	54.0	-17.7	-17.3
2483.5	50.8	36.9	51.1	37.3	54.0	-17.1	-16.7
4824.0	49.8	36.2	49.4	36.2	54.0	-17.8	-17.8
4874.0	49.1	36.4	49.6	36.4	54.0	-17.6	-17.6
4924.0	49.8	36.2	49.8	36.2	54.0	-17.8	-17.8
7236.0	53.8	40.6	53.7	40.9	54.0	-13.4	-13.1
7311.0	52.9	40.0	53.3	40.6	54.0	-14.0	-13.4
7386.0	53.5	40.4	54.5	41.5	54.0	-13.6	-12.5
12060.0	60.0	46.6	59.4	46.7	54.0	-7.4	-7.3
12185.0	59.0	46.5	59.9	46.5	54.0	-7.5	-7.5
12310.0	60.3	47.2	60.1	47.2	54.0	-6.8	-6.8

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 5 Radiated Emissions in Restricted Frequency Bands Data Mode 7, 802.11g

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	54.3	38.6	61.6	43.5	54.0	-15.4	-10.5
2483.5	54.8	39.6	63.2	45.4	54.0	-14.4	-8.6
4824.0	49.0	36.0	49.2	36.0	54.0	-18.0	-18.0
4874.0	50.3	36.2	49.6	36.2	54.0	-17.8	-17.8
4924.0	49.8	36.0	49.0	36.1	54.0	-18.0	-17.9
7236.0	55.5	41.1	59.7	45.5	54.0	-12.9	-8.5
7311.0	53.8	40.5	62.2	46.3	54.0	-13.5	-7.7
7386.0	54.4	40.8	61.8	47.1	54.0	-13.2	-6.9
12060.0	58.3	45.7	58.4	45.6	54.0	-8.3	-8.4
12185.0	58.2	45.4	59.5	45.7	54.0	-8.6	-8.3
12310.0	59.2	46.1	59.5	46.1	54.0	-7.9	-7.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 6 Radiated Emissions in Restricted Frequency Bands Data Mode 8, 802.11n

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	51.7	37.1	59.0	41.8	54.0	-16.9	-12.2
2483.5	55.5	38.9	64.0	43.3	54.0	-15.1	-10.7
4824.0	49.1	36.1	49.0	36.1	54.0	-17.9	-17.9
4874.0	49.1	36.3	49.0	36.3	54.0	-17.7	-17.7
4924.0	49.2	36.1	49.3	36.1	54.0	-17.9	-17.9
7236.0	53.3	39.8	57.8	42.3	54.0	-14.2	-11.7
7311.0	55.8	40.9	66.4	47.5	54.0	-13.1	-6.5
7386.0	54.1	40.8	58.2	42.6	54.0	-13.2	-11.4
12060.0	59.9	46.6	60.2	46.6	54.0	-7.4	-7.4
12185.0	60.0	46.3	59.5	46.4	54.0	-7.7	-7.6
12310.0	60.1	47.1	60.3	47.1	54.0	-6.9	-6.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C and RSS-247 Issue 3 Intentional Radiator requirements. The EUT demonstrated a worst-case minimum margin of -0.5 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted EMI Procedure

The design operates from Direct Current power only and offers no provision to interface with Utility AC Power systems. Therefore, No AC Line conducted emissions testing was required or preformed.

General Radiated Emissions Procedure

Testing for the radiated emissions were performed as specified in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. For testing purposes, the EUT was arranged as presented in the applicable configuration diagrams above and operated through all modes as presented.

Exploratory radiated emissions measurements were performed in the SAC chamber or screen room, finding maximized emissions over frequency, EUT orientation, antenna height and polarity. This data is then used to focus the final radiated emissions measurements on these maximized points.

Final radiated emissions data were taken with the EUT located in the OATS or SAC at distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 6,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop, Biconical, Broadband Biconilog, Log Periodic, and Double Ridge or Pyramidal Horns and mixers above 1 GHz.

Refer to tables 5 and 6 for general radiated emissions data and figures one through seven for plots of the worst case radiated emissions taken in the SAC (30 MHz to 1 GHz) and screen room (1 to 25 GHz).

Table 7 General Radiated Emissions Data - Horizontal Polarization

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
349.99	39.54	37.08	47	-9.92
439.13	36.099	29.93	47	-17.07
448.9	35.434	27.53	47	-19.47
825.35	40.372	33.02	47	-13.98
861.11	50.02	37.43	47	-9.57
878.75	42.532	33.66	47	-13.34

Table 8 General Radiated Emissions Data - Vertical Polarization

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
439.43	42.023	38.49	47	-8.51
450.11	34.95	28.49	47	-18.51
826.12	40.804	32.58	47	-14.42
861.38	48.53	36.82	47	-10.18
872.45	43.019	34.41	47	-12.59
879.02	40.355	31.42	47	-15.58

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Figure 1 Plot of General Radiated Emissions (30 MHz – 230 MHz)



Figure 2 Plot of General Radiated Emissions (200 MHz – 1.2 GHz)

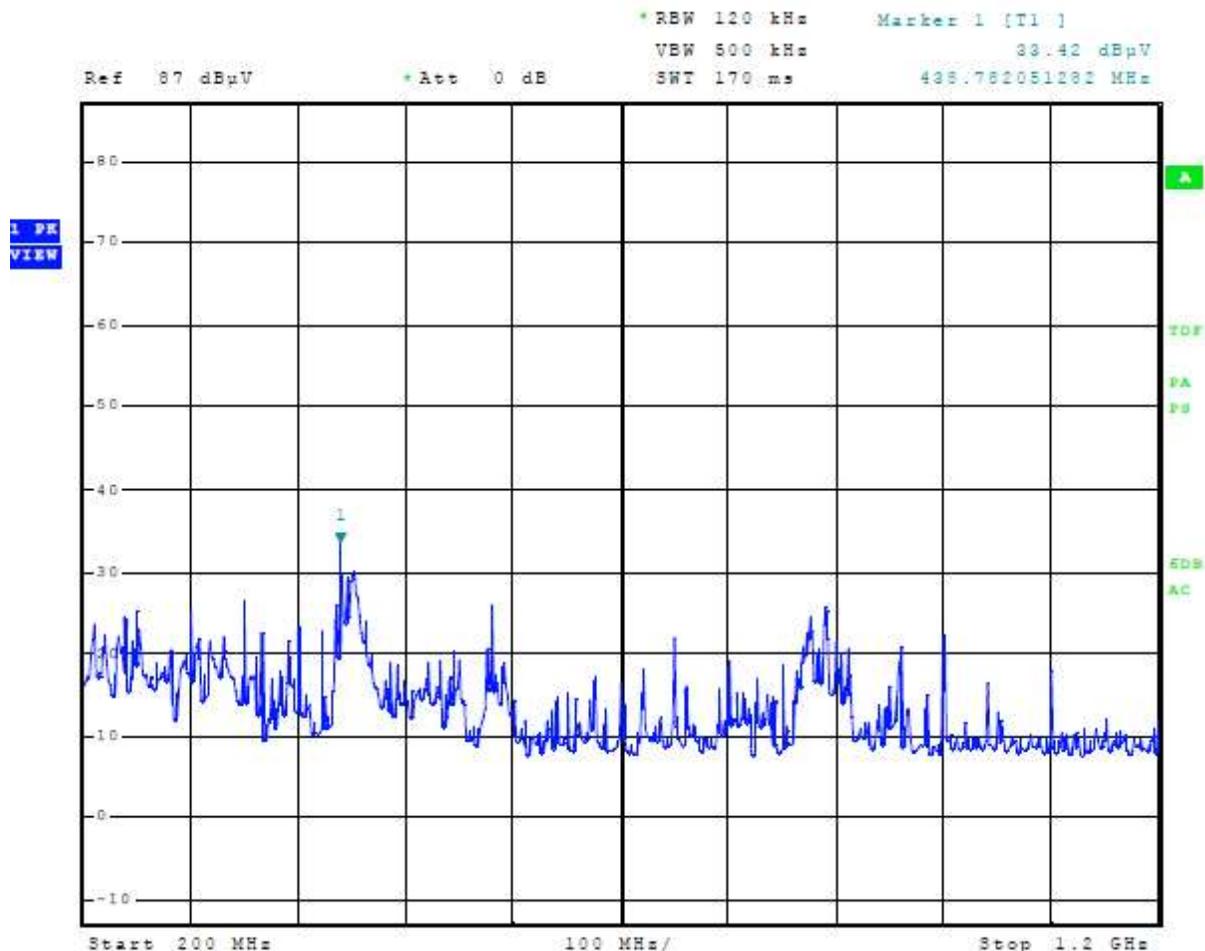


Figure 3 Plot of General Radiated Emissions (1 GHz – 3 GHz)

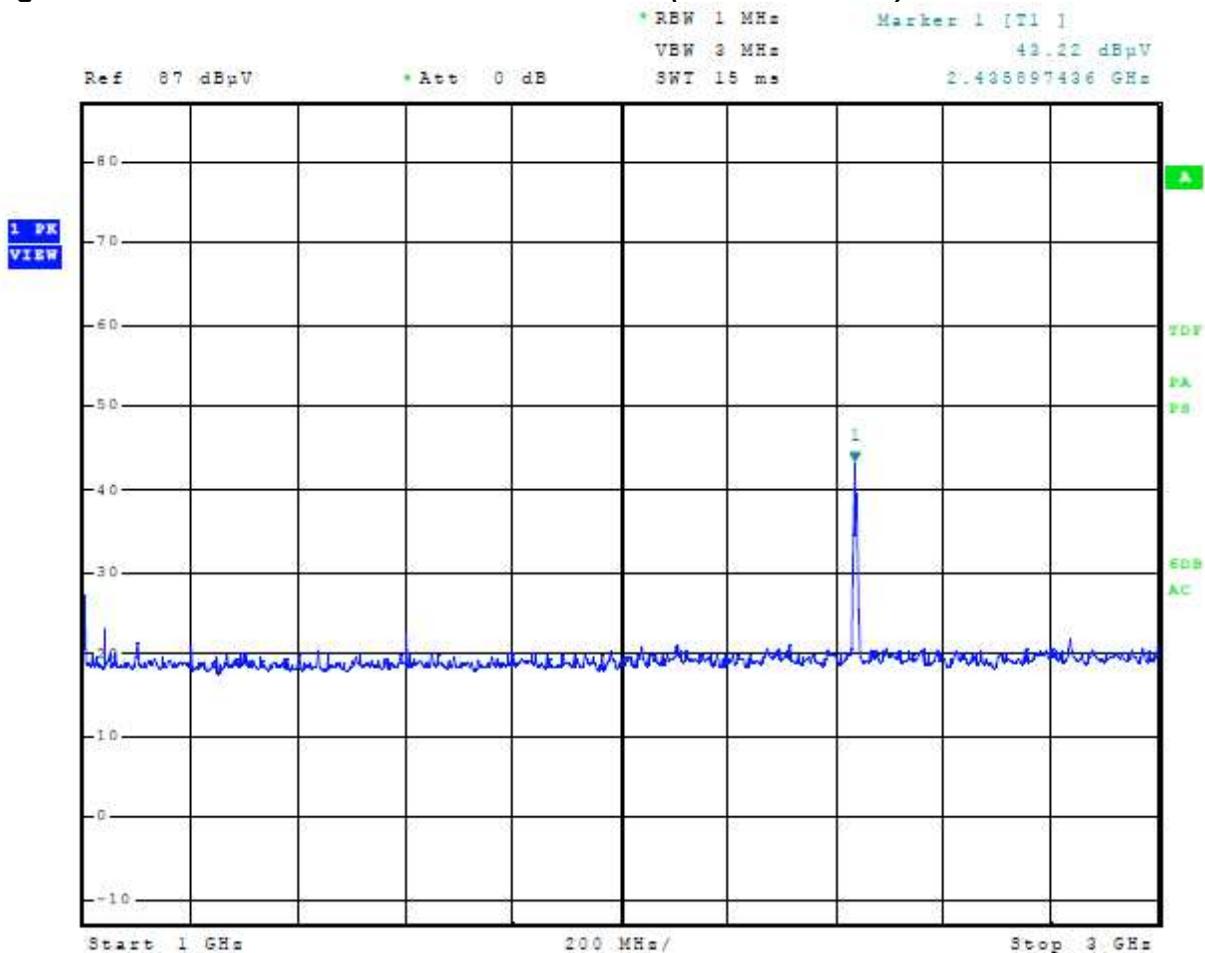


Figure 4 Plot of General Radiated Emissions (3 GHz – 6 GHz)

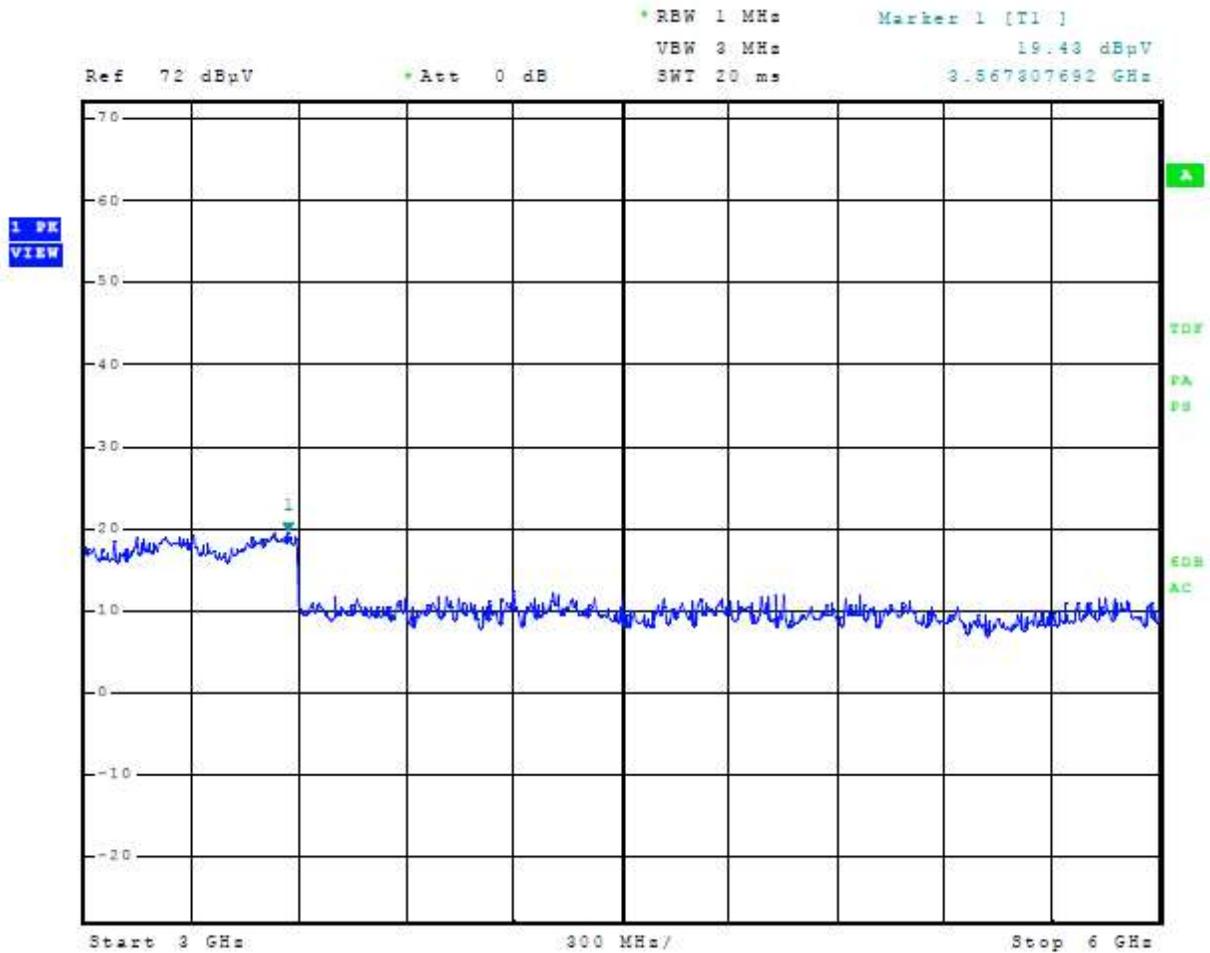


Figure 5 Plot of General Radiated Emissions (6 GHz – 12 GHz)

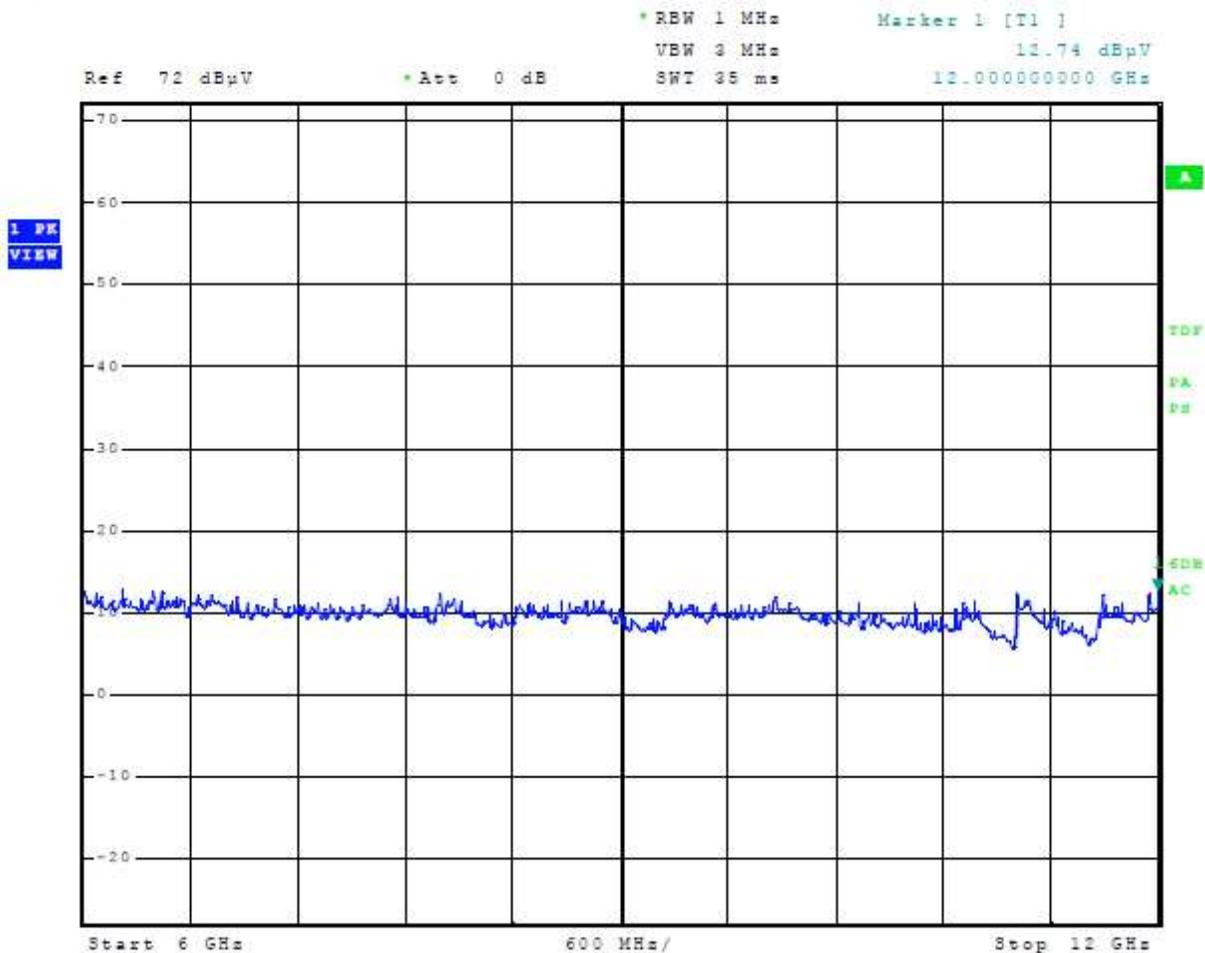


Figure 6 Plot of General Radiated Emissions (12 GHz – 18 GHz)


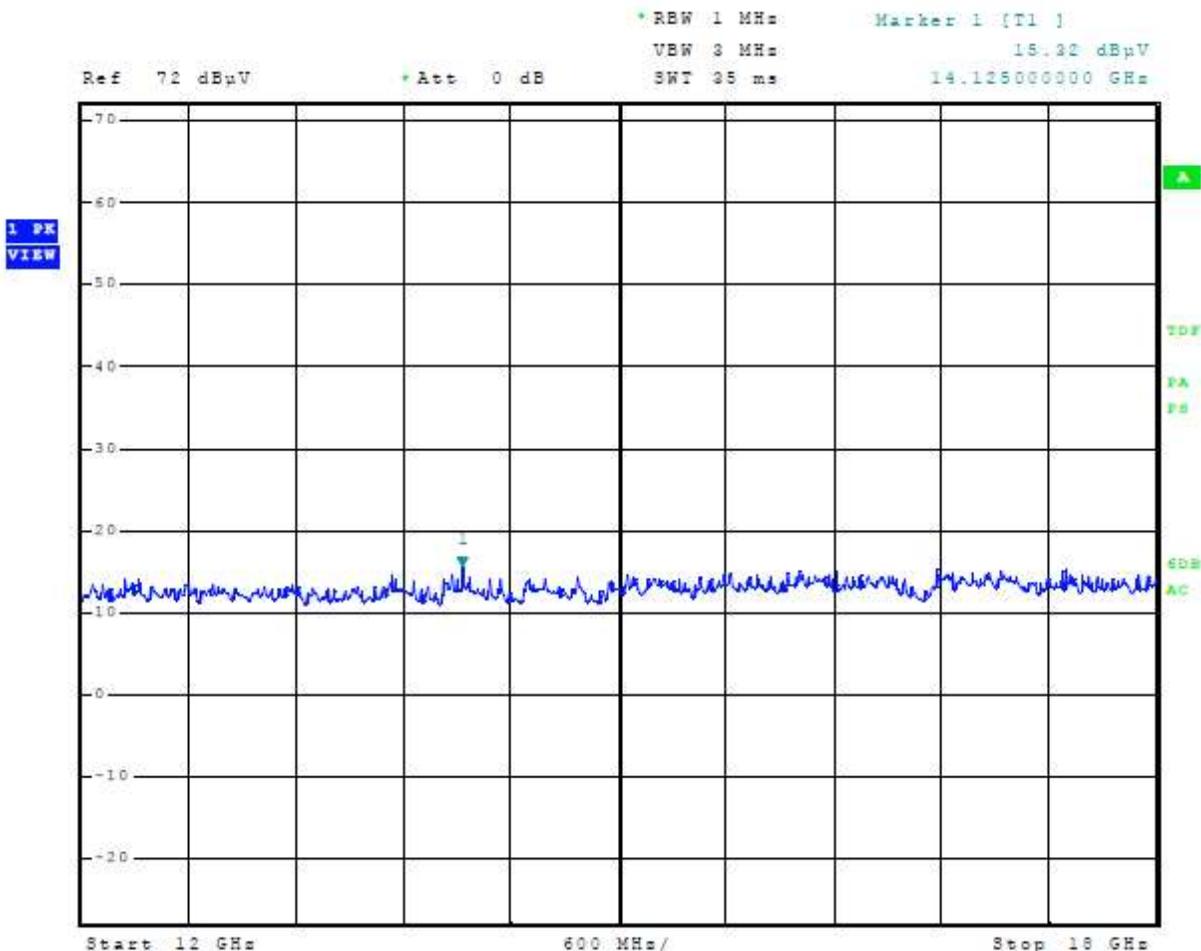


Figure 7 Plot of General Radiated Emissions (18 GHz – 25 GHz)

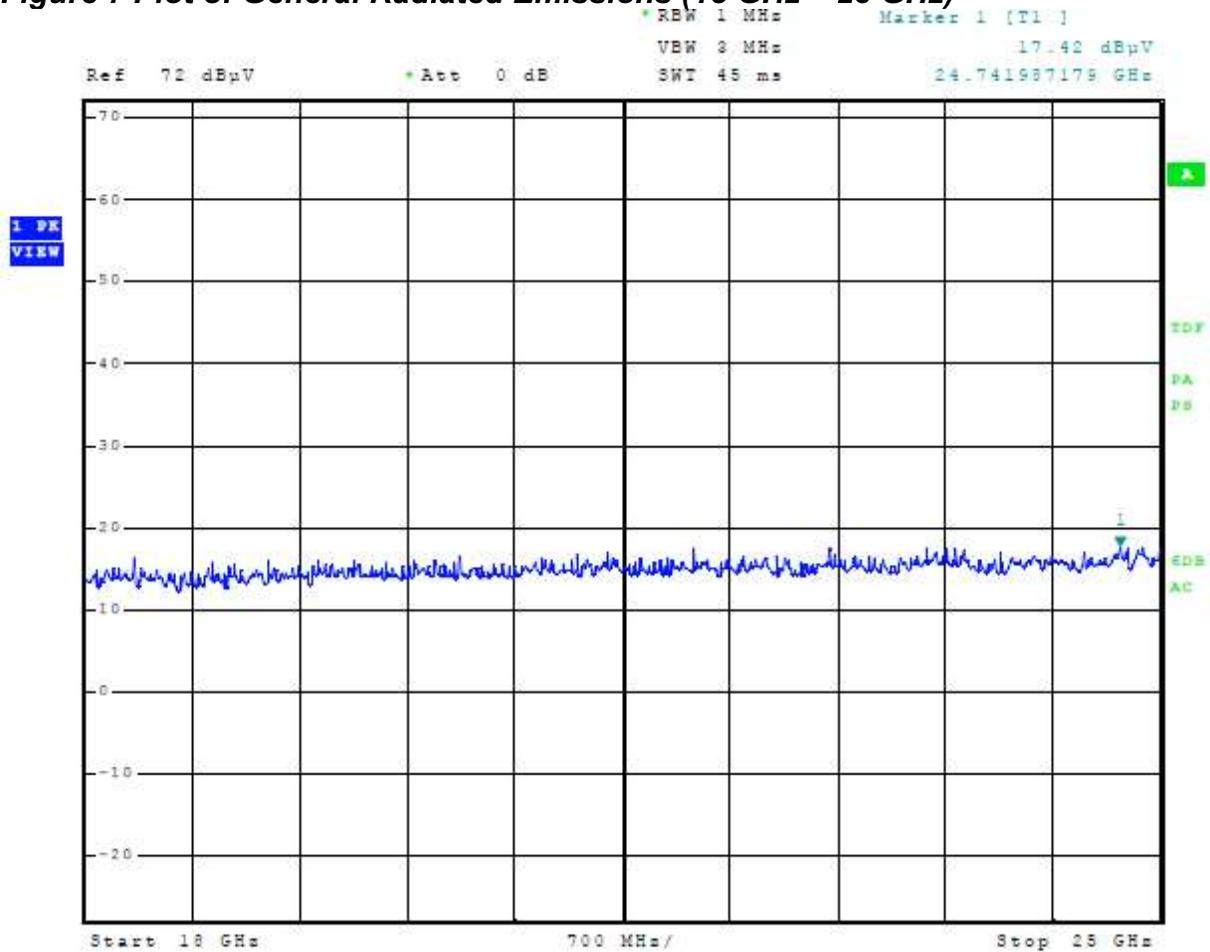

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C paragraph 15.209, RSS-210 Issue 11, and RSS-GEN Issue 5 Intentional Radiators. The EUT worst-case transmitter configuration demonstrated a minimum margin of -8.51 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

Test procedures of ANSI C63.10-2013 paragraph 6, and KDB 558074 were used during transmitter testing. Test sample EUT Antenna Port Conducted #2 was provided for testing antenna port conducted emissions. This sample was modified by replacing the internal antenna with a 50-ohm antenna port connector and attenuator for testing purposes. The transmitter peak and average power was measured at the antenna port using a wideband RF power meter as described in KDB 558074 and ANSI C63.10-2013. Average power measured did not include any time intervals during which the transmitter was off or transmitting at a reduced power level. The peak Power Spectral Density (PKPSD) was measured as defined in KDB 558074 and ANSI C63.10-2013. DTS Emission bandwidth was measured as described in KDB 558074 and ANSI C63.10-2013. The amplitude of each harmonic and general radiated emission was measured on the SAC at distance of 3 meters from the FSM antenna (radiated emission testing was performed on EUT Tx Radiated #1 representative of production equipment with integral antenna). The EUT was positioned on supporting turntable elevated as required above the ground plane, at a distance of 3 meters from the FSM antenna. Radiated emission investigations were performed from 9 kHz to 25,000 MHz. Each radiated emission was maximized by varying the FSM antenna height and polarization, and by rotating the turntable. The worst-case amplitude of each emission was then recorded from the analyzer display. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Radiated Emissions were measured in dB μ V/m @ 3 meters. Plots were taken of transmitter performance using EUT #2 Conducted Antenna Port, for reference in this and other documentation. These are shown in figures 8 through 43 and tables 9 through 16.

Figure 8 Plot of Transmitter Operation in 2402-2480 MHz Mode 3, BT (2EDR DQPSK)

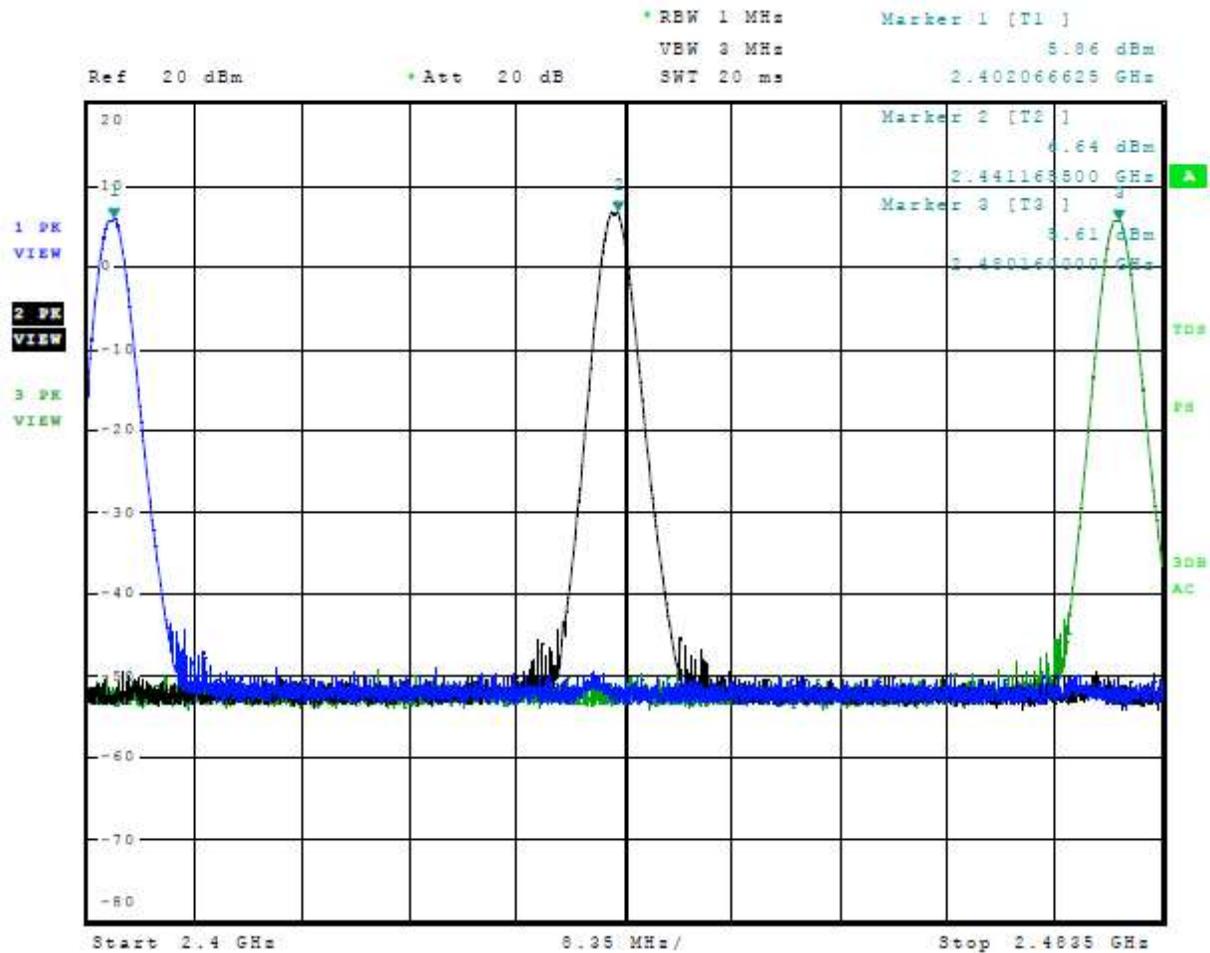


Figure 9 Plot of Transmitter Operation in 2402-2480 MHz Mode 4, BT (3EDR 8DPSK)

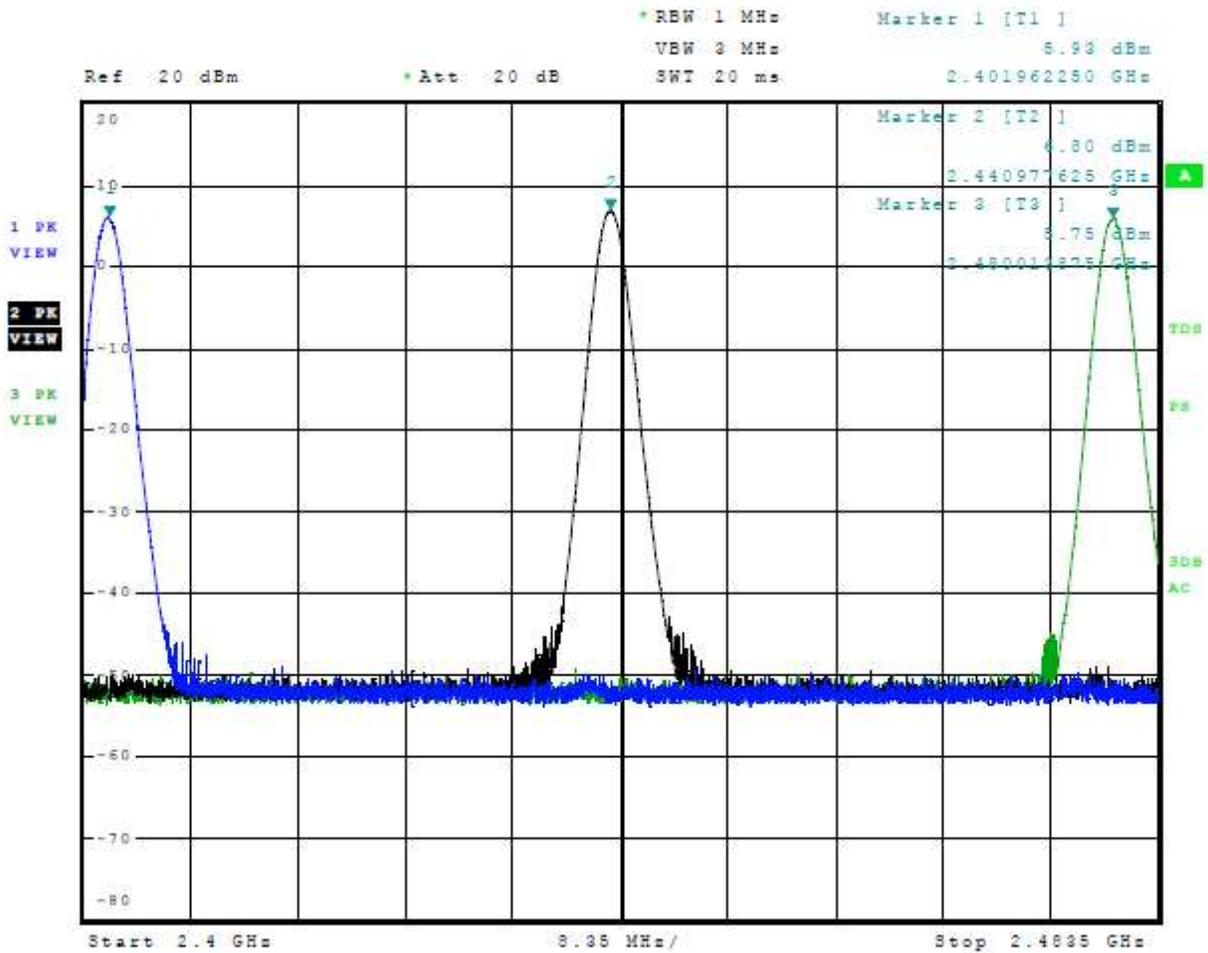


Figure 10 Plot of Transmitter Operation in 2402-2480 MHz Mode 5 BT BLE (GMSK)

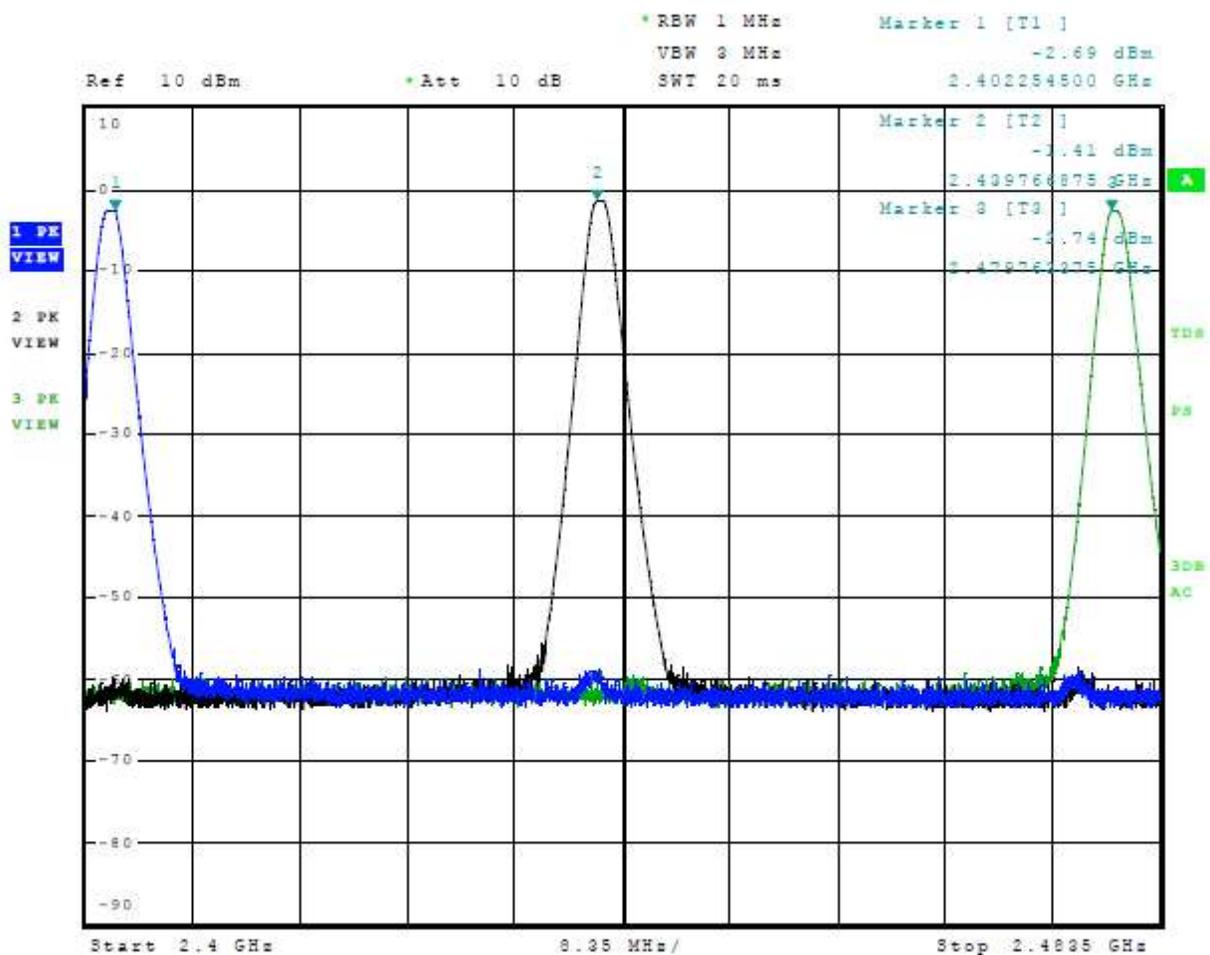


Figure 11 Plot of Transmitter Operation in 2402-2480 MHz Mode 6, 802.11b

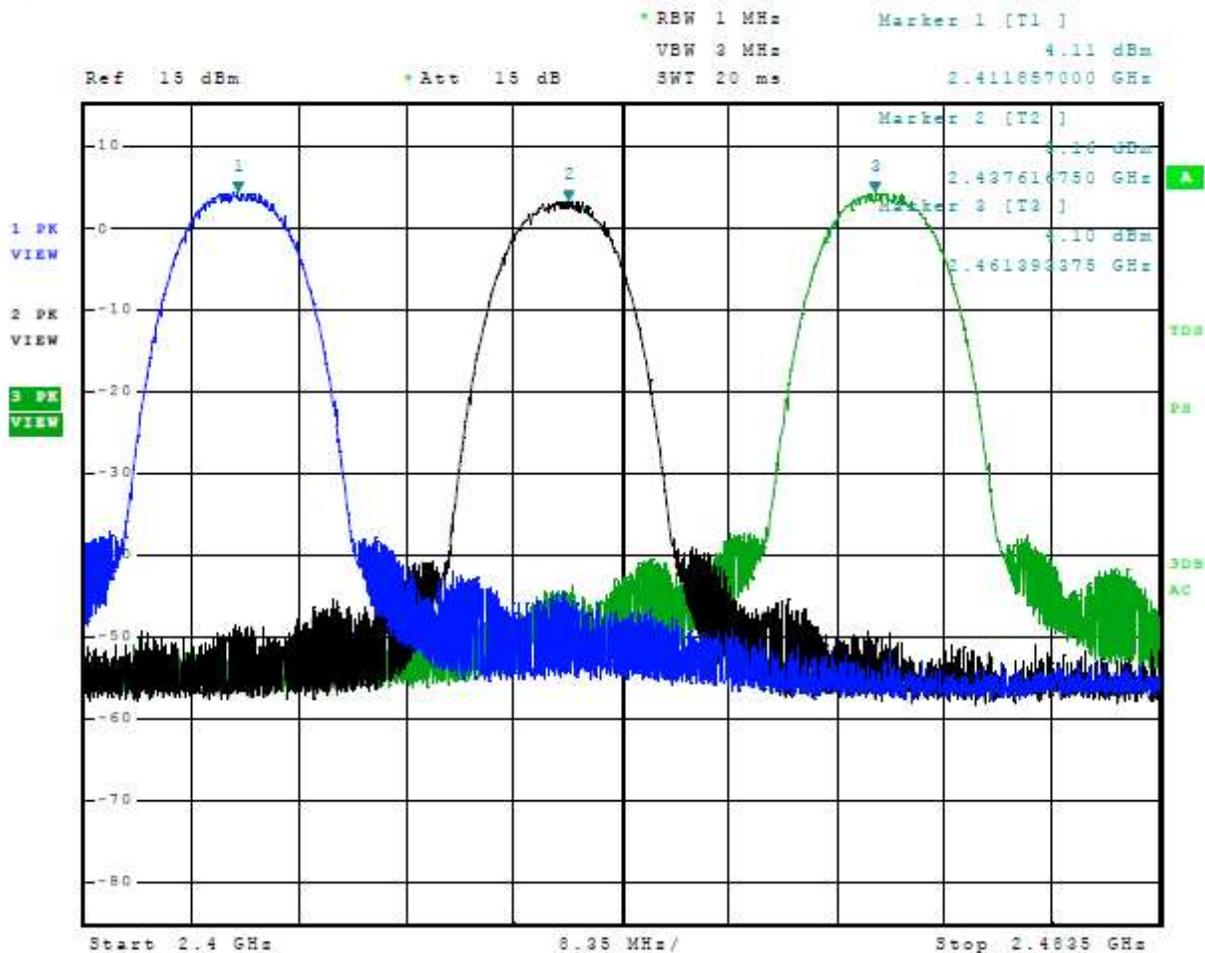


Figure 12 Plot of Transmitter Operation in 2402-2480 MHz Mode 7, 802.11g

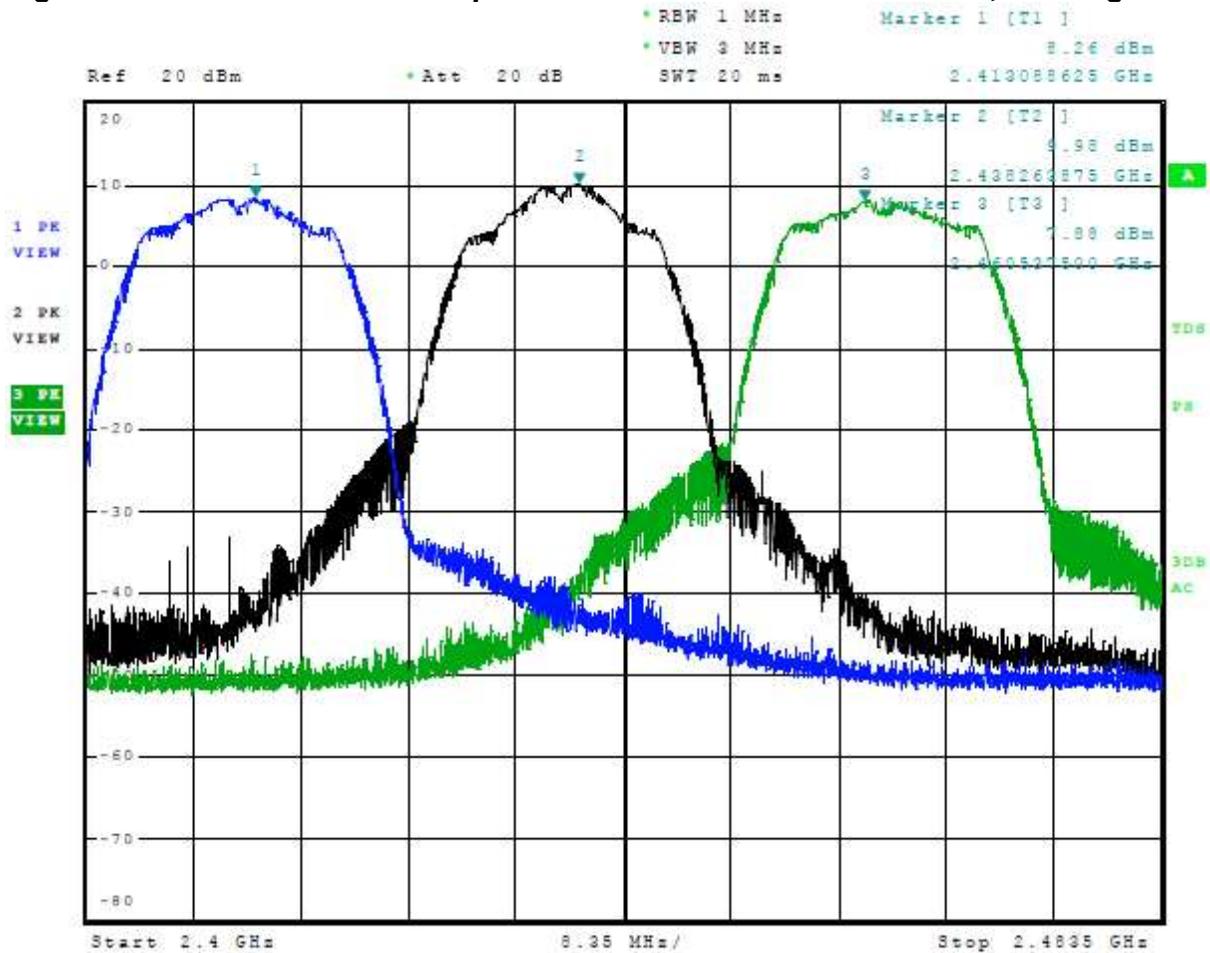


Figure 13 Plot of Transmitter Operation in 2402-2480 MHz Mode 8, 802.11n

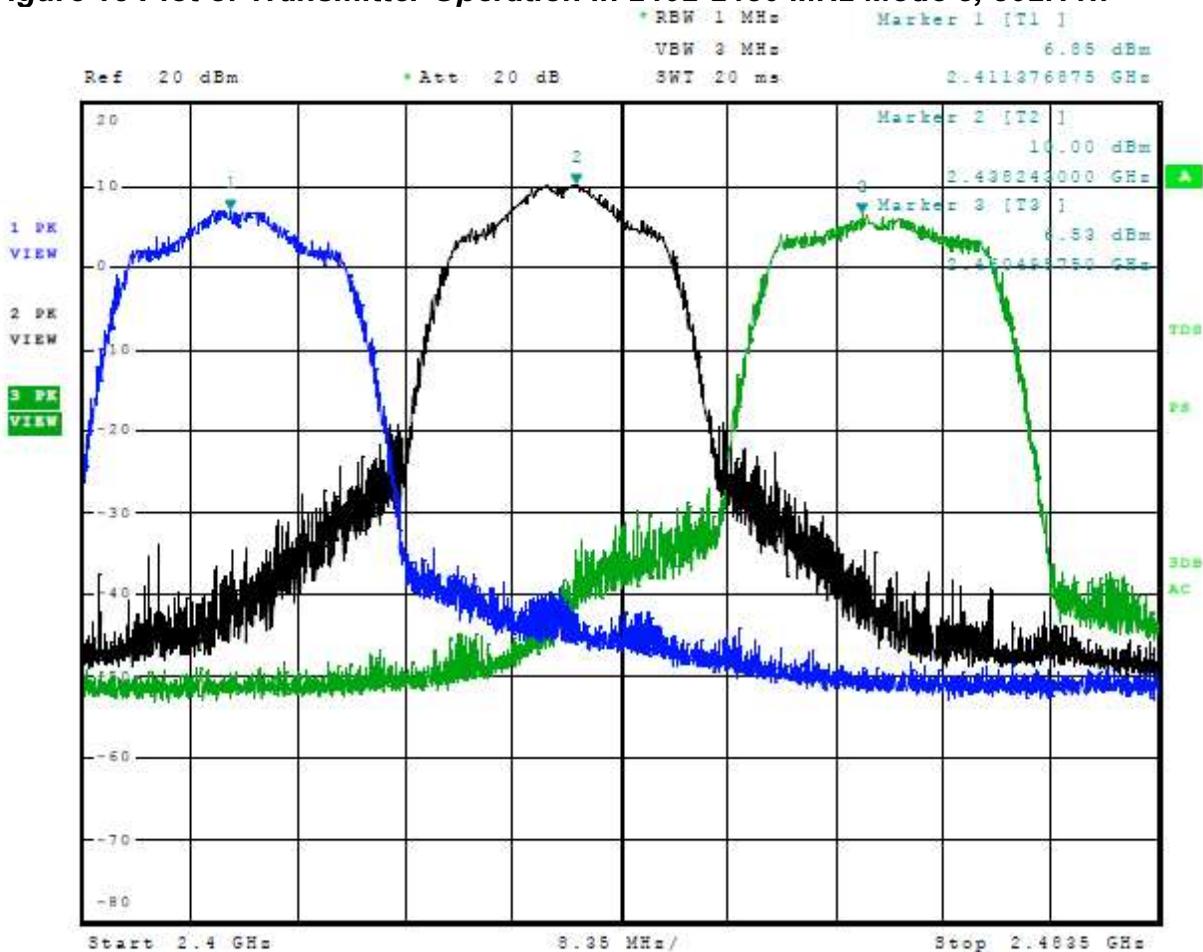


Figure 14 Plot of Emissions Low Band Edge Mode 3, BT (2EDR DQPSK)

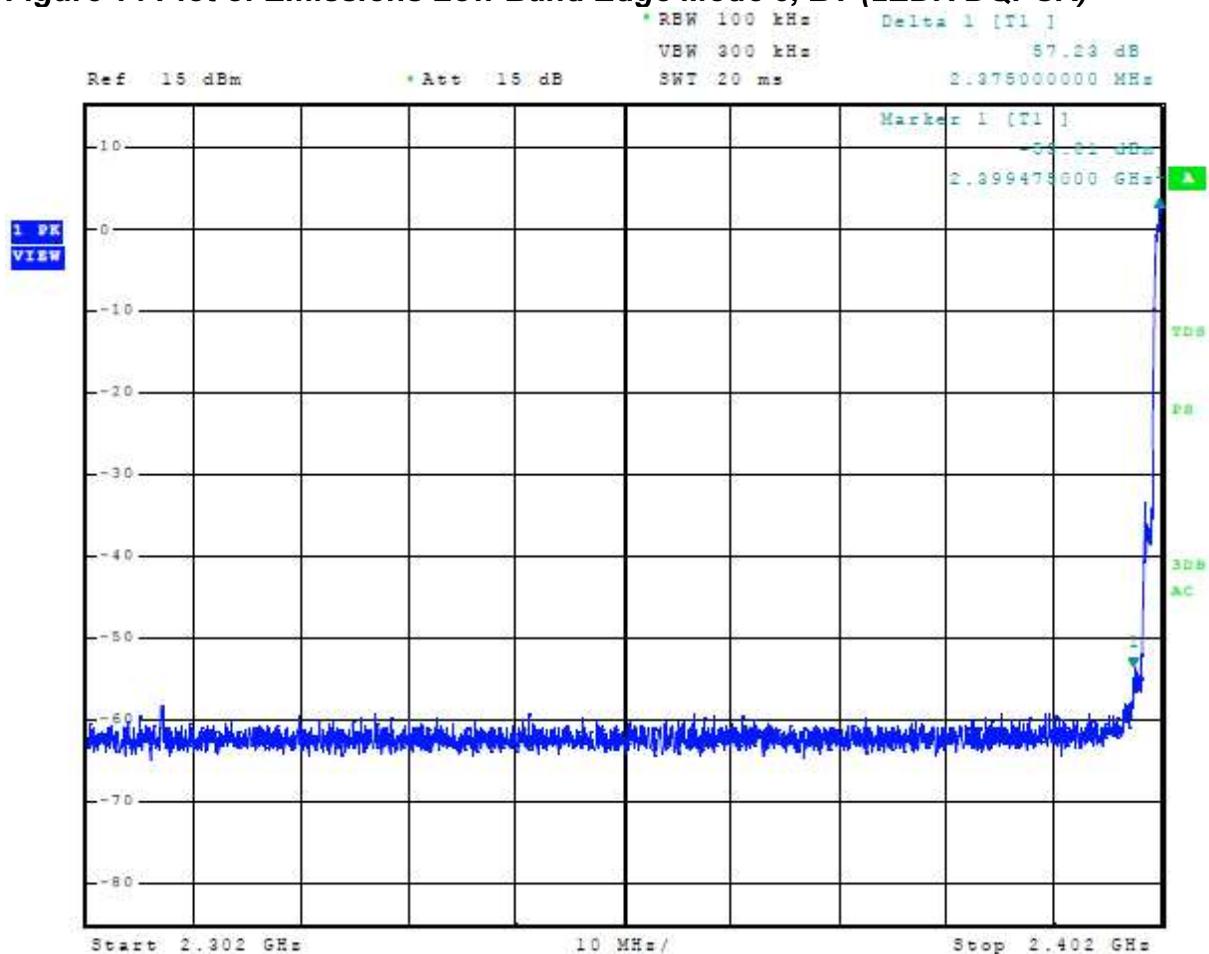


Figure 15 Plot of Emissions Low Band Edge Mode 4, BT (3EDR 8DPSK)

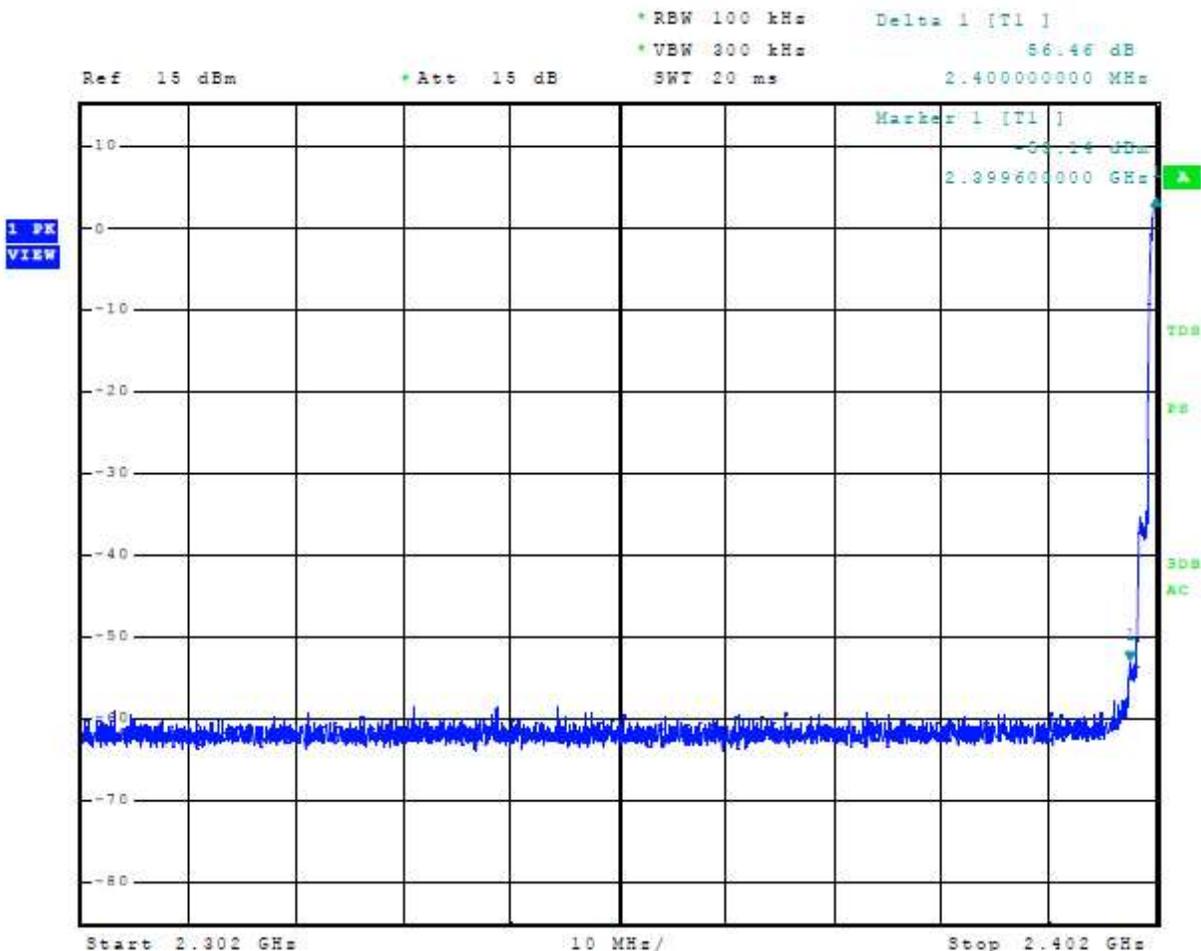


Figure 16 Plot of Emissions Low Band Edge Mode 5 BT BLE (GMSK)

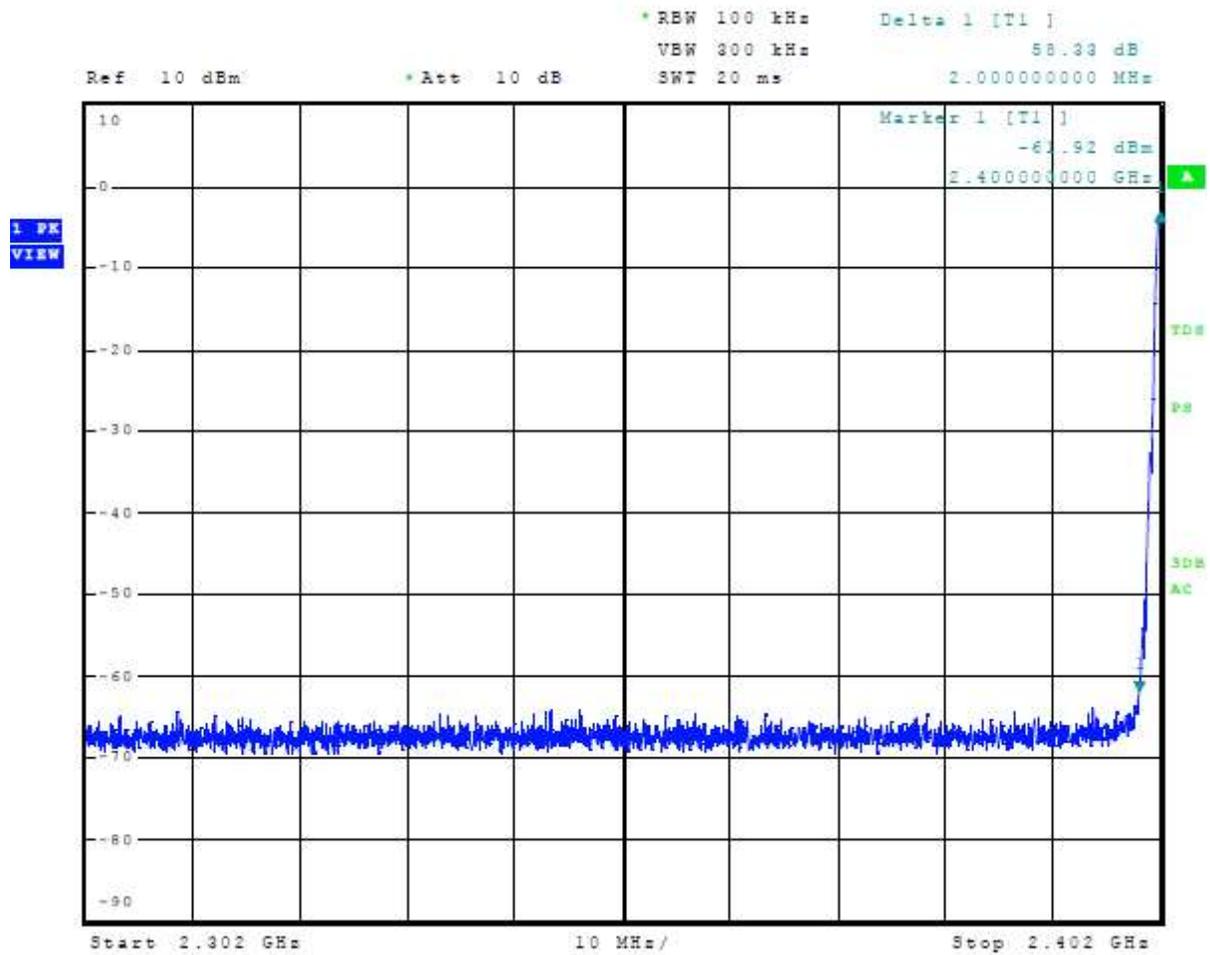


Figure 17 Plot of Emissions Low Band Edge Mode 6, 802.11b



Figure 18 Plot of Emissions Low Band Edge Mode 7, 802.11g

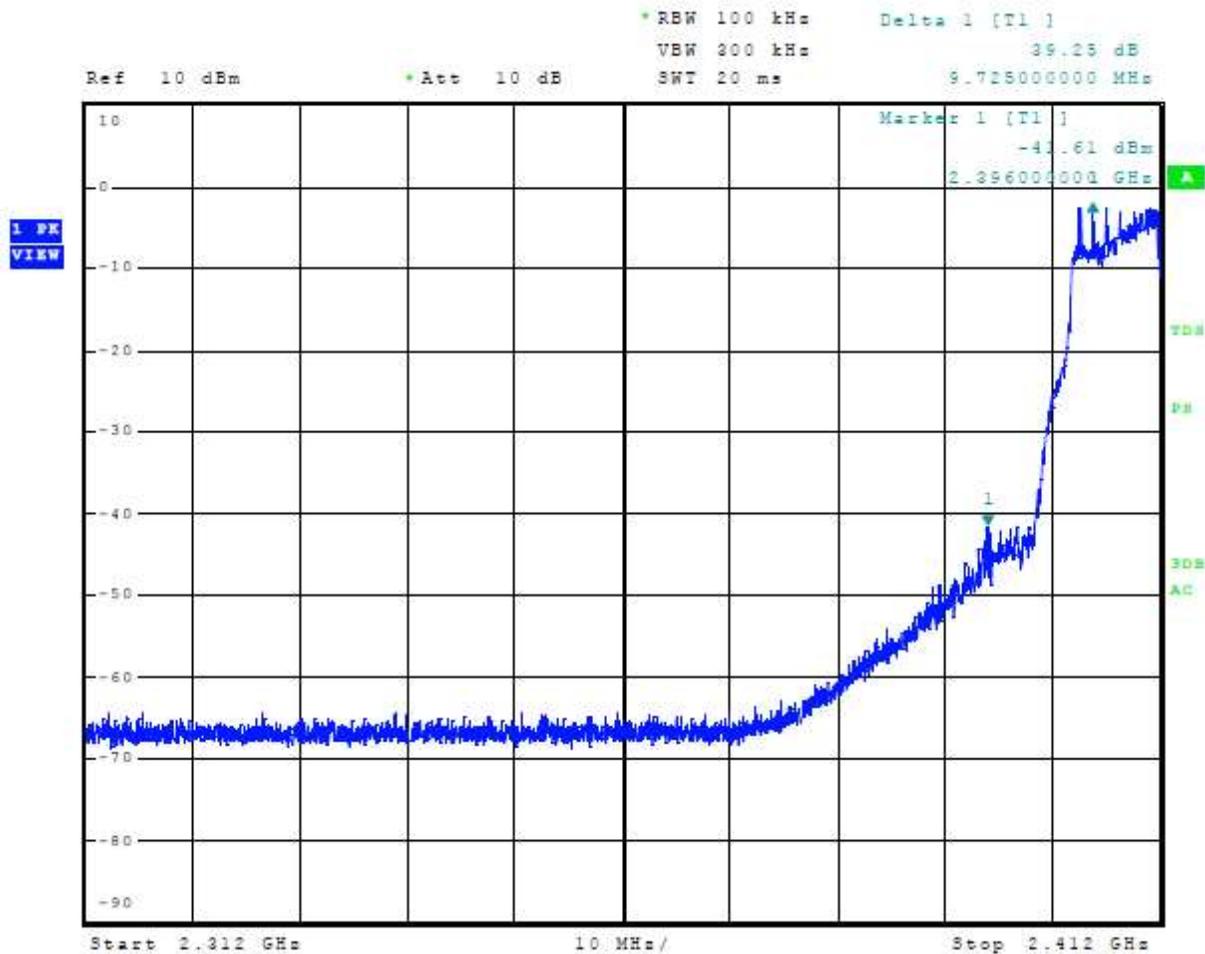


Figure 19 Plot of Emissions Low Band Edge Mode 8, 802.11n

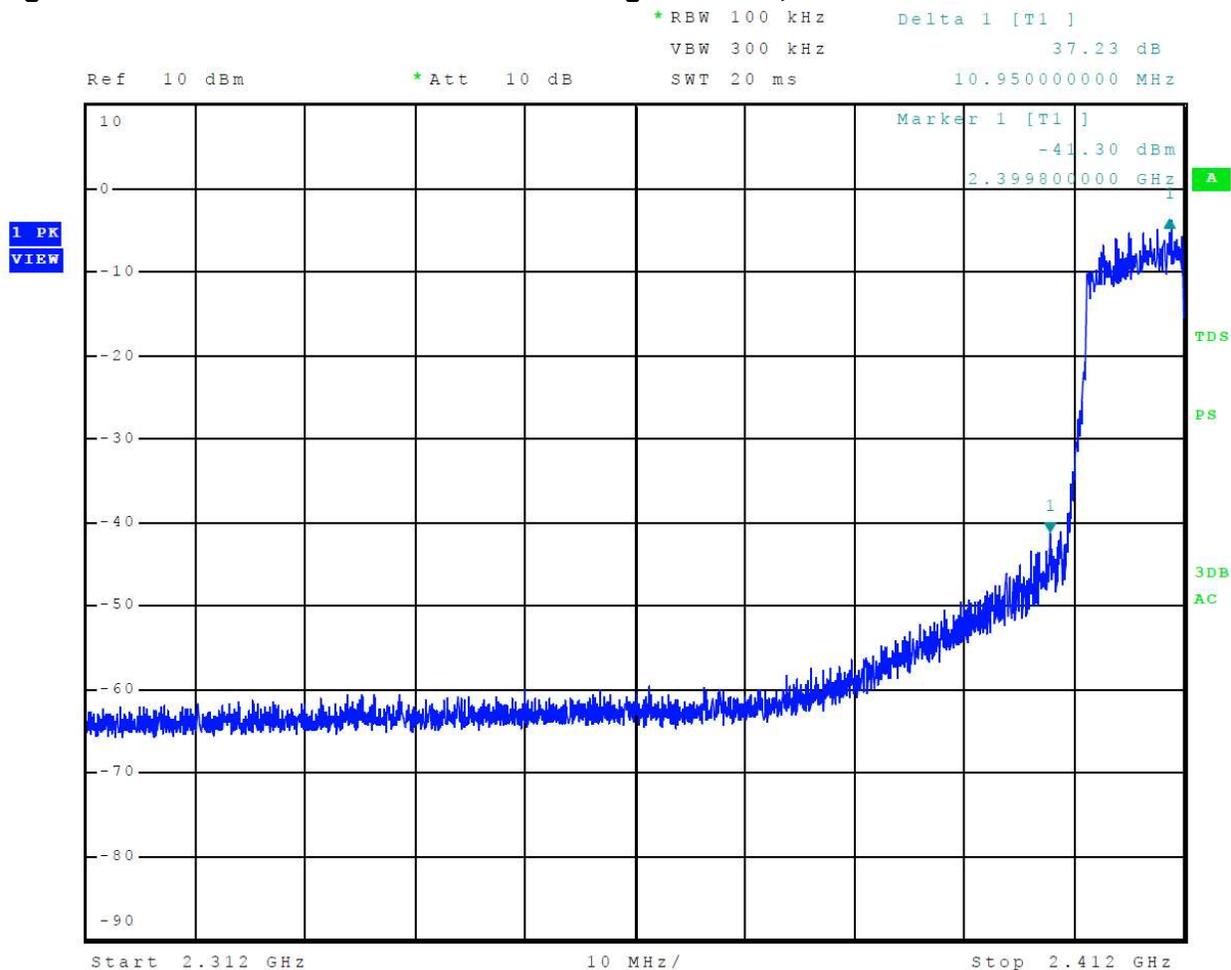


Figure 20 Plot of Transmitter Emissions High Band Edge Mode 3, BT (2EDR DQPSK)

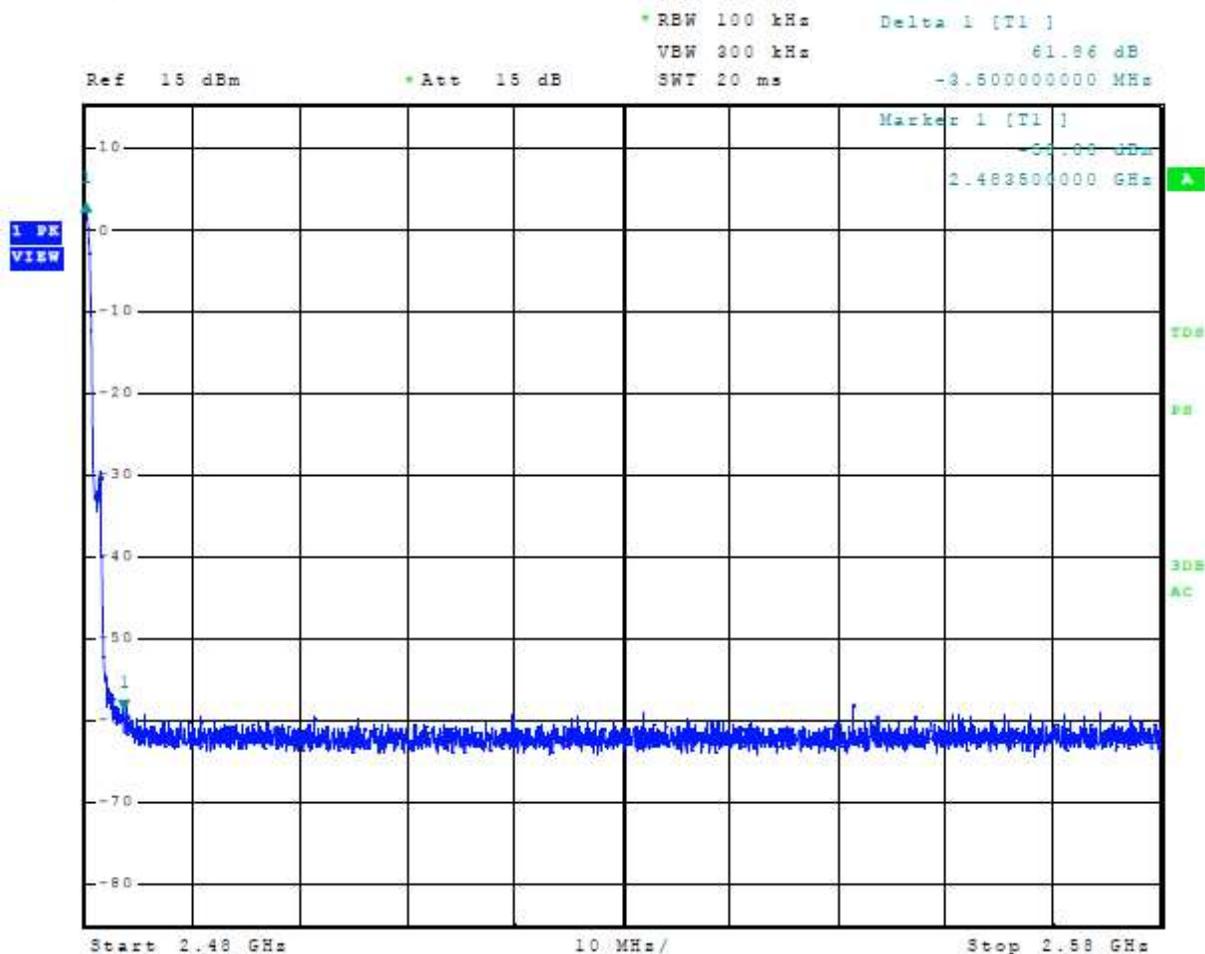


Figure 21 Plot of Transmitter Emissions High Band Edge Mode 4, BT (3EDR 8DPSK)

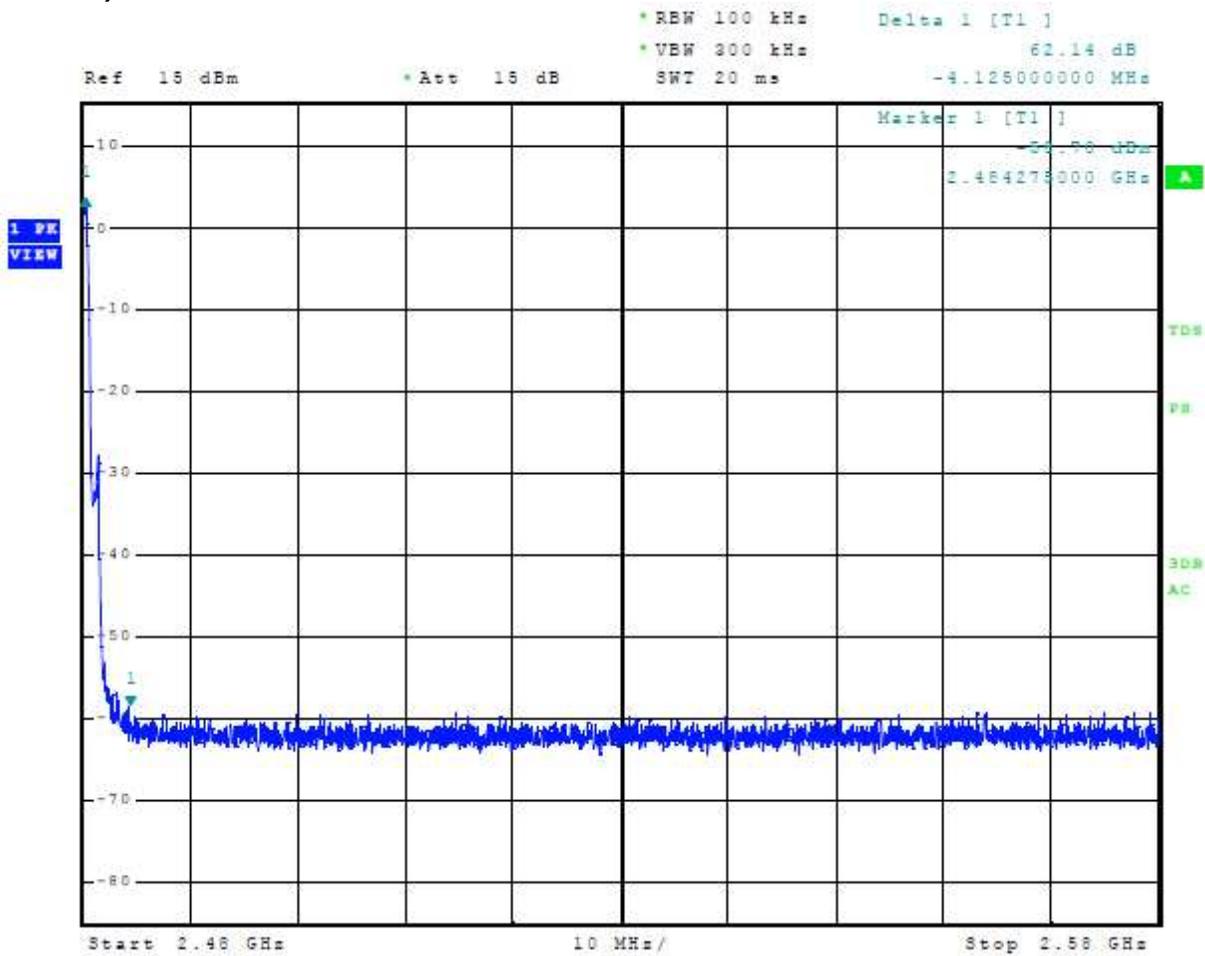


Figure 22 Plot of Transmitter Emissions High Band Edge Mode 5 BT BLE (GMSK)

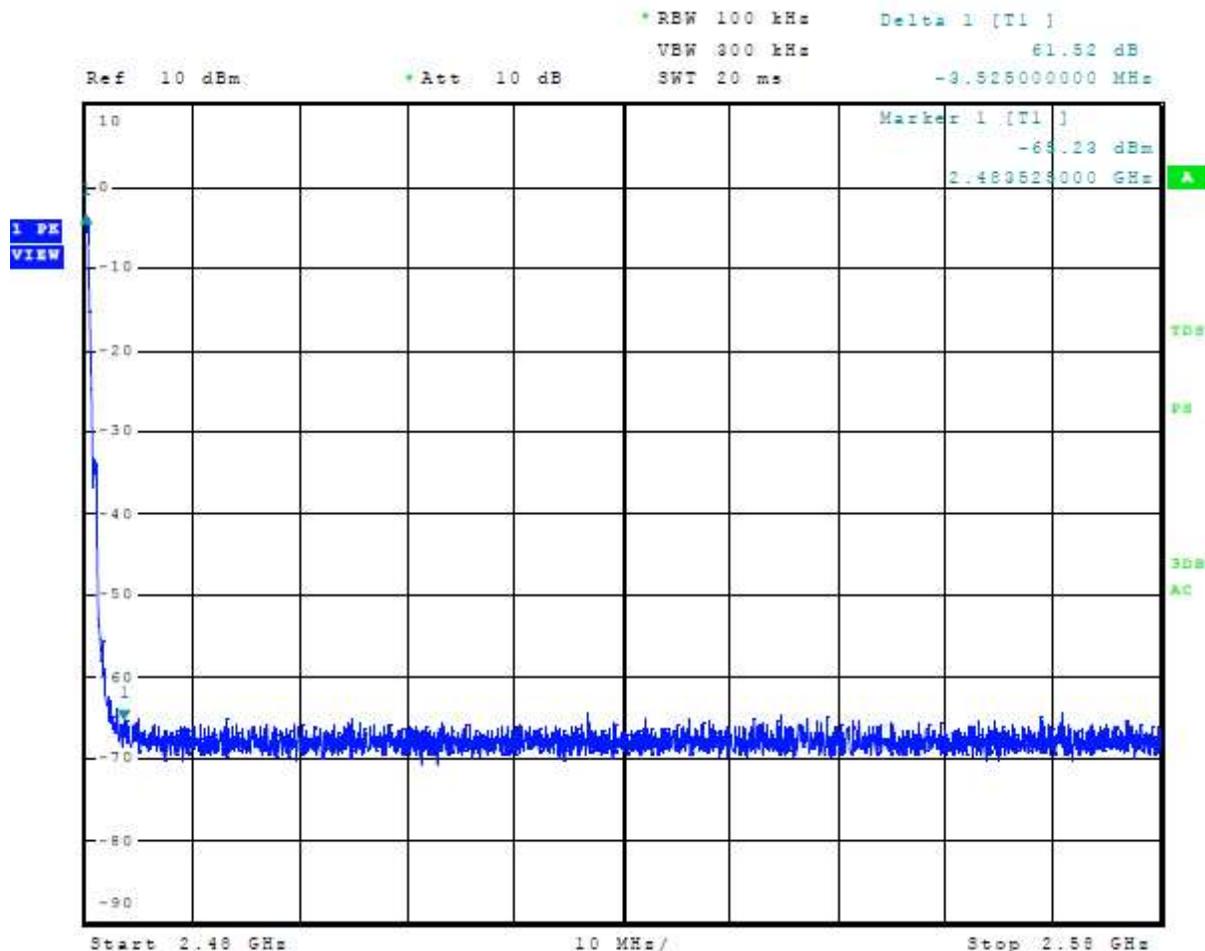


Figure 23 Plot of Transmitter Emissions High Band Edge Mode 6, 802.11b

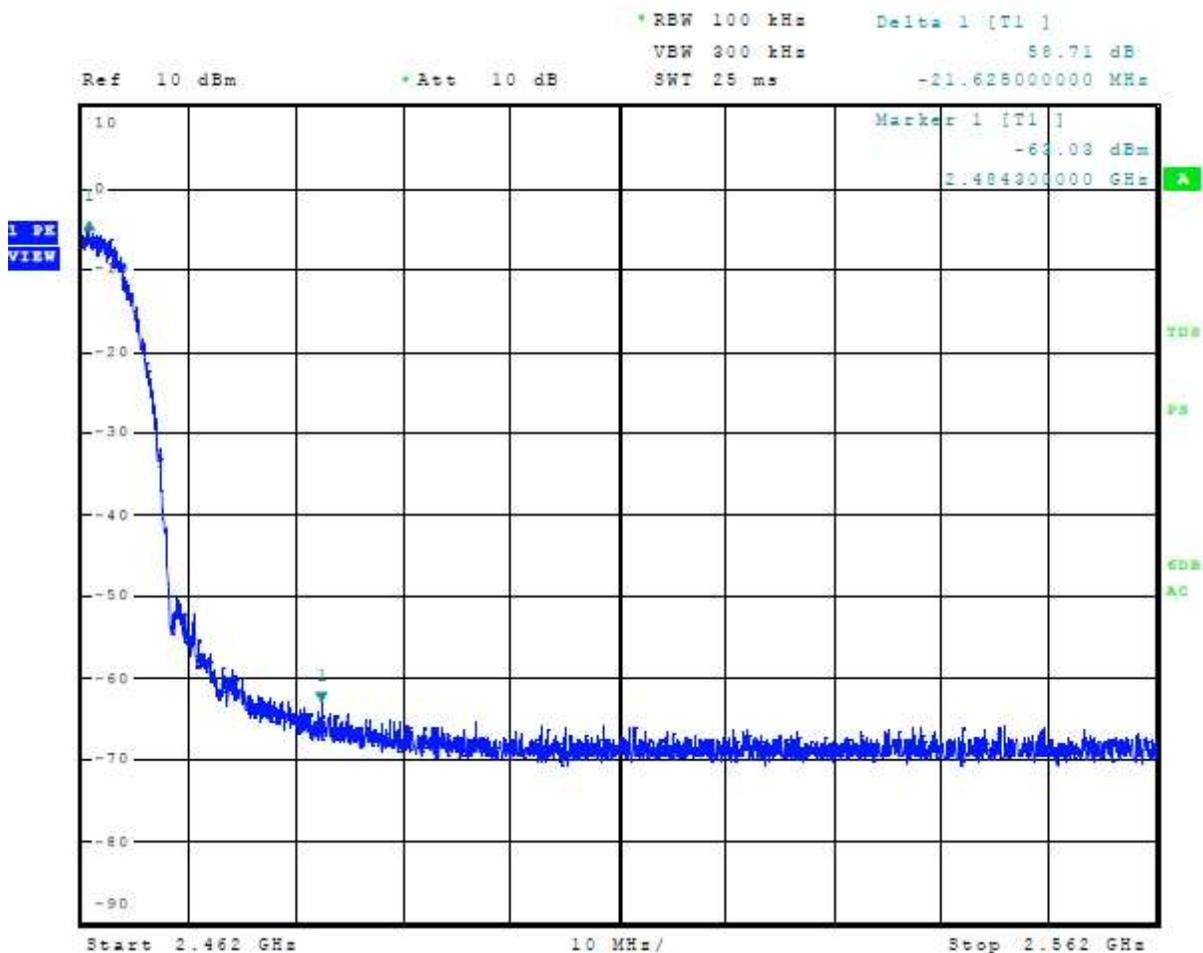


Figure 24 Plot of Transmitter Emissions High Band Edge Mode 7, 802.11g

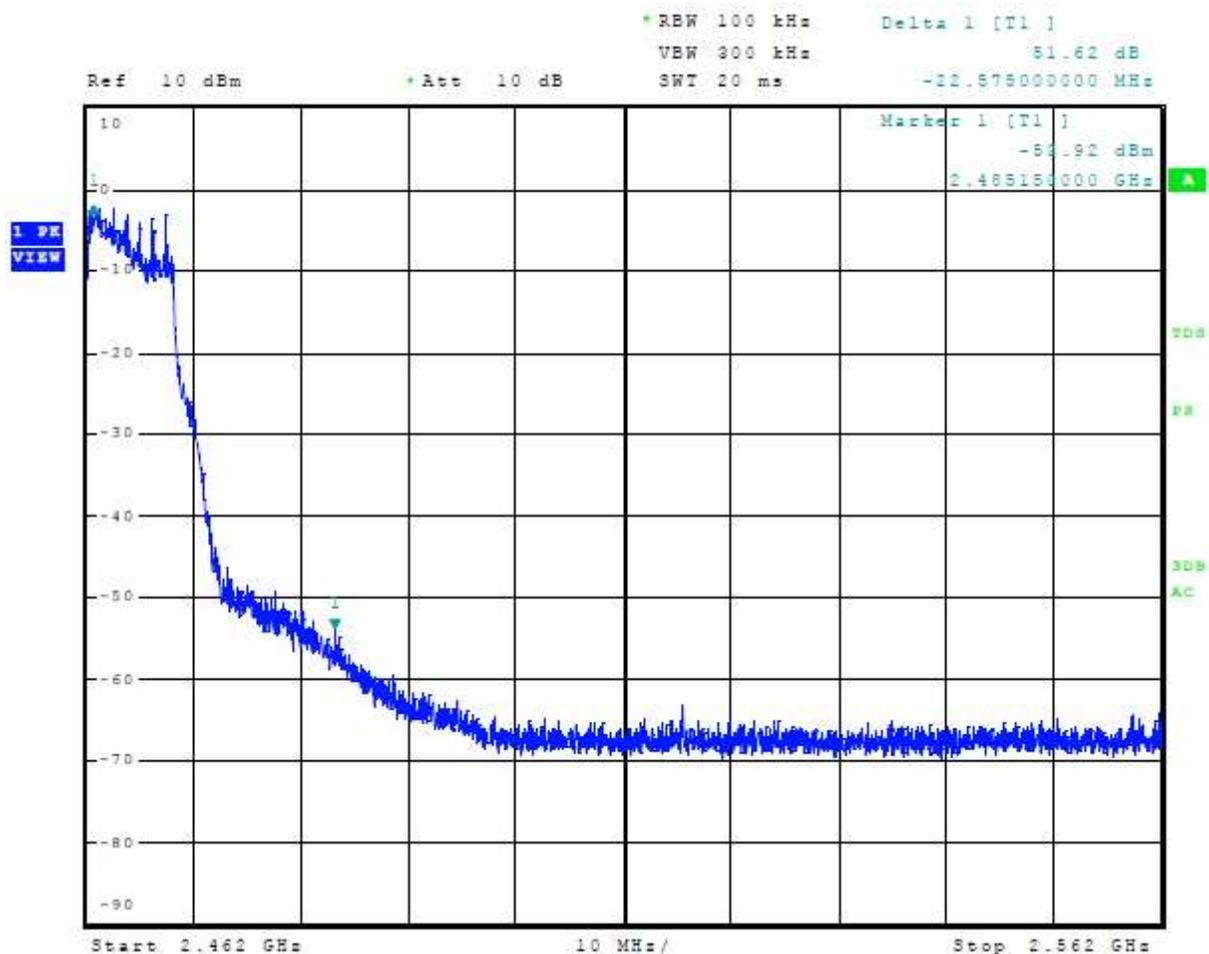


Figure 25 Plot of Transmitter Emissions High Band Edge Mode 8, 802.11n

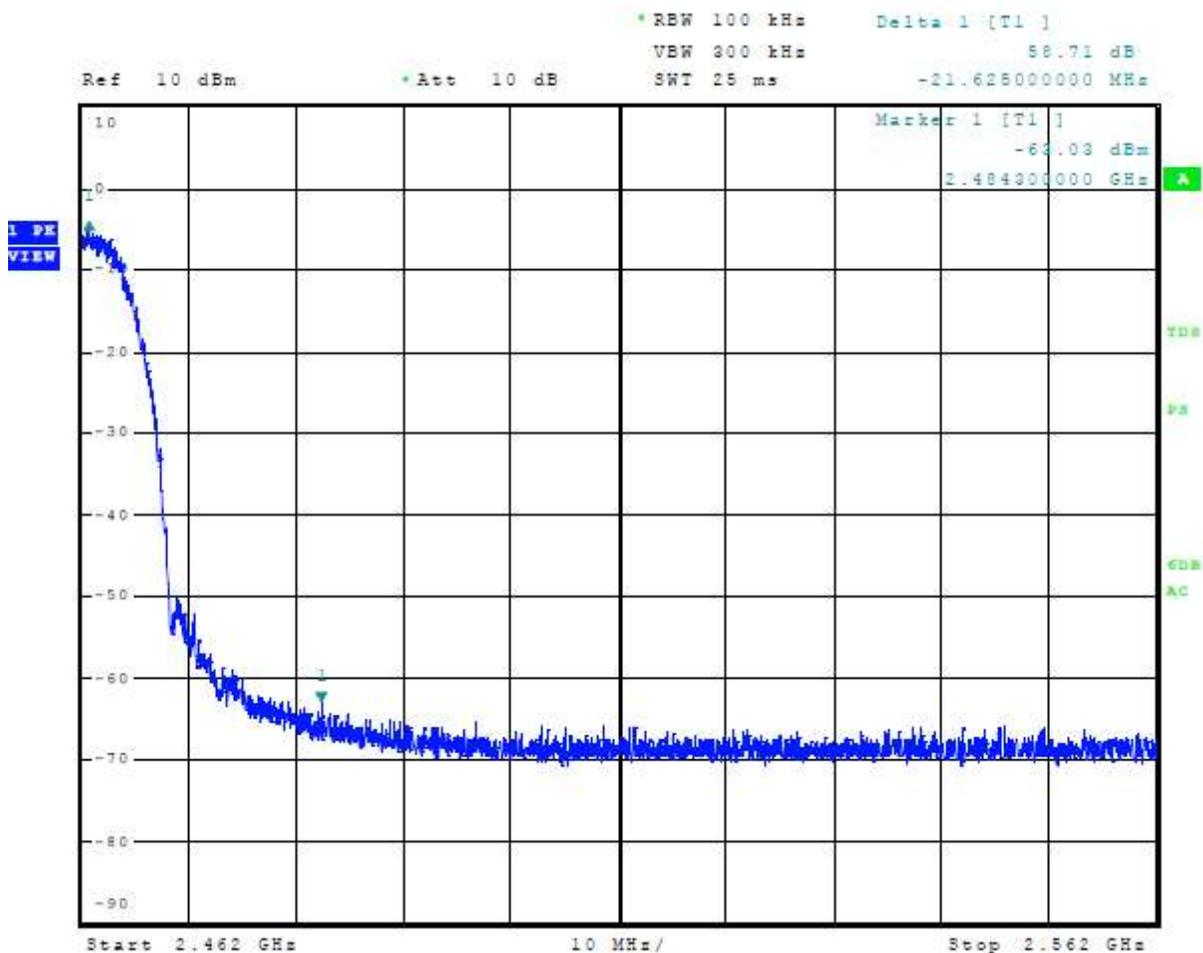


Figure 26 Plot of 6-dB Occupied Bandwidth Mode 3, BT (2EDR DQPSK)



Figure 27 Plot of 99% Occupied Bandwidth Mode 3, BT (2EDR DQPSK)

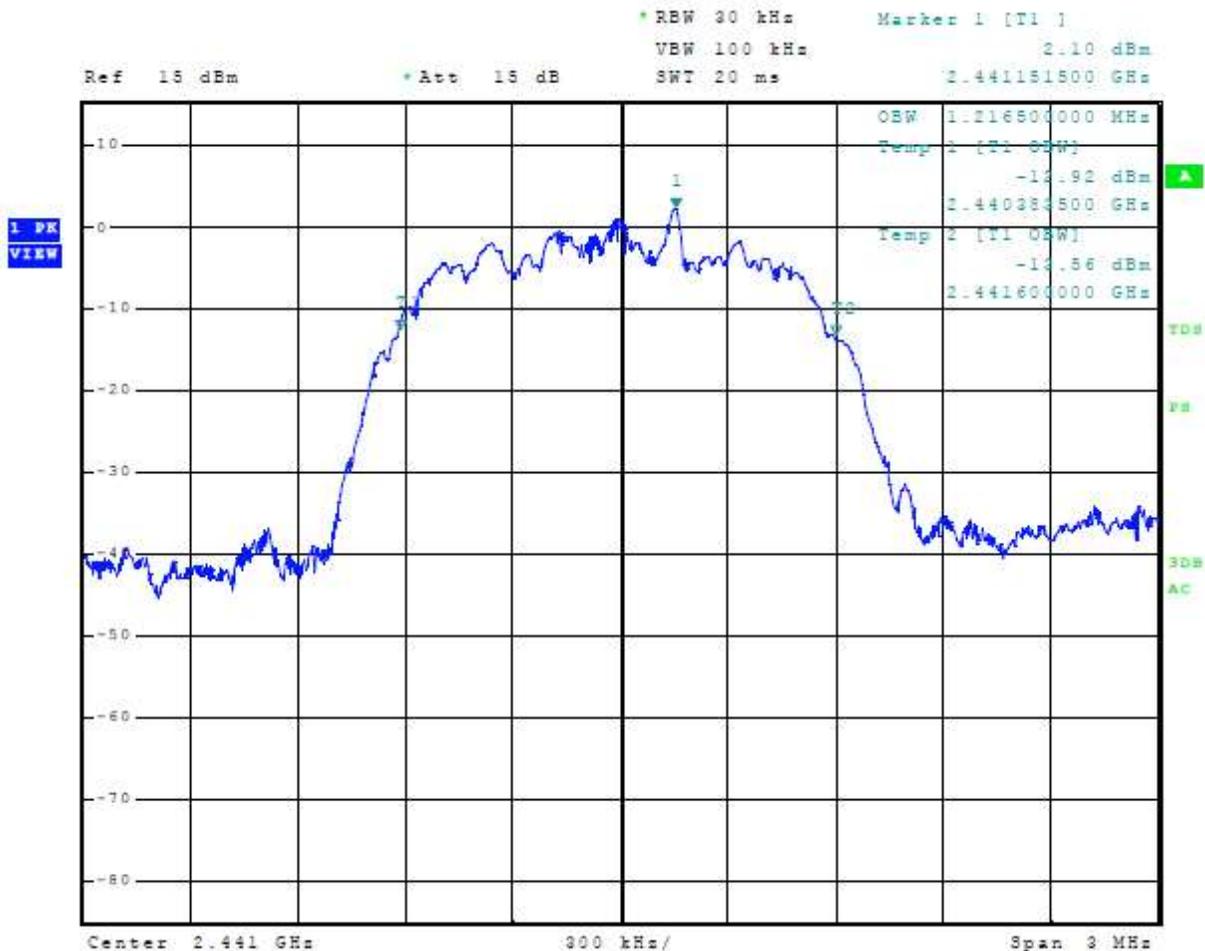


Figure 28 Plot of 6-dB Occupied Bandwidth Mode 4, BT (3EDR 8DPSK)

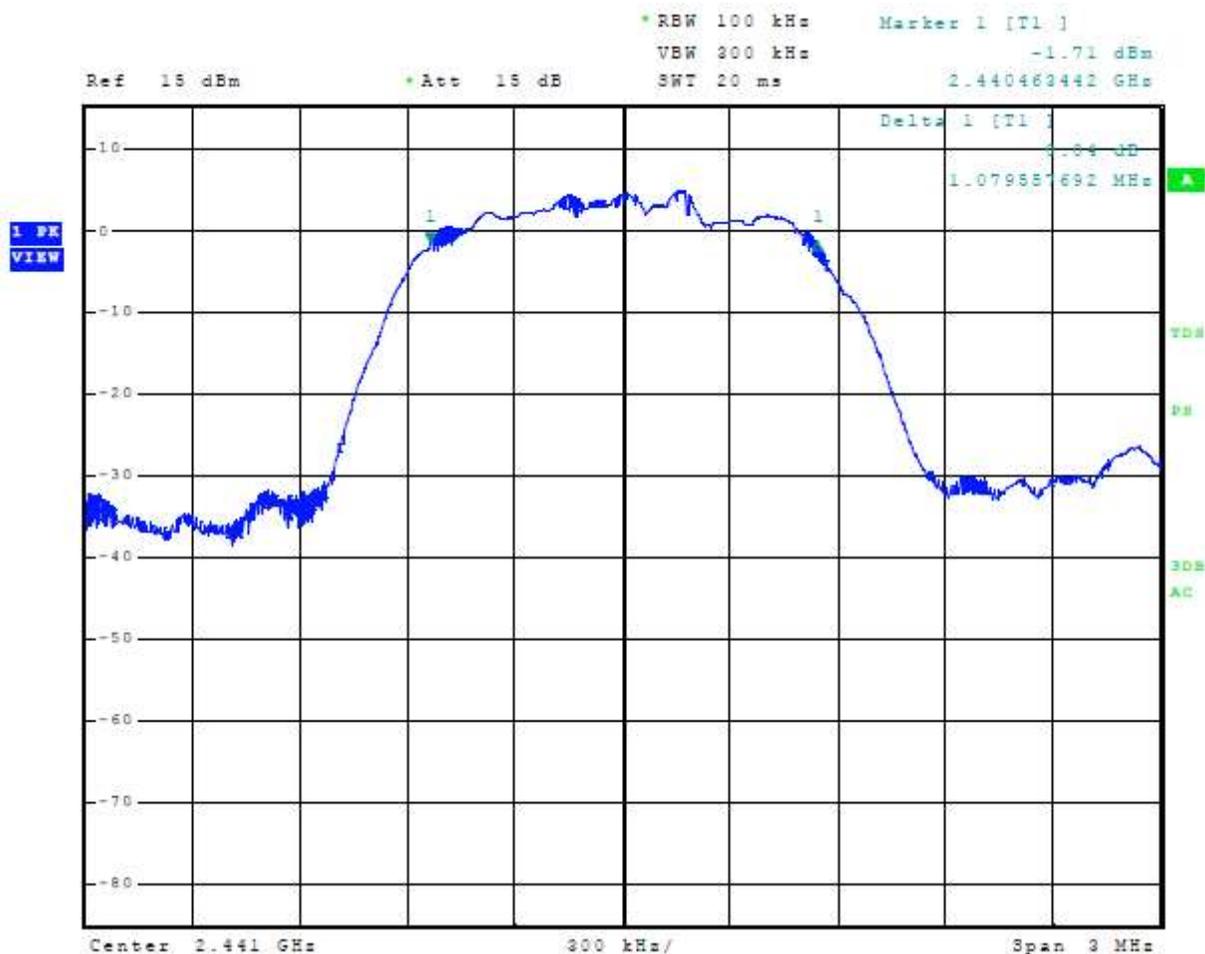


Figure 29 Plot of 99% Occupied Bandwidth Mode 4, BT (3EDR 8DPSK)



Figure 30 Plot of 6-dB Occupied Bandwidth Mode 5, BT BLE (GMSK)



Figure 31 Plot of 99% Occupied Bandwidth Mode 5, BT BLE (GMSK)

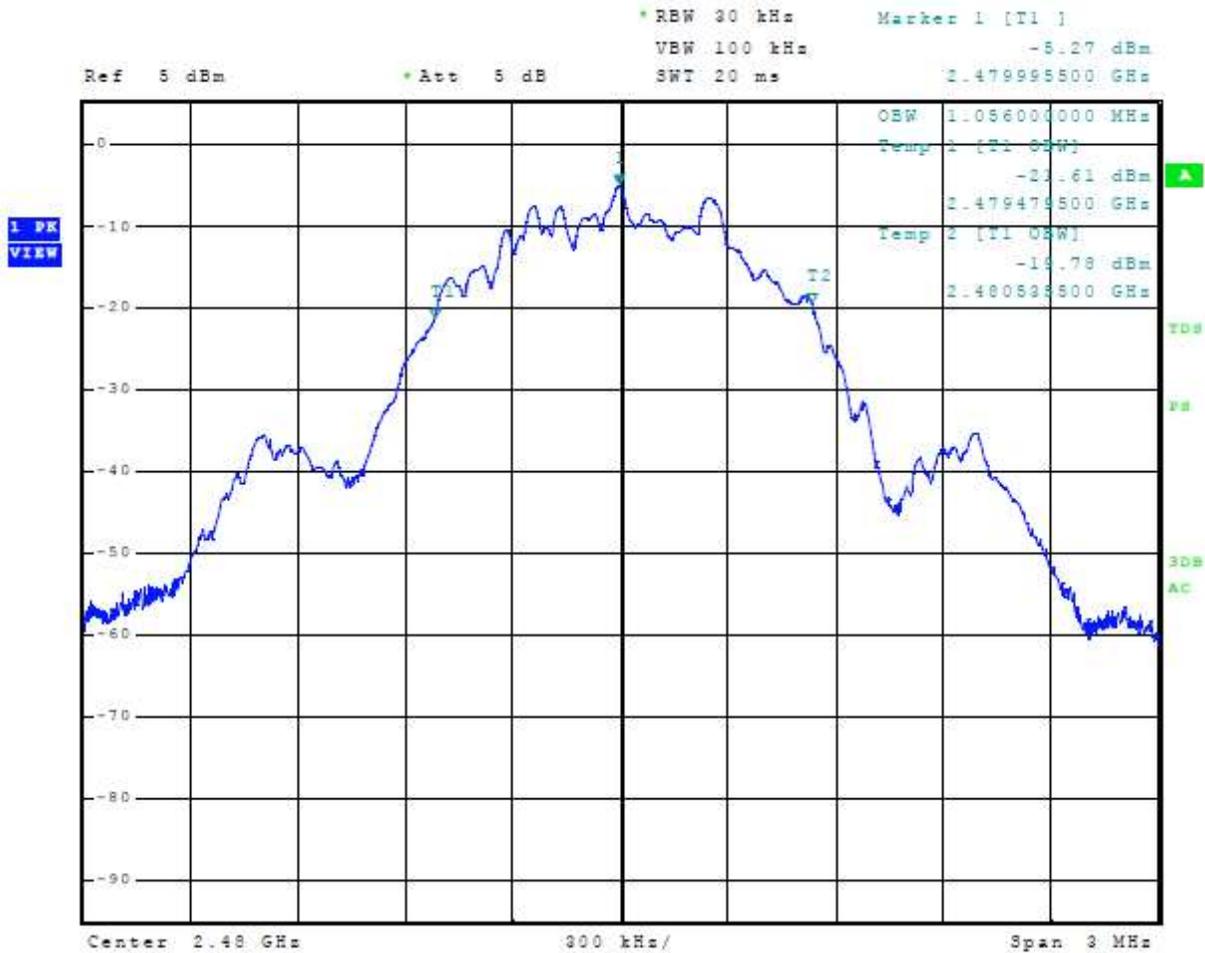


Figure 32 Plot of 6-dB Occupied Bandwidth Mode 6, 802.11b



Figure 33 Plot of 99% Occupied Bandwidth Mode 6, 802.11b



Figure 34 Plot of 6-dB Occupied Bandwidth Mode 7, 802.11g

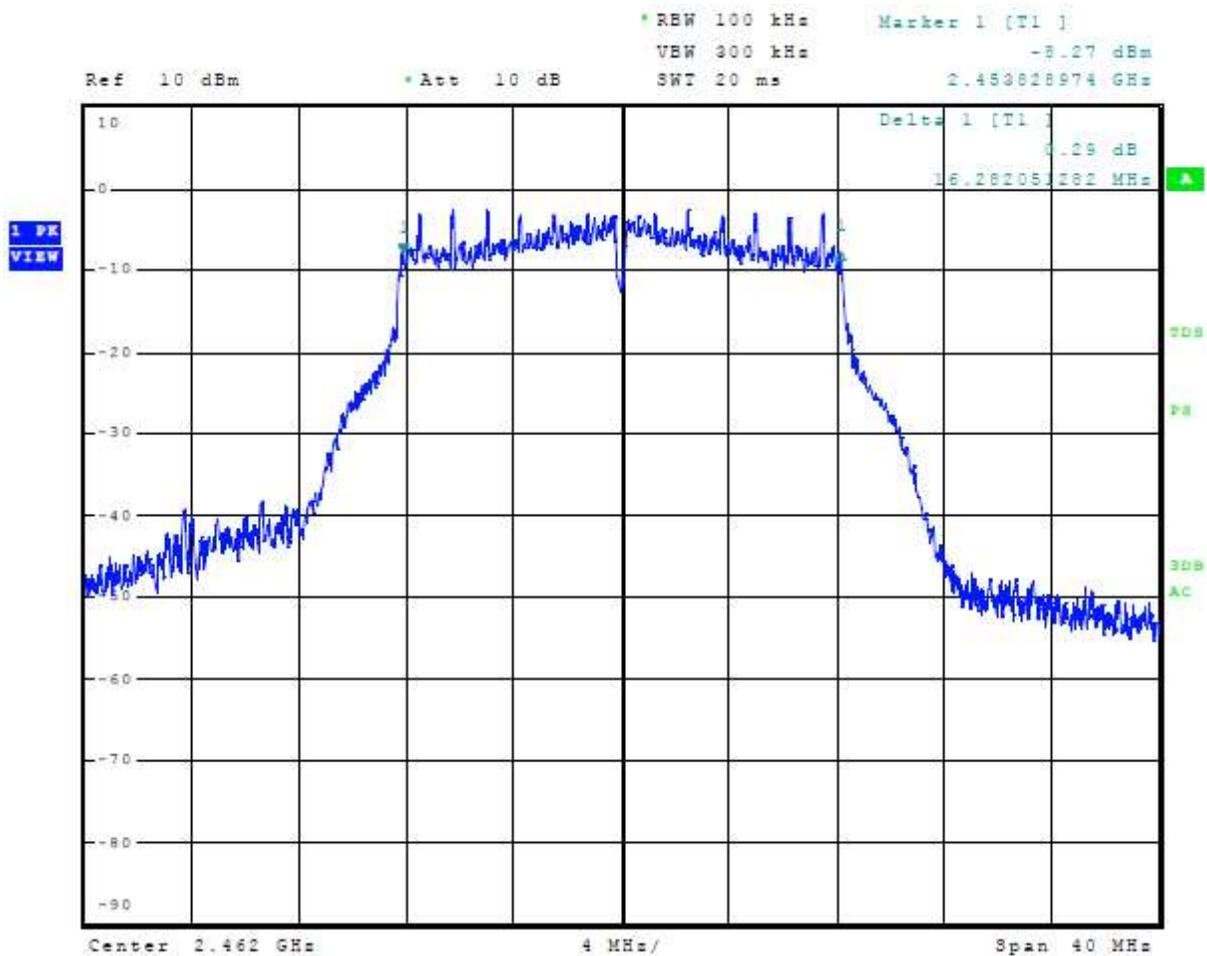


Figure 35 Plot of 99% Occupied Bandwidth Mode 7, 802.11g

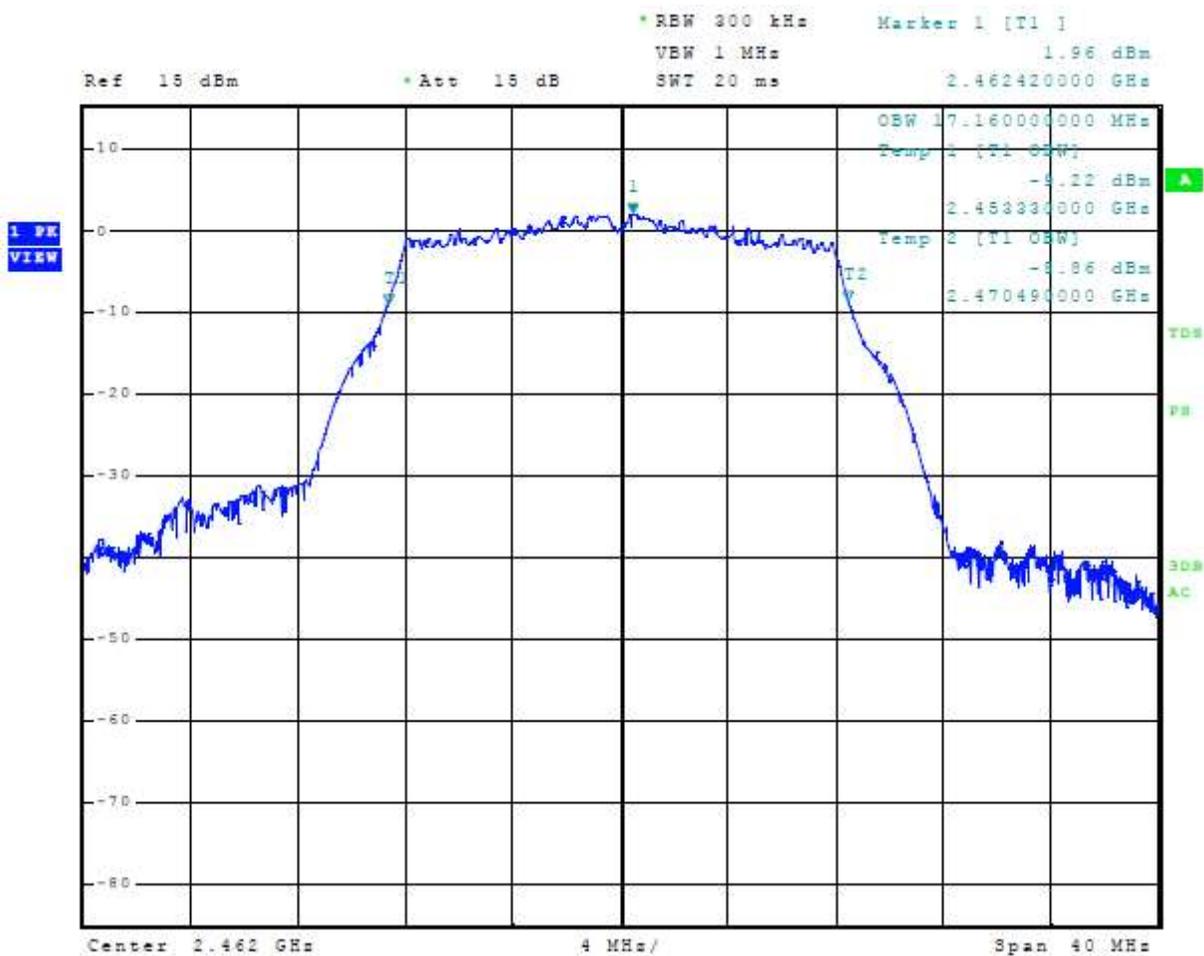


Figure 36 Plot of 6-dB Occupied Bandwidth Mode 8, 802.11n

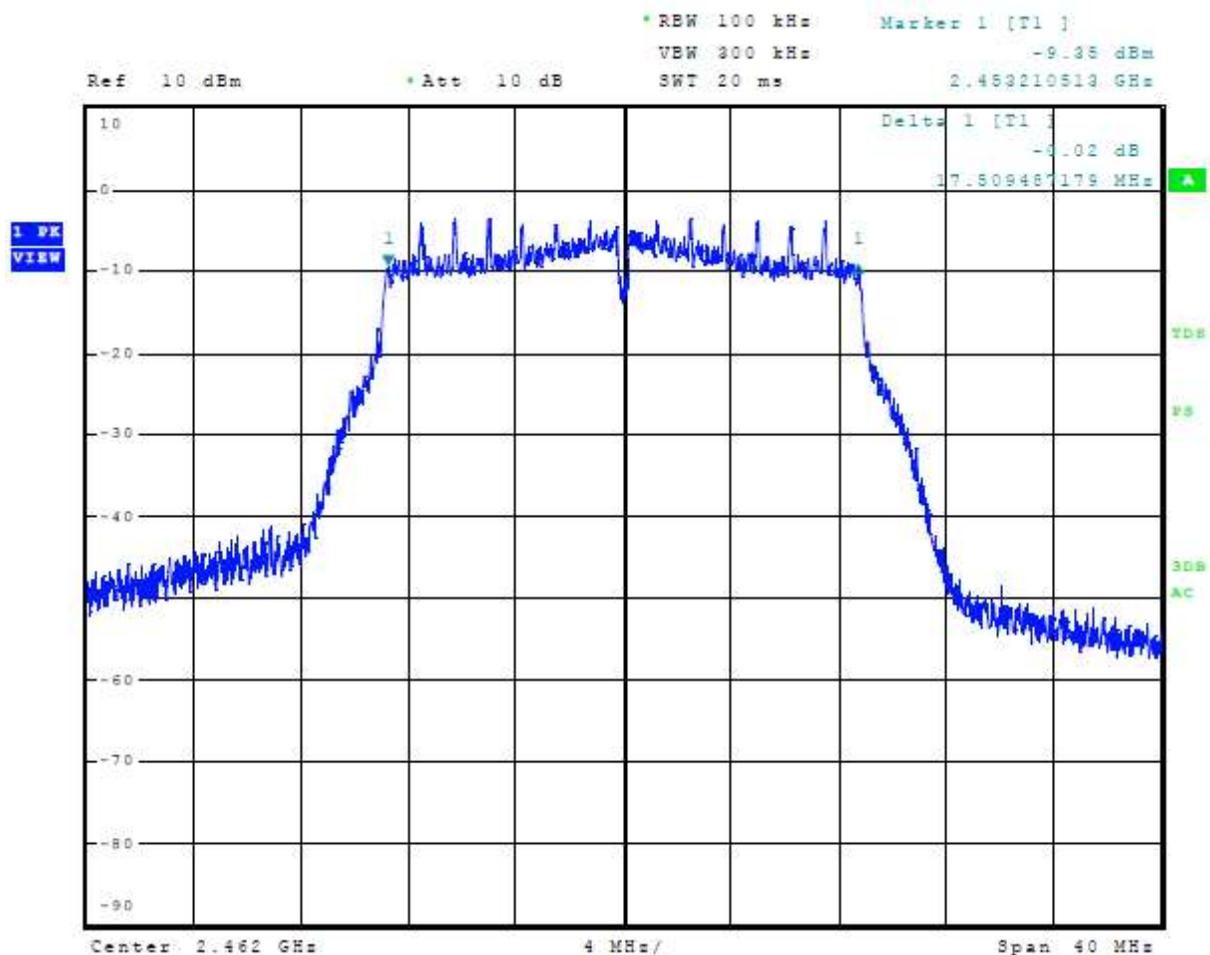


Figure 37 Plot of 99% Occupied Bandwidth Mode 8, 802.11n

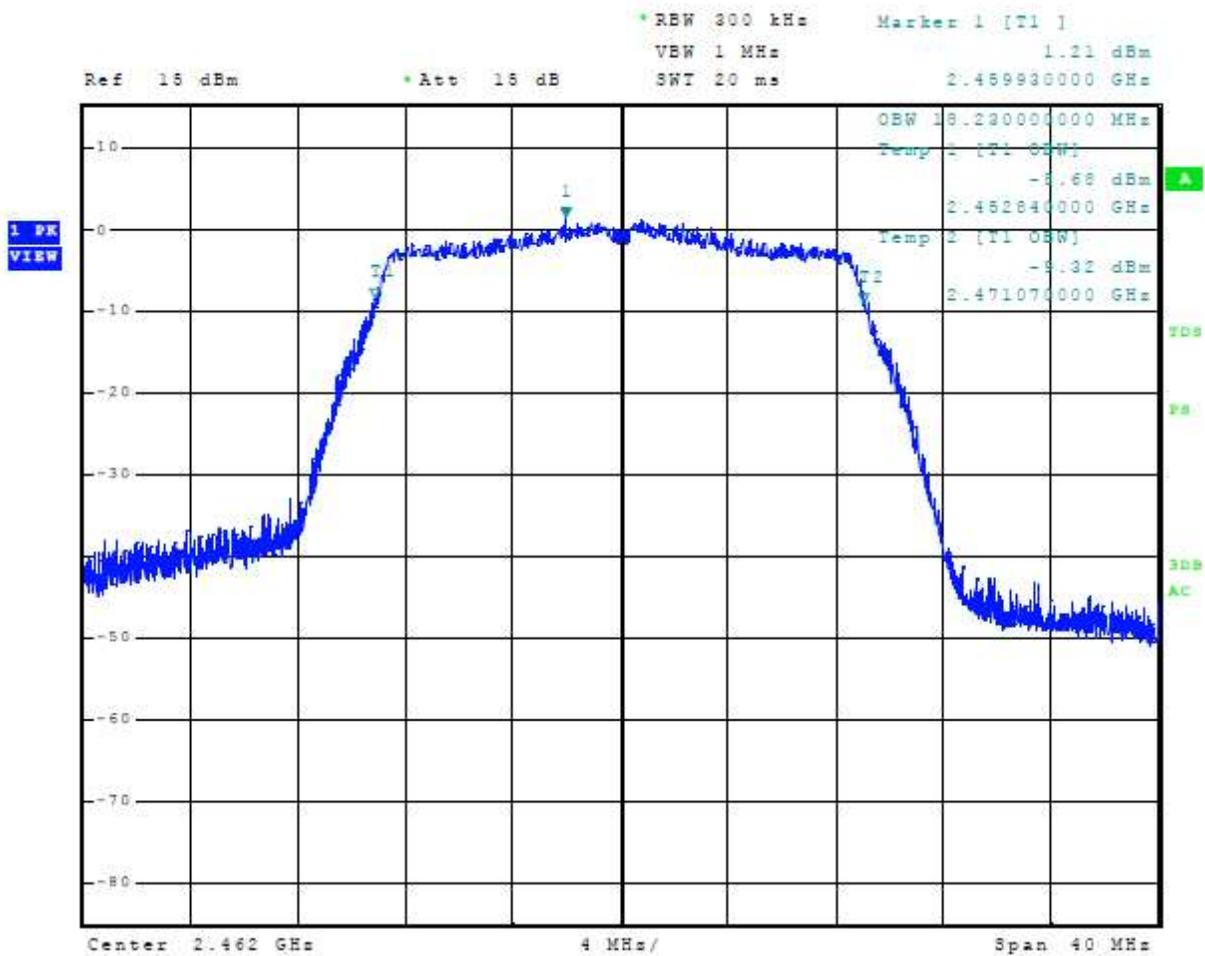


Figure 38 Plot of Transmitter Power Spectral Density Mode 3, BT (2EDR DQPSK)



Figure 39 Plot of Transmitter Power Spectral Density Mode 4, BT (3EDR 8DPSK)

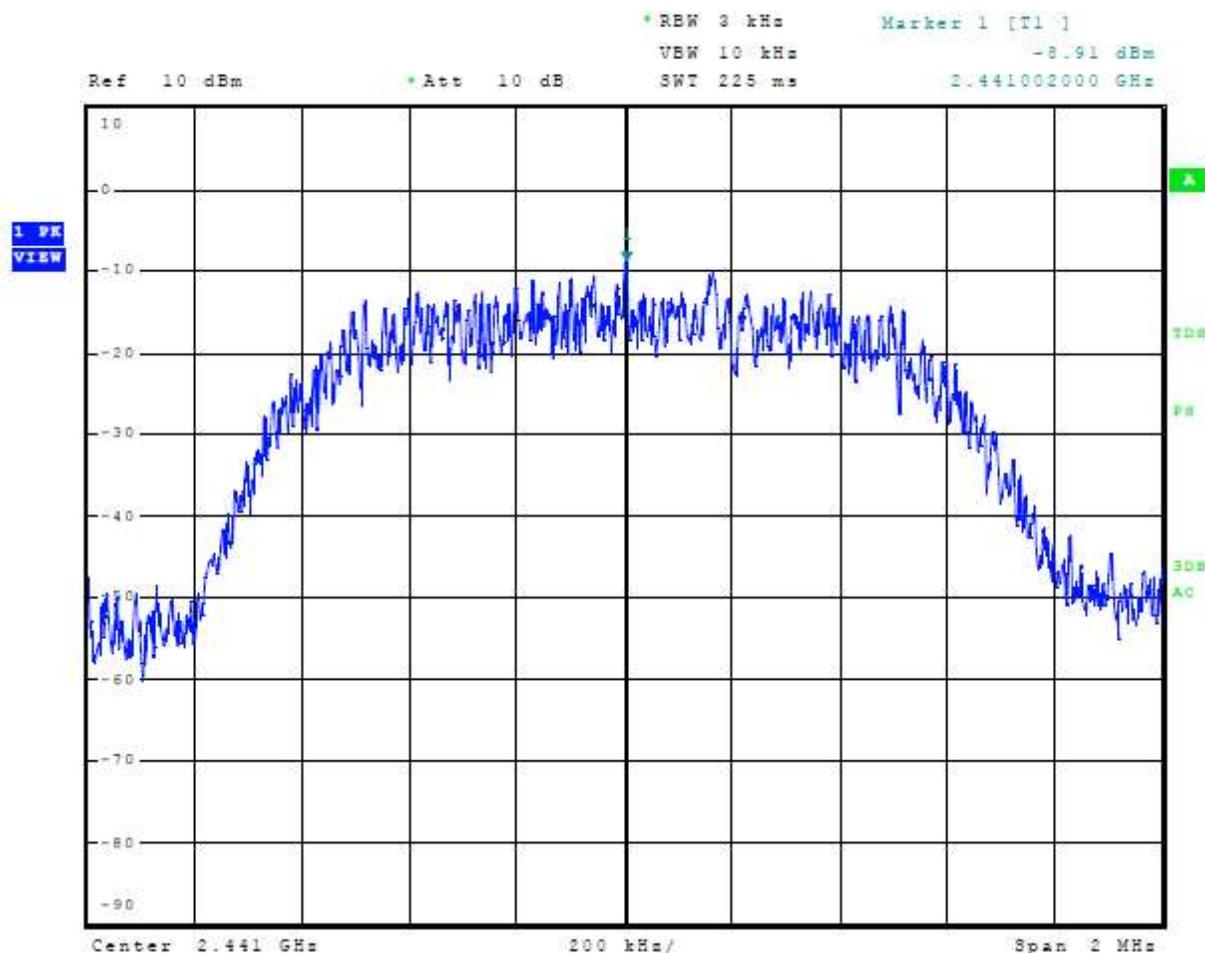


Figure 40 Plot of Transmitter Power Spectral Density Mode 5, BT BLE (GMSK)

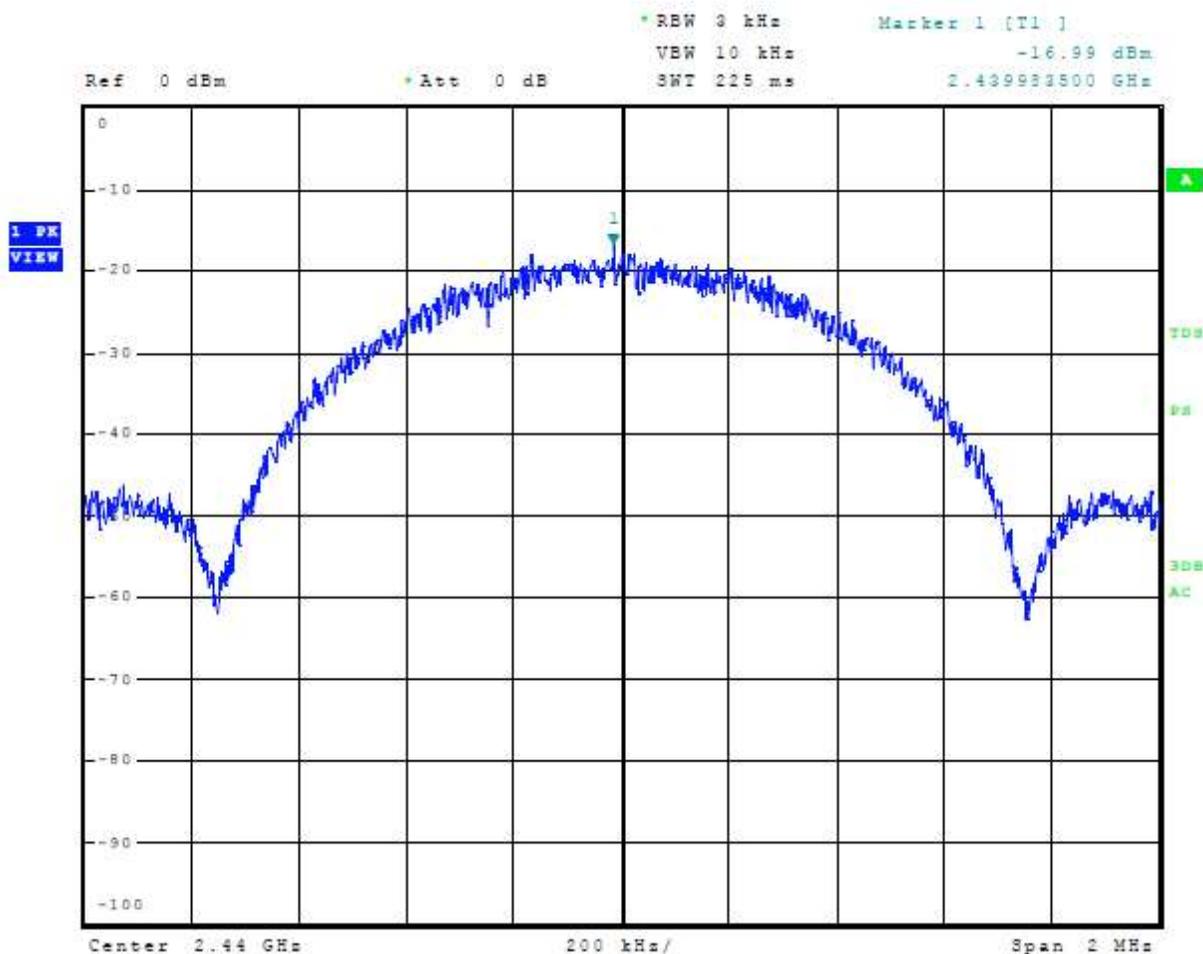


Figure 41 Plot of Transmitter Power Spectral Density Mode 6, 802.11b

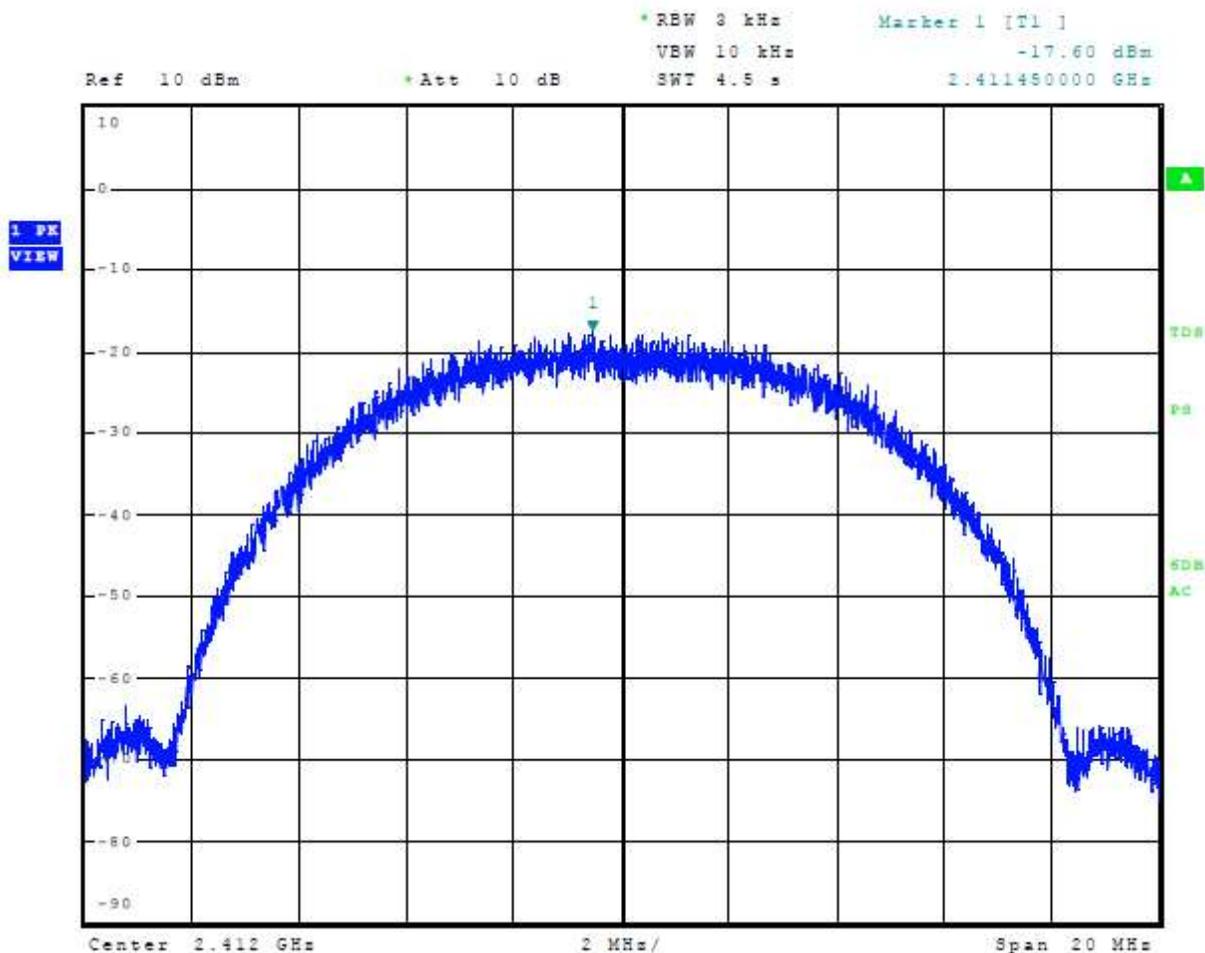


Figure 42 Plot of Transmitter Power Spectral Density Mode 7, 802.11g


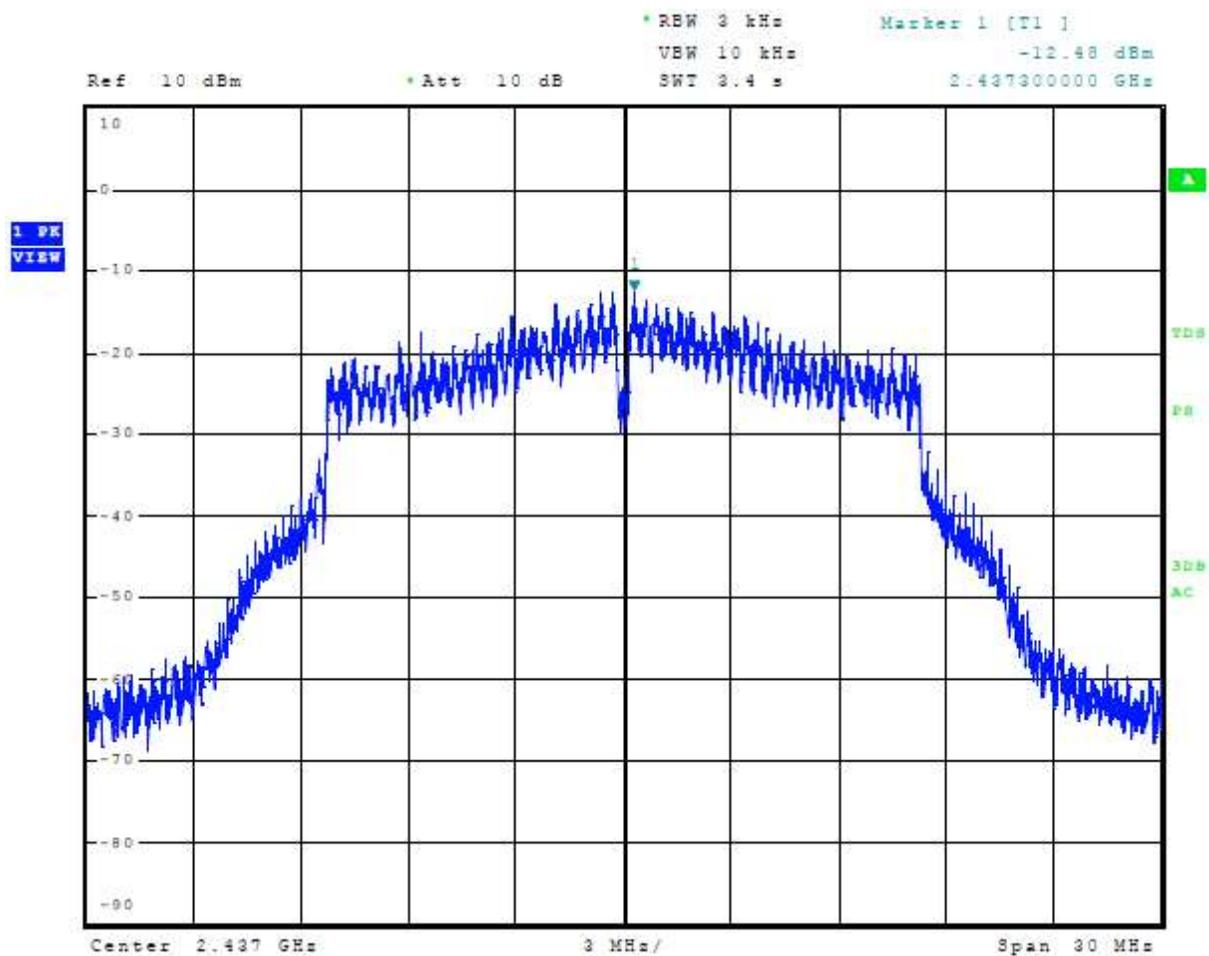


Figure 43 Plot of Transmitter Power Spectral Density Mode 8, 802.11n

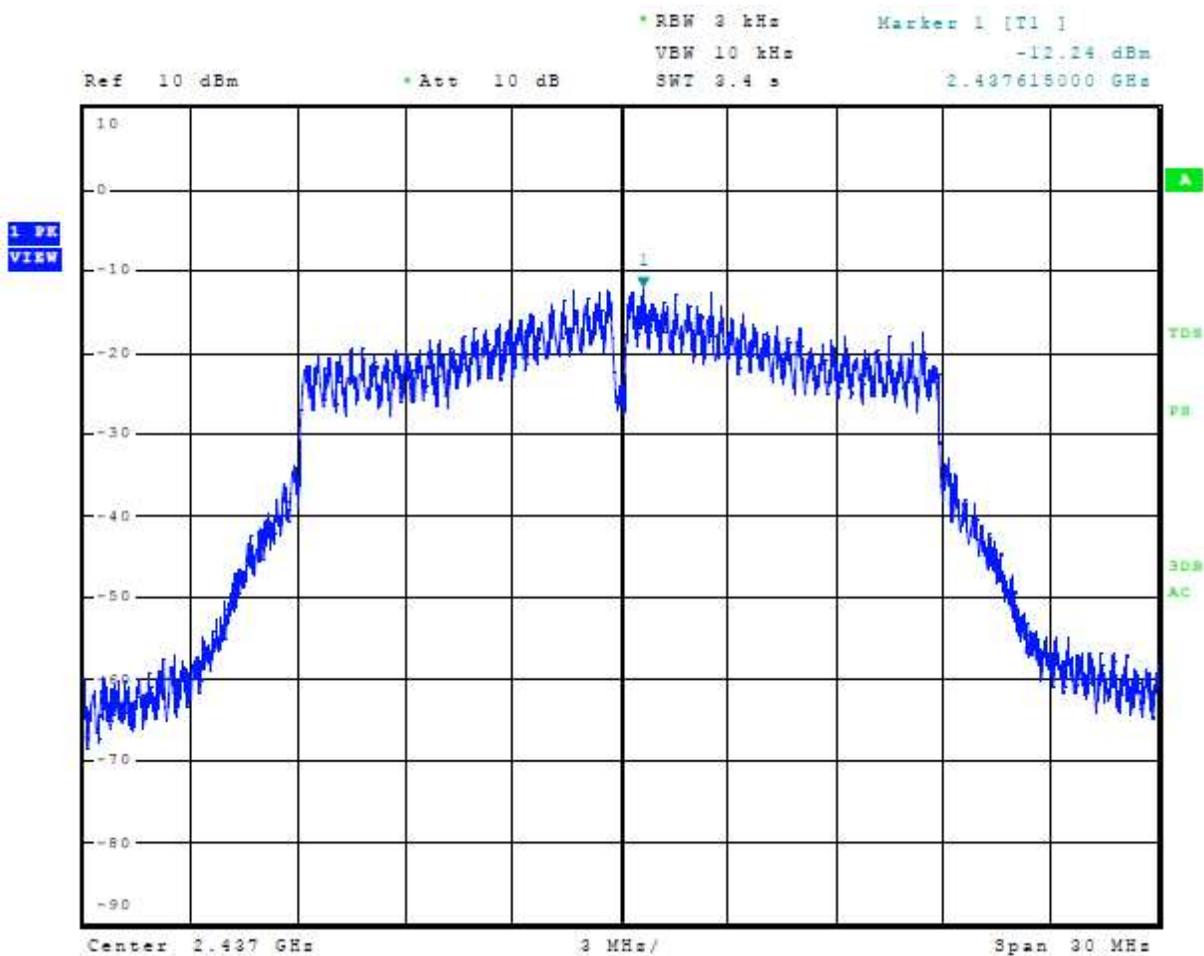

Transmitter Emissions Data

Table 9 Transmitter Radiated Emissions Mode 3, BT (2EDR DQPSK)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	49.3	35.9	49.3	36.0	54.0	-18.1	-18.0
7206.0	58.1	47.0	63.2	53.4	54.0	-7.0	-0.6
9608.0	56.8	43.4	56.3	43.4	54.0	-10.6	-10.6
12010.0	58.2	45.2	59.1	45.2	54.0	-8.8	-8.8
14412.0	60.3	47.0	59.8	47.0	54.0	-7.0	-7.0
16814.0	66.3	52.4	65.5	52.4	54.0	-1.6	-1.6
19216.0	63.8	50.6	64.0	50.6	54.0	-3.4	-3.4
21618.0	64.5	52.1	65.5	52.1	54.0	-1.9	-1.9
24020.0	67.0	53.3	66.2	53.3	54.0	-0.7	-0.7
2441.0	--	--	--	--	--	--	--
4882.0	50.0	36.3	49.7	36.4	54.0	-17.7	-17.6
7323.0	57.9	46.6	63.6	53.5	54.0	-7.4	-0.5
9764.0	56.3	43.1	56.0	43.2	54.0	-10.9	-10.8
12205.0	58.9	45.8	58.3	45.9	54.0	-8.2	-8.1
14646.0	60.5	47.6	60.8	47.6	54.0	-6.4	-6.4
17087.0	64.1	50.9	63.5	50.9	54.0	-3.1	-3.1
19528.0	63.6	50.6	63.4	50.6	54.0	-3.4	-3.4
21969.0	66.3	52.7	66.2	52.7	54.0	-1.3	-1.3
24410.0	65.5	52.4	65.6	52.4	54.0	-1.6	-1.6
2480.0	--	--	--	--	--	--	--
4960.0	49.1	36.6	49.5	36.3	54.0	-17.4	-17.7
7440.0	59.7	49.3	62.0	52.3	54.0	-4.7	-1.7
9920.0	56.6	43.6	56.3	43.6	54.0	-10.4	-10.4
12400.0	58.9	45.8	58.5	45.8	54.0	-8.2	-8.2
14880.0	60.1	47.0	60.3	47.0	54.0	-7.0	-7.0
17360.0	63.4	50.9	63.6	50.9	54.0	-3.1	-3.1
19840.0	63.5	50.8	64.4	50.8	54.0	-3.2	-3.2
22320.0	65.5	52.0	65.4	52.0	54.0	-2.0	-2.0
24800.0	65.1	52.0	65.4	52.0	54.0	-2.0	-2.0

Table 10 Transmitter Radiated Emissions Mode 4, BT (3EDR 8DPSK)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	48.8	35.9	49.0	36.0	54.0	-18.1	-18.0
7206.0	59.0	46.4	65.1	53.0	54.0	-7.6	-1.0
9608.0	56.3	43.4	56.8	43.4	54.0	-10.6	-10.6
12010.0	58.6	45.1	58.1	45.1	54.0	-8.9	-8.9
14412.0	59.9	47.0	60.2	47.0	54.0	-7.0	-7.0
16814.0	65.9	52.4	65.2	52.4	54.0	-1.6	-1.6
19216.0	63.3	50.6	63.6	50.6	54.0	-3.4	-3.4
21618.0	65.2	52.1	65.1	52.1	54.0	-1.9	-1.9
24020.0	65.9	53.3	65.9	53.3	54.0	-0.7	-0.7
2441.0	--	--	--	--	--	--	--
4882.0	49.6	36.3	49.6	36.5	54.0	-17.7	-17.5
7323.0	58.7	45.9	62.7	53.3	54.0	-8.1	-0.7
9764.0	56.0	43.1	56.1	43.1	54.0	-10.9	-10.9
12205.0	59.3	45.7	58.5	45.7	54.0	-8.3	-8.3
14646.0	60.5	47.6	60.8	47.6	54.0	-6.4	-6.4
17087.0	63.5	50.9	64.2	50.9	54.0	-3.1	-3.1
19528.0	63.9	50.6	63.3	50.6	54.0	-3.4	-3.4
21969.0	65.4	52.7	65.8	52.7	54.0	-1.3	-1.3
24410.0	65.6	52.4	65.7	52.4	54.0	-1.6	-1.6
2480.0	--	--	--	--	--	--	--
4960.0	49.1	36.2	49.5	36.3	54.0	-17.8	-17.7
7440.0	61.7	50.0	64.9	53.2	54.0	-4.0	-0.8
9920.0	56.6	43.6	55.9	43.6	54.0	-10.4	-10.4
12400.0	58.4	45.7	59.0	45.6	54.0	-8.3	-8.4
14880.0	60.0	47.0	59.8	47.0	54.0	-7.0	-7.0
17360.0	64.0	50.9	64.1	50.9	54.0	-3.1	-3.1
19840.0	63.7	50.8	63.7	50.8	54.0	-3.2	-3.2
22320.0	65.2	52.0	65.0	52.0	54.0	-2.0	-2.0
24800.0	65.3	52.0	65.1	52.0	54.0	-2.0	-2.0

Table 11 Transmitter Radiated Emissions Mode 5, BT BLE (GMSK)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	49.2	35.9	48.9	35.9	54.0	-18.1	-18.1
7206.0	52.9	40.0	53.8	41.5	54.0	-14.0	-12.5
9608.0	56.4	43.4	56.5	43.4	54.0	-10.6	-10.6
12010.0	58.3	45.1	58.1	45.0	54.0	-8.9	-9.0
14412.0	60.0	47.0	60.2	47.0	54.0	-7.0	-7.0
16814.0	65.6	52.4	65.8	52.4	54.0	-1.6	-1.6
19216.0	63.5	50.6	63.7	50.6	54.0	-3.4	-3.4
21618.0	64.9	52.1	65.2	52.1	54.0	-1.9	-1.9
24020.0	66.5	53.3	66.3	53.3	54.0	-0.7	-0.7
2441.0	--	--	--	--	--	--	--
4882.0	49.0	36.1	49.6	36.1	54.0	-17.9	-17.9
7323.0	53.0	40.3	55.3	41.9	54.0	-13.7	-12.1
9764.0	56.1	43.0	56.4	43.0	54.0	-11.0	-11.0
12205.0	59.0	45.7	58.9	45.6	54.0	-8.3	-8.4
14646.0	60.8	47.7	60.2	47.7	54.0	-6.3	-6.3
17087.0	64.3	50.9	64.5	50.9	54.0	-3.1	-3.1
19528.0	63.5	50.4	63.4	50.4	54.0	-3.6	-3.6
21969.0	65.7	52.8	65.5	52.8	54.0	-1.2	-1.2
24410.0	65.4	52.4	65.5	52.4	54.0	-1.6	-1.6
2480.0	--	--	--	--	--	--	--
4960.0	49.4	36.0	49.3	36.0	54.0	-18.0	-18.0
7440.0	53.2	40.3	54.4	41.3	54.0	-13.7	-12.7
9920.0	56.3	43.6	56.9	43.6	54.0	-10.4	-10.4
12400.0	58.6	45.7	59.1	45.6	54.0	-8.3	-8.4
14880.0	60.1	47.1	60.3	47.1	54.0	-6.9	-6.9
17360.0	64.0	50.9	63.7	50.9	54.0	-3.1	-3.1
19840.0	63.6	50.8	64.5	50.8	54.0	-3.2	-3.2
22320.0	65.0	52.0	65.3	52.0	54.0	-2.0	-2.0
24800.0	64.8	52.0	65.0	52.0	54.0	-2.0	-2.0

Table 12 Transmitter Radiated Emissions Mode 6, 802.11b

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	49.8	36.2	49.4	36.2	54.0	-17.8	-17.8
7236.0	53.8	40.6	53.7	40.9	54.0	-13.4	-13.1
9648.0	56.9	43.9	57.2	43.8	54.0	-10.1	-10.2
12060.0	60.0	46.6	59.4	46.7	54.0	-7.4	-7.3
14472.0	60.3	47.1	60.3	47.1	54.0	-6.9	-6.9
16884.0	65.0	51.1	65.0	51.1	54.0	-2.9	-2.9
19296.0	64.1	51.0	63.9	51.0	54.0	-3.0	-3.0
21708.0	65.3	51.9	65.1	51.9	54.0	-2.1	-2.1
24120.0	66.2	52.8	65.9	52.8	54.0	-1.2	-1.2
2437.0	--	--	--	--	--	--	--
4874.0	49.1	36.4	49.6	36.4	54.0	-17.6	-17.6
7311.0	52.9	40.0	53.3	40.6	54.0	-14.0	-13.4
9748.0	56.4	43.3	56.4	43.3	54.0	-10.7	-10.7
12185.0	59.0	46.5	59.9	46.5	54.0	-7.5	-7.5
14622.0	60.8	47.9	60.7	47.9	54.0	-6.1	-6.1
17059.0	63.3	50.3	63.3	50.3	54.0	-3.7	-3.7
19496.0	63.5	50.8	64.3	50.8	54.0	-3.2	-3.2
21933.0	66.1	52.9	65.9	53.0	54.0	-1.1	-1.0
24370.0	65.6	52.5	66.0	52.5	54.0	-1.5	-1.5
2462.0	--	--	--	--	--	--	--
4924.0	49.8	36.2	49.8	36.2	54.0	-17.8	-17.8
7386.0	53.5	40.4	54.5	41.5	54.0	-13.6	-12.5
9848.0	57.5	44.1	57.3	44.1	54.0	-9.9	-9.9
12310.0	60.3	47.2	60.1	47.2	54.0	-6.8	-6.8
14772.0	60.6	47.4	60.5	47.4	54.0	-6.6	-6.6
17234.0	63.2	50.4	63.3	50.3	54.0	-3.6	-3.7
19696.0	64.6	51.1	64.4	51.1	54.0	-2.9	-2.9
22158.0	65.6	52.2	65.1	52.2	54.0	-1.8	-1.8
24620.0	64.3	51.5	64.6	51.5	54.0	-2.5	-2.5

Table 13 Transmitter Radiated Emissions Mode 7, 802.11g

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	49.0	36.0	49.2	36.0	54.0	-18.0	-18.0
7236.0	55.5	41.1	59.7	45.5	54.0	-12.9	-8.5
9648.0	56.8	43.6	56.4	43.6	54.0	-10.4	-10.4
12060.0	58.3	45.7	58.4	45.6	54.0	-8.3	-8.4
14472.0	59.8	47.2	59.8	47.1	54.0	-6.8	-6.9
16884.0	65.0	52.0	64.3	52.0	54.0	-2.0	-2.0
19296.0	64.1	50.9	64.4	50.9	54.0	-3.1	-3.1
21708.0	64.6	51.8	64.7	51.8	54.0	-2.2	-2.2
24120.0	66.1	52.8	65.6	52.8	54.0	-1.2	-1.2
2437.0	--	--	--	--	--	--	--
4874.0	50.3	36.2	49.6	36.2	54.0	-17.8	-17.8
7311.0	53.8	40.5	62.2	46.3	54.0	-13.5	-7.7
9748.0	56.0	43.1	56.2	42.8	54.0	-10.9	-11.2
12185.0	58.2	45.4	59.5	45.7	54.0	-8.6	-8.3
14622.0	60.6	47.7	61.4	48.0	54.0	-6.3	-6.0
17059.0	64.8	51.0	64.8	51.0	54.0	-3.0	-3.0
19496.0	64.1	50.8	63.6	50.7	54.0	-3.2	-3.3
21933.0	65.8	52.9	65.5	52.9	54.0	-1.1	-1.1
24370.0	65.6	52.6	65.6	52.6	54.0	-1.4	-1.4
2462.0	--	--	--	--	--	--	--
4924.0	49.8	36.0	49.0	36.1	54.0	-18.0	-17.9
7386.0	54.4	40.8	61.8	47.1	54.0	-13.2	-6.9
9848.0	57.4	43.9	56.9	44.0	54.0	-10.1	-10.0
12310.0	59.2	46.1	59.5	46.1	54.0	-7.9	-7.9
14772.0	60.4	47.2	60.9	47.2	54.0	-6.8	-6.8
17234.0	64.4	50.9	64.3	50.9	54.0	-3.1	-3.1
19696.0	64.4	51.1	64.8	51.1	54.0	-2.9	-2.9
22158.0	65.3	52.2	65.0	52.2	54.0	-1.8	-1.8
24620.0	65.1	51.7	65.5	51.6	54.0	-2.3	-2.4

Table 14 Transmitter Radiated Emissions Mode 8, 802.11n

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	49.1	36.1	49.0	36.1	54.0	-17.9	-17.9
7236.0	53.3	39.8	57.8	42.3	54.0	-14.2	-11.7
9648.0	56.7	43.7	56.6	43.7	54.0	-10.3	-10.3
12060.0	59.9	46.6	60.2	46.6	54.0	-7.4	-7.4
14472.0	60.6	47.0	60.5	47.0	54.0	-7.0	-7.0
16884.0	64.4	51.1	64.4	51.1	54.0	-2.9	-2.9
19296.0	63.9	50.8	63.8	50.8	54.0	-3.2	-3.2
21708.0	64.6	51.7	64.8	51.7	54.0	-2.3	-2.3
24120.0	65.4	52.8	65.6	52.8	54.0	-1.2	-1.2
2437.0	--	--	--	--	--	--	--
4874.0	49.1	36.3	49.0	36.3	54.0	-17.7	-17.7
7311.0	55.8	40.9	66.4	47.5	54.0	-13.1	-6.5
9748.0	56.2	43.2	56.0	43.1	54.0	-10.8	-10.9
12185.0	60.0	46.3	59.5	46.4	54.0	-7.7	-7.6
14622.0	60.9	47.8	60.8	47.7	54.0	-6.2	-6.3
17059.0	62.6	50.3	63.2	50.3	54.0	-3.7	-3.7
19496.0	64.0	50.7	63.4	50.7	54.0	-3.3	-3.3
21933.0	66.4	52.9	65.9	52.9	54.0	-1.1	-1.1
24370.0	65.5	52.5	65.9	52.5	54.0	-1.5	-1.5
2462.0	--	--	--	--	--	--	--
4924.0	49.2	36.1	49.3	36.1	54.0	-17.9	-17.9
7386.0	54.1	40.8	58.2	42.6	54.0	-13.2	-11.4
9848.0	57.6	44.0	57.3	44.0	54.0	-10.0	-10.0
12310.0	60.1	47.1	60.3	47.1	54.0	-6.9	-6.9
14772.0	60.2	47.3	60.4	47.3	54.0	-6.7	-6.7
17234.0	63.5	50.3	63.0	50.3	54.0	-3.7	-3.7
19696.0	64.1	51.0	64.3	51.1	54.0	-3.0	-2.9
22158.0	65.3	52.1	64.7	52.1	54.0	-1.9	-1.9
24620.0	64.4	51.6	64.8	51.6	54.0	-2.4	-2.4

Table 15 Transmitter Antenna Port Conducted Data modes 3-5

Frequency MHz	Antenna Port Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
Mode 3, BT (2EDR DQPSK)				
2402	0.004	1,216.5	1,070.3	-10.1
2441	0.005	1,216.5	1,076.7	-9.0
2480	0.004	1,216.5	1,074.0	-9.9
Mode 4, BT (3EDR 8DPSK)				
2402	0.004	1,214.3	1,069.5	-9.9
2441	0.005	1,214.3	1,079.6	-8.9
2480	0.004	1,214.3	1,076.0	-10.1
Mode 5, BT BLE (GMSK)				
2402	0.001	1,054.5	668.5	-18.6
2441	0.001	1,055.3	671.0	-17.0
2480	0.001	1,056.0	672.5	-18.3

Table 16 Transmitter Antenna Port Conducted Data modes 6-8

Frequency MHz	Antenna Port Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
Mode 6, 802.11b				
2412	0.003	11,190.0	8,745.0	-17.6
2437	0.002	11,002.5	7,490.0	-18.1
2462	0.003	11,340.0	7,895.8	-18.0
Mode 7, 802.11g				
2412	0.009	17,080.0	16,260.0	-13.8
2437	0.010	16,600.0	15,448.7	-12.5
2462	0.008	17,160.0	16,282.0	-14.3
Mode 8, 802.11n				
2412	0.006	18,210.0	17,500.0	-16.8
2437	0.011	17,660.0	16,250.0	-12.2
2462	0.006	18,230.0	17,509.5	-16.0

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated and conducted emission requirements of 47CFR Subpart 15C Paragraph 15.247, RSS-247 Issue 3 and RSS-GEN Issue 5 emission requirements for Digital Transmission Systems. The highest average output power measured at the antenna port for modes 3 through 8 was 0.011 Watts. The highest peak power spectral density measured at the antenna port for modes 3 through 8 presented a minimum margin of -8.9 dB below the requirements. The EUT demonstrated a minimum margin of -0.5 dB below the harmonic emissions requirements. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment
- Annex C Laboratory Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/20/2025	3/20/2026
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/17/2025	3/17/2027
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	3/17/2025	3/17/2027
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/8/2024	7/8/2025
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/21/2025	1/21/2026
<input type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
<input type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/26/2023	9/26/2025
<input checked="" type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/19/2025	3/19/2026
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/21/2025	3/21/2026
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
<input type="checkbox"/> Attenuator	Fairview	SA6NFNF100W-40 (1625)	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Weather station	Davis	6152 (A70927D44N)		7/11/2024	7/11/2025

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input type="checkbox"/> Frequency Counter: Leader		LDC-825 (8060153)		3/19/2025	3/19/2026
<input type="checkbox"/> ISN	Com-Power	Model ISN T-8 (600111)		3/19/2025	3/19/2026
<input type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	9/16/2024	9/16/2025
<input type="checkbox"/> LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
<input checked="" type="checkbox"/> LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(4M)(281184)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/22/2025	3/22/2026
<input checked="" type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/20/2025	3/20/2026
<input type="checkbox"/> Antenna:	Solar	9229-1 & 9230-1		2/5/2025	2/5/2026
<input type="checkbox"/> CDN:	Com-Power	Model CDN M325E		9/16/2024	9/16/2025
<input type="checkbox"/> Oscilloscope Scope: Tektronix		MDO 4104		2/5/2025	2/5/2026
<input type="checkbox"/> EMC Transient Generator HVT		TR 3000		2/5/2025	2/5/2026
<input type="checkbox"/> AC Power Source (Ametech, California Instruments)				2/5/2025	2/5/2026
<input checked="" type="checkbox"/> Field Intensity Meter: EFM-018				2/5/2025	2/5/2026
<input checked="" type="checkbox"/> ESD Simulator: MZ-15				2/5/2025	2/5/2026
<input type="checkbox"/> Injection Clamp Luthi Model EM101				not required	
<input type="checkbox"/> R.F. Power Amp ACS 230-50W				not required	
<input type="checkbox"/> R.F. Power Amp EIN Model: A301				not required	
<input type="checkbox"/> R.F. Power Amp A.R. Model: 10W 1010M7				not required	
<input type="checkbox"/> R.F. Power Amp A.R. Model: 50U1000				not required	
<input checked="" type="checkbox"/> Temperature Chamber				not required	
<input checked="" type="checkbox"/> Shielded Room				not required	
POSSIBLY USE FOR GARMIN GPS TESTING					
<input type="checkbox"/> GNSS Sig Gen SG80K, SN: GNSS-00952				not required	

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0

Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2025-03-11 through 2026-03-31
Effective Dates




For the National Voluntary Laboratory Accreditation Program



Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

47CFR, PART 15C - Intentional Radiators
47CFR Paragraph 15.249 and
Industry Canada RSS-GEN Issue 5 and RSS-210 Issue 11
Application For Grant of Certification

Model: A05043

2402-2480 MHz
Low Power Digital Transmitter (DXX)

FCC ID: IPH-05043 IC: 1792A-05043

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062
Jeff Hailey
Staff Compliance Engineer

Test Report Number: 250404
Test Date: April 4, 2025 – May 27, 2025

Authorized Signatory: 
Patrick Powell
Rogers Labs, a division of The Compatibility Center LLC
FCC Designation: US5305
ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS..... 2

REVISIONS..... 4

EXECUTIVE SUMMARY 5

EQUIPMENT TESTED..... 6

Equipment Operational Modes.....7

Equipment Function8

Equipment Configuration.....9

ENVIRONMENTAL CONDITIONS..... 9

APPLICATION FOR CERTIFICATION..... 10

APPLICABLE STANDARDS 11

EQUIPMENT TESTING PROCEDURES 11

AC Line Conducted Emission Test Procedure11

Radiated Emission Test Procedure.....11

Antenna Port Conducted Emission Test Procedure.....12

Diagram 1 Test arrangement for power-line conducted emissions.....13

 Diagram 2 Test arrangement for radiated emissions of tabletop equipment..... 14

 Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) or Open Area Test Site (OATS)..... 15

 Diagram 4 Test arrangement for Antenna Port Conducted emissions 16

TEST SITE LOCATIONS 16

UNITS OF MEASUREMENTS 17

STATEMENT OF MODIFICATIONS AND DEVIATIONS 17

INTENTIONAL RADIATORS..... 18

Antenna Requirements18

Restricted Bands of Operation.....18

 Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 1 ANT (GFSK)19

Summary of Results for Radiated Emissions in Restricted Bands19

AC Line Conducted EMI Procedure20

General Radiated Emissions Procedure.....20

 Table 2 General Radiated Emissions Data - Horizontal Polarization21

 Table 3 General Radiated Emissions Data - Vertical Polarization21

Figure 1 Plot of General Radiated Emissions (30 MHz – 230 MHz)22

Figure 2 Plot of General Radiated Emissions (200 MHz – 1.2 GHz)23

Figure 3 Plot of General Radiated Emissions (1 GHz – 3 GHz).....24

Figure 4 Plot of General Radiated Emissions (3 GHz – 6 GHz).....25

Figure 5 Plot of General Radiated Emissions (6 GHz – 12 GHz).....26

Figure 6 Plot of General Radiated Emissions (12 GHz – 18 GHz).....27

Figure 7 Plot of General Radiated Emissions (18 GHz – 25 GHz).....28

Summary of Results for General Radiated Emissions28

Operation in the Band 2400 – 2483.5 MHz29

 Figure 8 Plot of Transmitter Emissions in 2402-2480 MHz Mode 1 ANT (GFSK).....30

 Figure 9 Plot of Transmitter Emissions Low Band Edge Mode 1 ANT (GFSK)31

 Figure 10 Plot of Transmitter Emissions High Band Edge Mode 1 ANT (GFSK).....32

 Figure 11 Plot of Transmitter 99% Occupied Bandwidth Mode 1 ANT (GFSK)33

Transmitter Emissions Data.....34

 Table 4 Transmitter Radiated Emissions Mode 1 ANT (GFSK)34

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator.....35

ANNEX..... **36**

Annex A Measurement Uncertainty Calculations.....37

Annex B Test Equipment.....38



NVLAP Lab Code 200087-0

Revisions

Revision 1 Issued – June 24, 2025

Executive Summary

License Exempt Digital Transmission System Intentional Radiator operating under Title 47 Code of Federal Regulations (47 CFR) Paragraph 15.249 and Industry Canada RSS-210 Issue 11 and RSS-GEN Issue 5, Low Power (DXX) Digital Device transmitter operations in the 2400 – 2483.5 MHz frequency band.

Name of Applicant: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

PMN: A05043

FCC ID: IPH-05043 IC: 1792A-05043

Operating Frequency Range: 2402-2480 MHz

A05043 was chosen for transmitter configuration testing and used for final measurements.

Operational communication mode 1

Mode	Peak Power (dBμV/m@3m)	Average power (dBμV/m@3m)	Limit@3m (dBuV/m)	Margin	99% OBW (kHz)
Mode 1, ANT (GFSK)	93.3	92.3	94.0	-1.7	989.3

This report addresses EUT Operations as Low Power Transmitter (DXX) using transmitter modulation mode 1. Note, the production device utilizes two non-user accessible integral antennas with 1.8 dBi (ANT) and 5.8 dBi (BT and WiFi) gain.

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Bands 47 CFR 15.205, RSS-210 4.1	-7.7	Complies
Conducted Emissions per 47CFR 15.207, RSS-GEN 8.8	N/A	Complies
Radiated Emissions 47 CFR 15.209, RSS-GEN 8.9	-8.51	Complies
Harmonic Emissions per 47 CFR 15.249, RSS-210 B.10	-0.7	Complies



NVLAP Lab Code 200087-0

Equipment Tested

Model: A05043

Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

Equipment	Model / PN	Serial Number
EUT #1 Radiated	A05043	3495259652
EUT #2 Antenna Port	A05043	3495259647
Garmin GT56 Transducer	010-13073-00	6QR262970
Power Cable	320-01043-50	n/a
Garmin GCV20 Sonar Box	010-01156-02	5JW004749 5JW004754
Garmin Heading Sensor	010-1141710	543023755
HDMI Load	n/a	n/a
Garmin NMEA Starter Kit	010-11442-00	n/a

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

The design may operate one transmitter chain at a time and is not capable of simultaneous transmission on more than one port.

Software (FVIN): 40.42; Antennas: 2.4 GHz ANT dipole (1.8 dBi), 2.4 GHz WiFi/BT dipole (5.8 dBi)


Equipment Operational Modes

Mode	Transmitter Operation
mode 1	ANT (GFSK)
mode 2	BT BR (GFSK)
mode 3	BT (2EDR $\pi/4$ DQPSK)
mode 4	BT (3EDR 8DPSK)
mode 5	BT BLE (GMSK)
mode 6	802.11b
mode 7	802.11g
mode 8	802.11n

Equipment Function

The EUT is a transceiver with display and GNSS. The radio supports 802.11b, 802.11g, 802.11n, BTC, BLE and ANT transmit and receive. For more detailed feature descriptions, please refer to the manufacturer's specifications or user's manual. The typical use configuration has the EUT and powered from direct current power. The design provides interface capability as presented below and wireless communications with compatible equipment. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections than those presented in the configuration options as described by the manufacturer and presented below. For testing purposes, the EUT received power from external direct current power supply. During testing, the test system was configured to operate in a manufacturer defined modes. The manufacturer provided test software for testing transmitter and equipment function. The software provided the ability to operate the transmitters at near 100% duty cycle for testing purposes. The testing mode of operation exceeds typical duty cycle operation of production equipment. As requested by the manufacturer the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

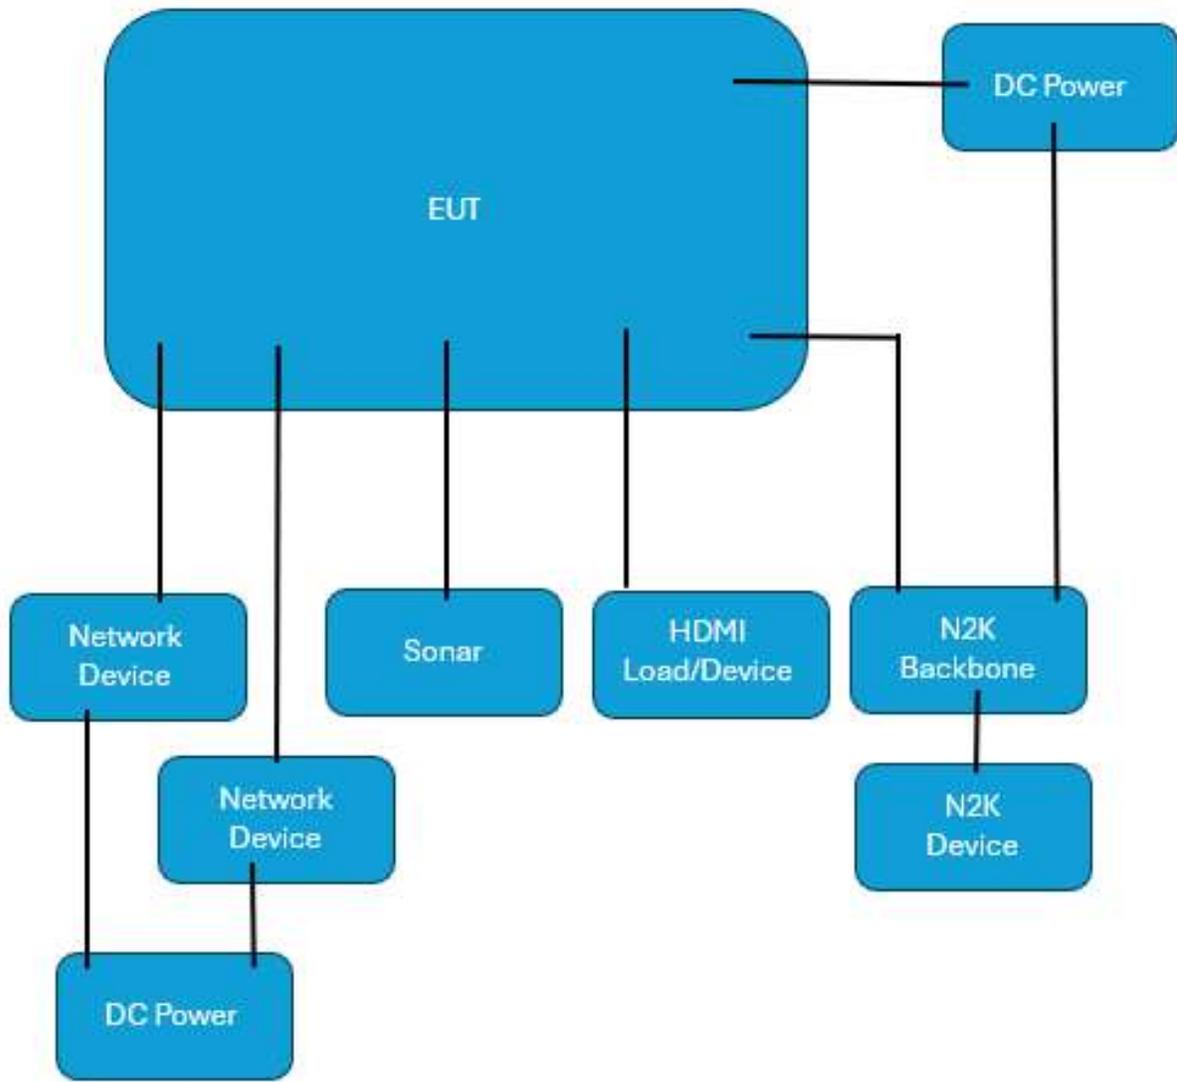

Environmental Conditions

Ambient Temperature	22.2° C
Relative Humidity	31.0 %
Atmospheric Pressure	1016.7 mb

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: HVIN: A05043
FCC ID: IPH-05043 IC: 1792A-05043
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from external direct current power provided from installation vehicle. The EUT provides interface ports for power, loads and communications as presented in this filing.
- (9) Transition Provisions of 47 CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards

The following information is submitted in accordance with the eCFR Title 47 Code of Federal Regulations (47CFR), dated November 18, 2024: Part 2, Subpart J, Part 15C Paragraph 15.249, Industry Canada RSS-210 Issue 11, and RSS-GEN Issue 5. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013. This report documents compliance with the EUT operations as Low Power Transmitter (DXX).

Equipment Testing Procedures

AC Line Conducted Emission Test Procedure

The design operates from Direct Current power only and offers no provision to interface with Utility AC Power systems. Therefore, No AC Line conducted emissions testing was required or performed.


Radiated Emission Test Procedure

Radiated emissions testing was performed as required in 47 CFR 15C, RSS-210 Issue 11, and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. Per above requirements, the frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions and all significant results reported. All other unreported findings were at least 20 dB below limits. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure


The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram three showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Diagram 1 Test arrangement for power-line conducted emissions

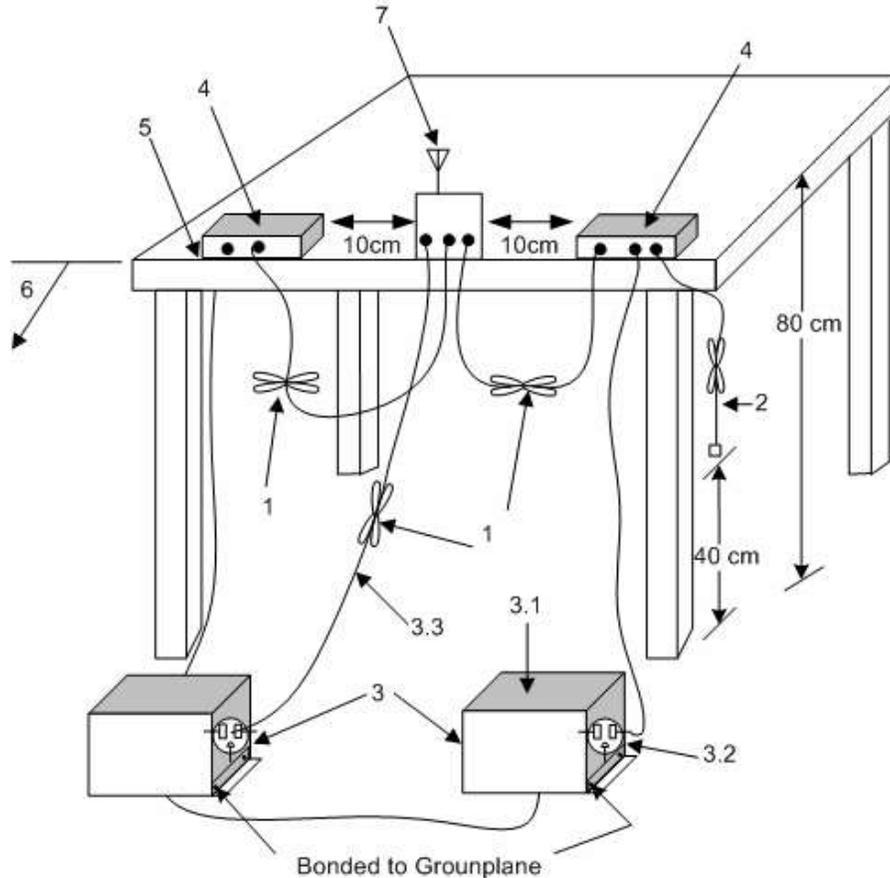

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test

Diagram 2 Test arrangement for radiated emissions of tabletop equipment

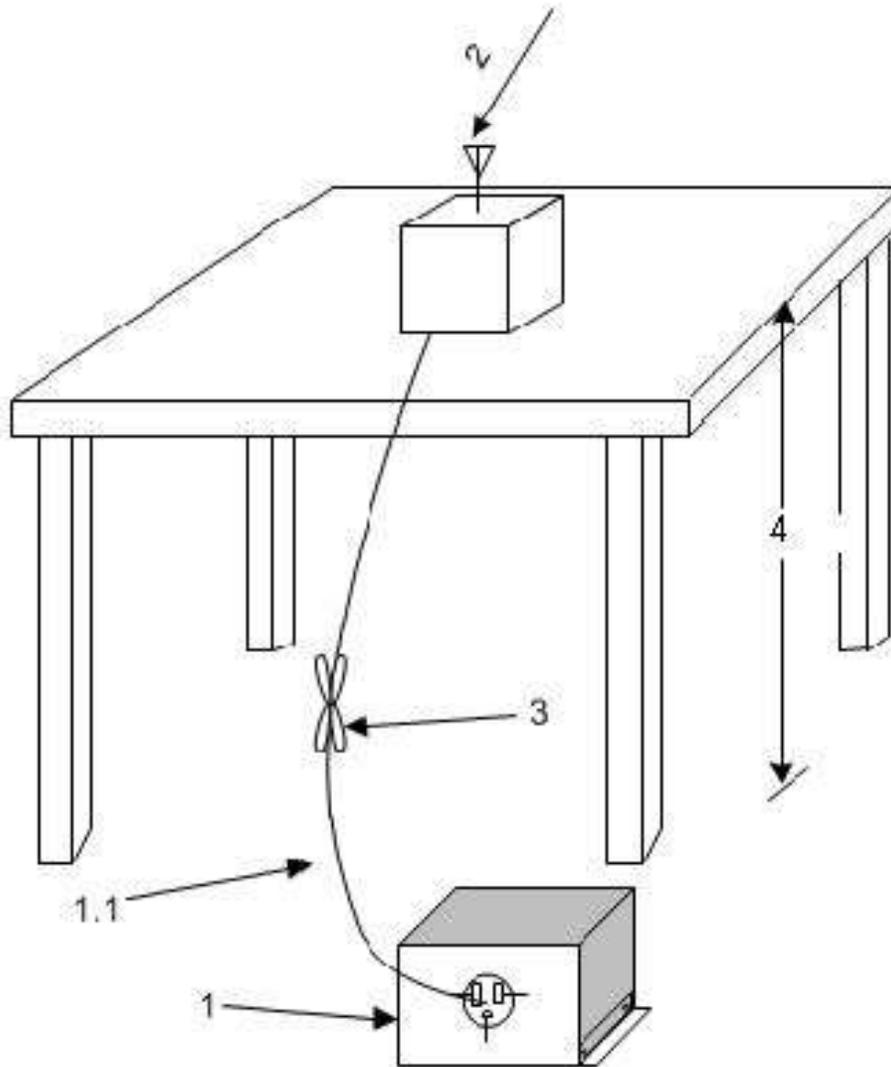

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).

1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.


2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) or Open Area Test Site (OATS)

Test arrangement for radiated emissions Below 1 GHz

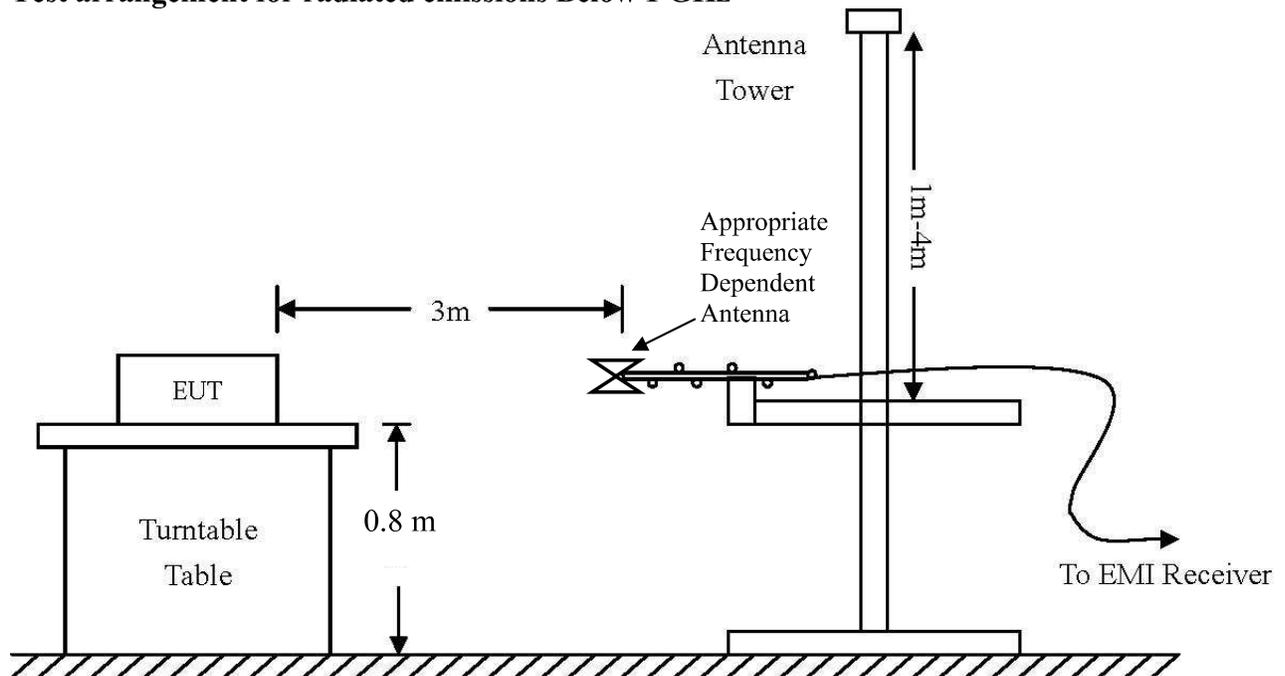

Test arrangement for radiated emissions Above 1 GHz


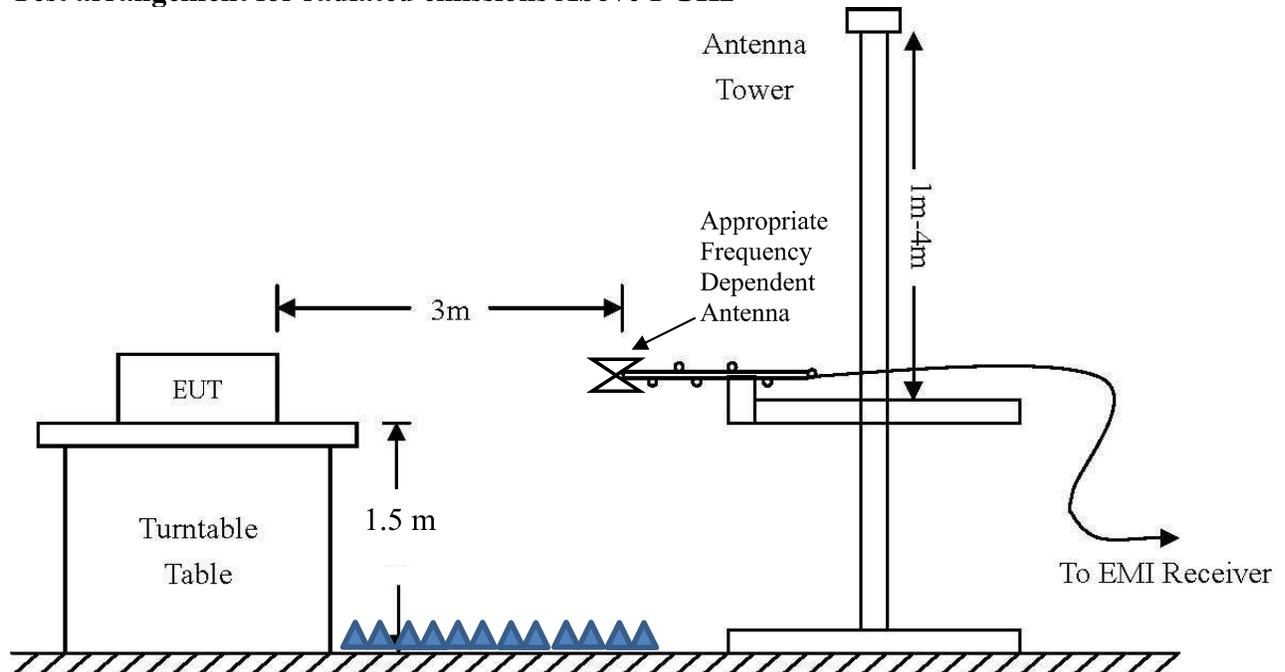


Diagram 4 Test arrangement for Antenna Port Conducted emissions

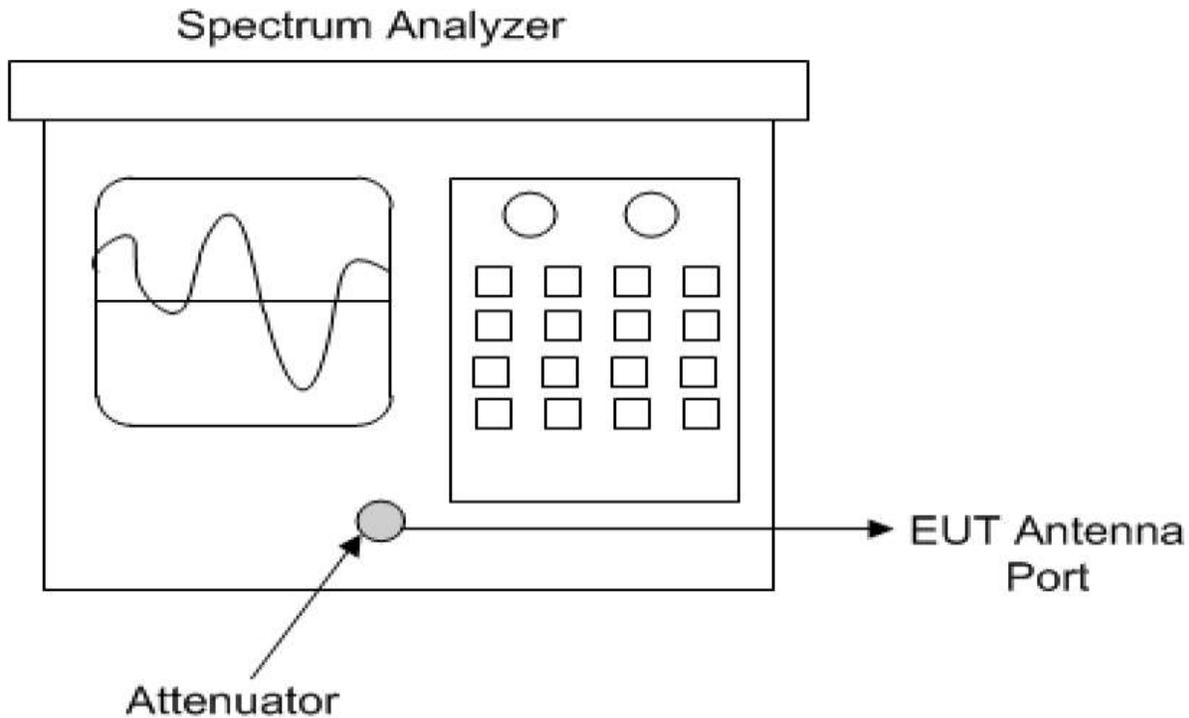

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS or at the 3 meters Outdoor Area Test Site (OATS) in the satellite location.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dB μ V; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dB μ V/m; dB referenced to one microvolt per meter

Note: Radiated limit may be expressed for measurement in dB μ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters.

Sample calculation demonstrates corrected field strength reading for Semi-Anechoic Chamber using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB/m) + Losses (dB) - Gain (dB)

Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the 47 CFR Part 15C, Industry Canada RSS-210 Issue 11, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Intentional Radiators

The following information is submitted supporting compliance with the requirements of 47 CFR, Subpart C, paragraph 15.249, Industry Canada RSS-210 Issue 11, and RSS-GEN Issue 5.

Per 47 CFR, Subpart A, paragraph 15.31, all testing was performed over three frequencies (1 near top, 1 near middle and 1 near bottom).

Antenna Requirements

The EUT incorporates integral non-user accessible systems. Production equipment offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured in the 3 meters Semi-Anechoic Chamber (SAC). The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated in the 3m SAC, using appropriate antennas or pyramidal horns, amplification stages, and receiver / spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 1 ANT (GFSK)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	50.3	36.5	53.7	36.6	54.0	-17.5	-17.4
2483.5	57.4	37.3	60.3	37.9	54.0	-16.7	-16.1
4804.0	49.9	36.0	49.3	36.0	54.0	-18.0	-18.0
4914.0	49.4	36.2	50.1	36.2	54.0	-17.8	-17.8
4960.0	49.2	36.2	49.9	36.6	54.0	-17.8	-17.4
7206.0	52.6	39.7	54.2	42.4	54.0	-14.3	-11.6
7371.0	53.3	40.4	55.0	43.7	54.0	-13.6	-10.3
7440.0	54.4	42.4	54.2	41.7	54.0	-11.6	-12.3
12010.0	58.6	45.1	58.3	45.1	54.0	-8.9	-8.9
12285.0	59.4	46.3	59.4	46.3	54.0	-7.7	-7.7
12400.0	59.0	45.7	59.2	45.7	54.0	-8.3	-8.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C and RSS-210 Issue 11 Intentional Radiator requirements. The EUT demonstrated a worst-case minimum margin of -7.7 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted EMI Procedure

The design operates from Direct Current power only and offers no provision to interface with Utility AC Power systems. Therefore, No AC Line conducted emissions testing was required or preformed.

General Radiated Emissions Procedure

The EUT was arranged in a manufacturer defined equipment configuration and operated with transmitter active during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies which produced the highest emissions. Each radiated emission was then maximized in the SAC before final radiated measurements were performed. Final data was taken with the EUT located in the SAC at 3 meters distance between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization.

Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

Refer to tables 2 and 3 for general radiated emissions data and figures one through seven for plots of the worst case radiated emissions taken in the SAC (30 MHz to 1 GHz) and screen room (1 to 25 GHz).

Table 2 General Radiated Emissions Data - Horizontal Polarization

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
349.99	39.54	37.08	47	-9.92
439.13	36.099	29.93	47	-17.07
448.9	35.434	27.53	47	-19.47
825.35	40.372	33.02	47	-13.98
861.11	50.02	37.43	47	-9.57
878.75	42.532	33.66	47	-13.34

Table 3 General Radiated Emissions Data - Vertical Polarization

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
439.43	42.023	38.49	47	-8.51
450.11	34.95	28.49	47	-18.51
826.12	40.804	32.58	47	-14.42
861.38	48.53	36.82	47	-10.18
872.45	43.019	34.41	47	-12.59
879.02	40.355	31.42	47	-15.58

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Figure 1 Plot of General Radiated Emissions (30 MHz – 230 MHz)



Figure 2 Plot of General Radiated Emissions (200 MHz – 1.2 GHz)

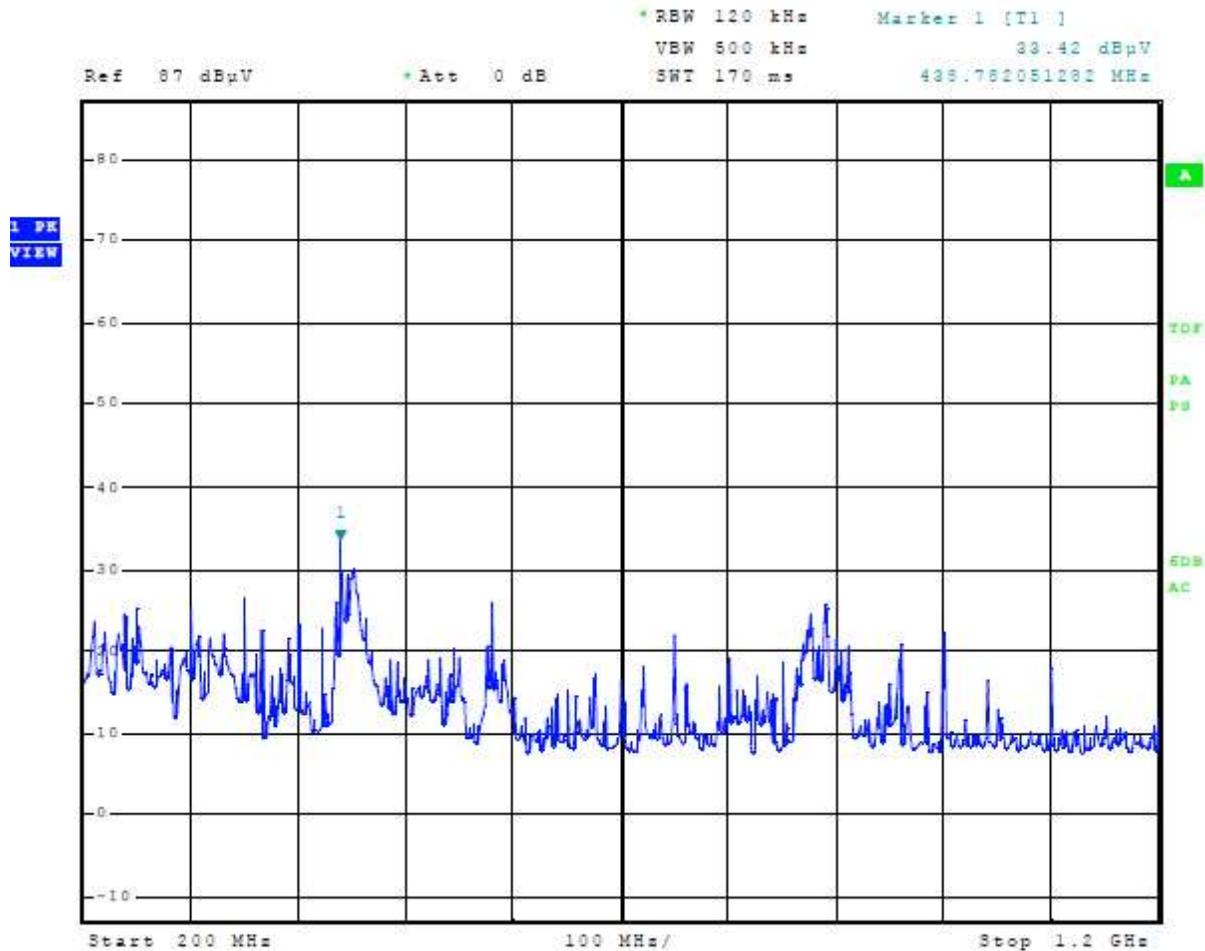


Figure 3 Plot of General Radiated Emissions (1 GHz – 3 GHz)

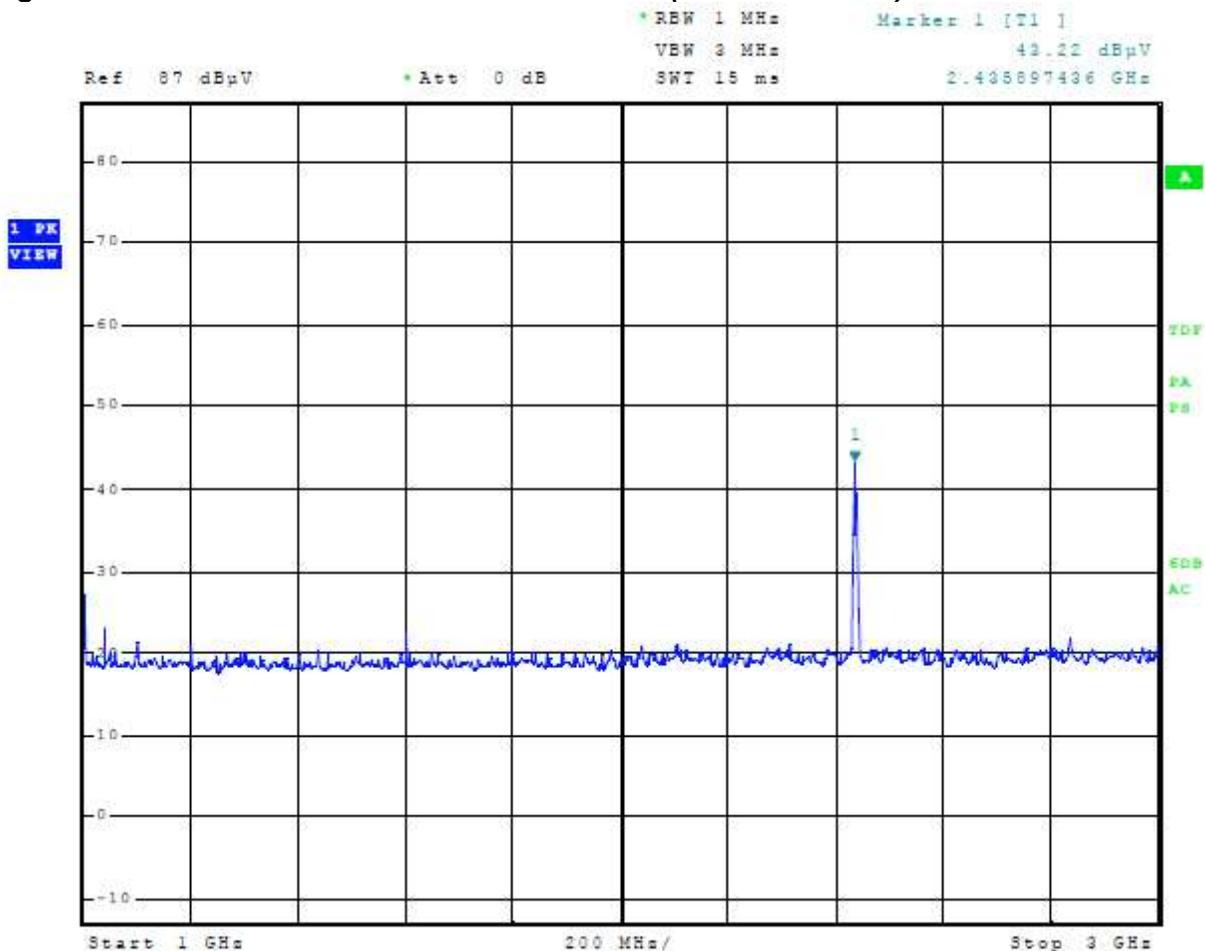


Figure 4 Plot of General Radiated Emissions (3 GHz – 6 GHz)

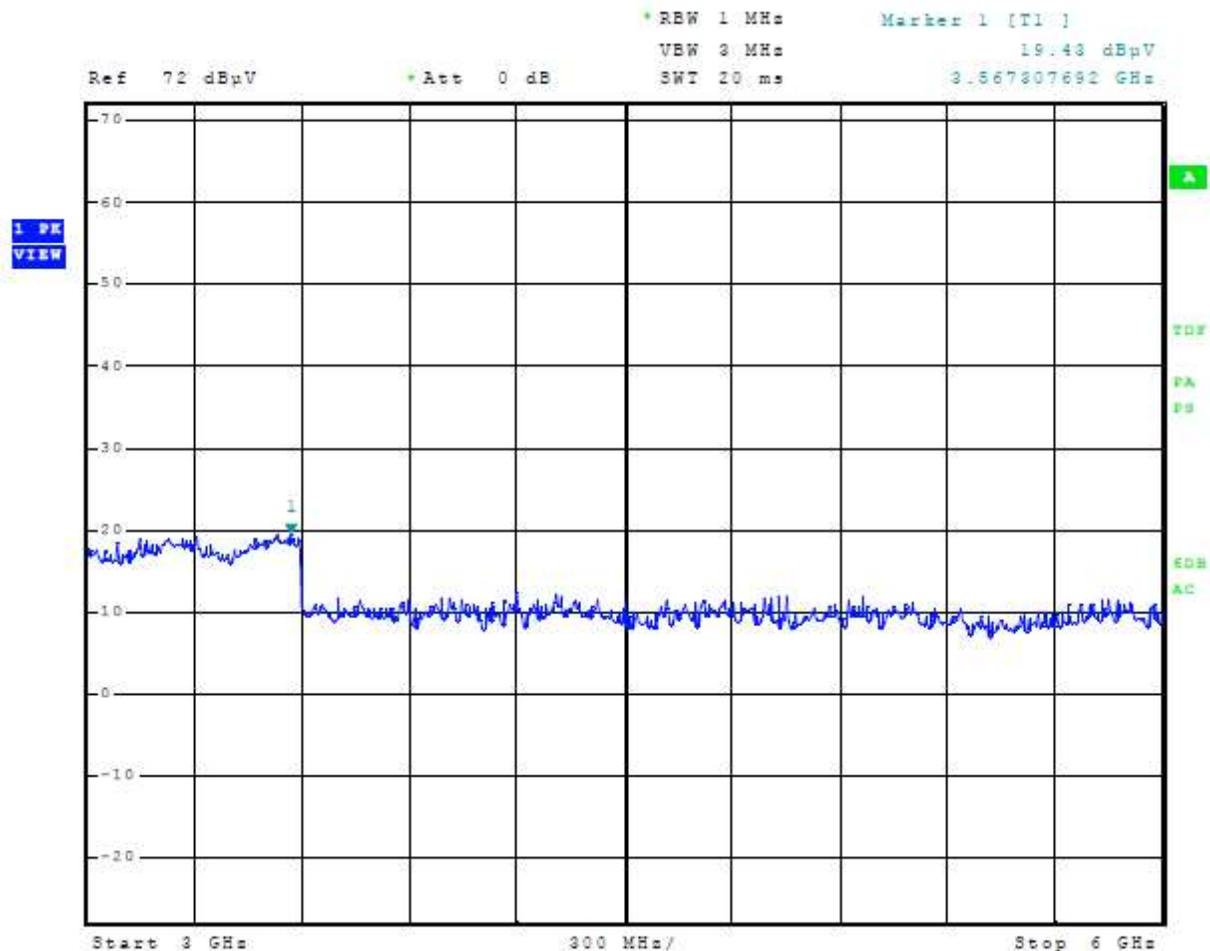


Figure 5 Plot of General Radiated Emissions (6 GHz – 12 GHz)

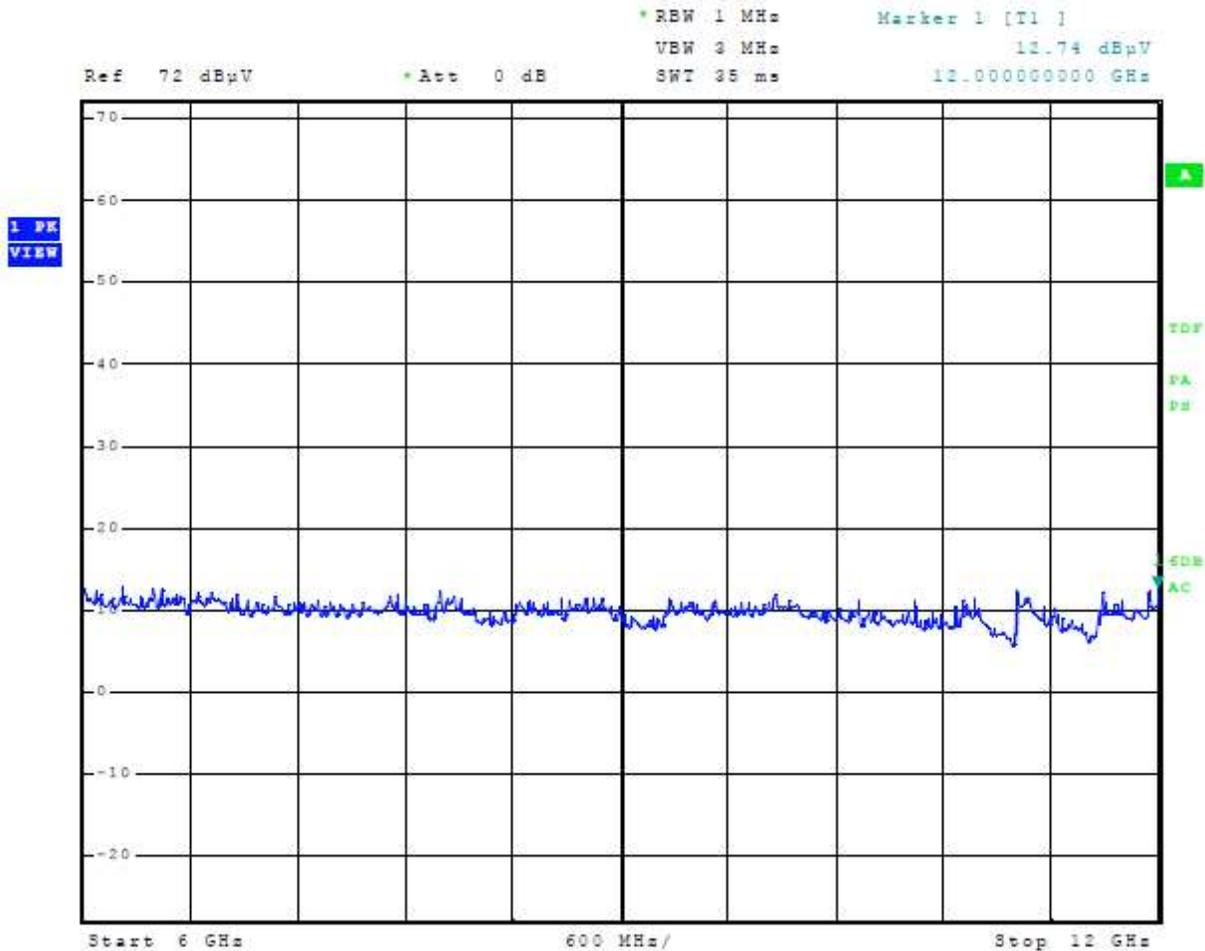


Figure 6 Plot of General Radiated Emissions (12 GHz – 18 GHz)


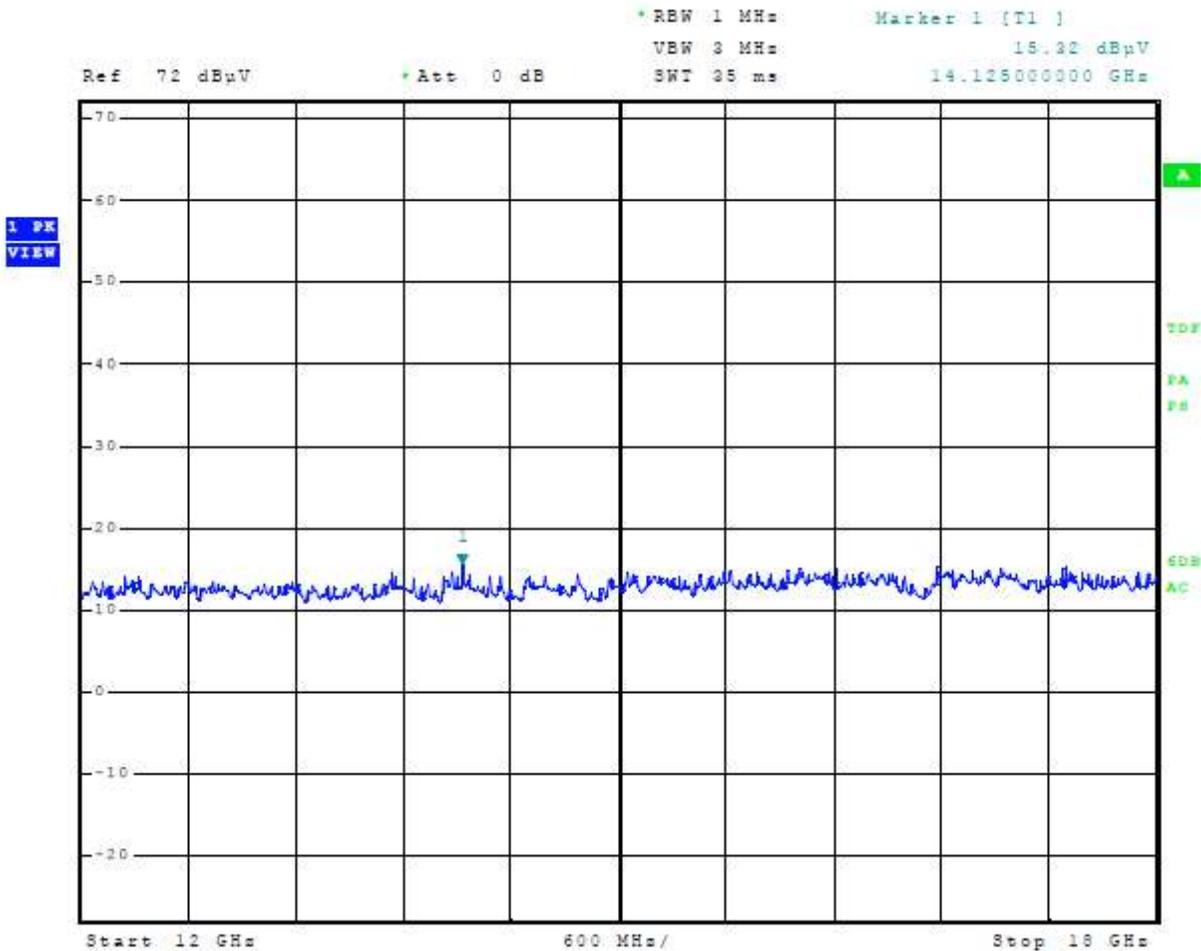


Figure 7 Plot of General Radiated Emissions (18 GHz – 25 GHz)

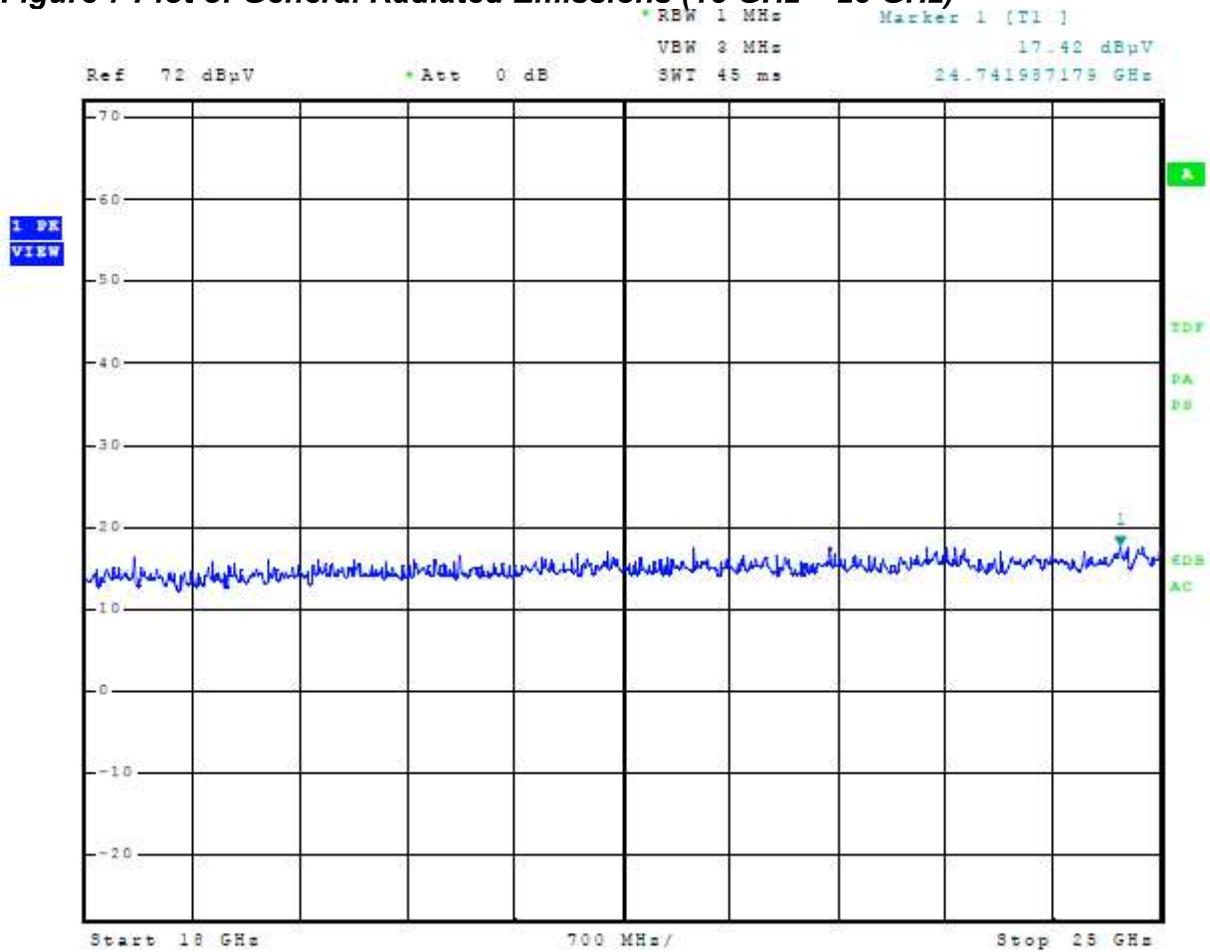

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C paragraph 15.209, RSS-210 Issue 11, and RSS-GEN Issue 5 Intentional Radiators. The EUT worst-case transmitter configuration demonstrated a minimum margin of -8.51 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

The transmitter output power, harmonic, and general emissions were measured in the semi anechoic chamber (SAC) @ 3 meters. The amplitude of radiated emission was measured in the SAC at distance of 3 meters from the FSM antenna (radiated emission testing was performed on sample #1) representative of production equipment with integral antennas. The EUT was placed on a turntable elevated as required above the ground plane and at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. The amplitude of each emission was then recorded from the analyzer display. Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits, whichever is the lesser attenuation. Antenna port emission plots were taken of transmitter performance for reference in this and other documentation using test sample #4. The amplitude of each radiated emission was maximized by equipment orientation and placement on the turn table, raising and lowering the FSM (Field Strength Measuring) antenna, changing the FSM antenna polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dB μ V/m @ 3 meters.

Refer to figures eight through eleven showing plots of mode 1 taken of the 2402-2480 MHz transmitter operation displaying compliance with the specifications.

Figure 8 Plot of Transmitter Emissions in 2402-2480 MHz Mode 1 ANT (GFSK)

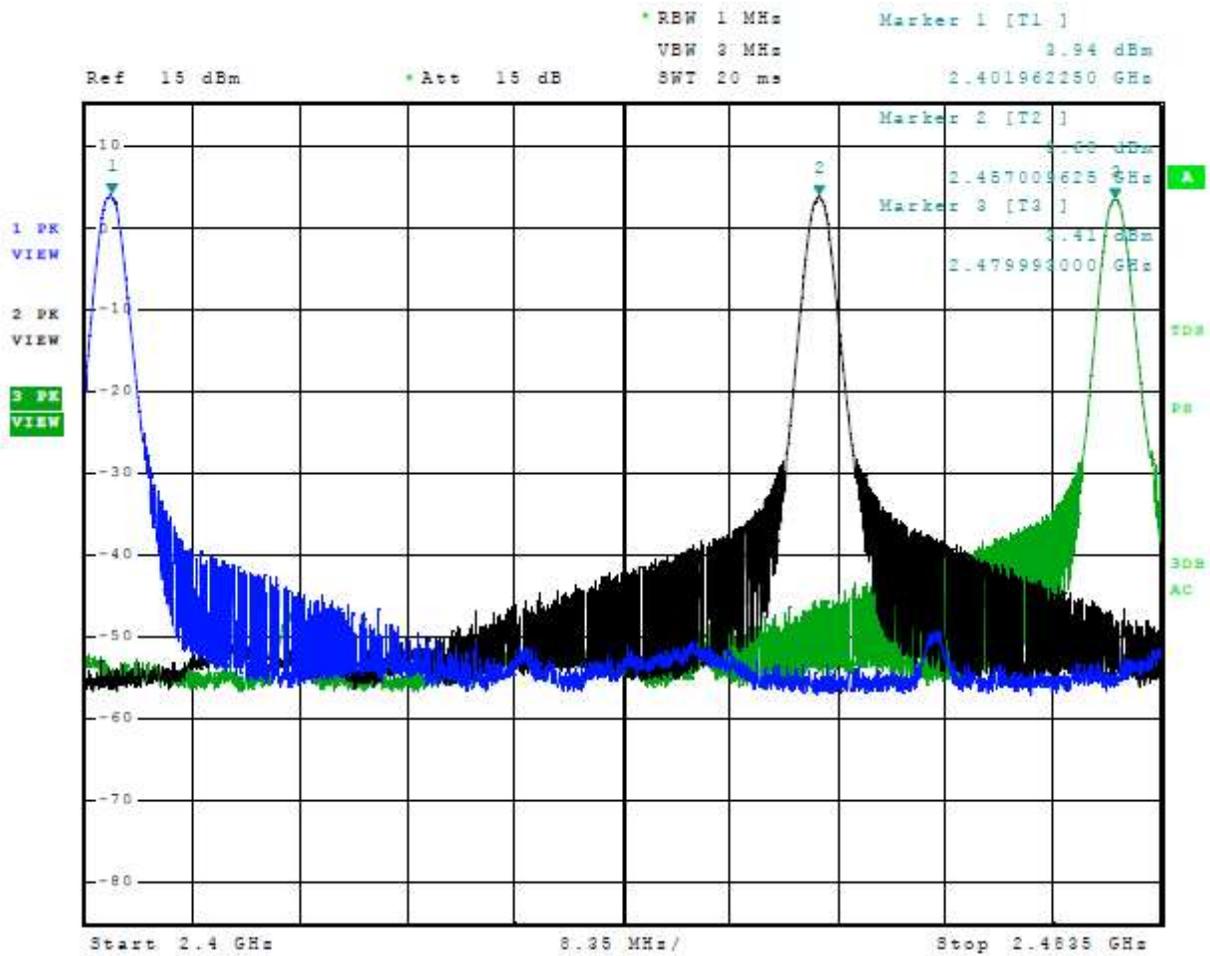


Figure 9 Plot of Transmitter Emissions Low Band Edge Mode 1 ANT (GFSK)

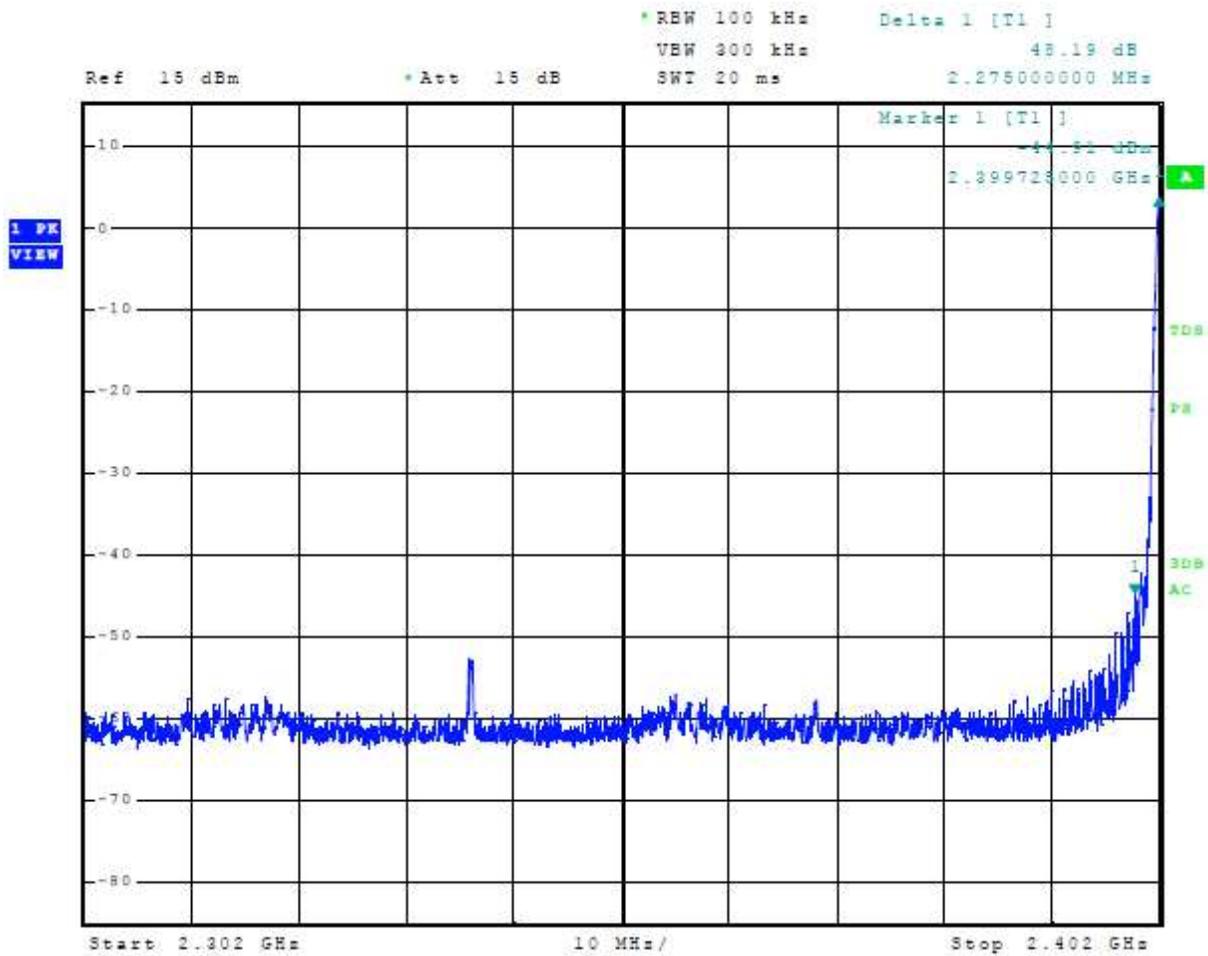


Figure 10 Plot of Transmitter Emissions High Band Edge Mode 1 ANT (GFSK)

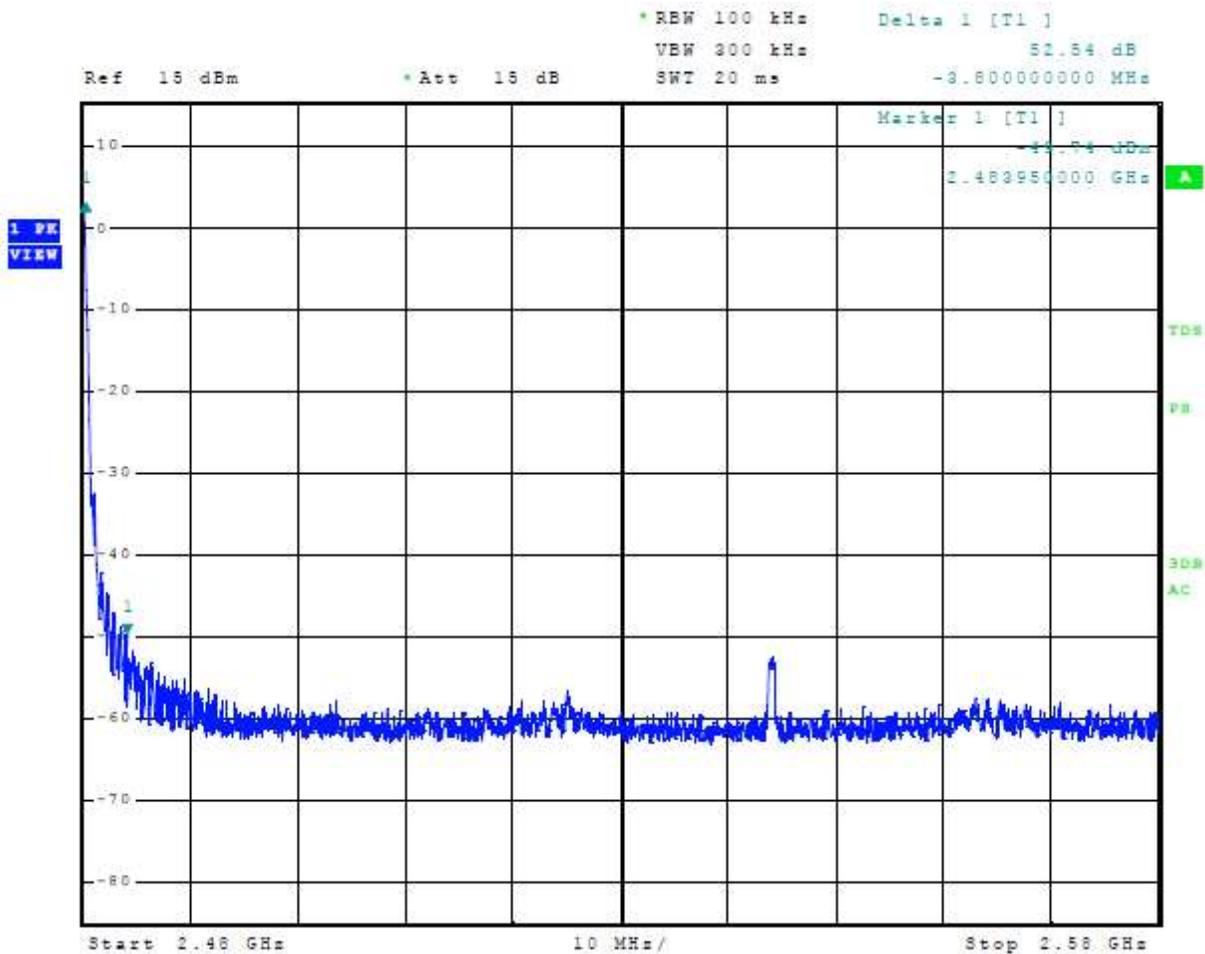


Figure 11 Plot of Transmitter 99% Occupied Bandwidth Mode 1 ANT (GFSK)



Transmitter Emissions Data

Table 4 Transmitter Radiated Emissions Mode 1 ANT (GFSK)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	88.8	87.9	92.1	91.2	94.0	-6.1	-2.8
4804.0	49.9	36.0	49.3	36.0	54.0	-18.0	-18.0
7206.0	52.6	39.7	54.2	42.4	54.0	-14.3	-11.6
9608.0	56.1	43.4	56.7	43.4	54.0	-10.6	-10.6
12010.0	58.6	45.1	58.3	45.1	54.0	-8.9	-8.9
14412.0	60.4	47.0	60.5	47.0	54.0	-7.0	-7.0
16814.0	65.4	52.4	65.3	52.4	54.0	-1.6	-1.6
19216.0	63.7	50.6	64.4	50.6	54.0	-3.4	-3.4
21618.0	65.1	52.1	65.1	52.1	54.0	-1.9	-1.9
24020.0	66.2	53.2	66.2	53.3	54.0	-0.8	-0.7
2457.0	86.8	85.9	92.4	91.5	94.0	-8.1	-2.5
4914.0	49.4	36.2	50.1	36.2	54.0	-17.8	-17.8
7371.0	53.3	40.4	55.0	43.7	54.0	-13.6	-10.3
9828.0	57.3	44.1	57.4	44.1	54.0	-9.9	-9.9
12285.0	59.4	46.3	59.4	46.3	54.0	-7.7	-7.7
14742.0	60.7	47.2	60.6	47.2	54.0	-6.8	-6.8
17199.0	63.4	50.3	63.0	50.3	54.0	-3.7	-3.7
19656.0	63.6	50.7	63.4	50.8	54.0	-3.3	-3.2
22113.0	64.9	51.9	64.7	51.9	54.0	-2.1	-2.1
24570.0	65.6	52.6	66.1	52.6	54.0	-1.4	-1.4
2480.0	87.8	86.9	93.3	92.3	94.0	-7.1	-1.7
4960.0	49.2	36.2	49.9	36.6	54.0	-17.8	-17.4
7440.0	54.4	42.4	54.2	41.7	54.0	-11.6	-12.3
9920.0	57.2	43.6	56.5	43.6	54.0	-10.4	-10.4
12400.0	59.0	45.7	59.2	45.7	54.0	-8.3	-8.3
14880.0	59.9	47.1	60.2	47.1	54.0	-6.9	-6.9
17360.0	64.9	50.9	64.0	50.9	54.0	-3.1	-3.1
19840.0	64.3	50.8	64.3	50.9	54.0	-3.2	-3.1
22320.0	65.7	52.0	65.0	52.0	54.0	-2.0	-2.0
24800.0	65.0	52.0	65.1	52.0	54.0	-2.0	-2.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15.249, Industry Canada RSS-210 Issue 11, and RSS-GEN Issue 5 Intentional Radiator regulations. The EUT worst-case test sample configuration demonstrated minimum average margin of -1.7 dB below the average emission limit for the fundamental. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -0.7 dB below the limit. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment
- Annex C Laboratory Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/20/2025	3/20/2026
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/17/2025	3/17/2027
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	3/17/2025	3/17/2027
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/8/2024	7/8/2025
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/21/2025	1/21/2026
<input type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
<input type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/16/2024	9/16/2025
<input type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/26/2023	9/26/2025
<input checked="" type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/19/2025	3/19/2026
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/21/2025	3/21/2026
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
<input type="checkbox"/> Attenuator	Fairview	SA6NFNF100W-40 (1625)	30-18000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/21/2025	3/21/2026
<input checked="" type="checkbox"/> Weather station	Davis	6152 (A70927D44N)		7/11/2024	7/11/2025



<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input type="checkbox"/> Frequency Counter: Leader		LDC-825 (8060153)		3/19/2025	3/19/2026
<input type="checkbox"/> ISN	Com-Power	Model ISN T-8 (600111)		3/19/2025	3/19/2026
<input type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	9/16/2024	9/16/2025
<input type="checkbox"/> LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
<input checked="" type="checkbox"/> LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(4M)(281184)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/16/2024	9/16/2025
<input checked="" type="checkbox"/> Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/22/2025	3/22/2026
<input checked="" type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/20/2025	3/20/2026
<input type="checkbox"/> Antenna:	Solar	9229-1 & 9230-1		2/5/2025	2/5/2026
<input type="checkbox"/> CDN:	Com-Power	Model CDN M325E		9/16/2024	9/16/2025
<input type="checkbox"/> Oscilloscope Scope: Tektronix		MDO 4104		2/5/2025	2/5/2026
<input type="checkbox"/> EMC Transient Generator HVT		TR 3000		2/5/2025	2/5/2026
<input type="checkbox"/> AC Power Source (Ametek, California Instruments)				2/5/2025	2/5/2026
<input checked="" type="checkbox"/> Field Intensity Meter: EFM-018				2/5/2025	2/5/2026
<input checked="" type="checkbox"/> ESD Simulator: MZ-15				2/5/2025	2/5/2026
<input type="checkbox"/> Injection Clamp Luthi Model EM101					not required
<input type="checkbox"/> R.F. Power Amp ACS 230-50W					not required
<input type="checkbox"/> R.F. Power Amp EIN Model: A301					not required
<input type="checkbox"/> R.F. Power Amp A.R. Model: 10W 1010M7					not required
<input type="checkbox"/> R.F. Power Amp A.R. Model: 50U1000					not required
<input checked="" type="checkbox"/> Temperature Chamber					not required
<input checked="" type="checkbox"/> Shielded Room					not required
POSSIBLY USE FOR GARMIN GPS TESTING					
<input type="checkbox"/> GNSS Sig Gen SG80K, SN: GNSS-00952					not required

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0

Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2025-03-11 through 2026-03-31
Effective Dates




For the National Voluntary Laboratory Accreditation Program

Garmin A05043 RF Exposure Exhibit

Uncontrolled / Public Environment

HVIN: A05043

47CFR 1.1307, RSS-102 Issue 6

Summary and Simultaneous ANT and 2G WiFi MPE Calculation

Summary: Standalone MPE Calculations and Summary								
Radio	Tx Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	S_L (W/m ²)	S_{20} (W/m ²)	R_c (cm)	S_c (W/m ²)
ANT (FCC)	100.0%	2402.0	2.5	1.5	10.0	0.007	0.5	10.0
BT (FCC)	100.0%	2441.0	4.8	3.8	10.0	0.036	1.2	10.0
2G WiFi (FCC)	100.0%	2437.0	11.4	3.8	10.0	0.086	2.9	4.2
	Tx Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	S_L (W/m ²)	S_{20} (W/m ²)	R_c (cm)	S_c (W/m ²)
ANT (ISED)	100.0%	2402.0	2.5	1.5	1.3	0.007	1.5	1.3
BT (ISED)	100.0%	2441.0	4.8	3.8	5.4	0.036	1.6	5.4
2G WiFi (ISED)	100.0%	2437.0	11.4	3.8	5.4	0.086	3.5	2.8
FCC Simultaneous MPE Calculation (Worst Case)						ISED Simultaneous MPE Calculation (Worst Case)		
	ANT (FCC)	2G WiFi (FCC)				ANT (ISED)	2G WiFi (ISED)	
Tx Frequency (MHz)	2402.0	2437.000				2402.0	2437.0	
S_{20} (W/m ²)	0.007	0.086				0.007	0.086	
S_L (W/m ²)	10.000	10.000				1.3	5.4	
Power Ratio (S_{20} / S_L)	0.0007	0.0086				0.0058	0.0160	
Sum of Power Ratios at compliance distance	0.01					Sum of Power Ratios at compliance distance		0.02
Requirement = Σ of MPE Ratio ≤ 1	EXEMPT					Requirement = Σ of MPE Ratio ≤ 1		EXEMPT

Note on simultaneous transmitting:

- BT and 2.4G WiFi cannot transmit simultaneously
- ANT can transmit simultaneously with EITHER BT or 2.4G WiFi

Conclusion

The A05043, a device that is deployed in public, uncontrolled environments, meets RF exposure requirements for both FCC and Industry Canada. For RF exposure safety, personnel should maintain a safe distance of **20 cm** from the product.

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone/Fax: (913) 660-0666

Revision 3

FCC ID: IPH-05043

IC: 1792A-05043

Test: 250404

Test to: 47CFR 2.1307, RSS-102 Iss.6

File: A05043 RFExp FCC-IC 250404 r3

Garmin International, Inc.

PMN: A05043

SN's: 3512701210, 3512701215

Date: June 23, 2025

Page 1 of 4

Garmin A05043 RF Exposure Exhibit

Uncontrolled / Public Environment

HVIN: A05043

47CFR 1.1307, RSS-102 Issue 6

Summary ANT MPE Calculation

				Antenna Gain (dBi)	1.8		
				dBd + 2.17 = dBi			
				Antenna Gain (dBd)	-0.37		
Tx Frequency (MHz)	2402	Peak Power (Watts)	0.0025	Antenna Gain (numeric)	1.5		
		Peak Power (mW)	2.5	Antenna minus cable (dBi)	1.80		
Cable Loss (dB)	0.0	(dBm)	3.9				
		Duty Cycle (%)	100.0%				
		Adjusted Power (mW)	2.5				
		Adjusted Power (dBm)	3.9				
		Calculated ERP (mw)	2.275	EIRP = Po(dBm) + Gain (dB)			
		Calculated EIRP (mw)	3.750	ERP = EIRP - 2.17 dB			
				Radiated (EIRP) dBm	5.740		
				Radiated (ERP) dBm	3.570		
		FCC radio frequency radiation exposure limits per 1.1310					
		Frequency (MHz)	Occupational Limit W/m ²	Public Limit W/m ²			
		30-300	10.0	2.0			
		300-1,500	f/30	f/150			
		1,500-100,000	50	10			
		2402.000	50	10			

Power density (S)
EIRP
----- = mW/cm²
 $4 \pi r^2$
r (cm) EIRP (mW)

IC radio frequency radiation exposure limits per RSS-102, Issue 6 Field Reference Level FRL Limit (W/m ²)					
Frequency (MHz)	Uncontrolled		Frequency (MHz)	Controlled	
10-20	2.0	2.0	10-20	10.0	10.0
20-48	$8.944/f^{0.5}$	0.2	20-48	$44.72/f^{0.5}$	0.9
48-300	1.291	1.291	48-100	6.455	6.455
300-6,000	$0.02619 * f^{0.6834}$	5.351	100-6,000	$0.6455 * f^{0.5}$	31.636
6,000-15,000	5.0	10.0	6,000-15,000	50.0	50.0
15,000-150,000	10	10.0	15,000-150,000	50.0	50.0
150,000-300,000	$6.67 * (10^{-3}) * f$	0.2	150,000-300,000	$3.33 * (10^{-4}) * f$	0.8

	FCC	ISED
f = Transmit Frequency (MHz)	f (MHz) = 2402.0	2402.0 MHz
P _T = Power Input to Antenna (mW)	P _T (mW) = 2.5	2.5 mW
Duty cycle (percentage of operation)	% = 100.0%	100.0% %
P _A = Adjusted Power due to Duty cycle or Cable Loss (mW)	P _A (mW) = 2.48	2.48 mW
G _N = Numeric Gain of the Antenna	G _N (numeric) = 1.51	1.51 numeric
S ₂₀ = Power Density of device at 20cm (mW/m ²)	S ₂₀ (mW/m ²) = 0.00	0.00 mW/m ²
S ₂₀ = Power Density of device at 20cm (W/m ²)	S ₂₀ (W/m ²) = 0.01	0.01 W/m ²
S _L = Power Density Limit (W/m ²)	S _L (W/m ²) = 10.00	1.29 W/m ²
R _C = Minimum distance to the Radiating Element for Compliance ($R_C = \sqrt{(P_A G_N) / (4\pi S_L)}$)	R _C (cm) = 0.5	1.5 cm
S _C = Power Density of the device at the Compliance Distance R _C ($S_C = (P_A G_N) / (4\pi R_C^2)$)	S _C (W/m ²) = 10.000	1.29 W/m ²
R ₂₀ = 20cm	R ₂₀ = 20	20 cm

Summary: Standalone MPE Calculations and Summary								
Radio	x Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	S _L (W/m ²)	S ₂₀ (W/m ²)	R _C (cm)	S _C (W/m ²)
ANT (FCC)	100.0%	2402.000	2.5	1.51	10.00	0.01	0.5	10.0
ANT (ISED)	100.0%	2402.000	2.5	1.51	1.29	0.01	1.5	1.3

Garmin A05043 RF Exposure Exhibit

Uncontrolled / Public Environment

HVIN: A05043

47CFR 1.1307, RSS-102 Issue 6

BT MPE Calculation

				Antenna Gain (dBi)	5.8
				dBi to dBd	2.2
Tx Frequency (MHz)	2441	Peak Power (Watts)	0.0048	Antenna Gain (dBd)	3.63
		Peak Power (mW)	4.8	Antenna Gain (numeric)	3.8
Cable Loss (dB)	0.0	(dBm)	6.8	Antenna minus cable (dBi)	5.80
		Duty Cycle (%)	100.0%		
		Adjusted Power (mW)	4.8		
		Adjusted Power (dBm)	6.8		

Calculated ERP (mw) 11.041
Calculated EIRP (mw) 18.197

EIRP = Po(dBm) + Gain (dB)
Radiated (EIRP) dBm 12.600
ERP = EIRP - 2.17 dB

Radiated (ERP) dBm 10.430

Power density (S)
EIRP
----- = mW/cm²
4 π r²
r (cm) EIRP (mW)

FCC radio frequency radiation exposure limits per 1.1310		
Frequency (MHz)	Occupational Limit W/m ²	Public Limit W/m ²
300-1500	f/30	f/150
1500-100,000	50	10
2441.0	50	10

IC radio frequency radiation exposure limits per RSS-102, Issue 6 Field Reference Level FRL Limit (W/m ²)					
Frequency (MHz)	Uncontrolled		Frequency (MHz)	Controlled	
10-20	2.0	2.0	10-20	10.0	10.0
20-48	8.944*f ^{0.5}	0.2	20-48	44.72*f ^{0.5}	0.9
48-300	1.291	1.291	48-100	6.455	6.455
300-6,000	0.02619*f ^{0.4434}	5.4	100-6,000	0.6455*f ^{0.5}	31.9
6,000-15,000	5.0	10.0	6,000-15,000	50.0	50.0
15,000-150,000	10	10.0	15,000-150,000	50.0	50.0
150,000-300,000	6.67*(10 ⁻⁶)*f	0.2	150,000-300,000	3.33*(10 ⁻⁶)*f	0.8

	FCC	ISED
f = Transmit Frequency (MHz)	f (MHz) = 2441.0	2441.0 MHz
P _T = Power Input to Antenna (mW)	P _T (mW) = 4.8	4.8 mW
Duty cycle (percentage of operation)	% = 100.0%	100.0% %
P _A = Adjusted Power due to Duty cycle or Cable Loss (mW)	P _A (mW) = 4.79	4.79 mW
G _N = Numeric Gain of the Antenna	G _N (numeric) = 3.80	3.80 numeric
S ₂₀ = Power Density of device at 20cm (mW/m ²)	S ₂₀ =(P _A G _N)/(4πR ₂₀ ²) S ₂₀ (mW/m ²) = 0.00	0.00 mW/m ²
S ₂₀ = Power Density of device at 20cm (W/m ²)	S ₂₀ =(P _A G _N)/(4πR ₂₀ ²) S ₂₀ (W/m ²) = 0.04	0.04 W/m ²
S _L = Power Density Limit (W/m ²)	S _L (W/m ²) = 10.00	5.41 W/m ²
R ₀ = Minimum distance to the Radiating Element for C	R _C =√(P _A G _N /4πS _L) R _C (cm) = 1.2	1.6 cm
S _C = Power Density of the device at the Compliance Distance	S _C =(P _A G _N)/(4πR _C ²) S _C (W/m ²) = 10.00	5.41 W/m ²
R ₂₀ = 20cm	R ₂₀ = 20	20 cm

Summary: Standalone MPE Calculations and Summary								
Radio	Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	S _L (W/m ²)	S ₂₀ (W/m ²)	R _C (cm)	S _C (W/m ²)
BT (FCC)	100.0%	2441.0	4.8	3.80	10.0	0.04	1.2	10.0
BT (ISED)	100.0%	2441.0	4.8	3.80	5.4	0.04	1.6	5.4

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone/Fax: (913) 660-0666

Revision 3

FCC ID: IPH-05043

IC: 1792A-05043

Test: 250404

Test to: 47CFR 2.1307, RSS-102 Iss.6

File: A05043 RFExp FCC-IC 250404 r3

Garmin International, Inc.

PMN: A05043

SN's: 3512701210, 3512701215

Date: June 23, 2025

Page 3 of 4

Garmin A05043 RF Exposure Exhibit

Uncontrolled / Public Environment

HVIN: A05043

47CFR 1.1307, RSS-102 Issue 6

2.4G WiFi MPE Calculation

					Antenna Gain (dBi)	5.8		
					dBi to dBd	2.2		
Tx Frequency (MHz)	2437	Peak Power (Watts)	0.0114		Antenna Gain (dBd)	3.63		
		Peak Power (mW)	11.4		Antenna Gain (numeric)	3.8		
Cable Loss (dB)	0.0	(dBm)	10.6		Antenna minus cable (dBi)	5.8		
		Max Duty Cycle (%)	100.0%					
		Adjusted Power (mW)	11.4					
		Adjusted Power (dBm)	10.6					
		Calculated ERP (mw)	26.303		EIRP = Po(dBm) + Gain (dB)			
		Calculated EIRP (mw)	43.351		Radiated (EIRP) dBm	16.370		
					ERP = EIRP - 2.17 dB			
					Radiated (ERP) dBm	14.200		
Power density (S) EIRP ----- = mW/cm ² 4 π r ² r (cm) EIRP (mW)		FCC radio frequency radiation exposure limits per 1.1310						
		Frequency (MHz)	Occupational Limit W/m ²	Public Limit W/m ²				
		300-1,500	f/30	f/150				
		1,500-100,000	50	10				
		2437.0	50	10				
IC radio frequency radiation exposure limits per RSS-102, Issue 6 Field Reference Level FRL Limit (W/m ²)								
Frequency (MHz)	Uncontrolled		Frequency (MHz)		Controlled			
10-20	2.0	2.0	10-20	10.0	10.0			
20-48	8.944/f ^{0.5}	0.2	20-48	44.72/f ^{0.5}	0.9			
48-300	1.291	1.291	48-100	6.455	6.455			
300-6,000	0.02619*f ^{0.6834}	5.4	100-6,000	0.6455*f ^{0.5}	31.9			
6,000-15,000	5.0	10.0	6,000-15,000	50.0	50.0			
15,000-150,000	10	10.0	15,000-150,000	50.0	50.0			
150,000-300,000	6.67*(10 ⁻⁵)*f	0.2	150,000-300,000	3.33*(10 ⁻⁴)*f	0.8			
f = Transmit Frequency (MHz)			f (MHz) =	2437.0	2437.0	MHz		
P _T = Power Input to Antenna (mW)			P _T (mW) =	11.4	11.4	mW		
Duty cycle (percentage of operation)			% =	100.0%	100.0%	%		
P _A = Adjusted Power due to Duty cycle or Cable Loss (mW)			P _A (mW) =	11.40	11.40	mW		
G _N = Numeric Gain of the Antenna			GN (numeric) =	3.80	3.80	numeric		
S ₂₀ = Power Density of device at 20cm (mW/m ²)		S ₂₀ =(P _A G _N)/(4πR ₂₀ ²)	S ₂₀ (mW/m ²) =	0.01	0.01	mW/m ²		
S ₂₀ = Power Density of device at 20cm (W/m ²)		S ₂₀ =(P _A G _N)/(4πR ₂₀ ²)	S ₂₀ (W/m ²) =	0.09	0.09	W/m ²		
S _L = Power Density Limit (W/m ²)			S _L (W/m ²) =	10.00	5.40	W/m ²		
R _C = Minimum distance to the Radiating Element for Compliance (R _C =√(P _A G _N /4πS _L))			R _C (cm) =	2.9	3.5	cm		
S _C = Power Density of the device at the Compliance Distance R _C (S _C =(P _A G _N)/(4πR _C) ²)			S _C (W/m ²) =	4.23	2.77	W/m ²		
R ₂₀ = 20cm			R ₂₀ =	20	20	cm		
Summary: Standalone MPE Calculations and Summary								
Radio	x Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	S _L (W/m ²)	S ₂₀ (W/m ²)	R _C (cm)	S _C (W/m ²)
2G WiFi (FCC)	100.0%	2437	11.4	3.8	10.0	0.09	2.9	4.23
2G WiFi (ISED)	100.0%	2437	11.40	3.8	5.40	0.09	3.5	2.77

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone/Fax: (913) 660-0666

Revision 3

FCC ID: IPH-05043

Test: 250404

Test to: 47CFR 2.1307, RSS-102 Iss.6

File: A05043 RFExp FCC-IC 250404 r3

IC: 1792A-05043

Garmin International, Inc.

PMN: A05043

SN's: 3512701210, 3512701215

Date: June 23, 2025

Page 4 of 4

A05043 Antenna Data Sheet

Antenna Manufacturer Information:

Antenna(s) are manufactured and designed at Garmin headquarters located at 1200 E. 151st Street, Olathe, KS, 66062, USA. Garmin is an antenna manufacturer that specializes in antenna construction and has been a technology leader in high performance antenna design for over thirty years. State-of-the art equipment is used to design, measure, and analyze new designs that are superior to competitor designs and highly proprietary in nature.

Antenna Description:

This data sheet contains the antenna gain information for the A05043-A1/A2 for Garmin Model A05043. The approximate operational frequency band of these technologies is given, and the maximum gain within the frequency band is shown in table 1.

Table 1 Antenna Gain:

Antenna Model Number	Antenna Type	Antenna Maximum Gain @ Frequency	Antenna Approximate Frequency Band
A05043-A1	Dipole	5.8 dBi @ 2410 MHz	2400 to 2480 MHz
A05043-A2	Dipole	1.8 dBi @ 2400 MHz	2400 to 2480 MHz

Additional Information:

Contact Garmin for other information regarding antenna design, dimensions, cable length, etc.